

Schema documentation for XML-Schema_PE_ext-1.7.0.xsd

august 26, 2022

Table of Contents

Resource hierarchy:	13
Namespace: "http://vdv/ka/pe/2"	15
Schema(s)	15
Main schema XML-Schema_PE_ext-1.7.0.xsd	15
Included schema XML-Schema_PE.xsd	15
Element(s)	15
Element tns:TXBEWEB_Type / tns:SESSION_DATA	15
Element tns:SESSION_DATA_Type / tns:DATE_TIME	16
Element tns:SESSION_DATA_Type / tns:SES_ID	16
Element tns:SESSION_DATA_Type / tns:ACTION	16
Element tns:SESSION_DATA_Type / tns:PARAMETER	17
Element tns:SESSION_DATA_Type / tns:KA_VERSION	17
Element tns:TXBEWEB_Type / tns:SAM_DATA	17
Element tns:SAM_DATA_Type / tns:samGueltigkeitsbeginn	18
Element tns:SAM_DATA_Type / tns:samVerfalldatum	18
Element tns:SAM_DATA_Type / tns:samOrganisations_ID	18
Element tns:SAM_DATA_Type / tns:samTransaktion_ID	18
Element tns:SAM_Transaktion_ID_Type / tns:samSequenznummer	19
Element tns:SAM_Transaktion_ID_Type / tns:SAM_ID.samNummer	19
Element tns:TXBEWEB_Type / tns:STATUS_DATA	19
Element tns:TXBEPOBPPEB_Type / tns:SESSION_DATA	20
Element tns:TXBEPOBPPEB_Type / tns:SAM_DATA	20
Element tns:TXBEPOBPPEB_Type / tns:STATUS_DATA	20
Element tns:TXBEWEB	21
Element tns:TXBEPOBPPEB	21
Element tns:STATUS_DATA_OK_Type / tns:STATUS_CODE	22
Element tns:STATUS_DATA_OK_Type / tns:STATUS_SUBCODE	22
Element tns:STATUS_DATA_OK_Type / tns:STATUS_TEXT	22
Element tns:STATUS_DATA_SessionError_Type / tns:STATUS_CODE	23
Element tns:STATUS_DATA_SessionError_Type / tns:STATUS_SUBCODE	23
Element tns:STATUS_DATA_SessionError_Type / tns:STATUS_TEXT	23
Element tns:STATUS_DATA_EngineError_Type / tns:STATUS_CODE	24
Element tns:STATUS_DATA_EngineError_Type / tns:STATUS_SUBCODE	24
Element tns:STATUS_DATA_EngineError_Type / tns:STATUS_TEXT	24
Element tns:STATUS_DATA_MediumError_Type / tns:STATUS_CODE	25
Element tns:STATUS_DATA_MediumError_Type / tns:STATUS_SUBCODE	25
Element tns:STATUS_DATA_MediumError_Type / tns:STATUS_TEXT	25
Element tns:STATUS_DATA_ApplicationError_Type / tns:STATUS_CODE	25
Element tns:STATUS_DATA_ApplicationError_Type / tns:STATUS_SUBCODE	26
Element tns:STATUS_DATA_ApplicationError_Type / tns:STATUS_TEXT	26
Element tns:STATUS_DATA_EntitlementError_Type / tns:STATUS_CODE	26
Element tns:STATUS_DATA_EntitlementError_Type / tns:STATUS_SUBCODE	27
Element tns:STATUS_DATA_EntitlementError_Type / tns:STATUS_TEXT	27
Element tns:STATUS_DATA_PrinterError_Type / tns:STATUS_CODE	27
Element tns:STATUS_DATA_PrinterError_Type / tns:STATUS_SUBCODE	28
Element tns:STATUS_DATA_PrinterError_Type / tns:STATUS_TEXT	28
Element tns:STATUS_DATA_SoftwareError_Type / tns:STATUS_CODE	28
Element tns:STATUS_DATA_SoftwareError_Type / tns:STATUS_SUBCODE	29
Element tns:STATUS_DATA_SoftwareError_Type / tns:STATUS_TEXT	29
Element tns:STATUS_DATA_ServiceOperatorError_Type / tns:STATUS_CODE	29
Element tns:STATUS_DATA_ServiceOperatorError_Type / tns:STATUS_SUBCODE	30
Element tns:STATUS_DATA_ServiceOperatorError_Type / tns:STATUS_TEXT	30
Element tns:ENGINE_DATA_Type / tns:VENDOR	30
Element tns:ENGINE_DATA_Type / tns:TYPE	30
Element tns:ENGINE_DATA_Type / tns:VERSION	31
Element tns:ENGINE_DATA_Type / tns:FIRMWARE	31
Element tns:ENGINE_DATA_Type / tns:TERM_TYP_CODE	31
Element tns:ENGINE_DATA_Type / tns:MAG_COUNT	31
Element tns:ENGINE_DATA_Type / tns:ACT_MAG	31
Element tns:ENGINE_DATA_Type / tns:ACT_MAG_NAME	32

Element tns:ENGINE_DATA_Type / tns:ACT_MAG_CONTENT	32
Element tns:ENGINE_DATA_Type / tns:PRINTER	32
Element tns:Schluesselversionen_Type / tns:K-PV-KM-MAC	32
Element tns:Schluesselversionen_Type / tns:K-KVP-KM-MAC	32
Element tns:Schluesselversionen_Type / tns:K-ERF-KM-MAC	33
Element tns:SAM-Schluessel-Info_Type / tns:SAM_ID.samNummer	33
Element tns:SAM-Schluessel-Info_Type / tns:LoadKey-Zaehler	33
Element tns:SAM-Schluessel-Info_Type / tns:Schluesselname	34
Element tns:SAM-Schluessel-Info_Type / tns:Nutzungs-Limit	34
Element tns:SAM-Schluessel-Info_Type / tns:Nutzungs-Sequenz-Zaehler	34
Element tns:NmKundendaten_Type / tns:kundeGeburtsdatum	35
Element tns:NmKundendaten_Type / tns:kundeSprache.code	35
Element tns:NmKundendaten_Type / tns:kundeName	35
Element tns:NmKundendaten_Type / tns:kundeVorname	35
Element tns:NmKundendaten_Type / tns:kundeGeschlecht.code	36
Element tns:NmKundendaten_Type / tns:kundenTyp1.code	36
Element tns:NmKundendaten_Type / tns:kundenTyp1.BeginnDatum	36
Element tns:NmKundendaten_Type / tns:kundenTyp1.AblaufDatum	37
Element tns:NmKundendaten_Type / tns:kundenTyp1.Anwendungsgebiet	37
Element tns:NmKundendaten_Type / tns:kundenTyp1.Tarifzonen.Ort_ID1	37
Element tns:NmKundendaten_Type / tns:kundenTyp1.Tarifzonen.Ort_ID2	38
Element tns:NmKundendaten_Type / tns:kundenTyp1.Tarifzonen.Ort_ID3	38
Element tns:NmKundendaten_Type / tns:kundenTyp1.StreckeVon	38
Element tns:NmKundendaten_Type / tns:kundenTyp1.StreckeNach	39
Element tns:NmKundendaten_Type / tns:kundenTyp2.code	39
Element tns:NmKundendaten_Type / tns:kundenTyp2.BeginnDatum	39
Element tns:NmKundendaten_Type / tns:kundenTyp2.AblaufDatum	40
Element tns:NmKundendaten_Type / tns:kundenTyp2.Anwendungsgebiet	40
Element tns:NmKundendaten_Type / tns:kundenTyp2.Tarifzonen.Ort_ID1	40
Element tns:NmKundendaten_Type / tns:kundenTyp2.Tarifzonen.Ort_ID2	41
Element tns:NmKundendaten_Type / tns:kundenTyp2.Tarifzonen.Ort_ID3	41
Element tns:NmKundendaten_Type / tns:kundenTyp2.StreckeVon	41
Element tns:NmKundendaten_Type / tns:kundenTyp2.StreckeNach	42
Element tns:NmKundendaten_Type / tns:kundenTyp3.code	42
Element tns:NmKundendaten_Type / tns:kundenTyp3.BeginnDatum	42
Element tns:NmKundendaten_Type / tns:kundenTyp3.AblaufDatum	43
Element tns:NmKundendaten_Type / tns:kundenTyp3.Anwendungsgebiet	43
Element tns:NmKundendaten_Type / tns:kundenTyp3.Tarifzonen.Ort_ID1	43
Element tns:NmKundendaten_Type / tns:kundenTyp3.Tarifzonen.Ort_ID2	43
Element tns:NmKundendaten_Type / tns:kundenTyp3.Tarifzonen.Ort_ID3	44
Element tns:NmKundendaten_Type / tns:kundenTyp3.StreckeVon	44
Element tns:NmKundendaten_Type / tns:kundenTyp3.StreckeNach	45
Element tns:NmKundendaten_Type / tns:Infotext	45
Element tns:NmVerzeichniseintragAppDaten_Type / tns:NmSystemspezifischerVerzeichnisteil ...	45
Element tns:NmSystemspezifischerVerzeichnisteil_Type / tns:zeigerSeparaterDatenteil	46
Element tns:NmVerzeichniseintragAppDaten_Type / tns:appInstanz_ID	46
Element tns:NmVerzeichniseintragAppDaten_Type / tns:appVersion	46
Element tns:NmVerzeichniseintragAppDaten_Type / tns:appGueltigkeitsbeginn	47
Element tns:NmVerzeichniseintragAppDaten_Type / tns:appGueltigkeitsende	47
Element tns:NmVerzeichniseintragAppDaten_Type / tns:appStatus	47
Element tns:NmVerzeichniseintragAppDaten_Type / tns:appSynchronNummer	47
Element tns:NmVerzeichniseintragApplikationslogbuch_Type / tns:NmSystemspezifischerVerzeichnisteil	48
Element tns:NmVerzeichniseintragApplikationslogbuch_Type / tns:logApplikationSeqNummer	48
Element tns:NmVerzeichniseintragKunde_Type / tns:NmSystemspezifischerVerzeichnisteil	48
Element tns:NmVerzeichniseintragLetzteTransaktion_Type / tns:logTransaktionsTyp.code	49
Element tns:NmVerzeichniseintragLetzteTransaktion_Type / tns:NmSystemspezifischerVerzeichnisteil	49
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz1	49
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz2	49
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz3	50
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz4	50
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz5	50
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz6	50
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz7	51
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz8	51
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz9	51
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz10	51
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz11	52
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz12	52
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz13	52
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz14	52

Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz15	53
Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz16	53
Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:NmSystemspezifischerVerzeich-	
nisteil	53
Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:berBerechtigung_ID	53
Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:prodProdukt_ID	54
Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:prodKeyOrganisation_ID	54
Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:berGueltigkeitsbeginn	54
Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:berGueltigkeitsende	55
Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:berStatus	55
Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:berSynchronNummer	55
Element tns:NmApplikationsverzeichnis_Type / tns:VerzeichniseintragAppDaten	55
Element tns:NmApplikationsverzeichnis_Type / tns:VerzeichniseintragAppLogbuch	56
Element tns:NmApplikationsverzeichnis_Type / tns:VerzeichniseintragKunde	56
Element tns:NmApplikationsverzeichnis_Type / tns:VerzeichniseintragSchluesselregister	57
Element tns:NmVerzeichniseintragSchluesselregister_Type / tns:NmSystemspezifis-	
cherVerzeichnisteil	57
Element tns:NmVerzeichniseintragSchluesselregister_Type / tns:Org_ID_Hersteller	58
Element tns:NmVerzeichniseintragSchluesselregister_Type / tns:NM-Spezifikationsversion	58
Element tns:NmVerzeichniseintragSchluesselregister_Type / tns:Herstellerversion	58
Element tns:NmVerzeichniseintragSchluesselregister_Type / tns:appInstanz_ID	59
Element tns:NmVerzeichniseintragSchluesselregister_Type / tns:Zufallszahl	59
Element tns:NmVerzeichniseintragSchluesselregister_Type / tns:RFU1	59
Element tns:NmVerzeichniseintragSchluesselregister_Type / tns:RFU2	59
Element tns:NmApplikationsverzeichnis_Type / tns:LetzteTransaktion	60
Element tns:NmApplikationsverzeichnis_Type / tns:Prioritaeten	60
Element tns:NmApplikationsverzeichnis_Type / tns:VerzeichniseintragBerDaten	61
Element tns:NmApplikationslogbuch_Type / tns:Transaktionsdatensatz	62
Element tns:NmApplikationsdaten_Type / tns:LetzteTransaktion	62
Element tns:NmApplikationsdaten_Type / tns:Schluesselversionen	62
Element tns:NmApplikationsdaten_Type / tns:Ausgabetransaktionskennung	63
Element tns:NmApplikationsdaten_Type / tns:Infotext	63
Element tns:NmBerechtigungsdaten_Type / tns:berechtigungTarifbereich	63
Element tns:NmBerechtigungsdaten_Type / tns:LetzteTransaktion	63
Element tns:NmBerechtigungsdaten_Type / tns:Schluesselversionen	64
Element tns:NmBerechtigungsdaten_Type / tns:Ausgabetransaktionskennung	64
Element tns:NmBerechtigungsdaten_Type / tns:Infotext	64
Element tns:Schluesselregister_Type / tns:Schluesselname	65
Element tns:TXWBD_Type / tns:SESSION_DATA	65
Element tns:TXWBD_Type / tns:ENGINE_DATA	66
Element tns:TXWBD_Type / tns:STATUS_DATA	66
Element tns:TXAUTH_Type / tns:SESSION_DATA	67
Element tns:TXAUTH_Type / tns:SAM_DATA	67
Element tns:TXAUTH_Type / tns:STATUS_DATA	67
Element tns:TXBGN_Type / tns:SESSION_DATA	68
Element tns:TXBGN_Type / tns:ENGINE_DATA	68
Element tns:TXBGN_Type / tns:SAM_DATA	69
Element tns:TXBGN_Type / tns:STATUS_DATA	69
Element tns:TXBGN_Type / tns:NmApplikationsverzeichnis	69
Element tns:TXLADKEYREG_Type / tns:SESSION_DATA	70
Element tns:TXLADKEYREG_Type / tns:SAM_DATA	71
Element tns:TXLADKEYREG_Type / tns:STATUS_DATA	71
Element tns:TXLOEKEYREG_Type / tns:SESSION_DATA	71
Element tns:TXLOEKEYREG_Type / tns:SAM_DATA	72
Element tns:TXLOEKEYREG_Type / tns:STATUS_DATA	72
Element tns:TXLESKEYREG_Type / tns:SESSION_DATA	72
Element tns:TXLESKEYREG_Type / tns:SAM_DATA	73
Element tns:TXLESKEYREG_Type / tns:STATUS_DATA	73
Element tns:TXLESKEYREG_Type / tns:Schluesselregister	73
Element tns:TXEND_Type / tns:SESSION_DATA	74
Element tns:TXEND_Type / tns:SAM_DATA	74
Element tns:TXEND_Type / tns:STATUS_DATA	75
Element tns:TXLESAPPPLOG_Type / tns:SESSION_DATA	75
Element tns:TXLESAPPPLOG_Type / tns:SAM_DATA	75
Element tns:TXLESAPPPLOG_Type / tns:STATUS_DATA	76
Element tns:TXLESAPPPLOG_Type / tns:NmApplikationsLogbuch	76
Element tns:TXLOEAPPPLOG_Type / tns:SESSION_DATA	76
Element tns:TXLOEAPPPLOG_Type / tns:SAM_DATA	77
Element tns:TXLOEAPPPLOG_Type / tns:STATUS_DATA	77
Element tns:TXAGBKUNDE_Type / tns:SESSION_DATA	77
Element tns:TXAGBKUNDE_Type / tns:SAM_DATA	78
Element tns:TXAGBKUNDE_Type / tns:STATUS_DATA	78

Element tns:TXLESKUNDE_Type / tns:SESSION_DATA	78
Element tns:TXLESKUNDE_Type / tns:SAM_DATA	79
Element tns:TXLESKUNDE_Type / tns:STATUS_DATA	79
Element tns:TXLESKUNDE_Type / tns:NmKundendaten	80
Element tns:TXLOEKUNDE_Type / tns:SESSION_DATA	81
Element tns:TXLOEKUNDE_Type / tns:SAM_DATA	82
Element tns:TXLOEKUNDE_Type / tns:STATUS_DATA	82
Element tns:TXAGBPRIOR_Type / tns:SESSION_DATA	82
Element tns:TXAGBPRIOR_Type / tns:SAM_DATA	83
Element tns:TXAGBPRIOR_Type / tns:STATUS_DATA	83
Element tns:TXLOEPRIOR_Type / tns:SESSION_DATA	84
Element tns:TXLOEPRIOR_Type / tns:SAM_DATA	84
Element tns:TXLOEPRIOR_Type / tns:STATUS_DATA	84
Element tns:TXAGBPINPUC_Type / tns:SESSION_DATA	85
Element tns:TXAGBPINPUC_Type / tns:SAM_DATA	85
Element tns:TXAGBPINPUC_Type / tns:STATUS_DATA	86
Element tns:TXPPIN_Type / tns:SESSION_DATA	86
Element tns:TXPPIN_Type / tns:SAM_DATA	86
Element tns:TXPPIN_Type / tns:STATUS_DATA	87
Element tns:TXAENDPIN_Type / tns:SESSION_DATA	87
Element tns:TXAENDPIN_Type / tns:SAM_DATA	87
Element tns:TXAENDPIN_Type / tns:STATUS_DATA	88
Element tns:TXSPIN_Type / tns:SESSION_DATA	88
Element tns:TXSPIN_Type / tns:SAM_DATA	88
Element tns:TXSPIN_Type / tns:STATUS_DATA	89
Element tns:TXDRUCK_Type / tns:SESSION_DATA	89
Element tns:TXDRUCK_Type / tns:SAM_DATA	90
Element tns:TXDRUCK_Type / tns:STATUS_DATA	90
Element tns:TXWEBAENDN_Type / tns:SESSION_DATA	90
Element tns:TXWEBAENDN_Type / tns:SAM_DATA	91
Element tns:TXWEBAENDN_Type / tns:STATUS_DATA	91
Element tns:TXSBER_Type / tns:SESSION_DATA	91
Element tns:TXSBER_Type / tns:SAM_DATA	92
Element tns:TXSBER_Type / tns:STATUS_DATA	92
Element tns:TXAGBBER_Type / tns:SESSION_DATA	92
Element tns:TXAGBBER_Type / tns:SAM_DATA	93
Element tns:TXAGBBER_Type / tns:STATUS_DATA	93
Element tns:TXLOEBER_Type / tns:SESSION_DATA	93
Element tns:TXLOEBER_Type / tns:SAM_DATA	94
Element tns:TXLOEBER_Type / tns:STATUS_DATA	94
Element tns:TXWEBPOBPBE_Type / tns:SESSION_DATA	95
Element tns:TXWEBPOBPBE_Type / tns:SAM_DATA	95
Element tns:TXWEBPOBPBE_Type / tns:STATUS_DATA	95
Element tns:TXPEB_Type / tns:SESSION_DATA	96
Element tns:TXPEB_Type / tns:SAM_DATA	96
Element tns:TXPEB_Type / tns:STATUS_DATA	97
Element tns:TXLPBE_Type / tns:inzahlungsbelegBerechtigung	97
Element tns:TXLPBE_Type / tns:berNmTransaktionMAC	97
Element tns:TXAENDBER_Type / tns:SESSION_DATA	97
Element tns:TXAENDBER_Type / tns:SAM_DATA	98
Element tns:TXAENDBER_Type / tns:STATUS_DATA	98
Element tns:TXLESBER_Type / tns:SESSION_DATA	99
Element tns:TXLESBER_Type / tns:SAM_DATA	99
Element tns:TXLESBER_Type / tns:STATUS_DATA	99
Element tns:TXLESBER_Type / tns:NmApplikationsverzeichnis	100
Element tns:TXLESBER_Type / tns:NmApplikationsDaten	100
Element tns:TXLESBER_Type / tns:NmBerechtigungsDaten	101
Element tns:TXAGBKEY_Type / tns:SESSION_DATA	101
Element tns:TXAGBKEY_Type / tns:SAM_DATA	101
Element tns:TXAGBKEY_Type / tns:STATUS_DATA	102
Element tns:TXLESKEY_Type / tns:SESSION_DATA	102
Element tns:TXLESKEY_Type / tns:SAM_DATA	103
Element tns:TXLESKEY_Type / tns:STATUS_DATA	103
Element tns:TXLESKEY_Type / tns:SAM_Schluesssel-Info	103
Element tns:TXAUFTRAG_Type / tns:SESSION_DATA	104
Element tns:TXAUFTRAG_Type / tns:STATUS_DATA	104
Element tns:TXANSCHR_Type / tns:SESSION_DATA	104
Element tns:TXANSCHR_Type / tns:STATUS_DATA	105
Element tns:TXANTWORT_Type / tns:SESSION_DATA	105
Element tns:TXANTWORT_Type / tns:STATUS_DATA	105
Element tns:TXANTWORT_Type / tns:SUB_SES_ID	106
Element tns:TXANTWORT_Type / tns:NmApplikationsverzeichnis	106

Element tns:ERROR_Type / tns:SESSION_DATA	107
Element tns:ERROR_Type / tns:ENGINE_DATA	107
Element tns:ERROR_Type / tns:STATUS_DATA	108
Element tns:TXWBD	108
Element tns:TXAUTH	108
Element tns:TXBGN	109
Element tns:TXEND	109
Element tns:TXLESAPPLOG	110
Element tns:TXLOEAPPLOG	110
Element tns:TXAGBKUNDE	111
Element tns:TXLESKUNDE	111
Element tns:TXLOEKUNDE	112
Element tns:TXAGBPRIOR	112
Element tns:TXLOEPRIO	113
Element tns:TXAGBPINPUC	113
Element tns:TXPPIN	114
Element tns:TXAENDPIN	114
Element tns:TXSPIN	114
Element tns:TXDRUCK	115
Element tns:TXWEBAENDN	115
Element tns:TXSBER	116
Element tns:TXAGBBER	117
Element tns:TXLOEBBER	117
Element tns:TXWEBPOBPB	118
Element tns:TXPEB	119
Element tns:TXLPEB	119
Element tns:TXAENDBER	120
Element tns:TXLESBER	120
Element tns:TXAGBKEY	121
Element tns:TXLESKEY	122
Element tns:TXLESKEYREG	122
Element tns:TXLOEKEYREG	123
Element tns:TXLADKEYREG	123
Element tns:TXAUFTRAG	123
Element tns:TXANSCHR	124
Element tns:TXANTWORT	124
Element tns:ERROR	125
Complex Type(s)	126
Complex Type tns:TXBEWEB_Type	126
Complex Type tns:SESSION_DATA_Type	126
Complex Type tns:SAM_DATA_Type	127
Complex Type tns:SAM_Transaktion_ID_Type	127
Complex Type tns:STATUS_DATA_Type	128
Complex Type tns:TXBEPOBPB_Type	128
Complex Type tns:STATUS_DATA_OK_Type	129
Complex Type tns:STATUS_DATA_SessionError_Type	129
Complex Type tns:STATUS_DATA_EngineError_Type	130
Complex Type tns:STATUS_DATA_MediumError_Type	130
Complex Type tns:STATUS_DATA_ApplicationError_Type	131
Complex Type tns:STATUS_DATA_EntitlementError_Type	131
Complex Type tns:STATUS_DATA_PrinterError_Type	132
Complex Type tns:STATUS_DATA_SoftwareError_Type	132
Complex Type tns:STATUS_DATA_ServiceOperatorError_Type	133
Complex Type tns:ENGINE_DATA_Type	133
Complex Type tns:Schluesselversionen_Type	134
Complex Type tns:SAM-Schluessel-Info_Type	135
Complex Type tns:NmKundendaten_Type	135
Complex Type tns:NmVerzeichniseintragAppDaten_Type	137
Complex Type tns:NmSystemspezifischerVerzeichnisteil_Type	138
Complex Type tns:NmVerzeichniseintragApplikationslogbuch_Type	138
Complex Type tns:NmVerzeichniseintragKunde_Type	139
Complex Type tns:NmVerzeichniseintragLetzteTransaktion_Type	139
Complex Type tns:NmVerzeichniseintragPrioritaeten_Type	140
Complex Type tns:NmVerzeichniseintragBerechtigungen_Type	140
Complex Type tns:NmApplikationsverzeichnis_Type	141
Complex Type tns:NmVerzeichniseintragSchluesselregister_Type	142
Complex Type tns:NmApplikationslogbuch_Type	142
Complex Type tns:NmApplikationsdaten_Type	143
Complex Type tns:NmBerechtigungsdaten_Type	143
Complex Type tns:Schluesselregister_Type	144
Complex Type tns:TXWBD_Type	144
Complex Type tns:TXAUTH_Type	144

Complex Type tns:TXBGN_Type	145
Complex Type tns:TXLADKEYREG_Type	145
Complex Type tns:TXLOEKEYREG_Type	146
Complex Type tns:TXLESKEYREG_Type	146
Complex Type tns:TXEND_Type	147
Complex Type tns:TXLESAPPROG_Type	147
Complex Type tns:TXLOEAPPROG_Type	147
Complex Type tns:TXAGBKUNDE_Type	148
Complex Type tns:TXLESKUNDE_Type	148
Complex Type tns:TXLOEKUNDE_Type	149
Complex Type tns:TXAGBPRIOR_Type	149
Complex Type tns:TXLOEPRIOR_Type	149
Complex Type tns:TXAGBPINPUC_Type	150
Complex Type tns:TXPPIN_Type	150
Complex Type tns:TXAENDPIN_Type	150
Complex Type tns:TXSPIN_Type	151
Complex Type tns:TXDRUCK_Type	151
Complex Type tns:TXWEBBAENDN_Type	152
Complex Type tns:TXSBER_Type	152
Complex Type tns:TXAGBBER_Type	153
Complex Type tns:TXLOEBER_Type	153
Complex Type tns:TXWEBPOBPEB_Type	154
Complex Type tns:TXPEB_Type	154
Complex Type tns:TXLPEB_Type	155
Complex Type tns:TXAENDBER_Type	155
Complex Type tns:TXLESBER_Type	156
Complex Type tns:TXAGBKEY_Type	157
Complex Type tns:TXLESKEY_Type	157
Complex Type tns:TXAUFTRAG_Type	157
Complex Type tns:TXANSCHR_Type	158
Complex Type tns:TXANTWORT_Type	158
Complex Type tns:ERROR_Type	159
Simple Type(s)	159
Simple Type tns:VersionNumberExtended	159
Simple Type tns:VersionNumber	160
Simple Type tns:STATUS_CODE_OK_Type	160
Simple Type tns:STATUS_SUBCODE_OK_Type	160
Simple Type tns:STATUS_CODE_SessionError_Type	161
Simple Type tns:STATUS_SUBCODE_SessionError_Type	161
Simple Type tns:STATUS_CODE_EngineError_Type	162
Simple Type tns:STATUS_SUBCODE_EngineError_Type	163
Simple Type tns:STATUS_CODE_MediumError_Type	164
Simple Type tns:STATUS_SUBCODE_MediumError_Type	164
Simple Type tns:STATUS_CODE_ApplicationError_Type	165
Simple Type tns:STATUS_SUBCODE_ApplicationError_Type	165
Simple Type tns:STATUS_CODE_EntitlementError_Type	166
Simple Type tns:STATUS_SUBCODE_EntitlementError_Type	167
Simple Type tns:STATUS_CODE_PrinterError_Type	168
Simple Type tns:STATUS_SUBCODE_PrinterError_Type	168
Simple Type tns:STATUS_CODE_SoftwareError_Type	169
Simple Type tns:STATUS_SUBCODE_SoftwareError_Type	169
Simple Type tns:STATUS_CODE_ServiceOperatorError_Type	170
Simple Type tns:STATUS_SUBCODE_ServiceOperatorError_Type	171
Namespace: "http://vdv/ka/kvp-dl-pv/2"	171
Schema(s)	171
Imported schema XML-Schema_KVP_DL_PV_ext-1.3.0.xsd	171
Included schema XML-Schema_KVP_DL_PV.xsd	172
Element(s)	172
Element tns:TXBEWEBKVP	172
Element tns:TXBEWEBKOKVP_Type / tns:belastungstransaktionBerechtigung	172
Element tns:TXBEWEBKOKVP_Type / tns:berNmTransaktionMAC	173
Element tns:TXTRANSABBRUCH	173
Element tns:AllgemeineTransaktionsdaten	174
Element tns:AllgemeineTransaktionsdaten / tns:logApplikationSeqNummer	175
Element tns:AllgemeineTransaktionsdaten / tns:logNmTransaktion_ID	175
Element tns:NmTransaktion_ID_Type / tns:samSequenznummer	175
Element tns:NmTransaktion_ID_Type / tns:SAM_ID.samNummer	176
Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsOperator_ID	176
Element tns:AllgemeineTransaktionsdaten / tns:logTerminal_ID	176
Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsZeitpunkt	177
Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsOrt_ID	177
Element tns:AllgemeineTransaktionsdaten / tns:logTransaktionsTyp.code	177

Element tns:TXTRANSABBRUCH_Type / tns:MKAH-PV-NM-MAC_ID	178
Element tns:TXTRANSABBRUCH_Type / tns:MKAH-PV-Nutzungszaehler	178
Element tns:TXTRANSABBRUCH_Type / tns:MKKVP--NM-MAC_ID	178
Element tns:TXTRANSABBRUCH_Type / tns:MKKVP-Nutzungszaehler	179
Element tns:TXBEKOKVP	179
Element tns:TXAEBER_Type_1_3_0 / tns:tx_ber	180
Element tns:TXAEBER_Type_1_3_0 / tns:berechtigungTarifbereichDaten	180
Element tns:TXAEBER_Type_1_3_0 / tns:berBerechtigung_ID	180
Element tns:TXAEBER_Type_1_3_0 / tns:prodProdukt_ID	181
Element tns:TXAEBER_1_3_0	181
Element tns:Mitnahme_Type / tns:mitnahmeTyp	182
Element tns:Mitnahme_Type / tns:mitnahmeAnzahl	182
Element tns:Linie_ID_Type / tns:linienNummer	183
Element tns:Linie_ID_Type / tns:linieDomaene_ID	183
Element tns:LinieVariante_ID_Type / tns:variantenNummer	183
Element tns:LinieVariante_ID_Type / tns:linie_ID	184
Element tns:Fahrt_ID_Type / tns:fahrtNummer	184
Element tns:Fahrt_ID_Type / tns:fahrtBetreiber_ID	184
Element tns:EFSVlaOrtsListe_Type / tns:efsVlaort_ID	185
Element tns:TX_PP_Type / tns:ppLeistungsPreis	185
Element tns:TX_PP_Type / tns:ppMehrwertsteuer	185
Element tns:TX_BERLOG_Type / tns:berLogLinieVariante_ID	186
Element tns:TX_BERLOG_Type / tns:berLogFahrt_ID	186
Element tns:TX_LOG_Type / tns:logTransaktionsoperator_ID	186
Element tns:TX_LOG_Type / tns:logTransaktionsZeitpunkt_ID	187
Element tns:TX_LOG_Type / tns:logTransaktionsort_ID	187
Element tns:TX_LOG_Type / tns:logTransaktionsTyp_ID	187
Element tns:TX_AFBLOG_Type / tns:afbLogFahrgastTyp	188
Element tns:TX_AFBLOG_Type / tns:afbLogVerkehrsmittelart	189
Element tns:TX_AFBLOG_Type / tns:afbLogServiceKlasse	189
Element tns:TX_AFBLOG_Type / tns:afbLogDynamischerRabattParameter	189
Element tns:TX_AFBLOG_Type / tns:afbLogMitnahme	190
Element tns:TX_AFBLOG_Type / tns:txberlog	190
Element tns:TX_AFBLOG_Type / tns:txlog	190
Element tns:TX_EFSLOG_Type / tns:efsFahrgastTyp	191
Element tns:TX_EFSLOG_Type / tns:efsVerkehrsmittelKategorie	191
Element tns:TX_EFSLOG_Type / tns:efsLogServiceKlasse	192
Element tns:TX_EFSLOG_Type / tns:efsServiceKlasseExtra	192
Element tns:TX_EFSLOG_Type / tns:efsStartort_ID	192
Element tns:TX_EFSLOG_Type / tns:efsZielort_ID	193
Element tns:TX_EFSLOG_Type / tns:efsViaOrte_IDs	193
Element tns:TX_EFSLOG_Type / tns:efsLogMitnahme	194
Element tns:TX_EFSLOG_Type / tns:txberlog	194
Element tns:TX_EFSLOG_Type / tns:txlog	194
Element tns:TX_ABKEY_Type / tns:berAbleitungsdaten	195
Element tns:TXASBER_Type / tns:prodProdukt_ID	195
Element tns:TXASBER_Type / tns:berBerechtigung_ID	195
Element tns:TXASBER_Type / tns:transSelektionKriterien	196
Element tns:TXANLN_Type / tns:prodAbrechnungsverfahren	196
Element tns:TXANLN_Type / tns:berBezahlArt	196
Element tns:TXANLN_Type / tns:prodProdukt_ID	197
Element tns:TXANLN_Type / tns:berBerechtigung_ID	197
Element tns:TXANLN_Type / tns:transSelektionKriterien	197
Element tns:TXANLN_Type / tns:txpp	198
Element tns:TXANLN_Type / tns:txafblog	198
Element tns:TXAUSEFS_Type / tns:prodAbrechnungsverfahren	199
Element tns:TXAUSEFS_Type / tns:berBezahlMittel	199
Element tns:TXAUSEFS_Type / tns:berBezahlArt	199
Element tns:TXAUSEFS_Type / tns:prodProdukt_ID	200
Element tns:TXAUSEFS_Type / tns:berBerechtigung_ID	200
Element tns:TXAUSEFS_Type / tns:transSelektionKriterien	200
Element tns:TXAUSEFS_Type / tns:txpp	201
Element tns:TXAUSEFS_Type / tns:txefslog	201
Element tns:TXADM_Type / tns:transMediennummer	202
Element tns:TXADM_Type / tns:transappInstanz_ID	202
Element tns:TXABER_Type / tns:tx_ber	202
Element tns:TXABER_Type / tns:berechtigungTarifbereich	203
Element tns:TXABER_Type / tns:berechtigungTarifbereichZusatz	203
Element tns:TXABER_Type / tns:ausgabeTransaktionBerechtigung	203
Element tns:TXABER_Type / tns:berNmTransaktionMAC	203
Element tns:TXEBER_Type / tns:fahrttransaktion	204
Element tns:TXEBER_Type / tns:berNmTransaktionMAC	204

Element tns:TXAEBER_Type / tns:tx_ber	205
Element tns:TXAEBER_Type / tns:berechtigungTarifbereich	205
Element tns:TXAENBER_Type / tns:fahrttransaktion	205
Element tns:TXAENBER_Type / tns:berNmTransaktionMAC	206
Element tns:TXRBER_Type / tns:ruecknahmeTransaktionBerechtigung	206
Element tns:TXRBER_Type / tns:berNmTransaktionMAC	206
Element tns:TXAMBER_Type / tns:tx_abkey	207
Element tns:TXEMBER_Type / tns:tx_abkey	207
Element tns:TXRMBER_Type / tns:tx_abkey	207
Element tns:TXASKON_Type / tns:samSAM_ID	208
Element tns:TXASKON_Type / tns:samSchluessel_ID	208
Element tns:TXASKON_Type / tns:samLoadKeyZaehler	208
Element tns:TXASKON_Type / tns:samNutzungsLimitNeu	209
Element tns:TXUEBERKON_Type / tns:samSAM_ID	209
Element tns:TXUEBERKON_Type / tns:samSchluessel_ID	209
Element tns:TXUEBERKON_Type / tns:samLoadKeyZaehler	210
Element tns:TXUEBERKON_Type / tns:samNutzungsLimitGen	210
Element tns:TXBEKODL_Type / tns:berBerechtigung_ID	210
Element tns:TXBEKODL_Type / tns:txpp	211
Element tns:TXBEKODL_Type / tns:fahrttransaktion	211
Element tns:TXBEKODL_Type / tns:berNmTransaktionMAC	211
Element tns:TXGKO_Type / tns:belastungstransaktionBerechtigung	212
Element tns:TXGKO_Type / tns:berNmTransaktionMAC	212
Element tns:TXGWEB_Type / tns:belastungstransaktionBerechtigung	212
Element tns:TXGWEB_Type / tns:berNmTransaktionMAC	213
Element tns:TXKNAWA_Type / tns:logTransaktionsOperator_ID	213
Element tns:TXKNAWA_Type / tns:logTerminal_ID	213
Element tns:TXKNAWA_Type / tns:logTransaktionsZeitpunkt	214
Element tns:TXKNAWA_Type / tns:logTransaktionsOrt_ID	214
Element tns:TXKNAWA_Type / tns:logValidationCode	214
Element tns:TXKNAWA_Type / tns:appInstanz_ID	215
Element tns:TXKNAWB_Type / tns:logTransaktionsOperator_ID	215
Element tns:TXKNAWB_Type / tns:logTerminal_ID	216
Element tns:TXKNAWB_Type / tns:logTransaktionsZeitpunkt	216
Element tns:TXKNAWB_Type / tns:logTransaktionsOrt_ID	216
Element tns:TXKNAWB_Type / tns:logValidationCode	217
Element tns:TXKNAWB_Type / tns:berBerechtigung_ID	217
Element tns:TXLPEB_Type / tns:ezahlungsbelegBerechtigung	218
Element tns:TXLPEB_Type / tns:berNmTransaktionMAC	218
Element tns:TXSANFB_Type / tns:berBerechtigung_ID	218
Element tns:TXSANFB_Type / tns:prodProdukt_ID	219
Element tns:TXSANFA_Type / tns:appInstanz_ID	219
Element tns:TXSMITB_Type / tns:berSperrkandidat	220
Element tns:TXSMITO_Type / tns:orgSperrkandidat	220
Element tns:TXSMITS_Type / tns:samSperrkandidat	220
Element tns:TXSFREIMITB_Type / tns:berSperrkandidat	221
Element tns:TXSFREIMITO_Type / tns:orgSperrkandidat	221
Element tns:TXSFREIMITS_Type / tns:samSperrkandidat	221
Element tns:TXADM	222
Element tns:TXAEBER	222
Element tns:TXAENBER	223
Element tns:TXAS	223
Element tns:TXASKON	224
Element tns:TXUEBERKON	225
Element tns:TXBEKODL	225
Element tns:TXGKO	226
Element tns:TXGWEB	226
Element tns:TXABER	227
Element tns:TXEBER	228
Element tns:TXRBER	228
Element tns:TXLPEB	229
Element tns:TXSANFB	229
Element tns:TXSANFA	230
Element tns:TXSAANFB	231
Element tns:TXSAANFA	231
Element tns:TXSMITB	232
Element tns:TXSMITO	233
Element tns:TXSMITS	233
Element tns:TXSFREIMITB	234
Element tns:TXSFREIMITO	235
Element tns:TXSFREIMITS	235
Element tns:TXAUSEFS	236

Element tns:TXASBERAFB	237
Element tns:TXASBEREFS	238
Element tns:TXANLN	238
Element tns:TXKNAWA	239
Element tns:TXKNAWB	240
Element tns:TXAMBER	241
Element tns:TXEMBER	242
Element tns:TXRMBER	242
Complex Type(s)	243
Complex Type tns:TXBEWEBKOKVP_Type	243
Complex Type tns:TXTRANSABBRUCH_Type	244
Complex Type tns:NmTransaktion_ID_Type	244
Complex Type tns:TXAEBER_Type_1_3_0	245
Complex Type tns:Mitnahme_Type	245
Complex Type tns:Linie_ID_Type	246
Complex Type tns:LinieVariante_ID_Type	246
Complex Type tns:Fahrt_ID_Type	246
Complex Type tns:EFSViaOrtsListe_Type	247
Complex Type tns:TX_PP_Type	247
Complex Type tns:TX_BERLOG_Type	248
Complex Type tns:TX_LOG_Type	248
Complex Type tns:TX_AFBLOG_Type	248
Complex Type tns:TX_EFSLOG_Type	249
Complex Type tns:TX_ABKEY_Type	250
Complex Type tns:TXASBER_Type	250
Complex Type tns:TXANLN_Type	251
Complex Type tns:TXAUSEFS_Type	251
Complex Type tns:TXADM_Type	252
Complex Type tns:TXABER_Type	253
Complex Type tns:TXEBER_Type	254
Complex Type tns:TXAEBER_Type	254
Complex Type tns:TXAENBER_Type	255
Complex Type tns:TXRBER_Type	255
Complex Type tns:TXAMBER_Type	256
Complex Type tns:TXEMBER_Type	256
Complex Type tns:TXRMBER_Type	257
Complex Type tns:TXASKON_Type	258
Complex Type tns:TXUEBERKON_Type	258
Complex Type tns:TXBEKODL_Type	259
Complex Type tns:TXGKO_Type	260
Complex Type tns:TXGWEB_Type	260
Complex Type tns:TXKNAWA_Type	261
Complex Type tns:TXKNAWB_Type	262
Complex Type tns:TXLPEB_Type	262
Complex Type tns:TXSANFB_Type	263
Complex Type tns:TXSANFA_Type	263
Complex Type tns:TXSAANFA_Type	264
Complex Type tns:TXSAANFB_Type	265
Complex Type tns:TXSMITB_Type	265
Complex Type tns:TXSMITO_Type	266
Complex Type tns:TXSMITS_Type	267
Complex Type tns:TXSFREIMITB_Type	267
Complex Type tns:TXSFREIMITO_Type	268
Complex Type tns:TXSFREIMITS_Type	268
Simple Type(s)	269
Simple Type tns:Validation_CODE_Type	269
Simple Type tns:Amount65535	271
Simple Type tns:Profil_CODE_Type	271
Simple Type tns:SelektionKriterien_Type	273
Simple Type tns:Kundentyp_CODE_Type	273
Simple Type tns:ServiceKlasse_CODE_Type	274
Simple Type tns:ServiceKlasseExtra_CODE_Type	275
Simple Type tns:TransportTypeCode_Type	276
Simple Type tns:TransportmittelKategorie_CODE_Type	277
Simple Type tns:Transportserviceart_CODE_Type	277
Namespace: "http://vdv/ka/ion/2"	278
Schema(s)	278
Imported schema XML-Schema_ION.xsd	278
Element(s)	278
Element tns:TXB	278
Element tns:TXA	279
Element tns:TXBRequest	279

Element tns:TXRequest	280
Element tns:TXDEABER	281
Element tns:TXSMITA	281
Element tns:TXSFREIMITA	282
Element tns:TXSANFSYMK	282
Element tns:TXSANFASYMK	283
Element tns:TXSAANFSYMK	284
Element tns:TXSAANFASYMK	284
Element tns:TXSFREIMITSYMK	285
Element tns:TXSFREIMITASYMK	286
Element tns:TXSMITSYMK	286
Element tns:TXSMITASYMK	287
Element tns:TXSNAWA	288
Element tns:TXSNAWB	288
Complex Type(s)	289
Complex Type tns:TX_BASE_Type	289
Complex Type tns:ION_TX_HEADER_Type	290
Complex Type tns:IONTransaktion_ID_Type	291
Complex Type tns:Transaktionsdatensatz_Type	291
Complex Type tns:berNmTransaktionMAC_Type	292
Complex Type tns:SymSchluessel_ID_Type	292
Complex Type tns:Terminal_ID_Type	293
Complex Type tns:Ort_ID_Type	293
Complex Type tns:TX_BER_Type	294
Complex Type tns:Berechtigung_ID_Type	294
Complex Type tns:EFMProdukt_ID_Type	294
Complex Type tns:NmApplikationInstanz_ID_Type	295
Complex Type tns:ASymSchluessel_ID_Type	295
Complex Type tns:appNmTransaktionMAC_Type	296
Complex Type tns:TX_RET_Type	296
Complex Type tns:TX_SMIT_Type	297
Complex Type tns:TX_SANF_Type	297
Complex Type tns:TXA_Type	298
Complex Type tns:TXB_Type	299
Complex Type tns:TXAS_Type	299
Complex Type tns:TXDEABER_Req_Type	300
Complex Type tns:TXSMITA_Type	300
Complex Type tns:TXSFREIMITA_Type	301
Complex Type tns:TXSANFSYMK_Type	302
Complex Type tns:TXSANFASYMK_Type	302
Complex Type tns:TXSAANFSYMK_Type	303
Complex Type tns:TXSAANFASYMK_Type	303
Complex Type tns:TXSFREIMITSYMK_Type	304
Complex Type tns:TXSFREIMITASYMK_Type	305
Complex Type tns:TXSMITSYMK_Type	305
Complex Type tns:TXSMITASYMK_Type	306
Complex Type tns:TXSNAWA_Req_Type	306
Complex Type tns:TXSNAWB_Req_Type	307
Simple Type(s)	308
Simple Type tns:TransSignatur_Type	308
Simple Type tns:SAM_ID_Type	309
Simple Type tns:TerminalTyp_CODE_Type	309
Simple Type tns:OrtsTyp_CODE_Type	310
Simple Type tns:Abrechnungsverfahren_CODE_Type	310
Simple Type tns:Bezahlart_CODE_Type	311
Simple Type tns:PrintableString	311
Simple Type tns:CommonServiceResultCode	312
Simple Type tns:NmTransaktionsTyp_CODE	313
Simple Type tns:AuftragsTyp_CODE	316
Simple Type tns:Mitteilung_CODE_Type	316
Simple Type tns:SperrlistenZyklusNummer_Type	316
Namespace: "http://vdv/ka/common/types/2"	317
Schema(s)	317
Imported schema XML-Schema_Common_Types.xsd	317
Simple Type(s)	317
Simple Type tns:DateTime	317
Simple Type tns:BitString16	318
Simple Type tns:Date	318
Simple Type tns:ReferenceNumberTwo	318
Simple Type tns:INT2	319
Simple Type tns:ReferenceNumberFour	319
Simple Type tns:INT4	320

Simple Type tns:ReferenceNumberThree	320
Simple Type tns:INT3	321
Simple Type tns:INT1	321
Simple Type tns:SequenceNumberFour	322
Simple Type tns:OctetString8	322
Simple Type tns:SequenceNumberTwo	322
Simple Type tns:DateTimeCompact	323
Simple Type tns:OctetString10	324
Simple Type tns:OctetString12	324
Simple Type tns:BitString1	324
Simple Type tns:BitString8	325
Simple Type tns:DateCompact	325
Simple Type tns:Datef	325
Simple Type tns:OctetString1	326
Simple Type tns:OctetString4	326
Simple Type tns:OctetString128	327
Simple Type tns:OctetString200	327
Simple Type tns:ReferenceNumberOne	327
Simple Type tns:SequenceNumberOne	328
Simple Type tns:SequenceNumberThree	328
Namespace: "http://vdv/ka/common/2"	328
Schema(s)	328
Imported schema XML-Schema_KA_Common.xsd	328
Element(s)	329
Element tns:VX	329
Simple Type(s)	329
Simple Type tns:Organisation_ID	329
Simple Type tns:KommunikationsPartnerRolle	330
Simple Type tns:StatusCode	331
Simple Type tns:StatusText	332
Complex Type(s)	332
Complex Type tns:VX_Message_Type	332
Namespace: "http://vdv/ka/ah/2"	333
Schema(s)	333
Imported schema XML-Schema_AH.xsd	333
Element(s)	333
Element ah:TXAA	333
Element ah:TXRA	334
Element ah:TXAEA	334
Element ah:TXSANFO	335
Element ah:TXSANFS	335
Element ah:TXSAANFO	336
Element ah:TXSAANFS	337
Element ah:TXKNAWDM	337
Element ah:TXLKAORG	338
Element ah:TXLKAORGReq	339
Element ah:TXLZVMORG	339
Element ah:TXLZVMORGReq	340
Complex Type(s)	341
Complex Type ah:TXAA_Type	341
Complex Type ah:TXRA_Type	341
Complex Type ah:TXAEA_Type	342
Complex Type ah:TXSANFO_Type	342
Complex Type ah:TXSANFS_Type	343
Complex Type ah:TXSAANFO_Type	344
Complex Type ah:TXSAANFS_Type	344
Complex Type ah:TXKNAWDM_Type	345
Complex Type ah:TX_LKAORG_Type	346
Complex Type ah:TXLKAORG_SL_DATA_Type	346
Complex Type ah:TXLKAORG_Req_Type	347
Complex Type ah:TX_LZVMORG_Type	347
Complex Type ah:TXLZVMORG_SL_DATA_Type	348
Complex Type ah:TXLZVMORG_Req_Type	349
Namespace: "http://vdv/ka/ah/types/2"	349
Schema(s)	349
Imported schema XML-Schema_AH_Types.xsd	349
Element(s)	349
Element tns:Organisation_ID.organisationsNummer	349
Complex Type(s)	350
Complex Type tns:TX_APP_Type	350
Complex Type tns:Kundenroute_Type	350
Complex Type tns:OrgIDRolleRoute_Type	351

Complex Type tns:Kundenrolle_Type	351
Complex Type tns:Organisation_Type	351
Simple Type(s)	352
Simple Type tns:IP_Format	352
Simple Type tns:Port_Format	352
Simple Type tns:Email_Type	353
Simple Type tns:AHErrorCode	353
Namespace: ""	356
Element(s)	356
Element tns:TX_BASE_Type / txbase	356
Element tns:ION_TX_HEADER_Type / transAuftrag	357
Element tns:ION_TX_HEADER_Type / transEmpfaenger_ID	358
Element tns:ION_TX_HEADER_Type / transEmpfaengerRolle	358
Element tns:ION_TX_HEADER_Type / transStatus	358
Element tns:ION_TX_HEADER_Type / transTransaktion_ID	359
Element tns:IONTransaktion_ID_Type / transSequenznummer	359
Element tns:IONTransaktion_ID_Type / transSenderRolle	359
Element tns:IONTransaktion_ID_Type / transSender_ID	360
Element tns:ION_TX_HEADER_Type / transTransaktionsTyp	360
Element tns:ION_TX_HEADER_Type / transTransaktionsZeitpunkt	360
Element tns:ION_TX_HEADER_Type / transVersion	361
Element tns:ION_TX_HEADER_Type / transWiederholungsZaehler	361
Element tns:ION_TX_HEADER_Type / transSignaturTyp	361
Element tns:ION_TX_HEADER_Type / transSignaturZertifikat	362
Element tns:ION_TX_HEADER_Type / transSignatur	362
Element tns:Transaktionsdatensatz_Type / Transaktionsdaten	362
Element tns:berNmTransaktionMAC_Type / berMAC_PV	362
Element tns:berNmTransaktionMAC_Type / berMAC_KVP	363
Element tns:berNmTransaktionMAC_Type / berMAC_PV_Schluesssel_ID	363
Element tns:SymSchluesssel_ID_Type / schluessselNummer	363
Element tns:SymSchluesssel_ID_Type / schluessselVersion	364
Element tns:SymSchluesssel_ID_Type / schluessselInhaber_ID	364
Element tns:berNmTransaktionMAC_Type / berMAC_KVP_Schluesssel_ID	364
Element tns:Terminal_ID_Type / terminalTyp	364
Element tns:Terminal_ID_Type / terminalNummer	365
Element tns:Terminal_ID_Type / terminalOwner_ID	365
Element tns:Ort_ID_Type / ortTyp	365
Element tns:Ort_ID_Type / ortNummer	366
Element tns:Ort_ID_Type / ortDomaene_ID	366
Element tns:TX_BER_Type / berGueltigkeitsbeginn	366
Element tns:TX_BER_Type / berGueltigkeitsende	367
Element tns:TX_BER_Type / prodAbrechnungsVerfahren	367
Element tns:TX_BER_Type / berBezahlArt	367
Element tns:TX_BER_Type / berBezahlMittel	368
Element tns:Berechtigung_ID_Type / berechtigungNummer	368
Element tns:Berechtigung_ID_Type / kvp_ID	368
Element tns:EFMPProdukt_ID_Type / produktNummer	368
Element tns:EFMPProdukt_ID_Type / organisationID	369
Element tns:NmApplikationInstanz_ID_Type / NmAppInstanznummer	369
Element tns:NmApplikationInstanz_ID_Type / kvp_ID	369
Element tns:ASymSchluesssel_ID_Type / signaturSchluesssel	370
Element tns:appNmTransaktionMAC_Type / appMAC_AH	370
Element tns:appNmTransaktionMAC_Type / appMAC_KVP	370
Element tns:appNmTransaktionMAC_Type / appMAC_AH_Schluesssel_ID	370
Element tns:appNmTransaktionMAC_Type / appMAC_KVP_Schluesssel_ID	371
Element tns:TX_RET_Type / transOrigID	371
Element tns:TX_RET_Type / transOrigSignatur	372
Element tns:TX_RET_Type / transOriginalZeit	372
Element tns:TX_SMIT_Type / sperrAnforderungBezug	372
Element tns:TX_SMIT_Type / sperrEntscheidung	372
Element tns:TX_SANF_Type / sperrSperrgrund	373
Element tns:TXA_Type / transAblehnungGrund	373
Element tns:TXAS_Type / transSendeAuftrag	374
Element tns:TXAS_Type / transSendeAuftragstyp	374
Element tns:TXDEABER_Req_Type / prodAkzeptanzEnde	374
Element tns:TXDEABER_Req_Type / prodProdukt_ID	375
Element tns:TXSMITA_Type / appSperrkandidat	375
Element tns:TXSANFSYMK_Type / keySperrkandidatsym	375
Element tns:TXSANFASYMK_Type / keySperrkandidatasym	376
Element tns:TXSFREIMITSYMK_Type / keySperrkandidatsym	376
Element tns:TXSFREIMITASYMK_Type / keySperrkandidatasym	376
Element tns:TXSMITSYMK_Type / keySperrkandidatsym	377

Element tns:TXSMITASYMK_Type / keySperrkandidatasym	377
Element tns:TXSNAWA_Req_Type / samSperrkandidat	377
Element tns:TXSNAWA_Req_Type / orgSperrkandidat	378
Element tns:TXSNAWA_Req_Type / zyklusNummer	378
Element tns:TXSNAWA_Req_Type / sperrtransaktionApplikation	379
Element tns:TXSNAWA_Req_Type / appNmTransaktionMAC	379
Element tns:TXSNAWB_Req_Type / samSperrkandidat	379
Element tns:TXSNAWB_Req_Type / orgSperrkandidat	380
Element tns:TXSNAWB_Req_Type / zyklusNummer	380
Element tns:TXSNAWB_Req_Type / sperrtransaktionBerechtigung	380
Element tns:TXSNAWB_Req_Type / berNmTransaktionMAC	381
Element tns:VX_Message_Type / StatusCode	381
Element tns:VX_Message_Type / StatusText	382
Element ah:TXAA_Type / nmMedium_ID.nutzermediumNummer	382
Element ah:TXAA_Type / tx_app	382
Element tns:TX_APP_Type / appInstanz_ID	383
Element tns:TX_APP_Type / appGueltigkeitsbeginn	383
Element tns:TX_APP_Type / appGueltigkeitsende	383
Element tns:TX_APP_Type / appVersion	384
Element ah:TXAA_Type / ausgabeTransaktionApplikation	384
Element ah:TXAA_Type / appNmTransaktionMAC	384
Element ah:TXRA_Type / ruecknahmeTransaktionApplikation	385
Element ah:TXRA_Type / appNmTransaktionMAC	385
Element ah:TXRA_Type / appVersion	385
Element ah:TXAEA_Type / appInstanzId	386
Element ah:TXAEA_Type / appGueltigkeitsende	386
Element ah:TXAEA_Type / appGueltigkeitsbeginn	386
Element ah:TXAEA_Type / appVersion	386
Element ah:TXSANFS_Type / samSperrkandidat	387
Element ah:TXSANFS_Type / samSequenznummer	387
Element ah:TXKNAWDM_Type / logTransaktionsOperator_ID	387
Element ah:TXKNAWDM_Type / logTerminal_ID	388
Element ah:TXKNAWDM_Type / logTransaktionsZeitpunkt	388
Element ah:TXKNAWDM_Type / logTransaktionsOrt_ID	388
Element ah:TXKNAWDM_Type / transMediennummer	389
Element ah:TX_LKAORG_Type / orgListe	389
Element ah:TXLKAORG_SL_DATA_Type / ErstellungsDatum	389
Element ah:TXLKAORG_SL_DATA_Type / daten	389
Element ah:TX_LZVMORG_Type / orgListe	390
Element ah:TXLZVMORG_SL_DATA_Type / ErstellungsDatum	390
Element ah:TXLZVMORG_SL_DATA_Type / daten	390
Element tns:Kundenroute_Type / bezeichnung	391
Element tns:Kundenroute_Type / kurzBezeichnung	391
Element tns:Kundenroute_Type / email	391
Element tns:Kundenroute_Type / orgIDRolleRoute	391
Element tns:OrgIDRolleRoute_Type / orgID	392
Element tns:OrgIDRolleRoute_Type / rollencode	392
Element tns:OrgIDRolleRoute_Type / serviceUrl	393
Element tns:OrgIDRolleRoute_Type / interfaceVersion	393
Element tns:Kundenrolle_Type / rollencode	393
Element tns:Kundenrolle_Type / ip	394
Element tns:Kundenrolle_Type / port	394
Element tns:Organisation_Type / bezeichnung	394
Element tns:Organisation_Type / kurzbezeichnung	394
Element tns:Organisation_Type / orgId	395
Element tns:Organisation_Type / kommunikationsPartnerRoute	395

Resource hierarchy:



Legend:  Import,  Include,  Redefine,  Override,  Cycle detected

XML-Schema_PE_ext-1.7.0.xsd

  XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

  XML-Schema_ION.xsd

  XML-Schema_Common_Types.xsd

  XML-Schema_KA_Common.xsd

- ↳ XML-Schema_Common_Types.xsd
- ↳ XML-Schema_KVP_DL_PV.xsd
 - ↳ XML-Schema_Common_Types.xsd
 - ↳ XML-Schema_KA_Common.xsd
 - ↳ XML-Schema_Common_Types.xsd
 - ↳ XML-Schema_ION.xsd
 - ↳ XML-Schema_Common_Types.xsd
 - ↳ XML-Schema_KA_Common.xsd
 - ↳ XML-Schema_Common_Types.xsd
- ↳ XML-Schema_PE.xsd
 - ↳ XML-Schema_Common_Types.xsd
 - ↳ XML-Schema_KA_Common.xsd
 - ↳ XML-Schema_Common_Types.xsd
 - ↳ XML-Schema_ION.xsd
 - ↳ XML-Schema_Common_Types.xsd
 - ↳ XML-Schema_KA_Common.xsd
 - ↳ XML-Schema_Common_Types.xsd
- ↳ XML-Schema_KVP_DL_PV_ext-1.3.0.xsd
 - ↳ XML-Schema_ION.xsd
 - ↳ XML-Schema_Common_Types.xsd
 - ↳ XML-Schema_KA_Common.xsd
 - ↳ XML-Schema_Common_Types.xsd
- ↳ XML-Schema_KVP_DL_PV.xsd
 - ↳ XML-Schema_Common_Types.xsd
 - ↳ XML-Schema_KA_Common.xsd
 - ↳ XML-Schema_Common_Types.xsd
 - ↳ XML-Schema_ION.xsd
 - ↳ XML-Schema_Common_Types.xsd
 - ↳ XML-Schema_KA_Common.xsd
 - ↳ XML-Schema_Common_Types.xsd
- ↳ XML-Schema_AH.xsd
 - ↳ XML-Schema_Common_Types.xsd
- ↳ XML-Schema_ION.xsd

- 🔗 [XML-Schema_Common_Types.xsd](#)
- 🔗 [XML-Schema_KA_Common.xsd](#)
- 🔗 [XML-Schema_Common_Types.xsd](#)
- 🔗 [XML-Schema_AH_Types.xsd](#)
- 🔗 [XML-Schema_Common_Types.xsd](#)
- 🔗 [XML-Schema_ION.xsd](#)
- 🔗 [XML-Schema_Common_Types.xsd](#)
- 🔗 [XML-Schema_KA_Common.xsd](#)
- 🔗 [XML-Schema_Common_Types.xsd](#)
- 🔗 [XML-Schema_KA_Common.xsd](#)
- 🔗 [XML-Schema_Common_Types.xsd](#)

Namespace: "http://vdv/ka/pe/2"

Schema(s)

Main schema XML-Schema_PE_ext-1.7.0.xsd

Namespace	http://vdv/ka/pe/2
Properties	attribute form default: unqualified
	element form default: qualified
	version: 1.7.0
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/ext/1.7.0/XML-Schema_PE_ext-1.7.0.xsd

Included schema XML-Schema_PE.xsd

Namespace	http://vdv/ka/pe/2
Annotations	This schema defines types and elements for internal communication between the personalization unit of a terminal and the sales unit / backoffice system. The elements are not used for WSDLs, since the communication is realized via XML over http. The communication direction is always from the sales unit (request) to the personalization unit (response).
Properties	attribute form default: unqualified
	element form default: qualified
	version: 1.10.0
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element(s)

Element tns:TXBEWEB_Type / tns:SESSION_DATA

Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<pre><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/ext/1.7.0/XML-Schema_PE_ext-1.7.0.xsd

Element tns:SESSION_DATA_Type / tns:DATE_TIME

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<pre><xs:element name="DATE_TIME" type="tns:DateTime" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:SESSION_DATA_Type / tns:SES_ID


Namespace	http://vdv/ka/pe/2
Diagram	
Type	restriction of xs:unsignedLong
Properties	content: simple
Facets	maxInclusive 9999999999999999999 minInclusive 0
Source	<pre><xs:element name="SES_ID"> <xs:simpleType> <xs:restriction base="xs:unsignedLong"> <xs:minInclusive value="0"/> <xs:maxInclusive value="9999999999999999999"/> </xs:restriction> </xs:simpleType> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:SESSION_DATA_Type / tns:ACTION


Namespace	http://vdv/ka/pe/2
Diagram	

Type	xs:string
Properties	content: simple
	nillable: true
Source	<code><xs:element name="ACTION" type="xs:string" nillable="true"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

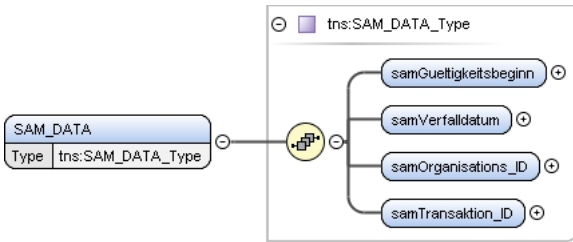
Element **tns:SESSION_DATA_Type** / **tns:PARAMETER**

Namespace	http://vdv/ka/pe/2
Diagram	 A diagram showing a box labeled 'PARAMETER' connected to a box labeled 'xs:string'.
Type	xs:string
Properties	content: simple
	nillable: true
Source	<code><xs:element name="PARAMETER" type="xs:string" nillable="true"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:SESSION_DATA_Type** / **tns:KA_VERSION**


Namespace	http://vdv/ka/pe/2
Diagram	 A diagram showing a box labeled 'KA_VERSION' connected to a box labeled 'tns:VersionNumberExtended'.
Type	tns:VersionNumberExtended
Type hierarchy	<ul style="list-style-type: none"> xs:string tns:BitString16 tns:VersionNumberExtended
Properties	content: simple
Facets	length 16
	pattern [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]
Source	<code><xs:element name="KA_VERSION" type="tns:VersionNumberExtended"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXBEWEB_Type** / **tns:SAM_DATA**


Namespace	http://vdv/ka/pe/2
Diagram	 A diagram showing a box labeled 'SAM_DATA' with 'Type tns:SAM_DATA_Type' below it. This box is connected to a yellow circle containing a plus sign, which is then connected to a box labeled 'tns:SAM_DATA_Type'. Inside this box, there are four sub-elements: 'samGueltigkeitsbeginn', 'samVerfalldatum', 'samOrganisations_ID', and 'samTransaktion_ID', each with a plus sign in a circle next to it.
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<code><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"></code>

	<pre> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA> </pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/ext/1.7.0/XML-Schema_PE_ext-1.7.0.xsd


Element `tns:SAM_DATA_Type / tns:samGueltigkeitsbeginn`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Date
Properties	content: simple
Source	<code><xs:element name="samGueltigkeitsbeginn" type="ct:Date" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element `tns:SAM_DATA_Type / tns:samVerfalldatum`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Date
Properties	content: simple
Source	<code><xs:element name="samVerfalldatum" type="ct:Date" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:SAM_DATA_Type / tns:samOrganisations_ID`

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT2 <ul style="list-style-type: none"> tns:ReferenceNumberTwo <ul style="list-style-type: none"> tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="samOrganisations_ID" type="ka:Organisation_ID" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element `tns:SAM_DATA_Type / tns:samTransaktion_ID`

Namespace	http://vdv/ka/pe/2
Diagram	

Type	tns:SAM_Transaktion_ID_Type
Properties	content: complex
Model	tns:samSequenznummer , tns:SAM_ID.samNummer
Children	tns:SAM_ID.samNummer, tns:samSequenznummer
Instance	<pre><tns:samTransaktion_ID xmlns:tns="http://vdv/ka/pe/2"> <tns:samSequenznummer>{1,1}</tns:samSequenznummer> <tns:SAM_ID.samNummer>{1,1}</tns:SAM_ID.samNummer> </tns:samTransaktion_ID></pre>
Source	<code><xs:element name="samTransaktion_ID" type="tns:SAM_Transaktion_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:SAM_Transaktion_ID_Type / tns:samSequenznummer

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:ReferenceNumberFour				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<code><xs:element name="samSequenznummer" type="ct:ReferenceNumberFour" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element tns:SAM_Transaktion_ID_Type / tns:SAM_ID.samNummer

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:ReferenceNumberThree				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<code><xs:element name="SAM_ID.samNummer" type="ct:ReferenceNumberThree" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element tns:TXBEWEB_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/ext/1.7.0/XML-Schema_PE_ext-1.7.0.xsd
-----------------	---

Element **tns:TXBEOBPPEB_Type** / **tns:SESSION_DATA**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<pre><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/ext/1.7.0/XML-Schema_PE_ext-1.7.0.xsd

Element **tns:TXBEOBPPEB_Type** / **tns:SAM_DATA**

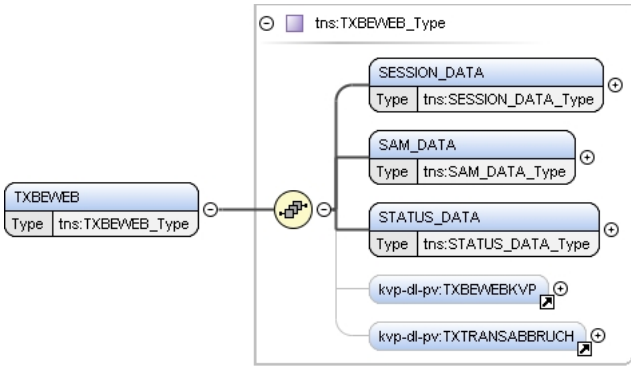
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<pre><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/ext/1.7.0/XML-Schema_PE_ext-1.7.0.xsd

Element **tns:TXBEOBPPEB_Type** / **tns:STATUS_DATA**

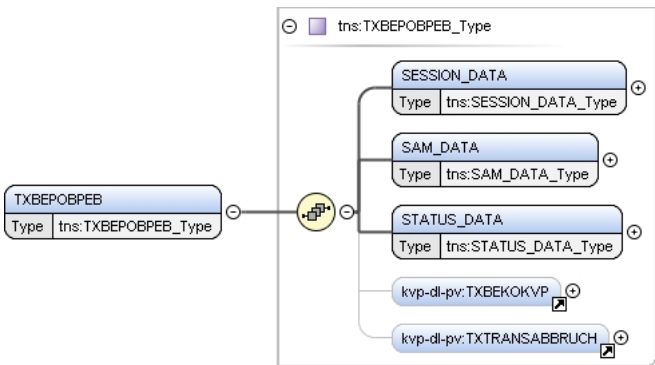
Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	 The diagram shows a box labeled 'STATUS_DATA' with 'Type tns:STATUS_DATA_Type' below it. A line connects this box to a purple box labeled 'tns:STATUS_DATA_Type'.
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/ext/1.7.0/XML-Schema_PE_ext-1.7.0.xsd

Element tns:TXBEWEB

Namespace	http://vdv/ka/pe/2
Annotations	Element: WEB-Konto aufbuchen/abbuchen
Diagram	 The diagram shows a box labeled 'TXBEWEB' with 'Type tns:TXBEWEB_Type' below it. A line connects this box to a yellow circle containing a plus sign. This circle is connected to a purple box labeled 'tns:TXBEWEB_Type'. Inside this box, there are five sub-elements: 'SESSION_DATA' (Type tns:SESSION_DATA_Type), 'SAM_DATA' (Type tns:SAM_DATA_Type), 'STATUS_DATA' (Type tns:STATUS_DATA_Type), 'kvp-dl-pv:TXBEWEBKVP' (Type tns:TXBEWEBKVP_Type), and 'kvp-dl-pv:TXTRANSABBRUCH' (Type tns:TXTRANSABBRUCH_Type).
Type	tns:TXBEWEB_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , tns:TXBEWEBKVP{0,1} , tns:TXTRANSABBRUCH{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXBEWEBKVP, tns:TXTRANSABBRUCH
Instance	<pre><tns:TXBEWEB xmlns:tns="http://vdv/ka/pe/2" xmlns:kvp-dl-pv="http://vdv/ka/kvp-dl-pv/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <kvp-dl-pv:TXBEWEBKVP>{0,1}</kvp-dl-pv:TXBEWEBKVP> <kvp-dl-pv:TXTRANSABBRUCH>{0,1}</kvp-dl-pv:TXTRANSABBRUCH> </tns:TXBEWEB></pre>
Source	<code><xs:element name="TXBEWEB" type="tns:TXBEWEB_Type"> <xs:annotation> <xs:documentation>Element: WEB-Konto aufbuchen/abbuchen</xs:documentation> </xs:annotation> </xs:element></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/ext/1.7.0/XML-Schema_PE_ext-1.7.0.xsd

Element tns:TXBEPOBPBEB

Namespace	http://vdv/ka/pe/2
Annotations	Element: POB/PEB-Konto aufbuchen/abbuchen
Diagram	 The diagram shows a box labeled 'TXBEPOBPBEB' with 'Type tns:TXBEPOBPBEB_Type' below it. A line connects this box to a yellow circle containing a plus sign. This circle is connected to a purple box labeled 'tns:TXBEPOBPBEB_Type'. Inside this box, there are five sub-elements: 'SESSION_DATA' (Type tns:SESSION_DATA_Type), 'SAM_DATA' (Type tns:SAM_DATA_Type), 'STATUS_DATA' (Type tns:STATUS_DATA_Type), 'kvp-dl-pv:TXBEKOKVP' (Type tns:TXBEKOKVP_Type), and 'kvp-dl-pv:TXTRANSABBRUCH' (Type tns:TXTRANSABBRUCH_Type).

Type	tns:TXBEPOBPB_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , tns:TXBEKOKVP{0,1} , tns:TXTRANSABBRUCH{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXBEKOKVP, tns:TXTRANSABBRUCH
Instance	<pre><tns:TXBEPOBPB xmlns:tns="http://vdv/ka/pe/2" xmlns:kvp-dl-pv="http://vdv/ka/kvp-dl-pv/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <kvp-dl-pv:TXBEKOKVP>{0,1}</kvp-dl-pv:TXBEKOKVP> <kvp-dl-pv:TXTRANSABBRUCH>{0,1}</kvp-dl-pv:TXTRANSABBRUCH> </tns:TXBEPOBPB></pre>
Source	<pre><xs:element name="TXBEPOBPB" type="tns:TXBEPOBPB_Type"> <xs:annotation> <xs:documentation>Element: POB/PEB-Konto aufbuchen/abbuchen</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/ext/1.7.0/XML-Schema_PE_ext-1.7.0.xsd

Element tns:STATUS_DATA_OK_Type / tns:STATUS_CODE

Namespace	http://vdv/ka/pe/2						
Diagram							
Type	tns:STATUS_CODE_OK_Type						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:STATUS_CODE_OK_Type 						
Properties	content: simple						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	0
maxInclusive	255						
minInclusive	0						
enumeration	0						
Source	<pre><xs:element name="STATUS_CODE" type="tns:STATUS_CODE_OK_Type" /></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Element tns:STATUS_DATA_OK_Type / tns:STATUS_SUBCODE


Namespace	http://vdv/ka/pe/2		
Diagram			
Type	tns:STATUS_SUBCODE_OK_Type		
Properties	content:	simple	
Facets	length	4	
	enumeration	0000	Kein Fehler aufgetreten
	pattern	[0-9][0-9][0-9][0-9]	
Source	<xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_OK_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd		

Element tns:STATUS_DATA_OK_Type / tns:STATUS_TEXT


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:PrintableString

Properties	content: simple
Facets	pattern [-p]*
Source	<code><xs:element name="STATUS_TEXT" type="ion:PrintableString"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:STATUS_DATA_SessionError_Type** / **tns:STATUS_CODE**

Namespace	http://vdv/ka/pe/2						
Diagram							
Type	tns:STATUS_CODE_SessionError_Type						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:STATUS_CODE_SessionError_Type 						
Properties	content: simple						
Facets	<table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> <tr><td>enumeration</td><td>1</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	1
maxInclusive	255						
minInclusive	0						
enumeration	1						
Source	<code><xs:element name="STATUS_CODE" type="tns:STATUS_CODE_SessionError_Type"/></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Element **tns:STATUS_DATA_SessionError_Type** / **tns:STATUS_SUBCODE**

Namespace	http://vdv/ka/pe/2		
Diagram			
Type	tns:STATUS_SUBCODE_SessionError_Type		
Properties	content:	simple	
Facets	length	4	
	enumeration	0000	Sonstiges
	enumeration	0001	nicht authentifiziert
	enumeration	0002	Benutzer/Kennwort-Kombination unbekannt
	enumeration	0003	Unbekannte Transaktion
	enumeration	0004	Parameterfehler
	enumeration	0005	Falsche Transaktionsreihenfolge
	enumeration	0006	Session besetzt
	enumeration	0007	Timeout
	enumeration	0008	Transaktion nicht unterstuetzt
	pattern	[0-9][0-9][0-9][0-9]	
Source	<xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_SessionError_Type"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd		

Element **tns:STATUS_DATA_SessionError_Type** / **tns:STATUS_TEXT**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:PrintableString
Properties	content: simple

Facets	pattern [-p]*
Source	<code><xs:element name="STATUS_TEXT" type="ion:PrintableString"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:STATUS_DATA_EngineError_Type` / `tns:STATUS_CODE`

Namespace	http://vdv/ka/pe/2						
Diagram							
Type	tns:STATUS_CODE_EngineError_Type						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:STATUS_CODE_EngineError_Type 						
Properties	content: simple						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>2</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	2
maxInclusive	255						
minInclusive	0						
enumeration	2						
Source	<code><xs:element name="STATUS_CODE" type="tns:STATUS_CODE_EngineError_Type"/></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Element `tns:STATUS_DATA_EngineError_Type` / `tns:STATUS_SUBCODE`


Namespace	http://vdv/ka/pe/2		
Diagram			
Type	tns:STATUS_SUBCODE_EngineError_Type		
Properties	content:	simple	
Facets	length	4	
	enumeration	0000	Sonstiges
	enumeration	0001	nicht autorisiert
	enumeration	0002	nicht bereit
	enumeration	0003	Magazinfehler oder nicht bereit
	enumeration	0004	SAM nicht vorhanden oder nicht bereit
	enumeration	0005	Nicht gegenueber SAM authentifiziert
	enumeration	0006	Alle SAMs ausgelastet
	pattern	[0-9][0-9][0-9][0-9]	
Source	<xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_EngineError_Type"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd		

Element `tns:STATUS_DATA_EngineError_Type` / `tns:STATUS_TEXT`


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:PrintableString
Properties	content: simple
Facets	pattern [-p]*
Source	<code><xs:element name="STATUS_TEXT" type="ion:PrintableString"/></code>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd
-----------------	---


Element **tns:STATUS_DATA_MediumError_Type** / **tns:STATUS_CODE**

Namespace	http://vdv/ka/pe/2						
Diagram							
Type	tns:STATUS_CODE_MediumError_Type						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:STATUS_CODE_MediumError_Type 						
Properties	content: simple						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>3</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	3
maxInclusive	255						
minInclusive	0						
enumeration	3						
Source	<code><xs:element name="STATUS_CODE" type="tns:STATUS_CODE_MediumError_Type"/></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Element **tns:STATUS_DATA_MediumError_Type** / **tns:STATUS_SUBCODE**

Namespace	http://vdv/ka/pe/2		
Diagram			
Type	tns:STATUS_SUBCODE_MediumError_Type		
Properties	content:	simple	
Facets	length	4	
	enumeration	0000	Sonstiges
	enumeration	0001	nicht autorisiert
	enumeration	0002	Medium nicht lesbar
	enumeration	0003	Keine Applikation auf dem Medium
	enumeration	0004	Medium nicht beschreibbar
	enumeration	0005	Transaktion abgebrochen
	pattern	[0-9][0-9][0-9][0-9]	
Source	<xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_MediumError_Type"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd		

Element **tns:STATUS_DATA_MediumError_Type** / **tns:STATUS_TEXT**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:PrintableString
Properties	content: simple
Facets	pattern [-p]*
Source	<code><xs:element name="STATUS_TEXT" type="ion:PrintableString"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:STATUS_DATA_ApplicationError_Type** / **tns:STATUS_CODE**

Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram							
Type	tns:STATUS_CODE_ApplicationError_Type						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:STATUS_CODE_ApplicationError_Type 						
Properties	content: simple						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>4</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	4
maxInclusive	255						
minInclusive	0						
enumeration	4						
Source	<code><xs:element name="STATUS_CODE" type="tns:STATUS_CODE_ApplicationError_Type" /></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Element **tns:STATUS_DATA_ApplicationError_Type** / **tns:STATUS_SUBCODE**

Namespace	http://vdv/ka/pe/2		
Diagram			
Type	tns:STATUS_SUBCODE_ApplicationError_Type		
Properties	content:	simple	
Facets	length	4	
	enumeration	0000	Sonstiges
	enumeration	0001	nicht autorisiert
	enumeration	0002	Lesen nicht moeglich
	enumeration	0003	Schreiben nicht moeglich
	enumeration	0004	PIN/PUC falsch
	enumeration	0005	Schlüsselregister voll
	enumeration	0006	Schlüsselreferenz in Schlüsselregister bereits vorhanden
	enumeration	0007	Schlüsselreferenz fuer Schlüsselregister nicht vorhanden
	enumeration	0008	Schlüsselreferenz in Schlüsselregister nicht vorhanden
	pattern	[0-9][0-9][0-9][0-9]	
	Source	<xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_ApplicationError_Type"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd		

Element **tns:STATUS_DATA_ApplicationError_Type** / **tns:STATUS_TEXT**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:PrintableString
Properties	content: simple
Facets	pattern: [-p]*
Source	<code><xs:element name="STATUS_TEXT" type="ion:PrintableString" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:STATUS_DATA_EntitlementError_Type** / **tns:STATUS_CODE**

Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram							
Type	tns:STATUS_CODE_EntitlementError_Type						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:STATUS_CODE_EntitlementError_Type 						
Properties	content: simple						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>5</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	5
maxInclusive	255						
minInclusive	0						
enumeration	5						
Source	<code><xs:element name="STATUS_CODE" type="tns:STATUS_CODE_EntitlementError_Type" /></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Element **tns:STATUS_DATA_EntitlementError_Type** / **tns:STATUS_SUBCODE**

Namespace	http://vdv/ka/pe/2		
Diagram			
Type	tns:STATUS_SUBCODE_EntitlementError_Type		
Properties	content:	simple	
Facets	length	4	
	enumeration	0000	Sonstiges
	enumeration	0001	nicht autorisiert
	enumeration	0002	Instanz nicht vorhanden
	enumeration	0003	Erforderliche Schluessele nicht vorhanden
	enumeration	0004	MAC-Fehler
	enumeration	0005	Berechtigung ungesichert gelesen
	enumeration	0006	Ueberschreiben/Loeschen der Daten nicht moeglich
	pattern	[0-9][0-9][0-9][0-9]	
Source	<xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_EntitlementError_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd		

Element **tns:STATUS_DATA_EntitlementError_Type** / **tns:STATUS_TEXT**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:PrintableString
Properties	content: simple
Facets	pattern [-p]*
Source	<code><xs:element name="STATUS_TEXT" type="ion:PrintableString" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:STATUS_DATA_PrinterError_Type** / **tns:STATUS_CODE**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_CODE_PrinterError_Type

Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 <ul style="list-style-type: none"> tns:STATUS_CODE_PrinterError_Type
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
	enumeration 6
Source	<code><xs:element name="STATUS_CODE" type="tns:STATUS_CODE_PrinterError_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:STATUS_DATA_PrinterError_Type** / **tns:STATUS_SUBCODE**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_SUBCODE_PrinterError_Type
Properties	content: simple
Facets	length 4
	enumeration 0000 Sonstiges
	enumeration 0001 nicht autorisiert
	enumeration 0002 Drucker nicht vorhanden
	enumeration 0003 Fehler beim Drucken
	enumeration 0004 Drucker Timeout
	pattern [0-9][0-9][0-9][0-9]
Source	<code><xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_PrinterError_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:STATUS_DATA_PrinterError_Type** / **tns:STATUS_TEXT**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:PrintableString
Properties	content: simple
Facets	pattern [-p]*
Source	<code><xs:element name="STATUS_TEXT" type="ion:PrintableString" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:STATUS_DATA_SoftwareError_Type** / **tns:STATUS_CODE**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_CODE_SoftwareError_Type
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 <ul style="list-style-type: none"> tns:STATUS_CODE_SoftwareError_Type
Properties	content: simple

Facets	maxInclusive	255
	minInclusive	0
	enumeration	7
Source	<xs:element name="STATUS_CODE" type="tns:STATUS_CODE_SoftwareError_Type" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element **tns:STATUS_DATA_SoftwareError_Type** / **tns:STATUS_SUBCODE**

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:STATUS_SUBCODE_SoftwareError_Type	
Properties	content:	simple
Facets	length	4
	enumeration	0000 Sonstiges
	enumeration	0001 Fehler bei Datenkonvertierung
	enumeration	0002 Interner Fehler
	enumeration	0003 Erforderliche Datei nicht verfuegbar
	enumeration	0004 Fehler bei Kryptogrammsignatur
	enumeration	0005 Fehler bei Kryptogrammentschuesselung
	enumeration	0006 Falscher LoadKey Zaehler
	pattern	[0-9][0-9][0-9][0-9]
Source	<xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_SoftwareError_Type" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element **tns:STATUS_DATA_SoftwareError_Type** / **tns:STATUS_TEXT**

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:PrintableString	
Properties	content:	simple
Facets	pattern	[-p]*
Source	<xs:element name="STATUS_TEXT" type="ion:PrintableString" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element **tns:STATUS_DATA_ServiceOperatorError_Type** / **tns:STATUS_CODE**

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:STATUS_CODE_ServiceOperatorError_Type	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:STATUS_CODE_ServiceOperatorError_Type 	
Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0

	enumeration 8
Source	<code><xs:element name="STATUS_CODE" type="tns:STATUS_CODE_ServiceOperatorError_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:STATUS_DATA_ServiceOperatorError_Type** / **tns:STATUS_SUBCODE**

Namespace	http://vdv/ka/pe/2								
Diagram									
Type	tns:STATUS_SUBCODE_ServiceOperatorError_Type								
Properties	content: simple								
Facets	<table> <tr> <td>length</td><td>4</td></tr> <tr> <td>enumeration</td><td>0000 sonstiges</td></tr> <tr> <td>enumeration</td><td>0001 TXANSCHR fehlt</td></tr> <tr> <td>pattern</td><td>[0-9][0-9][0-9][0-9]</td></tr> </table>	length	4	enumeration	0000 sonstiges	enumeration	0001 TXANSCHR fehlt	pattern	[0-9][0-9][0-9][0-9]
length	4								
enumeration	0000 sonstiges								
enumeration	0001 TXANSCHR fehlt								
pattern	[0-9][0-9][0-9][0-9]								
Source	<code><xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_ServiceOperatorError_Type"/></code>								
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd								

Element **tns:STATUS_DATA_ServiceOperatorError_Type** / **tns:STATUS_TEXT**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:PrintableString
Properties	content: simple
Facets	pattern [-p]*
Source	<code><xs:element name="STATUS_TEXT" type="ion:PrintableString"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:ENGINE_DATA_Type** / **tns:VENDOR**


Namespace	http://vdv/ka/pe/2				
Diagram					
Type	xs:string				
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>nillable:</td><td>true</td></tr> </table>	content:	simple	nillable:	true
content:	simple				
nillable:	true				
Source	<code><xs:element name="VENDOR" type="xs:string" nillable="true"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element **tns:ENGINE_DATA_Type** / **tns:TYPE**


Namespace	http://vdv/ka/pe/2				
Diagram					
Type	xs:string				
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>nillable:</td><td>true</td></tr> </table>	content:	simple	nillable:	true
content:	simple				
nillable:	true				
Source	<code><xs:element name="TYPE" type="xs:string" nillable="true"/></code>				

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd
-----------------	---


Element **tns:ENGINE_DATA_Type** / **tns:VERSION**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	xs:string
Properties	content: simple nillable: true
Source	<pre><xs:element name="VERSION" type="xs:string" nillable="true"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:ENGINE_DATA_Type** / **tns:FIRMWARE**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	xs:string
Properties	content: simple nillable: true
Source	<pre><xs:element name="FIRMWARE" type="xs:string" nillable="true"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:ENGINE_DATA_Type** / **tns:TERM_TYP_CODE**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	xs:unsignedInt
Properties	content: simple
Source	<pre><xs:element name="TERM_TYP_CODE" type="xs:unsignedInt"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:ENGINE_DATA_Type** / **tns:MAG_COUNT**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	xs:unsignedInt
Properties	content: simple
Source	<pre><xs:element name="MAG_COUNT" type="xs:unsignedInt"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:ENGINE_DATA_Type** / **tns:ACT_MAG**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	xs:unsignedInt

Properties	content: simple
Source	<code><xs:element name="ACT_MAG" type="xs:unsignedInt" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:ENGINE_DATA_Type** / **tns:ACT_MAG_NAME**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	xs:string
Properties	content: simple nillable: true
Source	<code><xs:element name="ACT_MAG_NAME" type="xs:string" nillable="true" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:ENGINE_DATA_Type** / **tns:ACT_MAG_CONTENT**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	xs:unsignedInt
Properties	content: simple nillable: true
Source	<code><xs:element name="ACT_MAG_CONTENT" type="xs:unsignedInt" nillable="true" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:ENGINE_DATA_Type** / **tns:PRINTER**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	xs:boolean
Properties	content: simple
Source	<code><xs:element name="PRINTER" type="xs:boolean" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:Schluesselversionen_Type** / **tns:K-PV-KM-MAC**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:OctetString1
Properties	content: simple
Facets	length 1
Source	<code><xs:element name="K-PV-KM-MAC" type="ct:OctetString1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:Schluesselversionen_Type** / **tns:K-KVP-KM-MAC**


Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:OctetString1
Properties	content: simple
Facets	length 1
Source	<code><xs:element name="K-KVP-KM-MAC" type="ct:OctetString1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element tns:Schluesselversionen_Type / tns:K-ERF-KM-MAC

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:OctetString1
Properties	content: simple
Facets	length 1
Source	<code><xs:element name="K-ERF-KM-MAC" type="ct:OctetString1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:SAM-Schluessel-Info_Type / tns:SAM_ID.samNumber

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:ReferenceNumberThree
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree
Properties	content: simple
Facets	maxInclusive 16777215 minInclusive 0
Source	<code><xs:element name="SAM_ID.samNumber" type="ct:ReferenceNumberThree"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:SAM-Schluessel-Info_Type / tns:LoadKey-Zaehler

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:ReferenceNumberFour
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour
Properties	content: simple
Facets	maxInclusive 4294967295 minInclusive 0
Source	<code><xs:element name="LoadKey-Zaehler" type="ct:ReferenceNumberFour"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:SAM-Schluessel-Info_Type** / **tns:Schluesselname**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><tns:Schluesselname xmlns:tns="http://vdv/ka/pe/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:Schluesselname></pre>
Source	<pre><xs:element name="Schluesselname" type="ion:SymSchluessel_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:SAM-Schluessel-Info_Type** / **tns:Nutzungs-Limit**

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:ReferenceNumberFour				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<pre><xs:element name="Nutzungs-Limit" type="ct:ReferenceNumberFour"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				


Element **tns:SAM-Schluessel-Info_Type** / **tns:Nutzungs-Sequenz-Zaehler**

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:ReferenceNumberFour				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<pre><xs:element name="Nutzungs-Sequenz-Zaehler" type="ct:ReferenceNumberFour"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				


Element `tns:NmKundendaten_Type` / `tns:kundeGeburtsdatum`

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:Datef	
Properties	content:	simple
Facets	length	8
	pattern	[0-9][0-9][0-9][0-9][0-1] [0-9][0-3][0-9]
Source	<code><xs:element name="kundeGeburtsdatum" type="ct:Datef" /></code>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	


Element `tns:NmKundendaten_Type` / `tns:kundeSprache.code`

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:INT1	
Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0
Source	<code><xs:element name="kundeSprache.code" type="ct:INT1" /></code>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element `tns:NmKundendaten_Type` / `tns:kundeName`


Namespace	http://vdv/ka/pe/2	
Diagram		
Type	restriction of tns:PrintableString	
Type hierarchy	<ul style="list-style-type: none"> xs:string tns:PrintableString 	
Properties	content:	simple
Facets	minLength	0
	maxLength	40
	pattern	[-þ]*
Source	<pre> <xs:element name="kundeName"> <xs:simpleType> <xs:restriction base="ion:PrintableString"> <xs:minLength value="0" /> <xs:maxLength value="40" /> </xs:restriction> </xs:simpleType> </xs:element> </pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element `tns:NmKundendaten_Type` / `tns:kundeVorname`


Namespace	http://vdv/ka/pe/2	
Diagram		

Type	restriction of tns:PrintableString
Type hierarchy	<ul style="list-style-type: none"> xs:string tns:PrintableString
Properties	content: simple
Facets	minLength 0
	maxLength 40
	pattern [-þ]*
Source	<pre><xs:element name="kundeVorname"> <xs:simpleType> <xs:restriction base="ion:PrintableString"> <xs:maxLength value="40"/> <xs:minLength value="0"/> </xs:restriction> </xs:simpleType> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element tns:NmKundendaten_Type / tns:kundeGeschlecht.code

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:BitString8
Properties	content: simple
Facets	length 8
	pattern [0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1]
Source	<pre><xs:element name="kundeGeschlecht.code" type="ct:BitString8"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmKundendaten_Type / tns:kundenTyp1.code


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<pre><xs:element name="kundenTyp1.code" type="ct:INT1"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmKundendaten_Type / tns:kundenTyp1.BeginnDatum


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:DateTimeCompact
Properties	content: simple
Facets	maxInclusive 2117-12-31T23:59:58
	minInclusive 1990-01-01T00:00:00

Source	<code><xs:element name="kundenTyp1.BeginnDatum" type="ct:DateTimeCompact" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

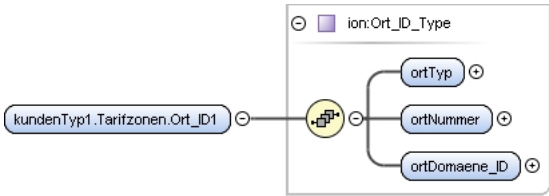
Element `tns:NmKundendaten_Type` / `tns:kundenTyp1.AblaufDatum`

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="kundenTyp1.AblaufDatum" type="ct:DateTimeCompact" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element `tns:NmKundendaten_Type` / `tns:kundenTyp1.Anwendungsgebiet`

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="kundenTyp1.Anwendungsgebiet" type="ct:ReferenceNumberTwo" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element `tns:NmKundendaten_Type` / `tns:kundenTyp1.Tarifzonen.Ort_ID1`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp1.Tarifzonen.Ort_ID1 xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp1.Tarifzonen.Ort_ID1></pre>
Source	<code><xs:element name="kundenTyp1.Tarifzonen.Ort_ID1" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmKundendaten_Type` / `tns:kundenTyp1.Tarifzonen.Ort_ID2`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp1.Tarifzonen.Ort_ID2 xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp1.Tarifzonen.Ort_ID2></pre>
Source	<code><xs:element name="kundenTyp1.Tarifzonen.Ort_ID2" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmKundendaten_Type` / `tns:kundenTyp1.Tarifzonen.Ort_ID3`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp1.Tarifzonen.Ort_ID3 xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp1.Tarifzonen.Ort_ID3></pre>
Source	<code><xs:element name="kundenTyp1.Tarifzonen.Ort_ID3" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmKundendaten_Type` / `tns:kundenTyp1.StreckeVon`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex

Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp1.StreckeVon xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp1.StreckeVon></pre>
Source	<code><xs:element name="kundenTyp1.StreckeVon" type="ion:Ort_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmKundendaten_Type` / `tns:kundenTyp1.StreckeNach`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp1.StreckeNach xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp1.StreckeNach></pre>
Source	<code><xs:element name="kundenTyp1.StreckeNach" type="ion:Ort_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmKundendaten_Type` / `tns:kundenTyp2.code`


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255 minInclusive 0
Source	<code><xs:element name="kundenTyp2.code" type="ct:INT1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmKundendaten_Type` / `tns:kundenTyp2.BeginnDatum`


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:DateTimeCompact
Properties	content: simple
Facets	maxInclusive 2117-12-31T23:59:58 minInclusive 1990-01-01T00:00:00

Source	<code><xs:element name="kundenTyp2.BeginnDatum" type="ct:DateTimeCompact" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

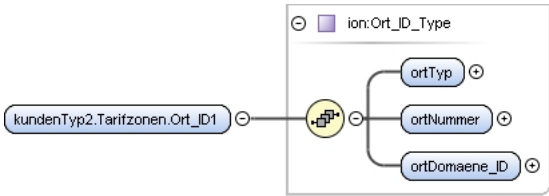
Element `tns:NmKundendaten_Type` / `tns:kundenTyp2.AblaufDatum`

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="kundenTyp2.AblaufDatum" type="ct:DateTimeCompact" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element `tns:NmKundendaten_Type` / `tns:kundenTyp2.Anwendungsgebiet`

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="kundenTyp2.Anwendungsgebiet" type="ct:ReferenceNumberTwo" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element `tns:NmKundendaten_Type` / `tns:kundenTyp2.Tarifzonen.Ort_ID1`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp2.Tarifzonen.Ort_ID1 xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp2.Tarifzonen.Ort_ID1></pre>
Source	<code><xs:element name="kundenTyp2.Tarifzonen.Ort_ID1" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmKundendaten_Type` / `tns:kundenTyp2.Tarifzonen.Ort_ID2`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp2.Tarifzonen.Ort_ID2 xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp2.Tarifzonen.Ort_ID2></pre>
Source	<code><xs:element name="kundenTyp2.Tarifzonen.Ort_ID2" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmKundendaten_Type` / `tns:kundenTyp2.Tarifzonen.Ort_ID3`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp2.Tarifzonen.Ort_ID3 xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp2.Tarifzonen.Ort_ID3></pre>
Source	<code><xs:element name="kundenTyp2.Tarifzonen.Ort_ID3" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmKundendaten_Type` / `tns:kundenTyp2.StreckeVon`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID

Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp2.StreckeVon xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp2.StreckeVon></pre>
Source	<code><xs:element name="kundenTyp2.StreckeVon" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmKundendaten_Type** / **tns:kundenTyp2.StreckeNach**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp2.StreckeNach xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp2.StreckeNach></pre>
Source	<code><xs:element name="kundenTyp2.StreckeNach" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:NmKundendaten_Type** / **tns:kundenTyp3.code**

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:INT1				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xs:element name="kundenTyp3.code" type="ct:INT1" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				


Element **tns:NmKundendaten_Type** / **tns:kundenTyp3.BeginnDatum**

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="kundenTyp3.BeginnDatum" type="ct:DateTimeCompact" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

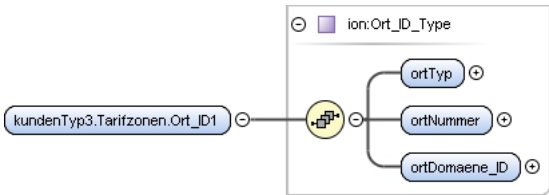
Element `tns:NmKundendaten_Type` / `tns:kundenTyp3.AblaufDatum`

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="kundenTyp3.AblaufDatum" type="ct:DateTimeCompact" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element `tns:NmKundendaten_Type` / `tns:kundenTyp3.Anwendungsgebiet`

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="kundenTyp3.Anwendungsgebiet" type="ct:ReferenceNumberTwo" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element `tns:NmKundendaten_Type` / `tns:kundenTyp3.Tarifzonen.Ort_ID1`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp3.Tarifzonen.Ort_ID1 xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp3.Tarifzonen.Ort_ID1></pre>
Source	<code><xs:element name="kundenTyp3.Tarifzonen.Ort_ID1" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmKundendaten_Type` / `tns:kundenTyp3.Tarifzonen.Ort_ID2`

Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp3.Tarifzonen.Ort_ID2 xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp3.Tarifzonen.Ort_ID2></pre>
Source	<pre><xs:element name="kundenTyp3.Tarifzonen.Ort_ID2" type="ion:Ort_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmKundendaten_Type** / **tns:kundenTyp3.Tarifzonen.Ort_ID3**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp3.Tarifzonen.Ort_ID3 xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp3.Tarifzonen.Ort_ID3></pre>
Source	<pre><xs:element name="kundenTyp3.Tarifzonen.Ort_ID3" type="ion:Ort_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmKundendaten_Type** / **tns:kundenTyp3.StreckeVon**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp3.StreckeVon xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp></pre>

	<pre><ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp3.StreckeVon></pre>
Source	<code><xs:element name="kundenTyp3.StreckeVon" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmKundendaten_Type** / **tns:kundenTyp3.StreckeNach**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:kundenTyp3.StreckeNach xmlns:tns="http://vdv/ka/pe/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:kundenTyp3.StreckeNach></pre>
Source	<code><xs:element name="kundenTyp3.StreckeNach" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmKundendaten_Type** / **tns:Infotext**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	restriction of tns:PrintableString
Type hierarchy	<ul style="list-style-type: none"> xs:string tns:PrintableString
Properties	content: simple
Facets	length 40 pattern <code>[-p]*</code>
Source	<pre><xs:element name="Infotext"> <xs:simpleType> <xs:restriction base="ion:PrintableString"> <xs:length value="40" fixed="true"/> </xs:restriction> </xs:simpleType> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmVerzeichniseintragAppDaten_Type** / **tns:NmSystemspezifischerVerzeichnisteil**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmSystemspezifischerVerzeichnisteil_Type

Properties	content: complex
Model	tns:zeigerSeparatorDatenteil
Children	tns:zeigerSeparatorDatenteil
Instance	<pre><tns:NmSystemspezifischerVerzeichnisteil xmlns:tns="http://vdv/ka/pe/2"> <tns:zeigerSeparatorDatenteil>{1,1}</tns:zeigerSeparatorDatenteil> </tns:NmSystemspezifischerVerzeichnisteil></pre>
Source	<pre><xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmSystemspezifischerVerzeichnisteil_Type / tns:zeigerSeparatorDatenteil

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:INT1				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<pre><xs:element name="zeigerSeparatorDatenteil" type="ct:INT1" /></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element tns:NmVerzeichniseintragAppDaten_Type / tns:appInstanz_ID

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<pre><tns:appInstanz_ID xmlns:tns="http://vdv/ka/pe/2"> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </tns:appInstanz_ID></pre>
Source	<pre><xs:element name="appInstanz_ID" type="ion:NmApplikationInstanz_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmVerzeichniseintragAppDaten_Type / tns:appVersion

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:VersionNumber
Type hierarchy	<ul style="list-style-type: none"> xs:string tns:BitString8 tns:VersionNumber
Properties	content: simple

Facets	length	8
	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1]
Source	<xs:element name="appVersion" type="tns:VersionNumber" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element **tns:NmVerzeichniseintragAppDaten_Type** / **tns:appGueltigkeitsbeginn**

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:DateTimeCompact	
Properties	content:	simple
Facets	maxInclusive	2117-12-31T23:59:58
	minInclusive	1990-01-01T00:00:00
Source	<xs:element name="appGueltigkeitsbeginn" type="ct:DateTimeCompact" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element **tns:NmVerzeichniseintragAppDaten_Type** / **tns:appGueltigkeitsende**

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:DateTimeCompact	
Properties	content:	simple
Facets	maxInclusive	2117-12-31T23:59:58
	minInclusive	1990-01-01T00:00:00
Source	<xs:element name="appGueltigkeitsende" type="ct:DateTimeCompact" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element **tns:NmVerzeichniseintragAppDaten_Type** / **tns:appStatus**

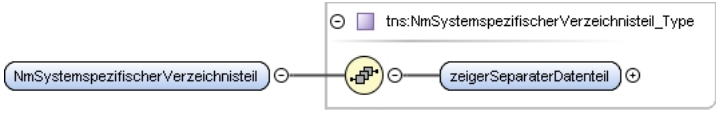
Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:INT1	
Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0
Source	<xs:element name="appStatus" type="ct:INT1" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element **tns:NmVerzeichniseintragAppDaten_Type** / **tns:appSynchronNummer**


Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:INT1	
Properties	content:	simple
Facets	maxInclusive	255

	minInclusive 0
Source	<code><xs:element name="appSynchronNumber" type="ct:INT1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element `tns:NmVerzeichniseintragApplikationslogbuch_Type` / `tns:NmSystemspezifischerVerzeichnisteil`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:NmSystemspezifischerVerzeichnisteil_Type</code>
Properties	content: complex
Model	<code>tns:zeigerSeparaterDatenteil</code>
Children	<code>tns:zeigerSeparaterDatenteil</code>
Instance	<pre><tns:NmSystemspezifischerVerzeichnisteil xmlns:tns="http://vdv/ka/pe/2"> <tns:zeigerSeparaterDatenteil>{1,1}</tns:zeigerSeparaterDatenteil> </tns:NmSystemspezifischerVerzeichnisteil></pre>
Source	<code><xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmVerzeichniseintragApplikationslogbuch_Type` / `tns:logApplikationSeqNummer`


Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:ReferenceNumberTwo</code>
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo
Properties	content: simple
Facets	maxInclusive 65535 minInclusive 0
Source	<code><xs:element name="logApplikationSeqNummer" type="ct:ReferenceNumberTwo" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmVerzeichniseintragKunde_Type` / `tns:NmSystemspezifischerVerzeichnisteil`


Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:NmSystemspezifischerVerzeichnisteil_Type</code>
Properties	content: complex
Model	<code>tns:zeigerSeparaterDatenteil</code>
Children	<code>tns:zeigerSeparaterDatenteil</code>
Instance	<pre><tns:NmSystemspezifischerVerzeichnisteil xmlns:tns="http://vdv/ka/pe/2"></pre>

	<pre><tns:zeigerSeparaterDatenteil>{1,1}</tns:zeigerSeparaterDatenteil> </tns:NmSystemspezifischerVerzeichnisteil></pre>
Source	<pre><xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:NmVerzeichniseintragLetzteTransaktion_Type** / **tns:logTransaktionsTyp.code**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255 minInclusive 0
Source	<pre><xs:element name="logTransaktionsTyp.code" type="ct:INT1"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmVerzeichniseintragLetzteTransaktion_Type** / **tns:NmSystemspezifischerVerzeichnisteil**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmSystemspezifischerVerzeichnisteil_Type
Properties	content: complex
Model	tns:zeigerSeparaterDatenteil
Children	tns:zeigerSeparaterDatenteil
Instance	<pre><tns:NmSystemspezifischerVerzeichnisteil xmlns:tns="http://vdv/ka/pe/2"> <tns:zeigerSeparaterDatenteil>{1,1}</tns:zeigerSeparaterDatenteil> </tns:NmSystemspezifischerVerzeichnisteil></pre>
Source	<pre><xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmVerzeichniseintragPrioritaeten_Type** / **tns:berInstanz1**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255 minInclusive 0
Source	<pre><xs:element name="berInstanz1" type="ct:INT1"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmVerzeichniseintragPrioritaeten_Type** / **tns:berInstanz2**


Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="berInstanz2" type="ct:INT1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:NmVerzeichniseintragPrioritaeten_Type** / **tns:berInstanz3**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="berInstanz3" type="ct:INT1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:NmVerzeichniseintragPrioritaeten_Type** / **tns:berInstanz4**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="berInstanz4" type="ct:INT1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmVerzeichniseintragPrioritaeten_Type** / **tns:berInstanz5**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="berInstanz5" type="ct:INT1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmVerzeichniseintragPrioritaeten_Type** / **tns:berInstanz6**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1

Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0
Source	<xs:element name="berInstanz6" type="ct:INT1"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	


Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz7

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:INT1	
Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0
Source	<xs:element name="berInstanz7" type="ct:INT1"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	


Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz8

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:INT1	
Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0
Source	<xs:element name="berInstanz8" type="ct:INT1"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz9


Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:INT1	
Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0
Source	<xs:element name="berInstanz9" type="ct:INT1"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element tns:NmVerzeichniseintragPrioritaeten_Type / tns:berInstanz10


Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:INT1	
Properties	content:	simple
Facets	maxInclusive	255

	minInclusive 0
Source	<code><xs:element name="berInstanz10" type="ct:INT1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:NmVerzeichniseintragPrioritaeten_Type** / **tns:berInstanz11**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="berInstanz11" type="ct:INT1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:NmVerzeichniseintragPrioritaeten_Type** / **tns:berInstanz12**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="berInstanz12" type="ct:INT1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmVerzeichniseintragPrioritaeten_Type** / **tns:berInstanz13**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="berInstanz13" type="ct:INT1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:NmVerzeichniseintragPrioritaeten_Type** / **tns:berInstanz14**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="berInstanz14" type="ct:INT1" /></code>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd
-----------------	---

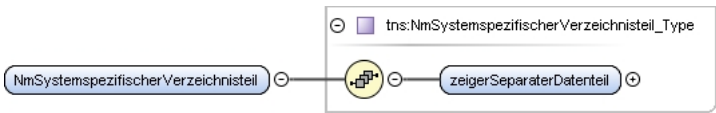
Element `tns:NmVerzeichniseintragPrioritaeten_Type` / `tns:berInstanz15`

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:INT1				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xs:element name="berInstanz15" type="ct:INT1" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

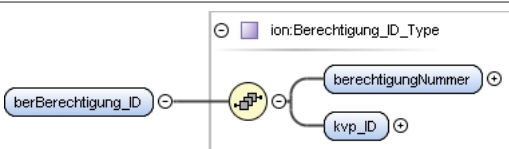
Element `tns:NmVerzeichniseintragPrioritaeten_Type` / `tns:berInstanz16`

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:INT1				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xs:element name="berInstanz16" type="ct:INT1" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element `tns:NmVerzeichniseintragBerechtigungen_Type` / `tns:NmSystemspezifischerVerzeichnisteil`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmSystemspezifischerVerzeichnisteil_Type
Properties	content: complex
Model	tns:zeigerSeparaterDatenteil
Children	tns:zeigerSeparaterDatenteil
Instance	<code><tns:NmSystemspezifischerVerzeichnisteil xmlns:tns="http://vdv/ka/pe/2"> <tns:zeigerSeparaterDatenteil>{1,1}</tns:zeigerSeparaterDatenteil> </tns:NmSystemspezifischerVerzeichnisteil></code>
Source	<code><xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmVerzeichniseintragBerechtigungen_Type` / `tns:berBerechtigung_ID`

Namespace	http://vdv/ka/pe/2
Diagram	

Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/pe/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:prodProdukt_ID

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<pre><tns:prodProdukt_ID xmlns:tns="http://vdv/ka/pe/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID></pre>
Source	<xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:prodKeyOrganisation_ID


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:ReferenceNumberTwo
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo
Properties	content: simple
Facets	maxInclusive 65535 minInclusive 0
Source	<xs:element name="prodKeyOrganisation_ID" type="ct:ReferenceNumberTwo"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:berGueltigkeitsbeginn


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:DateTimeCompact

Properties	content:	simple
Facets	maxInclusive	2117-12-31T23:59:58
	minInclusive	1990-01-01T00:00:00
Source	<xs:element name="berGueltigkeitsbeginn" type="ct:DateTimeCompact" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	


Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:berGueltigkeitsende

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:DateTimeCompact	
Properties	content:	simple
Facets	maxInclusive	2117-12-31T23:59:58
	minInclusive	1990-01-01T00:00:00
Source	<xs:element name="berGueltigkeitsende" type="ct:DateTimeCompact" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:berStatus

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:INT1	
Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0
Source	<xs:element name="berStatus" type="ct:INT1" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element tns:NmVerzeichniseintragBerechtigungen_Type / tns:berSynchronNummer

Namespace	http://vdv/ka/pe/2	
Diagram		
Type	tns:ReferenceNumberOne	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:ReferenceNumberOne 	
Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0
Source	<xs:element name="berSynchronNummer" type="ct:ReferenceNumberOne" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Element tns:NmApplikationsverzeichnis_Type / tns:VerzeichniseintragAppDaten

Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:NmVerzeichniseintragAppDaten_Type
Properties	content: complex
Model	tns:NmSystemspezifischerVerzeichnisteil, tns:appInstanz_ID, tns:appVersion, tns:appGueltigkeitsbeginn, tns:appGueltigkeitsende, tns:appStatus, tns:appSynchronNummer
Children	tns:NmSystemspezifischerVerzeichnisteil, tns:appGueltigkeitsbeginn, tns:appGueltigkeitsende, tns:appInstanz_ID, tns:appStatus, tns:appSynchronNummer, tns:appVersion
Instance	<pre><tns:VerzeichniseintragAppDaten xmlns:tns="http://vdv/ka/pe/2"> <tns:NmSystemspezifischerVerzeichnisteil>{1,1}</tns:NmSystemspezifischerVerzeichnisteil> <tns:appInstanz_ID>{1,1}</tns:appInstanz_ID> <tns:appVersion>{1,1}</tns:appVersion> <tns:appGueltigkeitsbeginn>{1,1}</tns:appGueltigkeitsbeginn> <tns:appGueltigkeitsende>{1,1}</tns:appGueltigkeitsende> <tns:appStatus>{1,1}</tns:appStatus> <tns:appSynchronNummer>{1,1}</tns:appSynchronNummer> </tns:VerzeichniseintragAppDaten></pre>
Source	<xs:element name="VerzeichniseintragAppDaten" type="tns:NmVerzeichniseintragAppDaten_Type" />
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmApplikationsverzeichnis_Type / tns:VerzeichniseintragAppLogbuch

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmVerzeichniseintragApplikationslogbuch_Type
Properties	content: complex
Model	tns:NmSystemspezifischerVerzeichnisteil, tns:logApplikationSeqNummer
Children	tns:NmSystemspezifischerVerzeichnisteil, tns:logApplikationSeqNummer
Instance	<pre><tns:VerzeichniseintragAppLogbuch xmlns:tns="http://vdv/ka/pe/2"> <tns:NmSystemspezifischerVerzeichnisteil>{1,1}</tns:NmSystemspezifischerVerzeichnisteil> <tns:logApplikationSeqNummer>{1,1}</tns:logApplikationSeqNummer> </tns:VerzeichniseintragAppLogbuch></pre>
Source	<xs:element name="VerzeichniseintragAppLogbuch" type="tns:NmVerzeichniseintragApplikationslogbuch_Type" />
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmApplikationsverzeichnis_Type / tns:VerzeichniseintragKunde

Namespace	http://vdv/ka/pe/2
Diagram	

Type	tns:NmVerzeichniseintragKunde_Type
Properties	content: complex
Model	tns:NmSystemspezifischerVerzeichnisteil
Children	tns:NmSystemspezifischerVerzeichnisteil
Instance	<pre><tns:VerzeichniseintragKunde xmlns:tns="http://vdv/ka/pe/2"> <tns:NmSystemspezifischerVerzeichnisteil>{1,1}</tns:NmSystemspezifischerVerzeichnisteil> </tns:VerzeichniseintragKunde></pre>
Source	<xs:element name="VerzeichniseintragKunde" type="tns:NmVerzeichniseintragKunde_Type" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmApplikationsverzeichnis_Type / tns:VerzeichniseintragSchluesselregister


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmVerzeichniseintragSchluesselregister_Type
Properties	content: complex minOccurs: 0
Model	tns:NmSystemspezifischerVerzeichnisteil, tns:Org_ID_Hersteller, tns:NM-Spezifikationsversion, tns:Herstellerversion, tns:applInstanz_ID, tns:Zufallszahl, tns:RFU1, tns:RFU2
Children	tns:Herstellerversion, tns:NM-Spezifikationsversion, tns:NmSystemspezifischerVerzeichnisteil, tns:Org_ID_Hersteller, tns:RFU1, tns:RFU2, tns:Zufallszahl, tns:applInstanz_ID
Instance	<pre><tns:VerzeichniseintragSchluesselregister xmlns:tns="http://vdv/ka/pe/2"> <tns:NmSystemspezifischerVerzeichnisteil>{1,1}</tns:NmSystemspezifischerVerzeichnisteil> <tns:Org_ID_Hersteller>{1,1}</tns:Org_ID_Hersteller> <tns:NM-Spezifikationsversion>{1,1}</tns:NM-Spezifikationsversion> <tns:Herstellerversion>{1,1}</tns:Herstellerversion> <tns:applInstanz_ID>{1,1}</tns:applInstanz_ID> <tns:Zufallszahl>{1,1}</tns:Zufallszahl> <tns:RFU1>{1,1}</tns:RFU1> <tns:RFU2>{1,1}</tns:RFU2> </tns:VerzeichniseintragSchluesselregister></pre>
Source	<xs:element name="VerzeichniseintragSchluesselregister" type="tns:NmVerzeichniseintragSchluesselregister_Type" minOccurs="0" />
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmVerzeichniseintragSchluesselregister_Type / tns:NmSystemspezifischerVerzeichnisteil


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmSystemspezifischerVerzeichnisteil_Type

Properties	content: complex
Model	tns:zeigerSeparaterDatenteil
Children	tns:zeigerSeparaterDatenteil
Instance	<pre><tns:NmSystemspezifischerVerzeichnisteil xmlns:tns="http://vdv/ka/pe/2"> <tns:zeigerSeparaterDatenteil>{1,1}</tns:zeigerSeparaterDatenteil> </tns:NmSystemspezifischerVerzeichnisteil></pre>
Source	<pre><xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element **tns:NmVerzeichniseintragsSchluesselregister_Type** / **tns:Org_ID_Hersteller**

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="Org_ID_Hersteller" type="ka:Organisation_ID"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element **tns:NmVerzeichniseintragsSchluesselregister_Type** / **tns:NM-Spezifikationsversion**

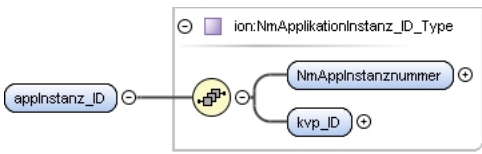
Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:VersionNumberExtended				
Type hierarchy	<ul style="list-style-type: none"> xs:string tns:BitString16 tns:VersionNumberExtended 				
Properties	content: simple				
Facets	<table> <tr> <td>length</td><td>16</td></tr> <tr> <td>pattern</td><td> [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1] </td></tr> </table>	length	16	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]
length	16				
pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]				
Source	<pre><xs:element name="NM-Spezifikationsversion" type="tns:VersionNumberExtended"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Element **tns:NmVerzeichniseintragsSchluesselregister_Type** / **tns:Herstellerversion**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:OctetString4

Properties	content: simple
Facets	length 4
Source	<code><xs:element name="Herstellerversion" type="ct:OctetString4"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element `tns:NmVerzeichniseintragSchluesselregister_Type` / `tns:appInstanz_ID`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:NmApplikationInstanz_ID_Type</code>
Properties	content: complex
Model	<code>NmAppInstanznummer</code> , <code>kvp_ID</code>
Children	<code>NmAppInstanznummer</code> , <code>kvp_ID</code>
Instance	<pre><tns:appInstanz_ID xmlns:tns="http://vdv/ka/pe/2"> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </tns:appInstanz_ID></pre>
Source	<code><xs:element name="appInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element `tns:NmVerzeichniseintragSchluesselregister_Type` / `tns:Zufallszahl`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:OctetString4</code>
Properties	content: simple
Facets	length 4
Source	<code><xs:element name="Zufallszahl" type="ct:OctetString4"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmVerzeichniseintragSchluesselregister_Type` / `tns:RFU1`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:OctetString1</code>
Properties	content: simple
Facets	length 1
Source	<code><xs:element name="RFU1" type="ct:OctetString1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmVerzeichniseintragSchluesselregister_Type` / `tns:RFU2`

Namespace	http://vdv/ka/pe/2
Diagram	

Type	tns:OctetString1
Properties	content: simple
Facets	length 1
Source	<code><xs:element name="RFU2" type="ct:OctetString1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmApplikationsverzeichnis_Type / tns:LetzteTransaktion

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmVerzeichniseintragLetzteTransaktion_Type
Properties	content: complex
Model	tns:logTransaktionsTyp.code , tns:NmSystemspezifischerVerzeichnisteil
Children	tns:NmSystemspezifischerVerzeichnisteil, tns:logTransaktionsTyp.code
Instance	<pre><tns:LetzteTransaktion xmlns:tns="http://vdv/ka/pe/2"> <tns:logTransaktionsTyp.code>{1,1}</tns:logTransaktionsTyp.code> <tns:NmSystemspezifischerVerzeichnisteil>{1,1}</tns:NmSystemspezifischerVerzeichnisteil> </tns:LetzteTransaktion></pre>
Source	<code><xs:element name="LetzteTransaktion" type="tns:NmVerzeichniseintragLetzteTransaktion_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmApplikationsverzeichnis_Type / tns:Prioritaeten

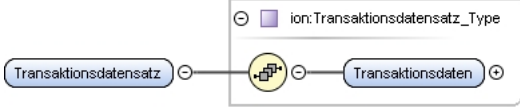
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmVerzeichniseintragPrioritaeten_Type

Properties	content: complex
Model	tns:berInstanz1, tns:berInstanz2, tns:berInstanz3, tns:berInstanz4, tns:berInstanz5, tns:berInstanz6, tns:berInstanz7, tns:berInstanz8, tns:berInstanz9, tns:berInstanz10, tns:berInstanz11, tns:berInstanz12, tns:berInstanz13, tns:berInstanz14, tns:berInstanz15, tns:berInstanz16
Children	tns:berInstanz1, tns:berInstanz10, tns:berInstanz11, tns:berInstanz12, tns:berInstanz13, tns:berInstanz14, tns:berInstanz15, tns:berInstanz16, tns:berInstanz2, tns:berInstanz3, tns:berInstanz4, tns:berInstanz5, tns:berInstanz6, tns:berInstanz7, tns:berInstanz8, tns:berInstanz9
Instance	<pre><tns:Prioritaeten xmlns:tns="http://vdv/ka/pe/2"> <tns:berInstanz1>{1,1}</tns:berInstanz1> <tns:berInstanz2>{1,1}</tns:berInstanz2> <tns:berInstanz3>{1,1}</tns:berInstanz3> <tns:berInstanz4>{1,1}</tns:berInstanz4> <tns:berInstanz5>{1,1}</tns:berInstanz5> <tns:berInstanz6>{1,1}</tns:berInstanz6> <tns:berInstanz7>{1,1}</tns:berInstanz7> <tns:berInstanz8>{1,1}</tns:berInstanz8> <tns:berInstanz9>{1,1}</tns:berInstanz9> <tns:berInstanz10>{1,1}</tns:berInstanz10> <tns:berInstanz11>{1,1}</tns:berInstanz11> <tns:berInstanz12>{1,1}</tns:berInstanz12> <tns:berInstanz13>{1,1}</tns:berInstanz13> <tns:berInstanz14>{1,1}</tns:berInstanz14> <tns:berInstanz15>{1,1}</tns:berInstanz15> <tns:berInstanz16>{1,1}</tns:berInstanz16> </tns:Prioritaeten></pre>
Source	<xs:element name="Prioritaeten" type="tns:NmVerzeichniseintragPrioritaeten_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

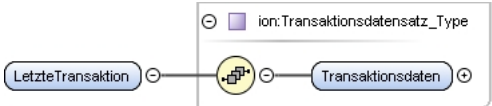
Element tns:NmApplikationsverzeichnis_Type / tns:VerzeichniseintragBerDaten

Namespace	http://vdv/ka/pe/2
Diagram	<pre> classDiagram class tnsNmvBerechtigungen_Type { NmSystemspezifischerVerzeichnisteil berBerechtigung_ID prodProdukt_ID prodKeyOrganisation_ID berGueltigkeitsbeginn berGueltigkeitsende berStatus berSynchronNummer } class tnsVerzeichniseintragBerDaten { tnsNmvBerechtigungen_Type } tnsVerzeichniseintragBerDaten --> tnsNmvBerechtigungen_Type </pre>
Type	tns:NmVerzeichniseintragBerechtigungen_Type
Properties	content: complex
Model	tns:NmSystemspezifischerVerzeichnisteil, tns:berBerechtigung_ID, tns:prodProdukt_ID, tns:prodKeyOrganisation_ID, tns:berGueltigkeitsbeginn, tns:berGueltigkeitsende, tns:berStatus, tns:berSynchronNummer
Children	tns:NmSystemspezifischerVerzeichnisteil, tns:berBerechtigung_ID, tns:berGueltigkeitsbeginn, tns:berGueltigkeitsende, tns:berStatus, tns:berSynchronNummer, tns:prodKeyOrganisation_ID, tns:prodProdukt_ID
Instance	<pre><tns:VerzeichniseintragBerDaten xmlns:tns="http://vdv/ka/pe/2"> <tns:NmSystemspezifischerVerzeichnisteil>{1,1}</tns:NmSystemspezifischerVerzeichnisteil> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:prodKeyOrganisation_ID>{1,1}</tns:prodKeyOrganisation_ID> <tns:berGueltigkeitsbeginn>{1,1}</tns:berGueltigkeitsbeginn> <tns:berGueltigkeitsende>{1,1}</tns:berGueltigkeitsende> <tns:berStatus>{1,1}</tns:berStatus> <tns:berSynchronNummer>{1,1}</tns:berSynchronNummer> </tns:VerzeichniseintragBerDaten></pre>
Source	<xs:element name="VerzeichniseintragBerDaten" type="tns:NmVerzeichniseintragBerechtigungen_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

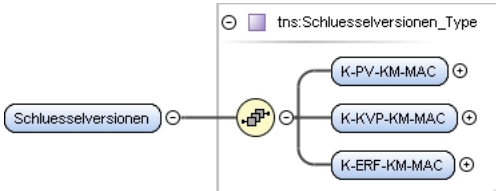
Element `tns:NmApplikationslogbuch_Type` / `tns:Transaktionsdatensatz`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:Transaktionsdatensatz xmlns:tns="http://vdv/ka/pe/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:Transaktionsdatensatz></pre>
Source	<pre><xs:element name="Transaktionsdatensatz" type="ion:Transaktionsdatensatz_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element `tns:NmApplikationsdaten_Type` / `tns:LetzteTransaktion`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:LetzteTransaktion xmlns:tns="http://vdv/ka/pe/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:LetzteTransaktion></pre>
Source	<pre><xs:element name="LetzteTransaktion" type="ion:Transaktionsdatensatz_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element `tns:NmApplikationsdaten_Type` / `tns:Schluesselversionen`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Schluesselversionen_Type
Properties	content: complex
Model	tns:K-PV-KM-MAC , tns:K-KVP-KM-MAC , tns:K-ERF-KM-MAC
Children	tns:K-ERF-KM-MAC, tns:K-KVP-KM-MAC, tns:K-PV-KM-MAC
Instance	<pre><tns:Schluesselversionen xmlns:tns="http://vdv/ka/pe/2"> <tns:K-PV-KM-MAC>{1,1}</tns:K-PV-KM-MAC> <tns:K-KVP-KM-MAC>{1,1}</tns:K-KVP-KM-MAC> <tns:K-ERF-KM-MAC>{1,1}</tns:K-ERF-KM-MAC> </tns:Schluesselversionen></pre>
Source	<pre><xs:element name="Schluesselversionen" type="tns:Schluesselversionen_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element `tns:NmApplikationsdaten_Type` / `tns:Ausgabetransaktionskennung`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_Transaktion_ID_Type
Properties	content: complex
Model	tns:samSequenznummer, tns:SAM_ID.samNummer
Children	tns:SAM_ID.samNummer, tns:samSequenznummer
Instance	<pre><tns:Ausgabetransaktionskennung xmlns:tns="http://vdv/ka/pe/2"> <tns:samSequenznummer>{1,1}</tns:samSequenznummer> <tns:SAM_ID.samNummer>{1,1}</tns:SAM_ID.samNummer> </tns:Ausgabetransaktionskennung></pre>
Source	<pre><xs:element name="Ausgabetransaktionskennung" type="tns:SAM_Transaktion_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmApplikationsdaten_Type` / `tns:Infotext`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	restriction of tns:PrintableString
Type hierarchy	<ul style="list-style-type: none"> xs:string tns:PrintableString
Properties	content: simple
Facets	length 40 pattern [-p]*
Source	<pre><xs:element name="Infotext"> <xs:simpleType> <xs:restriction base="ion:PrintableString"> <xs:length value="40" fixed="true"/> </xs:restriction> </xs:simpleType> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmBerechtigungsdaten_Type` / `tns:berechtigungTarifbereich`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<pre><xs:element name="berechtigungTarifbereich" type="xs:hexBinary" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:NmBerechtigungsdaten_Type` / `tns:LetzteTransaktion`

Namespace	http://vdv/ka/pe/2
Diagram	

Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:LetzteTransaktion xmlns:tns="http://vdv/ka/pe/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:LetzteTransaktion></pre>
Source	<code><xs:element name="LetzteTransaktion" type="ion:Transaktionsdatensatz_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmBerechtigungsdaten_Type / tns:Schluesselversionen

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Schluesselversionen_Type
Properties	content: complex
Model	tns:K-PV-KM-MAC , tns:K-KVP-KM-MAC , tns:K-ERF-KM-MAC
Children	tns:K-ERF-KM-MAC, tns:K-KVP-KM-MAC, tns:K-PV-KM-MAC
Instance	<pre><tns:Schluesselversionen xmlns:tns="http://vdv/ka/pe/2"> <tns:K-PV-KM-MAC>{1,1}</tns:K-PV-KM-MAC> <tns:K-KVP-KM-MAC>{1,1}</tns:K-KVP-KM-MAC> <tns:K-ERF-KM-MAC>{1,1}</tns:K-ERF-KM-MAC> </tns:Schluesselversionen></pre>
Source	<code><xs:element name="Schluesselversionen" type="tns:Schluesselversionen_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmBerechtigungsdaten_Type / tns:Ausgabetransaktionskennung

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_Transaktion_ID_Type
Properties	content: complex
Model	tns:samSequenznummer , tns:SAM_ID.samNummer
Children	tns:SAM_ID.samNummer, tns:samSequenznummer
Instance	<pre><tns:Ausgabetransaktionskennung xmlns:tns="http://vdv/ka/pe/2"> <tns:samSequenznummer>{1,1}</tns:samSequenznummer> <tns:SAM_ID.samNummer>{1,1}</tns:SAM_ID.samNummer> </tns:Ausgabetransaktionskennung></pre>
Source	<code><xs:element name="Ausgabetransaktionskennung" type="tns:SAM_Transaktion_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:NmBerechtigungsdaten_Type / tns:Infotext

Namespace	http://vdv/ka/pe/2
Diagram	

Type	restriction of tns:PrintableString
Type hierarchy	<ul style="list-style-type: none"> xs:string tns:PrintableString
Properties	content: simple
Facets	minLength 0
	maxLength 40
	pattern [-p] *
Source	<pre><xs:element name="Infotext"> <xs:simpleType> <xs:restriction base="ion:PrintableString"> <xs:minLength value="0" /> <xs:maxLength value="40" /> </xs:restriction> </xs:simpleType> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:Schluesselregister_Type / tns:Schluesselname

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
	minOccurs: 0
	maxOccurs: unbounded
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><tns:Schluesselname xmlns:tns="http://vdv/ka/pe/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:Schluesselname></pre>
Source	<pre><xs:element name="Schluesselname" type="ion:SymSchluessel_ID_Type" minOccurs="0" maxOccurs="unbounded" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXWBD_Type / tns:SESSION_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex

Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXWBD_Type / tns:ENGINE_DATA

Namespace	http://vdv/ka/pe/2
Diagram	<pre> graph LR subgraph tnsENGINE_DATA_Type [tns:ENGINE_DATA_Type] VENDOR TYPE VERSION FIRMWARE TERM_TYP_CODE MAG_COUNT ACT_MAG ACT_MAG_NAME ACT_MAG_CONTENT PRINTER end ENGINE_DATA --- tnsENGINE_DATA_Type </pre>
Type	tns:ENGINE_DATA_Type
Properties	content: complex
Model	tns:VENDOR , tns:TYPE , tns:VERSION , tns:FIRMWARE , tns:TERM_TYP_CODE , tns:MAG_COUNT , tns:ACT_MAG , tns:ACT_MAG_NAME , tns:ACT_MAG_CONTENT , tns:PRINTER
Children	tns:ACT_MAG, tns:ACT_MAG_CONTENT, tns:ACT_MAG_NAME, tns:FIRMWARE, tns:MAG_COUNT, tns:PRINTER, tns:TERM_TYP_CODE, tns:TYPE, tns:VENDOR, tns:VERSION
Instance	<pre><tns:ENGINE_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:VENDOR>{1,1}</tns:VENDOR> <tns:TYPE>{1,1}</tns:TYPE> <tns:VERSION>{1,1}</tns:VERSION> <tns:FIRMWARE>{1,1}</tns:FIRMWARE> <tns:TERM_TYP_CODE>{1,1}</tns:TERM_TYP_CODE> <tns:MAG_COUNT>{1,1}</tns:MAG_COUNT> <tns:ACT_MAG>{1,1}</tns:ACT_MAG> <tns:ACT_MAG_NAME>{1,1}</tns:ACT_MAG_NAME> <tns:ACT_MAG_CONTENT>{1,1}</tns:ACT_MAG_CONTENT> <tns:PRINTER>{1,1}</tns:PRINTER> </tns:ENGINE_DATA></pre>
Source	<code><xs:element name="ENGINE_DATA" type="tns:ENGINE_DATA_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXWBD_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	<pre> graph LR subgraph tnsSTATUS_DATA_Type [tns:STATUS_DATA_Type] VENDOR TYPE VERSION FIRMWARE TERM_TYP_CODE MAG_COUNT ACT_MAG ACT_MAG_NAME ACT_MAG_CONTENT PRINTER end STATUS_DATA --- tnsSTATUS_DATA_Type </pre>
Type	tns:STATUS_DATA_Type
Properties	content: complex

Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAUTH_Type** / **tns:SESSION_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAUTH_Type** / **tns:SAM_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAUTH_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXBGN_Type / tns:SESSION_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXBGN_Type / tns:ENGINE_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:ENGINE_DATA_Type
Properties	content: complex

Model	tns:VENDOR , tns:TYPE , tns:VERSION , tns:FIRMWARE , tns:TERM_TYP_CODE , tns:MAG_COUNT , tns:ACT_MAG , tns:ACT_MAG_NAME , tns:ACT_MAG_CONTENT , tns:PRINTER
Children	tns:ACT_MAG, tns:ACT_MAG_CONTENT, tns:ACT_MAG_NAME, tns:FIRMWARE, tns:MAG_COUNT, tns:PRINTER, tns:TERM_TYP_CODE, tns:TYPE, tns:VENDOR, tns:VERSION
Instance	<pre><tns:ENGINE_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:VENDOR>{1,1}</tns:VENDOR> <tns:TYPE>{1,1}</tns:TYPE> <tns:VERSION>{1,1}</tns:VERSION> <tns:FIRMWARE>{1,1}</tns:FIRMWARE> <tns:TERM_TYP_CODE>{1,1}</tns:TERM_TYP_CODE> <tns:MAG_COUNT>{1,1}</tns:MAG_COUNT> <tns:ACT_MAG>{1,1}</tns:ACT_MAG> <tns:ACT_MAG_NAME>{1,1}</tns:ACT_MAG_NAME> <tns:ACT_MAG_CONTENT>{1,1}</tns:ACT_MAG_CONTENT> <tns:PRINTER>{1,1}</tns:PRINTER> </tns:ENGINE_DATA></pre>
Source	<xs:element name="ENGINE_DATA" type="tns:ENGINE_DATA_Type" />
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXBGN_Type / tns:SAM_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex minOccurs: 0
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" />
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXBGN_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" />
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXBGN_Type / tns:NmApplikationsverzeichnis

Namespace	http://vdv/ka/pe/2
-----------	--------------------

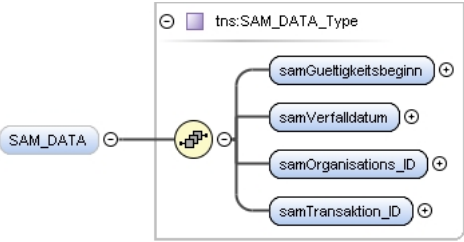
Diagram							
Type	tns:NmApplikationsverzeichnis_Type						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	tns:VerzeichniseintragAppDaten , tns:VerzeichniseintragAppLogbuch , tns:VerzeichniseintragKunde , tns:VerzeichniseintragSchluesselregister {0,1} , tns:LetzteTransaktion , tns:Prioritaeten , tns:VerzeichniseintragBerDaten						
Children	tns:LetzteTransaktion, tns:Prioritaeten, tns:VerzeichniseintragAppDaten, tns:VerzeichniseintragAppLogbuch, tns:VerzeichniseintragBerDaten, tns:VerzeichniseintragKunde, tns:VerzeichniseintragSchluesselregister						
Instance	<pre> <tns:NmApplikationsverzeichnis xmlns:tns="http://vdv/ka/pe/2"> <tns:VerzeichniseintragAppDaten>{1,1}</tns:VerzeichniseintragAppDaten> <tns:VerzeichniseintragAppLogbuch>{1,1}</tns:VerzeichniseintragAppLogbuch> <tns:VerzeichniseintragKunde>{1,1}</tns:VerzeichniseintragKunde> <tns:VerzeichniseintragSchluesselregister>{0,1}</tns:VerzeichniseintragSchluesselregister> <tns:LetzteTransaktion>{1,1}</tns:LetzteTransaktion> <tns:Prioritaeten>{1,1}</tns:Prioritaeten> <tns:VerzeichniseintragBerDaten>{1,1}</tns:VerzeichniseintragBerDaten> </tns:NmApplikationsverzeichnis> </pre>						
Source	<xs:element name="NmApplikationsverzeichnis" type="tns:NmApplikationsverzeichnis_Type" minOccurs="0" maxOccurs="1" />						
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Element tns:TXLADKEYREG_Type / tns:SESSION_DATA


Namespace	http://vdv/ka/pe/2		
Diagram			
Type	tns:SESSION_DATA_Type		
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> </table>	content:	complex
content:	complex		
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION		
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID		
Instance	<pre> <tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA> </pre>		
Source	<xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" />		

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd
-----------------	---

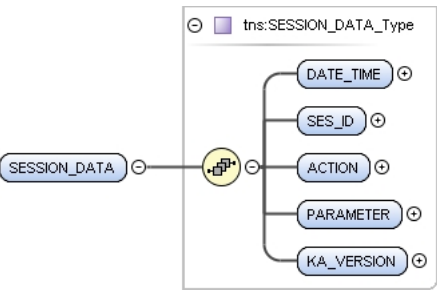
Element **tns:TXLADKEYREG_Type** / **tns:SAM_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a root element 'SAM_DATA' connected to a complex content model. This model contains four child elements: 'samGueltigkeitsbeginn', 'samVerfalldatum', 'samOrganisations_ID', and 'samTransaktion_ID'. Each child element is represented by a rounded rectangle with a plus sign in a circle to its right, indicating it is optional.
Type	tns:SAM_DATA_Type
Properties	content: complex minOccurs: 0
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<pre><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXLADKEYREG_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a root element 'STATUS_DATA' connected to a complex content model. This model contains one child element: 'tns:STATUS_DATA_Type', which is represented by a rounded rectangle with a plus sign in a circle to its right, indicating it is optional.
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<pre><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXLOEKEYREG_Type** / **tns:SESSION_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a root element 'SESSION_DATA' connected to a complex content model. This model contains five child elements: 'DATE_TIME', 'SES_ID', 'ACTION', 'PARAMETER', and 'KA_VERSION'. Each child element is represented by a rounded rectangle with a plus sign in a circle to its right, indicating it is optional.
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME></pre>

	<pre> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA> </pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:TXLOEKEYREG_Type` / `tns:SAM_DATA`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex minOccurs: 0
Model	tns:samGueltigkeitsbeginn, tns:samVerfalldatum, tns:samOrganisations_ID, tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre> <tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA> </pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:TXLOEKEYREG_Type` / `tns:STATUS_DATA`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:TXLESKEYREG_Type` / `tns:SESSION_DATA`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type

Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKEYREG_Type / tns:SAM_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex minOccurs: 0
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" /></code>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKEYREG_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKEYREG_Type / tns:Schluesselregister

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:Schluesselregister_Type
Properties	content: complex

	minOccurs: 0
	maxOccurs: 1
Model	tns:Schluesselname*
Children	tns:Schluesselname
Instance	<pre><tns:Schluesselregister xmlns:tns="http://vdv/ka/pe/2"> <tns:Schluesselname>{0,unbounded}</tns:Schluesselname> </tns:Schluesselregister></pre>
Source	<pre><xs:element name="Schluesselregister" type="tns:Schluesselregister_Type" minOccurs="0" maxOccurs="1" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXEND_Type / tns:SESSION_DATA


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<pre><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXEND_Type / tns:SAM_DATA

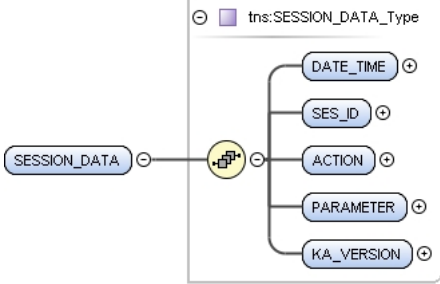
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn></pre>

	<pre><tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

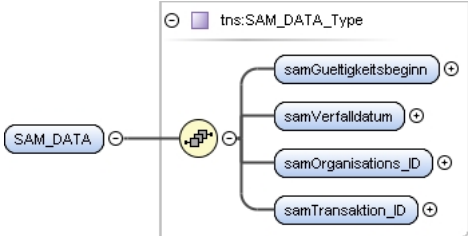
Element **tns:TXEND_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a box labeled 'tns:STATUS_DATA_Type' with a line connecting it to an element labeled 'STATUS_DATA'.
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXLESAPLOG_Type** / **tns:SESSION_DATA**


Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a box labeled 'tns:SESSION_DATA_Type' with a line connecting it to an element labeled 'SESSION_DATA'. Inside the box, there is a tree structure with a root node (a circle with a square) and five child nodes: 'DATE_TIME', 'SES_ID', 'ACTION', 'PARAMETER', and 'KA_VERSION'.
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXLESAPLOG_Type** / **tns:SAM_DATA**

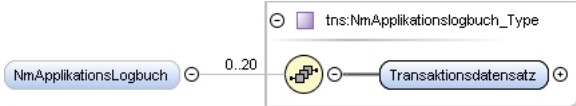
Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a box labeled 'tns:SAM_DATA_Type' with a line connecting it to an element labeled 'SAM_DATA'. Inside the box, there is a tree structure with a root node (a circle with a square) and four child nodes: 'samGueltigkeitsbeginn', 'samVerfalldatum', 'samOrganisations_ID', and 'samTransaktion_ID'.
Type	tns:SAM_DATA_Type
Properties	content: complex

Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

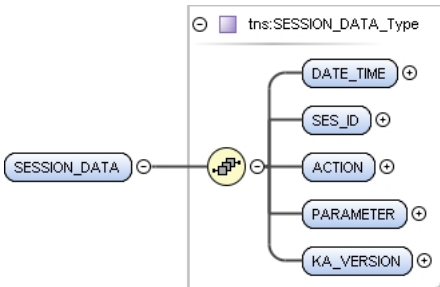
Element tns:TXLESAPLOG_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESAPLOG_Type / tns:NmApplikationsLogbuch

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmApplikationslogbuch_Type
Properties	content: complex minOccurs: 0
Model	tns:Transaktionsdatensatz
Children	tns:Transaktionsdatensatz
Instance	<pre><tns:NmApplikationsLogbuch xmlns:tns="http://vdv/ka/pe/2"> <tns:Transaktionsdatensatz>{1,1}</tns:Transaktionsdatensatz> </tns:NmApplikationsLogbuch></pre>
Source	<code><xs:element name="NmApplikationsLogbuch" type="tns:NmApplikationslogbuch_Type" minOccurs="0" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEAPLOG_Type / tns:SESSION_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION

Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEAPPLOG_Type / tns:SAM_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn, tns:samVerfalldatum, tns:samOrganisations_ID, tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEAPPLOG_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBKUNDE_Type / tns:SESSION_DATA

Namespace	http://vdv/ka/pe/2
Diagram	

Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBKUNDE_Type / tns:SAM_DATA

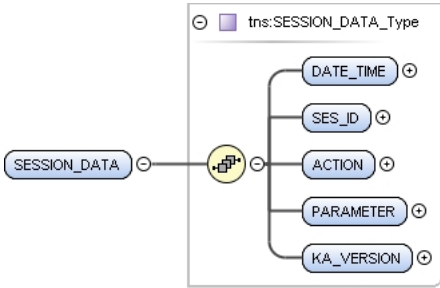
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1" /></code>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBKUNDE_Type / tns:STATUS_DATA

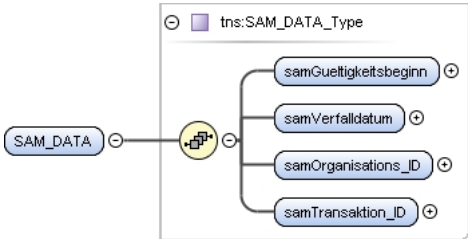
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKUNDE_Type / tns:SESSION_DATA


Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKUNDE_Type / tns:SAM_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKUNDE_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>

Schema location	file://C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd
-----------------	--

Element `tns:TXLESKUNDE_Type` / `tns:NmKundendaten`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:NmKundendaten_Type</code>
Properties	content: complex

	minOccurs: 0
Model	tns:kundeGeburtsdatum, tns:kundeSprache.code, tns:kundeName, tns:kundeVorname, tns:kundeGeschlecht.code, tns:kundenTyp1.code, tns:kundenTyp1.BeginnDatum, tns:kundenTyp1.AblaufDatum, tns:kundenTyp1.Anwendungsgebiet, tns:kundenTyp1.Tarifzonen.Ort_ID1, tns:kundenTyp1.Tarifzonen.Ort_ID2, tns:kundenTyp1.Tarifzonen.Ort_ID3, tns:kundenTyp1.StreckeVon, tns:kundenTyp1.StreckeNach, tns:kundenTyp2.code, tns:kundenTyp2.BeginnDatum, tns:kundenTyp2.AblaufDatum, tns:kundenTyp2.Anwendungsgebiet, tns:kundenTyp2.Tarifzonen.Ort_ID1, tns:kundenTyp2.Tarifzonen.Ort_ID2, tns:kundenTyp2.Tarifzonen.Ort_ID3, tns:kundenTyp2.StreckeVon, tns:kundenTyp2.StreckeNach, tns:kundenTyp3.code, tns:kundenTyp3.BeginnDatum, tns:kundenTyp3.AblaufDatum, tns:kundenTyp3.Anwendungsgebiet, tns:kundenTyp3.Tarifzonen.Ort_ID1, tns:kundenTyp3.Tarifzonen.Ort_ID2, tns:kundenTyp3.Tarifzonen.Ort_ID3, tns:kundenTyp3.StreckeVon, tns:kundenTyp3.StreckeNach, tns:Infotext
Children	tns:Infotext, tns:kundeGeburtsdatum, tns:kundeGeschlecht.code, tns:kundeName, tns:kundeSprache.code, tns:kundeVorname, tns:kundenTyp1.AblaufDatum, tns:kundenTyp1.Anwendungsgebiet, tns:kundenTyp1.BeginnDatum, tns:kundenTyp1.StreckeNach, tns:kundenTyp1.StreckeVon, tns:kundenTyp1.Tarifzonen.Ort_ID1, tns:kundenTyp1.Tarifzonen.Ort_ID2, tns:kundenTyp1.Tarifzonen.Ort_ID3, tns:kundenTyp2.BeginnDatum, tns:kundenTyp2.StreckeNach, tns:kundenTyp2.StreckeVon, tns:kundenTyp2.Tarifzonen.Ort_ID1, tns:kundenTyp2.Tarifzonen.Ort_ID2, tns:kundenTyp2.Tarifzonen.Ort_ID3, tns:kundenTyp2.code, tns:kundenTyp3.AblaufDatum, tns:kundenTyp3.Anwendungsgebiet, tns:kundenTyp3.BeginnDatum, tns:kundenTyp3.StreckeNach, tns:kundenTyp3.StreckeVon, tns:kundenTyp3.Tarifzonen.Ort_ID1, tns:kundenTyp3.Tarifzonen.Ort_ID2, tns:kundenTyp3.Tarifzonen.Ort_ID3, tns:kundenTyp3.code
Instance	<pre> <tns:NmKundendaten xmlns:tns="http://vdv/ka/pe/2"> <tns:kundeGeburtsdatum>{1,1}</tns:kundeGeburtsdatum> <tns:kundeSprache.code>{1,1}</tns:kundeSprache.code> <tns:kundeName>{1,1}</tns:kundeName> <tns:kundeVorname>{1,1}</tns:kundeVorname> <tns:kundeGeschlecht.code>{1,1}</tns:kundeGeschlecht.code> <tns:kundenTyp1.code>{1,1}</tns:kundenTyp1.code> <tns:kundenTyp1.BeginnDatum>{1,1}</tns:kundenTyp1.BeginnDatum> <tns:kundenTyp1.AblaufDatum>{1,1}</tns:kundenTyp1.AblaufDatum> <tns:kundenTyp1.Anwendungsgebiet>{1,1}</tns:kundenTyp1.Anwendungsgebiet> <tns:kundenTyp1.Tarifzonen.Ort_ID1>{1,1}</tns:kundenTyp1.Tarifzonen.Ort_ID1> <tns:kundenTyp1.Tarifzonen.Ort_ID2>{1,1}</tns:kundenTyp1.Tarifzonen.Ort_ID2> <tns:kundenTyp1.Tarifzonen.Ort_ID3>{1,1}</tns:kundenTyp1.Tarifzonen.Ort_ID3> <tns:kundenTyp1.StreckeVon>{1,1}</tns:kundenTyp1.StreckeVon> <tns:kundenTyp1.StreckeNach>{1,1}</tns:kundenTyp1.StreckeNach> <tns:kundenTyp2.code>{1,1}</tns:kundenTyp2.code> <tns:kundenTyp2.BeginnDatum>{1,1}</tns:kundenTyp2.BeginnDatum> <tns:kundenTyp2.AblaufDatum>{1,1}</tns:kundenTyp2.AblaufDatum> <tns:kundenTyp2.Anwendungsgebiet>{1,1}</tns:kundenTyp2.Anwendungsgebiet> <tns:kundenTyp2.Tarifzonen.Ort_ID1>{1,1}</tns:kundenTyp2.Tarifzonen.Ort_ID1> <tns:kundenTyp2.Tarifzonen.Ort_ID2>{1,1}</tns:kundenTyp2.Tarifzonen.Ort_ID2> <tns:kundenTyp2.Tarifzonen.Ort_ID3>{1,1}</tns:kundenTyp2.Tarifzonen.Ort_ID3> <tns:kundenTyp2.StreckeVon>{1,1}</tns:kundenTyp2.StreckeVon> <tns:kundenTyp2.StreckeNach>{1,1}</tns:kundenTyp2.StreckeNach> <tns:kundenTyp3.code>{1,1}</tns:kundenTyp3.code> <tns:kundenTyp3.BeginnDatum>{1,1}</tns:kundenTyp3.BeginnDatum> <tns:kundenTyp3.AblaufDatum>{1,1}</tns:kundenTyp3.AblaufDatum> <tns:kundenTyp3.Anwendungsgebiet>{1,1}</tns:kundenTyp3.Anwendungsgebiet> <tns:kundenTyp3.Tarifzonen.Ort_ID1>{1,1}</tns:kundenTyp3.Tarifzonen.Ort_ID1> <tns:kundenTyp3.Tarifzonen.Ort_ID2>{1,1}</tns:kundenTyp3.Tarifzonen.Ort_ID2> <tns:kundenTyp3.Tarifzonen.Ort_ID3>{1,1}</tns:kundenTyp3.Tarifzonen.Ort_ID3> <tns:kundenTyp3.StreckeVon>{1,1}</tns:kundenTyp3.StreckeVon> <tns:kundenTyp3.StreckeNach>{1,1}</tns:kundenTyp3.StreckeNach> <tns:Infotext>{1,1}</tns:Infotext> </tns:NmKundendaten> </pre>
Source	<xs:element name="NmKundendaten" type="tns:NmKundendaten_Type" minOccurs="0"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEKUNDE_Type / tns:SESSION_DATA

Namespace	http://vdv/ka/pe/2
Diagram	<pre> classDiagram class tns_SESSION_DATA_Type { DATE_TIME SES_ID ACTION PARAMETER KA_VERSION } class tns_SESSION_DATA { } tns_SESSION_DATA_Type -- > tns_SESSION_DATA </pre>
Type	tns:SESSION_DATA_Type

Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXLOEKUNDE_Type** / **tns:SAM_DATA**

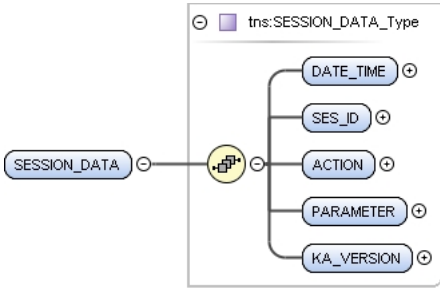
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXLOEKUNDE_Type** / **tns:STATUS_DATA**

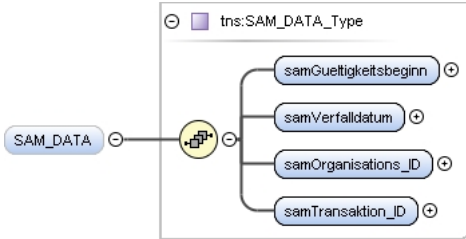
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAGBPRIOR_Type** / **tns:SESSION_DATA**


Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAGBPRIORity_Type** / **tns:SAM_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAGBPRIORity_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex

Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXLOEPRIO_Type** / **tns:SESSION_DATA**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXLOEPRIO_Type** / **tns:SAM_DATA**

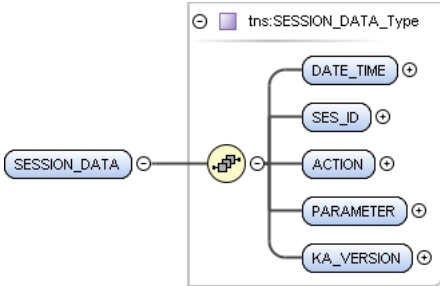
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXLOEPRIO_Type** / **tns:STATUS_DATA**

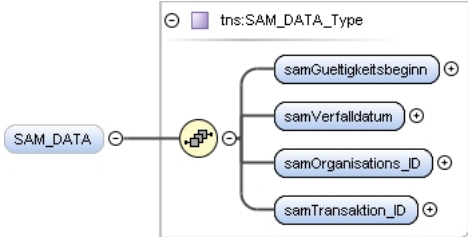
Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBPINPUC_Type / tns:SESSION_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBPINPUC_Type / tns:SAM_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>

Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAGBPINUC_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXPPIN_Type** / **tns:SESSION_DATA**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXPPIN_Type** / **tns:SAM_DATA**

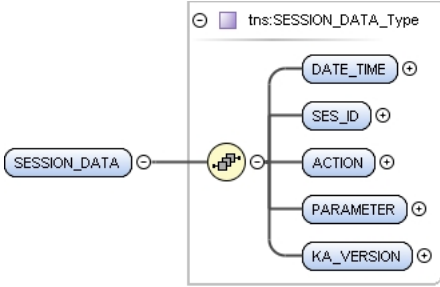
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum

Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

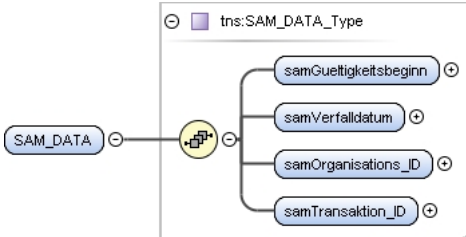
Element tns:TXPPIN_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a box labeled 'tns:STATUS_DATA_Type' with a single child element 'STATUS_DATA'.
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAENDPIN_Type / tns:SESSION_DATA

Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a box labeled 'tns:SESSION_DATA_Type' with a single child element 'SESSION_DATA'. Inside 'SESSION_DATA', there are five child elements: 'DATE_TIME', 'SES_ID', 'ACTION', 'PARAMETER', and 'KA_VERSION'.
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAENDPIN_Type / tns:SAM_DATA

Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a box labeled 'tns:SAM_DATA_Type' with a single child element 'SAM_DATA'. Inside 'SAM_DATA', there are four child elements: 'samGueltigkeitsbeginn', 'samVerfalldatum', 'samOrganisations_ID', and 'samTransaktion_ID'.

Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAENDPIN_Type / tns:STATUS_DATA

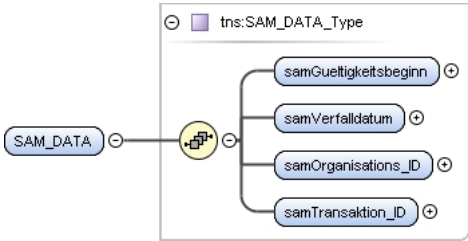
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXSPIN_Type / tns:SESSION_DATA


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXSPIN_Type / tns:SAM_DATA

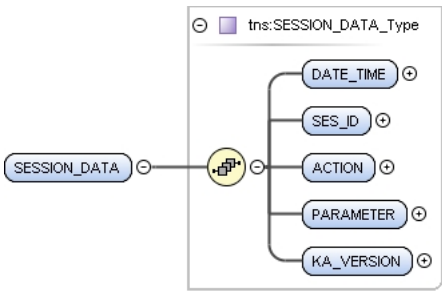
Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn, tns:samVerfalldatum, tns:samOrganisations_ID, tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

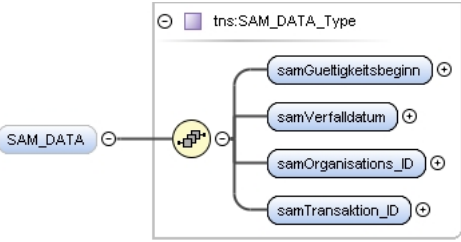
Element tns:TXSPIN_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element tns:TXDRUCK_Type / tns:SESSION_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME, tns:SES_ID, tns:ACTION, tns:PARAMETER, tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

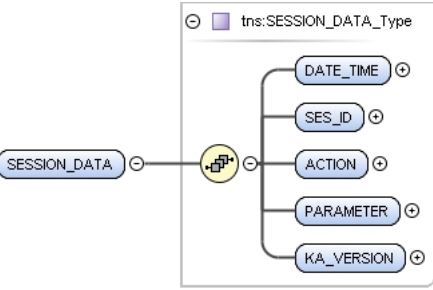
Element **tns:TXDRUCK_Type** / **tns:SAM_DATA**

Namespace	http://vdv/ka/pe/2						
Diagram	 The diagram shows a tree structure for the tns:SAM_DATA_Type . A root node labeled SAM_DATA is connected to a complex content container (yellow circle with a plus sign). This container is connected to four child nodes: samGueltigkeitsbeginn , samVerfalldatum , samOrganisations_ID , and samTransaktion_ID .						
Type	tns:SAM_DATA_Type						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID						
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum						
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>						
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1" /></code>						
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Element **tns:TXDRUCK_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2		
Diagram	 The diagram shows a simple structure for the tns:STATUS_DATA_Type . A root node labeled STATUS_DATA is connected to a complex content container (yellow circle with a plus sign), which is then connected to a single child node labeled tns:STATUS_DATA_Type .		
Type	tns:STATUS_DATA_Type		
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> </table>	content:	complex
content:	complex		
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>		
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd		

Element **tns:TXWEBAENDN_Type** / **tns:SESSION_DATA**

Namespace	http://vdv/ka/pe/2		
Diagram	 The diagram shows a tree structure for the tns:SESSION_DATA_Type . A root node labeled SESSION_DATA is connected to a complex content container (yellow circle with a plus sign). This container is connected to five child nodes: DATE_TIME , SES_ID , ACTION , PARAMETER , and KA_VERSION .		
Type	tns:SESSION_DATA_Type		
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> </table>	content:	complex
content:	complex		
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION		
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID		
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION></pre>		

	<pre> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA> </pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXWEBAENDN_Type** / **tns:SAM_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn, tns:samVerfalldatum, tns:samOrganisations_ID, tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre> <tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA> </pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXWEBAENDN_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXSBER_Type** / **tns:SESSION_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME, tns:SES_ID, tns:ACTION, tns:PARAMETER, tns:KA_VERSION

Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXSBER_Type / tns:SAM_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn, tns:samVerfalldatum, tns:samOrganisations_ID, tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXSBER_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBBER_Type / tns:SESSION_DATA

Namespace	http://vdv/ka/pe/2
Diagram	

Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBBER_Type / tns:SAM_DATA

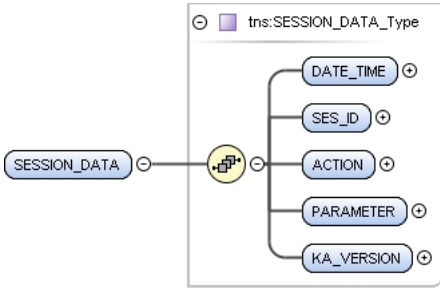
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex minOccurs: 0 maxOccurs: 1
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBBER_Type / tns:STATUS_DATA

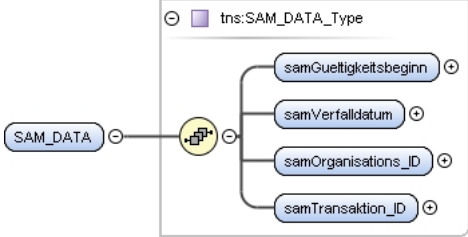
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEBER_Type / tns:SESSION_DATA


Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<pre><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEBER_Type / tns:SAM_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<pre><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEBER_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<pre><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd
-----------------	---

Element **tns:TXWEBPOBPEB_Type** / **tns:SESSION_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<pre><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXWEBPOBPEB_Type** / **tns:SAM_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<pre><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXWEBPOBPEB_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	

Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Element tns:TXPEB_Type / tns:SESSION_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

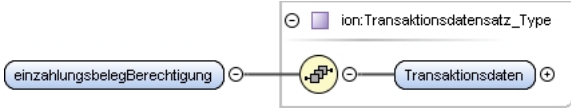
Element tns:TXPEB_Type / tns:SAM_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

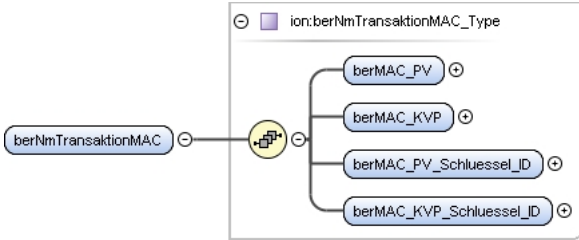
Element **tns:TXPEB_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a blue rounded rectangle labeled 'STATUS_DATA' connected by a line to a purple square labeled 'tns:STATUS_DATA_Type'.
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXLPEB_Type** / **tns:einzahlungsbelegBerechtigung**

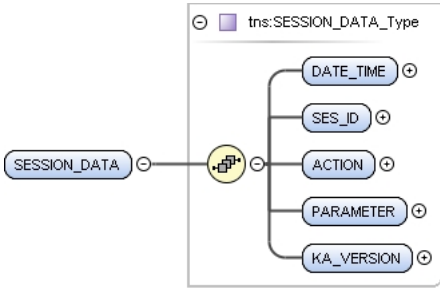
Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a blue rounded rectangle labeled 'einzahlungsbelegBerechtigung' connected by a line to a yellow circle with a plus sign, which is then connected to a blue rounded rectangle labeled 'Transaktionsdaten'. A purple square labeled 'ion:Transaktionsdatensatz_Type' is shown above the yellow circle.
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<code><tns:einzahlungsbelegBerechtigung xmlns:tns="http://vdv/ka/pe/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:einzahlungsbelegBerechtigung></code>
Source	<code><xs:element name="einzahlungsbelegBerechtigung" type="ion:Transaktionsdatensatz_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXLPEB_Type** / **tns:berNmTransaktionMAC**

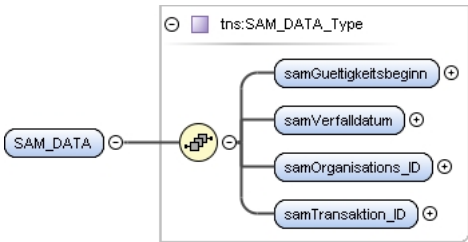
Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a blue rounded rectangle labeled 'berNmTransaktionMAC' connected by a line to a yellow circle with a plus sign. This circle is connected to four blue rounded rectangles: 'berMAC_PV', 'berMAC_KVP', 'berMAC_PV_Schluesssel_ID', and 'berMAC_KVP_Schluesssel_ID'. A purple square labeled 'ion:berNmTransaktionMAC_Type' is shown above the yellow circle.
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluesssel_ID , berMAC_KVP_Schluesssel_ID
Children	berMAC_KVP, berMAC_KVP_Schluesssel_ID, berMAC_PV, berMAC_PV_Schluesssel_ID
Instance	<code><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/pe/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluesssel_ID>{1,1}</berMAC_PV_Schluesssel_ID> <berMAC_KVP_Schluesssel_ID>{1,1}</berMAC_KVP_Schluesssel_ID> </tns:berNmTransaktionMAC></code>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAENDBER_Type** / **tns:SESSION_DATA**


Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAENDBER_Type** / **tns:SAM_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAENDBER_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:TXLESBER_Type` / `tns:SESSION_DATA`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:SESSION_DATA_Type</code>
Properties	content: complex
Model	<code>tns:DATE_TIME</code> , <code>tns:SES_ID</code> , <code>tns:ACTION</code> , <code>tns:PARAMETER</code> , <code>tns:KA_VERSION</code>
Children	<code>tns:ACTION</code> , <code>tns:DATE_TIME</code> , <code>tns:KA_VERSION</code> , <code>tns:PARAMETER</code> , <code>tns:SES_ID</code>
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:TXLESBER_Type` / `tns:SAM_DATA`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:SAM_DATA_Type</code>
Properties	content: complex
Model	<code>tns:samGueltigkeitsbeginn</code> , <code>tns:samVerfalldatum</code> , <code>tns:samOrganisations_ID</code> , <code>tns:samTransaktion_ID</code>
Children	<code>tns:samGueltigkeitsbeginn</code> , <code>tns:samOrganisations_ID</code> , <code>tns:samTransaktion_ID</code> , <code>tns:samVerfalldatum</code>
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<code><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:TXLESBER_Type` / `tns:STATUS_DATA`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:STATUS_DATA_Type</code>
Properties	content: complex

Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:TXLESBER_Type` / `tns:NmApplikationsverzeichnis`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:NmApplikationsverzeichnis_Type</code>
Properties	content: complex
Model	<code>tns:VerzeichniseintragAppDaten</code> , <code>tns:VerzeichniseintragAppLogbuch</code> , <code>tns:VerzeichniseintragKunde</code> , <code>tns:VerzeichniseintragSchluesselregister</code> {0,1} , <code>tns:LetzteTransaktion</code> , <code>tns:Prioritaeten</code> , <code>tns:VerzeichniseintragBerDaten</code>
Children	<code>tns:LetzteTransaktion</code> , <code>tns:Prioritaeten</code> , <code>tns:VerzeichniseintragAppDaten</code> , <code>tns:VerzeichniseintragAppLogbuch</code> , <code>tns:VerzeichniseintragBerDaten</code> , <code>tns:VerzeichniseintragKunde</code> , <code>tns:VerzeichniseintragSchluesselregister</code>
Instance	<pre> <tns:NmApplikationsverzeichnis xmlns:tns="http://vdv/ka/pe/2"> <tns:VerzeichniseintragAppDaten>{1,1}</tns:VerzeichniseintragAppDaten> <tns:VerzeichniseintragAppLogbuch>{1,1}</tns:VerzeichniseintragAppLogbuch> <tns:VerzeichniseintragKunde>{1,1}</tns:VerzeichniseintragKunde> <tns:VerzeichniseintragSchluesselregister>{0,1}</tns:VerzeichniseintragSchluesselregister> <tns:LetzteTransaktion>{1,1}</tns:LetzteTransaktion> <tns:Prioritaeten>{1,1}</tns:Prioritaeten> <tns:VerzeichniseintragBerDaten>{1,1}</tns:VerzeichniseintragBerDaten> </tns:NmApplikationsverzeichnis> </pre>
Source	<code><xs:element name="NmApplikationsverzeichnis" type="tns:NmApplikationsverzeichnis_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element `tns:TXLESBER_Type` / `tns:NmApplikationsDaten`

Namespace	http://vdv/ka/pe/2
Diagram	
Type	<code>tns:NmApplikationsdaten_Type</code>
Properties	content: complex
Model	<code>tns:LetzteTransaktion</code> , <code>tns:Schluesselversionen</code> , <code>tns:Ausgabetransaktionskennung</code> , <code>tns:Infotext</code>
Children	<code>tns:Ausgabetransaktionskennung</code> , <code>tns:Infotext</code> , <code>tns:LetzteTransaktion</code> , <code>tns:Schluesselversionen</code>
Instance	<pre> <tns:NmApplikationsDaten xmlns:tns="http://vdv/ka/pe/2"> <tns:LetzteTransaktion>{1,1}</tns:LetzteTransaktion> <tns:Schluesselversionen>{1,1}</tns:Schluesselversionen> <tns:Ausgabetransaktionskennung>{1,1}</tns:Ausgabetransaktionskennung> <tns:Infotext>{1,1}</tns:Infotext> </tns:NmApplikationsDaten> </pre>
Source	<code><xs:element name="NmApplikationsDaten" type="tns:NmApplikationsdaten_Type" /></code>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd
-----------------	---

Element **tns:TXLESBER_Type** / **tns:NmBerechtigungsDaten**

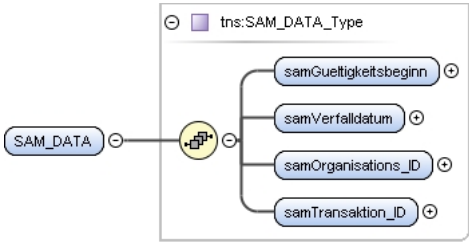
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmBerechtigungsdaten_Type
Properties	content: complex
Model	tns:berechtigungTarfbereich , tns:LetzteTransaktion , tns:Schluesselversionen , tns:Ausgabetransaktionskennung , tns:Infotext
Children	tns:Ausgabetransaktionskennung, tns:Infotext, tns:LetzteTransaktion, tns:Schluesselversionen, tns:berechtigungTarfbereich
Instance	<pre><tns:NmBerechtigungsDaten xmlns:tns="http://vdv/ka/pe/2"> <tns:berechtigungTarfbereich>{1,1}</tns:berechtigungTarfbereich> <tns:LetzteTransaktion>{1,1}</tns:LetzteTransaktion> <tns:Schluesselversionen>{1,1}</tns:Schluesselversionen> <tns:Ausgabetransaktionskennung>{1,1}</tns:Ausgabetransaktionskennung> <tns:Infotext>{1,1}</tns:Infotext> </tns:NmBerechtigungsDaten></pre>
Source	<code><xs:element name="NmBerechtigungsDaten" type="tns:NmBerechtigungsdaten_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAGBKEY_Type** / **tns:SESSION_DATA**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAGBKEY_Type** / **tns:SAM_DATA**

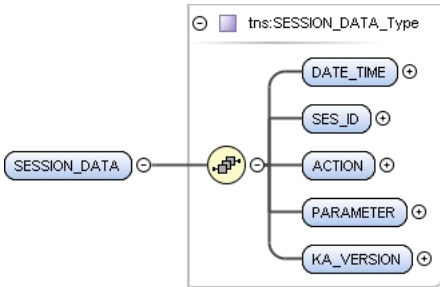
Namespace	http://vdv/ka/pe/2
-----------	--------------------

Diagram	 The diagram shows a complex type 'tns:SAM_DATA_Type' containing four child elements: 'samGueltigkeitsbeginn', 'samVerfalldatum', 'samOrganisations_ID', and 'samTransaktion_ID'. Each child element is represented by a rounded rectangle with a plus icon. The parent type is represented by a rounded rectangle with a minus icon.
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn, tns:samVerfalldatum, tns:samOrganisations_ID, tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<pre><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBKEY_Type / tns:STATUS_DATA

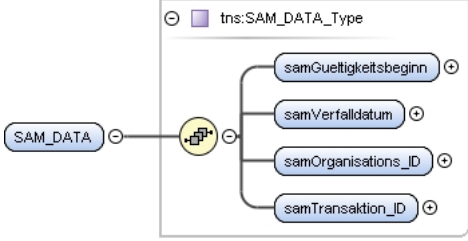
Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a complex type 'tns:STATUS_DATA_Type' containing one child element: 'STATUS_DATA'. The child element is represented by a rounded rectangle with a plus icon, and the parent type is represented by a rounded rectangle with a minus icon.
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<pre><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKEY_Type / tns:SESSION_DATA


Namespace	http://vdv/ka/pe/2
Diagram	 The diagram shows a complex type 'tns:SESSION_DATA_Type' containing five child elements: 'DATE_TIME', 'SES_ID', 'ACTION', 'PARAMETER', and 'KA_VERSION'. Each child element is represented by a rounded rectangle with a plus icon. The parent type is represented by a rounded rectangle with a minus icon.
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME, tns:SES_ID, tns:ACTION, tns:PARAMETER, tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<pre><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd
-----------------	---

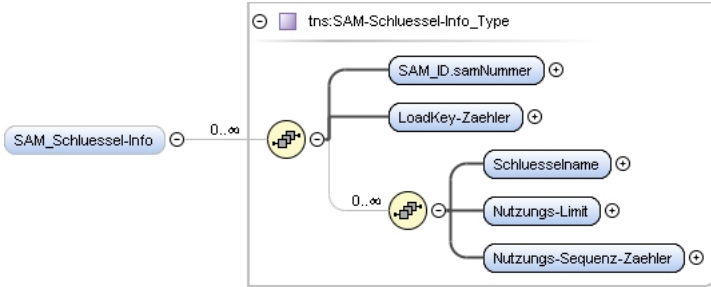
Element tns:TXLESKEY_Type / tns:SAM_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_DATA_Type
Properties	content: complex
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Instance	<pre><tns:SAM_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:samGueltigkeitsbeginn>{1,1}</tns:samGueltigkeitsbeginn> <tns:samVerfalldatum>{1,1}</tns:samVerfalldatum> <tns:samOrganisations_ID>{1,1}</tns:samOrganisations_ID> <tns:samTransaktion_ID>{1,1}</tns:samTransaktion_ID> </tns:SAM_DATA></pre>
Source	<pre><xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKEY_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<pre><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKEY_Type / tns:SAM_Schluessel-Info

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SAM_Schluessel-Info_Type
Properties	content: complex minOccurs: 0
Model	tns:SAM_ID.samNummer , tns:LoadKey-Zaehler , tns:Schluesselname , tns:Nutzungs-Limit , tns:Nutzungs-Sequenz-Zaehler
Children	tns:LoadKey-Zaehler, tns:Nutzungs-Limit, tns:Nutzungs-Sequenz-Zaehler, tns:SAM_ID.samNummer, tns:Schluesselname
Instance	<pre><tns:SAM_Schluessel-Info xmlns:tns="http://vdv/ka/pe/2"></pre>

	<pre> <tns:SAM_ID.samNummer>{1,1}</tns:SAM_ID.samNummer> <tns:LoadKey-Zaehler>{1,1}</tns:LoadKey-Zaehler> <tns:Schluesselname>{1,1}</tns:Schluesselname> <tns:Nutzungs-Limit>{1,1}</tns:Nutzungs-Limit> <tns:Nutzungs-Sequenz-Zaehler>{1,1}</tns:Nutzungs-Sequenz-Zaehler> </tns:SAM_Schluessel-Info> </pre>
Source	<code><xs:element name="SAM_Schluessel-Info" type="tns:SAM-Schluessel-Info_Type" minOccurs="0" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAUFTRAG_Type** / **tns:SESSION_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre> <tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA> </pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAUFTRAG_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXANSCHR_Type** / **tns:SESSION_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	

Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXANSCHR_Type / tns:STATUS_DATA

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXANTWORT_Type / tns:SESSION_DATA


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<code><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXANTWORT_Type / tns:STATUS_DATA

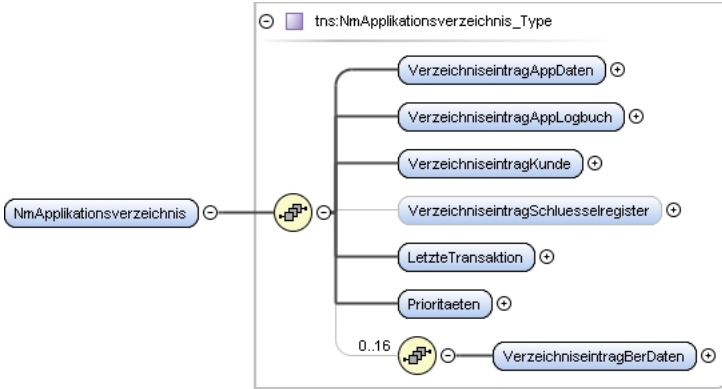
Namespace	http://vdv/ka/pe/2
Diagram	

Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXANTWORT_Type / tns:SUB_SES_ID

Namespace	http://vdv/ka/pe/2
Diagram	
Type	restriction of xs:unsignedInt
Properties	content: simple
Facets	maxInclusive 999999 minInclusive 0
Source	<pre> <xs:element name="SUB_SES_ID"> <xs:simpleType> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="999999"/> </xs:restriction> </xs:simpleType> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXANTWORT_Type / tns:NmApplikationsverzeichnis

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:NmApplikationsverzeichnis_Type
Properties	content: complex
Model	tns:VerzeichniseintragAppDaten , tns:VerzeichniseintragAppLogbuch , tns:VerzeichniseintragKunde , tns:VerzeichniseintragSchluesselregister {0,1} , tns:LetzteTransaktion , tns:Prioritaeten , tns:VerzeichniseintragBerDaten
Children	tns:LetzteTransaktion, tns:Prioritaeten, tns:VerzeichniseintragAppDaten, tns:VerzeichniseintragAppLogbuch, tns:VerzeichniseintragBerDaten, tns:VerzeichniseintragKunde, tns:VerzeichniseintragSchluesselregister
Instance	<pre> <tns:NmApplikationsverzeichnis xmlns:tns="http://vdv/ka/pe/2"> <tns:VerzeichniseintragAppDaten>{1,1}</tns:VerzeichniseintragAppDaten> <tns:VerzeichniseintragAppLogbuch>{1,1}</tns:VerzeichniseintragAppLogbuch> <tns:VerzeichniseintragKunde>{1,1}</tns:VerzeichniseintragKunde> <tns:VerzeichniseintragSchluesselregister>{0,1}</tns:VerzeichniseintragSchluesselregister> <tns:LetzteTransaktion>{1,1}</tns:LetzteTransaktion> <tns:Prioritaeten>{1,1}</tns:Prioritaeten> <tns:VerzeichniseintragBerDaten>{1,1}</tns:VerzeichniseintragBerDaten> </tns:NmApplikationsverzeichnis> </pre>
Source	<code><xs:element name="NmApplikationsverzeichnis" type="tns:NmApplikationsverzeichnis_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:ERROR_Type** / **tns:SESSION_DATA**


Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:SESSION_DATA_Type
Properties	content: complex
Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Instance	<pre><tns:SESSION_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:DATE_TIME>{1,1}</tns:DATE_TIME> <tns:SES_ID>{1,1}</tns:SES_ID> <tns:ACTION>{1,1}</tns:ACTION> <tns:PARAMETER>{1,1}</tns:PARAMETER> <tns:KA_VERSION>{1,1}</tns:KA_VERSION> </tns:SESSION_DATA></pre>
Source	<pre><xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:ERROR_Type** / **tns:ENGINE_DATA**

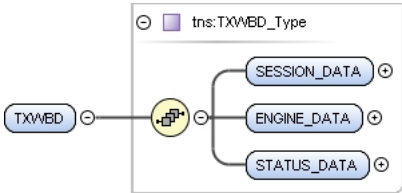
Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:ENGINE_DATA_Type
Properties	content: complex
Model	tns:VENDOR , tns:TYPE , tns:VERSION , tns:FIRMWARE , tns:TERM_TYP_CODE , tns:MAG_COUNT , tns:ACT_MAG , tns:ACT_MAG_NAME , tns:ACT_MAG_CONTENT , tns:PRINTER
Children	tns:ACT_MAG, tns:ACT_MAG CONTENT, tns:ACT_MAG NAME, tns:FIRMWARE, tns:MAG_COUNT, tns:PRINTER, tns:TERM_TYP_CODE, tns:TYPE, tns:VENDOR, tns:VERSION
Instance	<pre><tns:ENGINE_DATA xmlns:tns="http://vdv/ka/pe/2"> <tns:VENDOR>{1,1}</tns:VENDOR> <tns:TYPE>{1,1}</tns:TYPE> <tns:VERSION>{1,1}</tns:VERSION> <tns:FIRMWARE>{1,1}</tns:FIRMWARE> <tns:TERM_TYP_CODE>{1,1}</tns:TERM_TYP_CODE></pre>

	<pre> <tns:MAG_COUNT>{1,1}</tns:MAG_COUNT> <tns:ACT_MAG>{1,1}</tns:ACT_MAG> <tns:ACT_MAG_NAME>{1,1}</tns:ACT_MAG_NAME> <tns:ACT_MAG_CONTENT>{1,1}</tns:ACT_MAG_CONTENT> <tns:PRINTER>{1,1}</tns:PRINTER> </tns:ENGINE_DATA> </pre>
Source	<code><xs:element name="ENGINE_DATA" type="tns:ENGINE_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

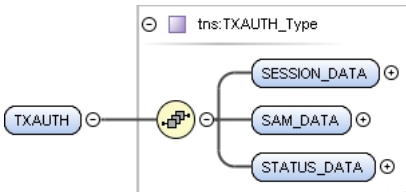
Element **tns:ERROR_Type** / **tns:STATUS_DATA**

Namespace	http://vdv/ka/pe/2
Diagram	
Type	tns:STATUS_DATA_Type
Properties	content: complex
Source	<code><xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXWBD**

Namespace	http://vdv/ka/pe/2
Annotations	Element: Wer bist Du (Abfrage von Informationen)
Diagram	
Type	tns:TXWBD_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:ENGINE_DATA , tns:STATUS_DATA
Children	tns:ENGINE_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre> <tns:TXWBD xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:ENGINE_DATA>{1,1}</tns:ENGINE_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXWBD> </pre>
Source	<pre> <xs:element name="TXWBD" type="tns:TXWBD_Type"> <xs:annotation> <xs:documentation>Element: Wer bist Du (Abfrage von Informationen)</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element **tns:TXAUTH**

Namespace	http://vdv/ka/pe/2
Annotations	Element: Authentisierung
Diagram	

Type	tns:TXAUTH_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXAUTH xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXAUTH></pre>
Source	<pre><xs:element name="TXAUTH" type="tns:TXAUTH_Type"> <xs:annotation> <xs:documentation>Element: Authentisierung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXBGN

Namespace	http://vdv/ka/pe/2
Annotations	Element: Beginn einer Session
Diagram	
Type	tns:TXBGN_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:ENGINE_DATA , tns:SAM_DATA{0,1} , tns:STATUS_DATA , tns:NmApplikationsverzeichnis{0,1}
Children	tns:ENGINE_DATA, tns:NmApplikationsverzeichnis, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXBGN xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:ENGINE_DATA>{1,1}</tns:ENGINE_DATA> <tns:SAM_DATA>{0,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <tns:NmApplikationsverzeichnis>{0,1}</tns:NmApplikationsverzeichnis> </tns:TXBGN></pre>
Source	<pre><xs:element name="TXBGN" type="tns:TXBGN_Type"> <xs:annotation> <xs:documentation>Element: Beginn einer Session</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXEND

Namespace	http://vdv/ka/pe/2
Annotations	Element: Ende einer Session
Diagram	

Type	tns:TXEND_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA{0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXEND xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{0,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXEND></pre>
Source	<pre><xs:element name="TXEND" type="tns:TXEND_Type"> <xs:annotation> <xs:documentation>Element:Ende einer Session</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESAPPPLOG

Namespace	http://vdv/ka/pe/2
Annotations	Element:Applikationslogbuch lesen
Diagram	
Type	tns:TXLESAPPPLOG_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , tns:NmApplikationsLogbuch{0,1}
Children	tns:NmApplikationsLogbuch, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXLESAPPPLOG xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <tns:NmApplikationsLogbuch>{0,1}</tns:NmApplikationsLogbuch> </tns:TXLESAPPPLOG></pre>
Source	<pre><xs:element name="TXLESAPPPLOG" type="tns:TXLESAPPPLOG_Type"> <xs:annotation> <xs:documentation>Element:Applikationslogbuch lesen</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEAPPPLOG

Namespace	http://vdv/ka/pe/2
Annotations	Element:Applikationslogbuch loeschen
Diagram	
Type	tns:TXLOEAPPPLOG_Type
Properties	content: complex

Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXLOEAPPLOG xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXLOEAPPLOG></pre>
Source	<pre><xs:element name="TXLOEAPPLOG" type="tns:TXLOEAPPLOG_Type"> <xs:annotation> <xs:documentation>Element:Applikationslogbuch loeschen</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBKUNDE

Namespace	http://vdv/ka/pe/2
Annotations	Element:Kundendaten ausgeben
Diagram	
Type	tns:TXAGBKUNDE_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA {0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXAGBKUNDE xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{0,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXAGBKUNDE></pre>
Source	<pre><xs:element name="TXAGBKUNDE" type="tns:TXAGBKUNDE_Type"> <xs:annotation> <xs:documentation>Element:Kundendaten ausgeben</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKUNDE

Namespace	http://vdv/ka/pe/2
Annotations	Element:Kundendaten lesen
Diagram	
Type	tns:TXLESKUNDE_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , tns:NmKundendaten {0,1}
Children	tns:NmKundendaten, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXLESKUNDE xmlns:tns="http://vdv/ka/pe/2"></pre>

	<pre> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <tns:NmKundendaten>{0,1}</tns:NmKundendaten> </tns:TXLESKUNDE> </pre>
Source	<pre> <xs:element name="TXLESKUNDE" type="tns:TXLESKUNDE_Type"> <xs:annotation> <xs:documentation>Element:Kundendaten lesen</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEKUNDE

Namespace	http://vdv/ka/pe/2
Annotations	Element:Kundendaten loeschen
Diagram	
Type	tns:TXLOEKUNDE_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre> <tns:TXLOEKUNDE xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXLOEKUNDE> </pre>
Source	<pre> <xs:element name="TXLOEKUNDE" type="tns:TXLOEKUNDE_Type"> <xs:annotation> <xs:documentation>Element:Kundendaten loeschen</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBPRIOR

Namespace	http://vdv/ka/pe/2
Annotations	Element:Prioritaeten setzen
Diagram	
Type	tns:TXAGBPRIOR_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA {0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre> <tns:TXAGBPRIOR xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{0,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXAGBPRIOR> </pre>
Source	<pre> <xs:element name="TXAGBPRIOR" type="tns:TXAGBPRIOR_Type"> </pre>

	<pre> <xs:annotation> <xs:documentation>Element:Prioritaeten setzen</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEPRIO

Namespace	http://vdv/ka/pe/2
Annotations	Element:Prioritaeten loeschen
Diagram	
Type	tns:TXLOEPRIO_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre> <tns:TXLOEPRIO xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXLOEPRIO> </pre>
Source	<pre> <xs:element name="TXLOEPRIO" type="tns:TXLOEPRIO_Type"> <xs:annotation> <xs:documentation>Element:Prioritaeten loeschen</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBPINPUC

Namespace	http://vdv/ka/pe/2
Annotations	Element: PIN/PUC initialisieren
Diagram	
Type	tns:TXAGBPINPUC_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA {0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre> <tns:TXAGBPINPUC xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{0,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXAGBPINPUC> </pre>
Source	<pre> <xs:element name="TXAGBPINPUC" type="tns:TXAGBPINPUC_Type"> <xs:annotation> <xs:documentation>Element: PIN/PUC initialisieren</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXPPIN

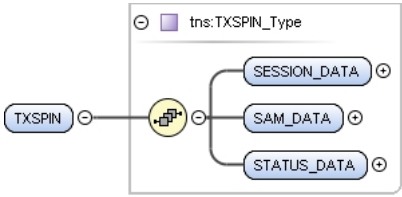
Namespace	http://vdv/ka/pe/2
Annotations	Element: PIN pruefen
Diagram	
Type	tns:TXPPIN_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXPPIN xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXPPIN></pre>
Source	<pre><xs:element name="TXPPIN" type="tns:TXPPIN_Type"> <xs:annotation> <xs:documentation>Element: PIN pruefen</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAENDPIN

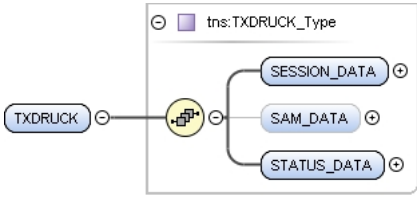
Namespace	http://vdv/ka/pe/2
Annotations	Element: PIN aendern
Diagram	
Type	tns:TXAENDPIN_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXAENDPIN xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXAENDPIN></pre>
Source	<pre><xs:element name="TXAENDPIN" type="tns:TXAENDPIN_Type"> <xs:annotation> <xs:documentation>Element: PIN aendern</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXSPIN

Namespace	http://vdv/ka/pe/2
Annotations	Element: PIN entsperren

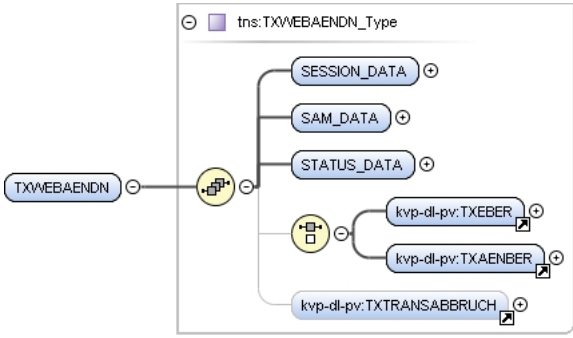
Diagram	
Type	tns:TXSPIN_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXSPIN xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXSPIN></pre>
Source	<pre><xs:element name="TXSPIN" type="tns:TXSPIN_Type"> <xs:annotation> <xs:documentation>Element: PIN entsperren</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXDRUCK

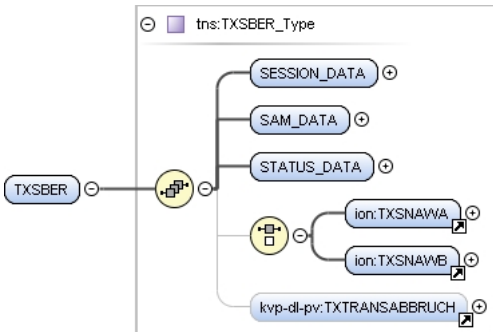
Namespace	http://vdv/ka/pe/2
Annotations	Element: Nutzermedium bedrucken
Diagram	
Type	tns:TXDRUCK_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA {0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXDRUCK xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{0,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXDRUCK></pre>
Source	<pre><xs:element name="TXDRUCK" type="tns:TXDRUCK_Type"> <xs:annotation> <xs:documentation>Element: Nutzermedium bedrucken</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXWEBAENDN

Namespace	http://vdv/ka/pe/2
Annotations	Element: WEB aufbuchen/NTP aendern

Diagram	
Type	tns:TXWEBAENDN_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (tns:TXEBER tns:TXAENBER) , tns:TXTRANSABBRUCH{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXAENBER, tns:TXEBER, tns:TXTRANSABBRUCH
Instance	<pre><tns:TXWEBAENDN xmlns:tns="http://vdv/ka/pe/2" xmlns:kvp-dl-pv="http://vdv/ka/kvp-dl-pv/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <kvp-dl-pv:TXEBER>{1,1}</kvp-dl-pv:TXEBER> <kvp-dl-pv:TXAENBER>{1,1}</kvp-dl-pv:TXAENBER> <kvp-dl-pv:TXTRANSABBRUCH>{0,1}</kvp-dl-pv:TXTRANSABBRUCH> </tns:TXWEBAENDN></pre>
Source	<pre><xs:element name="TXWEBAENDN" type="tns:TXWEBAENDN_Type"> <xs:annotation> <xs:documentation>Element: WEB aufbuchen/NTP aendern</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXSBER

Namespace	http://vdv/ka/pe/2
Annotations	Element: Berechtigung sperren/entsperren
Diagram	
Type	tns:TXSBER_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (tns:TXSNAWA tns:TXSNAWB) , tns:TXTRANSABBRUCH{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXSNAWA, tns:TXSNAWB, tns:TXTRANSABBRUCH
Instance	<pre><tns:TXSBER xmlns:tns="http://vdv/ka/pe/2" xmlns:ion="http://vdv/ka/ion/2" xmlns:kvp-dl-pv="http://vdv/ka/kvp-dl-pv/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <ion:TXSNAWA>{1,1}</ion:TXSNAWA> <ion:TXSNAWB>{1,1}</ion:TXSNAWB> <kvp-dl-pv:TXTRANSABBRUCH>{0,1}</kvp-dl-pv:TXTRANSABBRUCH> </tns:TXSBER></pre>
Source	<pre><xs:element name="TXSBER" type="tns:TXSBER_Type"></pre>

	<pre> <xs:annotation> <xs:documentation>Element: Berechtigung sperren/entsperren</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBBER

Namespace	http://vdv/ka/pe/2
Annotations	Element: Berechtigung ausgeben
Diagram	
Type	tns:TXAGBBER_Type
Properties	content: complex
Model	tns:SESSION_DATA, tns:SAM_DATA{0,1}, tns:STATUS_DATA, (ah:TXAA tns:TXABER tns:TXAMBER), tns:TXTRANSABBRUCH{0,1}
Children	ah:TXAA, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXABER, tns:TXAMBER, tns:TXTRANSABBRUCH
Instance	<pre> <tns:TXAGBBER xmlns:tns="http://vdv/ka/pe/2" xmlns:ah="http://vdv/ka/ah/2" xmlns:kvp-dl-pv="http://vdv/ka/kvp-dl-pv/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{0,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <ah:TXAA>{1,1}</ah:TXAA> <kvp-dl-pv:TXABER>{1,1}</kvp-dl-pv:TXABER> <kvp-dl-pv:TXAMBER>{1,1}</kvp-dl-pv:TXAMBER> <kvp-dl-pv:TXTRANSABBRUCH>{0,1}</kvp-dl-pv:TXTRANSABBRUCH> </tns:TXAGBBER> </pre>
Source	<pre> <xs:element name="TXAGBBER" type="tns:TXAGBBER_Type"> <xs:annotation> <xs:documentation>Element: Berechtigung ausgeben</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEBER

Namespace	http://vdv/ka/pe/2
Annotations	Element: Berechtigung zuruecknehmen

Diagram	
Type	tns:TXLOEBER_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (ah:TXRA tns:TXRBER tns:TXRMBER) , tns:TXTRANSABBRUCH{0,1}
Children	ah:TXRA, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXRBER, tns:TXRMBER, tns:TXTRANSABBRUCH
Instance	<pre><tns:TXLOEBER xmlns:tns="http://vdv/ka/pe/2" xmlns:ah="http://vdv/ka/ah/2" xmlns:kvp-dl-pv="http://vdv/ka/kvp-dl-pv/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <ah:TXRA>{1,1}</ah:TXRA> <kvp-dl-pv:TXRBER>{1,1}</kvp-dl-pv:TXRBER> <kvp-dl-pv:TXRMBER>{1,1}</kvp-dl-pv:TXRMBER> <kvp-dl-pv:TXTRANSABBRUCH>{0,1}</kvp-dl-pv:TXTRANSABBRUCH> </tns:TXLOEBER></pre>
Source	<pre><xs:element name="TXLOEBER" type="tns:TXLOEBER_Type"> <xs:annotation> <xs:documentation>Element: Berechtigung zuruecknehmen</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXWEBPOBPBEB

Namespace	http://vdv/ka/pe/2
Annotations	<p>Element: WEB/POB/PEB-Konto aufbuchen/abbuchen. Deprecated: Bitte TXBEWEB und TXBEOBPBEB aus der Erweiterung 1.7.0 verwenden. Dieses Element wird mit KA Release 3.0 entfernt.</p>
Diagram	
Type	tns:TXWEBPOBPBEB_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (tns:TXBEKOKVP tns:TXBEWEBKVP) , tns:TXTRANSABBRUCH{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXBEKOKVP, tns:TXBEWEBKVP, tns:TXTRANSABBRUCH
Instance	<pre><tns:TXWEBPOBPBEB xmlns:tns="http://vdv/ka/pe/2" xmlns:kvp-dl-pv="http://vdv/ka/kvp-dl-pv/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA></pre>

	<pre> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <kvp-dl-pv:TXBEKOKVP>{1,1}</kvp-dl-pv:TXBEKOKVP> <kvp-dl-pv:TXBEWEBKVP>{1,1}</kvp-dl-pv:TXBEWEBKVP> <kvp-dl-pv:TXTRANSABBRUCH>{0,1}</kvp-dl-pv:TXTRANSABBRUCH> </tns:TXWEBPOBPBEB> </pre>
Source	<pre> <xs:element name="TXWEBPOBPBEB" type="tns:TXWEBPOBPBEB_Type"> <xs:annotation> <xs:documentation>Element: WEB/POB/PEB-Konto aufbuchen/abbuchen. Deprecated: Bitte TXBEWEB und TXBEPOBPBEB aus der Erweiterung 1.7.0 verwenden. Dieses Element wird mit KA Release 3.0 entfernt.</ xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXPEB

Namespace	http://vdv/ka/pe/2
Annotations	Element: PEB-Konto aufladen
Diagram	
Type	tns:TXPEB_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , tns:TXLPEB{0,1} , tns:TXTRANSABBRUCH{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXLPEB, tns:TXTRANSABBRUCH
Instance	<pre> <tns:TXPEB xmlns:tns="http://vdv/ka/pe/2" xmlns:kvp-dl-pv="http://vdv/ka/kvp-dl-pv/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <kvp-dl-pv:TXLPEB>{0,1}</kvp-dl-pv:TXLPEB> <kvp-dl-pv:TXTRANSABBRUCH>{0,1}</kvp-dl-pv:TXTRANSABBRUCH> </tns:TXPEB> </pre>
Source	<pre> <xs:element name="TXPEB" type="tns:TXPEB_Type"> <xs:annotation> <xs:documentation>Element: PEB-Konto aufladen</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLPEB

Namespace	http://vdv/ka/pe/2
Annotations	Element: Laden eines PEB-Kontos, Antwortstruktur
Diagram	
Type	tns:TXLPEB_Type

Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXLPEB_Type
Properties	content: complex
Model	txbase , tns:inzahlungsbelegBerechtigung , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:inzahlungsbelegBerechtigung, txbase
Instance	<pre><tns:TXLPEB xmlns:tns="http://vdv/ka/pe/2"> <txbase>{1,1}</txbase> <tns:inzahlungsbelegBerechtigung>{1,1}</tns:inzahlungsbelegBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXLPEB></pre>
Source	<pre><xs:element name="TXLPEB" type="tns:TXLPEB_Type"> <xs:annotation> <xs:documentation>Element: Laden eines PEB-Kontos, Antwortstruktur</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAENDBER

Namespace	http://vdv/ka/pe/2
Annotations	Element: Berechtigung aendern
Diagram	
Type	tns:TXAENDBER_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (ah:TXAEA tns:TXAEBER_1_3_0)
Children	ah:TXAEA, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXAEBER_1_3_0
Instance	<pre><tns:TXAENDBER xmlns:tns="http://vdv/ka/pe/2" xmlns:ah="http://vdv/ka/ah/2" xmlns:kvp-dl-pv="http://vdv/ka/kvp-dl-pv/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <ah:TXAEA>{1,1}</ah:TXAEA> <kvp-dl-pv:TXAEBER_1_3_0>{1,1}</kvp-dl-pv:TXAEBER_1_3_0> </tns:TXAENDBER></pre>
Source	<pre><xs:element name="TXAENDBER" type="tns:TXAENDBER_Type"> <xs:annotation> <xs:documentation>Element: Berechtigung aendern</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESBER

Namespace	http://vdv/ka/pe/2
Annotations	Element: Berechtigung auslesen

Diagram	
Type	tns:TXLESBER_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (tns:NmApplikationsverzeichnis tns:NmApplikationsDaten tns:NmBerechtigungsDaten)
Children	tns:NmApplikationsDaten, tns:NmApplikationsverzeichnis, tns:NmBerechtigungsDaten, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXLESBER xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <tns:NmApplikationsverzeichnis>{1,1}</tns:NmApplikationsverzeichnis> <tns:NmApplikationsDaten>{1,1}</tns:NmApplikationsDaten> <tns:NmBerechtigungsDaten>{1,1}</tns:NmBerechtigungsDaten> </tns:TXLESBER></pre>
Source	<pre><xs:element name="TXLESBER" type="tns:TXLESBER_Type"> <xs:annotation> <xs:documentation>Element: Berechtigung auslesen</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAGBKEY

Namespace	http://vdv/ka/pe/2
Annotations	Element: LoadKey ausfuehren
Diagram	
Type	tns:TXAGBKEY_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXAGBKEY xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXAGBKEY></pre>
Source	<pre><xs:element name="TXAGBKEY" type="tns:TXAGBKEY_Type"> <xs:annotation> <xs:documentation>Element: LoadKey ausfuehren</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKEY

Namespace	http://vdv/ka/pe/2
Annotations	Element: LoadKey-Zaehler auslesen
Diagram	
Type	tns:TXLESKEY_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , tns:SAM_Schluessel-Info{0,1}
Children	tns:SAM_DATA, tns:SAM_Schluessel-Info, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXLESKEY xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{1,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <tns:SAM_Schluessel-Info>{0,1}</tns:SAM_Schluessel-Info> </tns:TXLESKEY></pre>
Source	<pre><xs:element name="TXLESKEY" type="tns:TXLESKEY_Type"> <xs:annotation> <xs:documentation>Element: LoadKey-Zaehler auslesen</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLESKEYREG

Namespace	http://vdv/ka/pe/2
Annotations	Element: Schluesselregister auslesen
Diagram	
Type	tns:TXLESKEYREG_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA{0,1} , tns:STATUS_DATA , tns:Schluesselregister{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:Schluesselregister
Instance	<pre><tns:TXLESKEYREG xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{0,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <tns:Schluesselregister>{0,1}</tns:Schluesselregister> </tns:TXLESKEYREG></pre>
Source	<pre><xs:element name="TXLESKEYREG" type="tns:TXLESKEYREG_Type"> <xs:annotation> <xs:documentation>Element: Schluesselregister auslesen</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLOEKEYREG

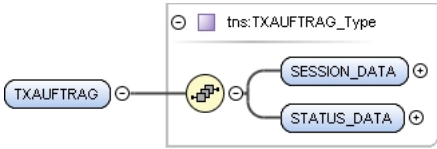
Namespace	http://vdv/ka/pe/2
Annotations	Element: Schluessel oder Schlüsselregister löschen
Diagram	
Type	tns:TXLOEKEYREG_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA{0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXLOEKEYREG xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{0,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXLOEKEYREG></pre>
Source	<pre><xs:element name="TXLOEKEYREG" type="tns:TXLOEKEYREG_Type"> <xs:annotation> <xs:documentation>Element: Schluessel oder Schlüsselregister löschen</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXLADKEYREG

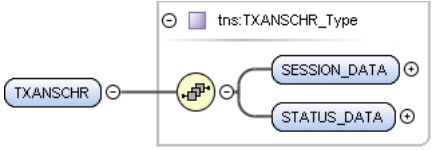
Namespace	http://vdv/ka/pe/2
Annotations	Element: Schluessel in Schlüsselregister laden
Diagram	
Type	tns:TXLADKEYREG_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:SAM_DATA{0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXLADKEYREG xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:SAM_DATA>{0,1}</tns:SAM_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXLADKEYREG></pre>
Source	<pre><xs:element name="TXLADKEYREG" type="tns:TXLADKEYREG_Type"> <xs:annotation> <xs:documentation>Element: Schluessel in Schlüsselregister laden</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXAUFTRAG

Namespace	http://vdv/ka/pe/2
Annotations	Element: Auftragsdaten uebermitteln

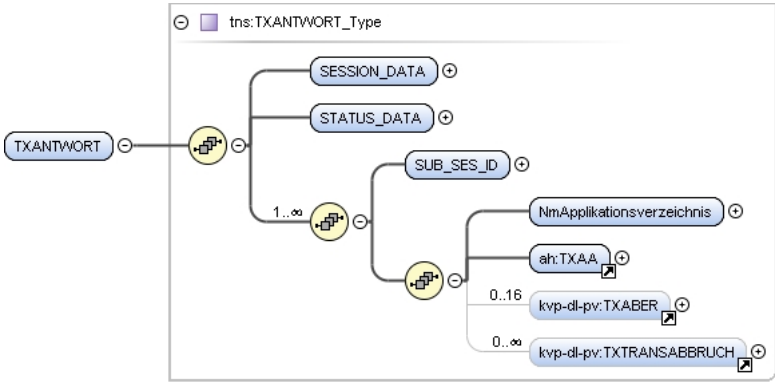
Diagram	
Type	tns:TXAUFTRAG_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:STATUS_DATA
Children	tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXAUFTRAG xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXAUFTRAG></pre>
Source	<pre><xs:element name="TXAUFTRAG" type="tns:TXAUFTRAG_Type"> <xs:annotation> <xs:documentation>Element: Auftragsdaten uebermitteln</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXANSCHR

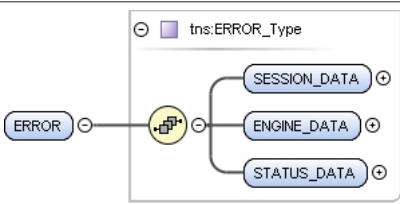
Namespace	http://vdv/ka/pe/2
Annotations	Element: Anschreibendaten uebermitteln
Diagram	
Type	tns:TXANSCHR_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:STATUS_DATA
Children	tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:TXANSCHR xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:TXANSCHR></pre>
Source	<pre><xs:element name="TXANSCHR" type="tns:TXANSCHR_Type"> <xs:annotation> <xs:documentation>Element: Anschreibendaten uebermitteln</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:TXANTWORT

Namespace	http://vdv/ka/pe/2
Annotations	Element: Antwortdaten abfragen

Diagram	
Type	tns:TXANTWORT_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:STATUS_DATA , tns:SUB_SES_ID , tns:NmApplikationsverzeichnis , ah:TXAA , tns:TXABER{0,16} , tns:TXTRANSABBRUCH*
Children	ah:TXAA, tns:NmApplikationsverzeichnis, tns:SESSION_DATA, tns:STATUS_DATA, tns:SUB_SES_ID, tns:TXABER, tns:TXTRANSABBRUCH
Instance	<pre><tns:TXANTWORT xmlns:tns="http://vdv/ka/pe/2" xmlns:ah="http://vdv/ka/ah/2" xmlns:kvp-dl-pv="http://vdv/ka/kvp-dl-pv/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> <tns:SUB_SES_ID>{1,1}</tns:SUB_SES_ID> <tns:NmApplikationsverzeichnis>{1,1}</tns:NmApplikationsverzeichnis> <ah:TXAA>{1,1}</ah:TXAA> <kvp-dl-pv:TXABER>{0,16}</kvp-dl-pv:TXABER> <kvp-dl-pv:TXTRANSABBRUCH>{0,unbounded}</kvp-dl-pv:TXTRANSABBRUCH> </tns:TXANTWORT></pre>
Source	<pre><xs:element name="TXANTWORT" type="tns:TXANTWORT_Type"> <xs:annotation> <xs:documentation>Element: Antwortdaten abfragen</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Element tns:ERROR

Namespace	http://vdv/ka/pe/2
Annotations	Element: Fehlermeldung mit Struktur
Diagram	
Type	tns:ERROR_Type
Properties	content: complex
Model	tns:SESSION_DATA , tns:ENGINE_DATA , tns:STATUS_DATA
Children	tns:ENGINE_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Instance	<pre><tns:ERROR xmlns:tns="http://vdv/ka/pe/2"> <tns:SESSION_DATA>{1,1}</tns:SESSION_DATA> <tns:ENGINE_DATA>{1,1}</tns:ENGINE_DATA> <tns:STATUS_DATA>{1,1}</tns:STATUS_DATA> </tns:ERROR></pre>
Source	<pre><xs:element name="ERROR" type="tns:ERROR_Type"> <xs:annotation> <xs:documentation>Element: Fehlermeldung mit Struktur</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type(s)

Complex Type `tns:TXBEWEB_Type`

Namespace	http://vdv/ka/pe/2
Annotations	Typ: WEB-Konto aufbuchen/abbuchen
Diagram	
Used by	Element <code>tns:TXBEWEB</code>
Model	<code>tns:SESSION_DATA</code> , <code>tns:SAM_DATA</code> , <code>tns:STATUS_DATA</code> , <code>tns:TXBEWEBKVP{0,1}</code> , <code>tns:TXTRANSABBRUCH{0,1}</code>
Children	<code>tns:SAM_DATA</code> , <code>tns:SESSION_DATA</code> , <code>tns:STATUS_DATA</code> , <code>tns:TXBEWEBKVP</code> , <code>tns:TXTRANSABBRUCH</code>
Source	<pre> <xs:complexType name="TXBEWEB_Type"> <xs:annotation> <xs:documentation>Typ: WEB-Konto aufbuchen/abbuchen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:element ref="kvp-dl-pv:TXBEWEBKVP" minOccurs="0" /> <xs:element ref="kvp-dl-pv:TXTRANSABBRUCH" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/ext/1.7.0/XML-Schema_PE_ext-1.7.0.xsd

Complex Type `tns:SESSION_DATA_Type`

Namespace	http://vdv/ka/pe/2
Annotations	Typ: SESSION_DATA aus Spec_PE
Diagram	
Used by	<p>Elements</p> <p><code>tns:ERROR_Type/tns:SESSION_DATA</code> , <code>tns:TXAENDBER_Type/tns:SESSION_DATA</code> , <code>tns:TXAENDPIN_Type/tns:SESSION_DATA</code> , <code>tns:TXAGBBER_Type/tns:SESSION_DATA</code> , <code>tns:TXAGBKEY_Type/tns:SESSION_DATA</code> , <code>tns:TXAGBKUNDE_Type/tns:SESSION_DATA</code> , <code>tns:TXAGBPINPUC_Type/tns:SESSION_DATA</code> , <code>tns:TXAGBPRIOR_Type/tns:SESSION_DATA</code> , <code>tns:TXANSCHR_Type/tns:SESSION_DATA</code> , <code>tns:TXANTWORT_Type/tns:SESSION_DATA</code> , <code>tns:TXAUFTRAG_Type/tns:SESSION_DATA</code> , <code>tns:TXAUTH_Type/tns:SESSION_DATA</code> , <code>tns:TXBEPOBPBE_Type/tns:SESSION_DATA</code> , <code>tns:TXBEWEB_Type/tns:SESSION_DATA</code> , <code>tns:TXBGN_Type/tns:SESSION_DATA</code> , <code>tns:TXDRUCK_Type/tns:SESSION_DATA</code> , <code>tns:TXEND_Type/tns:SESSION_DATA</code> , <code>tns:TXLADKEYREG_Type/tns:SESSION_DATA</code> , <code>tns:TXLESAPPLOG_Type/tns:SESSION_DATA</code> , <code>tns:TXLESBER_Type/tns:SESSION_DATA</code> , <code>tns:TXLESKEYREG_Type/tns:SESSION_DATA</code> , <code>tns:TXLESKEY_Type/tns:SESSION_DATA</code> , <code>tns:TXLESKUNDE_Type/tns:SESSION_DATA</code> , <code>tns:TXLOEAPPLOG_Type/tns:SESSION_DATA</code> , <code>tns:TXLOEBER_Type/tns:SESSION_DATA</code> , <code>tns:TXLOEKEYREG_Type/tns:SESSION_DATA</code> , <code>tns:TXLOEKUNDE_Type/tns:SESSION_DATA</code> , <code>tns:TXLOEPRIOR_Type/tns:SESSION_DATA</code> , <code>tns:TXPEB_Type/tns:SESSION_DATA</code> , <code>tns:TXPPIN_Type/tns:SESSION_DATA</code> , <code>tns:TXSBER_Type/tns:SESSION_DATA</code> , <code>tns:TXSPIN_Type/tns:SESSION_DATA</code> , <code>tns:TXWB-D_Type/tns:SESSION_DATA</code> , <code>tns:TXWEBAENDN_Type/tns:SESSION_DATA</code> , <code>tns:TXWEBPOBPBE_Type/tns:SESSION_DATA</code></p>

Model	tns:DATE_TIME , tns:SES_ID , tns:ACTION , tns:PARAMETER , tns:KA_VERSION
Children	tns:ACTION, tns:DATE_TIME, tns:KA_VERSION, tns:PARAMETER, tns:SES_ID
Source	<pre> <xs:complexType name="SESSION_DATA_Type"> <xs:annotation> <xs:documentation>Typ: SESSION_DATA aus Spec_PE</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="DATE_TIME" type="ct:DateTime" /> <xs:element name="SES_ID"> <xs:simpleType> <xs:restriction base="xs:unsignedLong"> <xs:minInclusive value="0" /> <xs:maxInclusive value="99999999999999999999" /> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="ACTION" type="xs:string" nillable="true" /> <xs:element name="PARAMETER" type="xs:string" nillable="true" /> <xs:element name="KA_VERSION" type="tns:VersionNumberExtended" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:SAM_DATA_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: SAM_DATA aus Spec_PE
Diagram	
Used by	<p>Elements</p> <p>tns:TXAENDBER_Type/tns:SAM_DATA, tns:TXAENDPIN_Type/tns:SAM_DATA, tns:TXAGBBER_Type/tns:SAM_DATA, tns:TXAGBKEY_Type/tns:SAM_DATA, tns:TXAGBKUNDE_Type/tns:SAM_DATA, tns:TXAGBPINPUC_Type/tns:SAM_DATA, tns:TXAGBPRIOR_Type/tns:SAM_DATA, tns:TXAUTH_Type/tns:SAM_DATA, tns:TXBEPOBPPEB_Type/tns:SAM_DATA, tns:TXBEWEB_Type/tns:SAM_DATA, tns:TXBGN_Type/tns:SAM_DATA, tns:TXDRUCK_Type/tns:SAM_DATA, tns:TXEND_Type/tns:SAM_DATA, tns:TXLADKEYREG_Type/tns:SAM_DATA, tns:TXLESAPPLOG_Type/tns:SAM_DATA, tns:TXLESBER_Type/tns:SAM_DATA, tns:TXLESKEYREG_Type/tns:SAM_DATA, tns:TXLESKEY_Type/tns:SAM_DATA, tns:TXLESKUNDE_Type/tns:SAM_DATA, tns:TXLOEAPPLOG_Type/tns:SAM_DATA, tns:TXLOEBER_Type/tns:SAM_DATA, tns:TXLOEKEYREG_Type/tns:SAM_DATA, tns:TXLOEKUNDE_Type/tns:SAM_DATA, tns:TXLOEPRIOR_Type/tns:SAM_DATA, tns:TXPEB_Type/tns:SAM_DATA, tns:TXPPIN_Type/tns:SAM_DATA, tns:TXSBER_Type/tns:SAM_DATA, tns:TXSPIN_Type/tns:SAM_DATA, tns:TXWEBAENDN_Type/tns:SAM_DATA, tns:TXWEBPOBPPEB_Type/tns:SAM_DATA</p>
Model	tns:samGueltigkeitsbeginn , tns:samVerfalldatum , tns:samOrganisations_ID , tns:samTransaktion_ID
Children	tns:samGueltigkeitsbeginn, tns:samOrganisations_ID, tns:samTransaktion_ID, tns:samVerfalldatum
Source	<pre> <xs:complexType name="SAM_DATA_Type"> <xs:annotation> <xs:documentation>Typ: SAM_DATA aus Spec_PE</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="samGueltigkeitsbeginn" type="ct:Date" /> <xs:element name="samVerfalldatum" type="ct:Date" /> <xs:element name="samOrganisations_ID" type="ka:Organisation_ID" /> <xs:element name="samTransaktion_ID" type="tns:SAM_Transaktion_ID_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:SAM_Transaktion_ID_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: SAM Transaktions-ID bestehend aus

	der SAM Sequenznummer und der laufenden Nummer aus der SAM ID.
Diagram	
Used by	Elements tns:NmApplikationsdaten_Type/tns:Ausgabetransaktionskennung, tns:NmBerechtigungsdaten_Type/tns:Ausgabetransaktionskennung, tns:SAM_DATA_Type/tns:samTransaktion_ID
Model	tns:samSequenznummer , tns:SAM_ID.samNummer
Children	tns:SAM_ID.samNummer, tns:samSequenznummer
Source	<pre><xs:complexType name="SAM_Transaktion_ID_Type"> <xs:annotation> <xs:documentation>Typ: SAM Transaktions-ID bestehend aus der SAM Sequenznummer und der laufenden Nummer aus der SAM ID.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="samSequenznummer" type="ct:ReferenceNumberFour" /> <xs:element name="SAM_ID.samNummer" type="ct:ReferenceNumberThree" /> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:STATUS_DATA_Type

Namespace	http://vdv/ka/pe/2
Annotations	Abstrakter Typ fuer STATUS_DATA welcher allgemein verwendet wird. In der Nachricht wird automatisch der richtige Typ referenziert
Diagram	
Properties	abstract: true
Used by	<p>Elements tns:ERROR_Type/tns:STATUS_DATA, tns:TXAENDBER_Type/tns:STATUS_DATA, tns:TXAENDPIN_Type/tns:STATUS_DATA, tns:TXAGBBER_Type/tns:STATUS_DATA, tns:TXAGBKEY_Type/tns:STATUS_DATA, tns:TXAGBKUNDE_Type/tns:STATUS_DATA, tns:TXAGBPINPUC_Type/tns:STATUS_DATA, tns:TXAGBPRIOR_Type/tns:STATUS_DATA, tns:TXANSCHR_Type/tns:STATUS_DATA, tns:TXANTWORT_Type/tns:STATUS_DATA, tns:TXAUFTRAG_Type/tns:STATUS_DATA, tns:TXAUTH_Type/tns:STATUS_DATA, tns:TXBEPOBPPEB_Type/tns:STATUS_DATA, tns:TXBEWEB_Type/tns:STATUS_DATA, tns:TXBGN_Type/tns:STATUS_DATA, tns:TXDRUCK_Type/tns:STATUS_DATA, tns:TXEND_Type/tns:STATUS_DATA, tns:TXLADKEYREG_Type/tns:STATUS_DATA, tns:TXLESAPPLOG_Type/tns:STATUS_DATA, tns:TXLESBER_Type/tns:STATUS_DATA, tns:TXLESKEYREG_Type/tns:STATUS_DATA, tns:TXLESKEY_Type/tns:STATUS_DATA, tns:TXLESKUNDE_Type/tns:STATUS_DATA, tns:TXLOEAPPLOG_Type/tns:STATUS_DATA, tns:TXLOEBER_Type/tns:STATUS_DATA, tns:TXLOEKEYREG_Type/tns:STATUS_DATA, tns:TXLOEKUNDE_Type/tns:STATUS_DATA, tns:TXLOEPRIOR_Type/tns:STATUS_DATA, tns:TXPEB_Type/tns:STATUS_DATA, tns:TXPIN_Type/tns:STATUS_DATA, tns:TXSBER_Type/tns:STATUS_DATA, tns:TXSPIN_Type/tns:STATUS_DATA, tns:TXWBD_Type/tns:STATUS_DATA, tns:TXWEBEAENDN_Type/tns:STATUS_DATA, tns:TXWEBPOBPPEB_Type/tns:STATUS_DATA</p> <p>Complex Types tns:STATUS_DATA_ApplicationError_Type, tns:STATUS_DATA_EngineError_Type, tns:STATUS_DATA_EntitlementError_Type, tns:STATUS_DATA_MediumError_Type, tns:STATUS_DATA_OK_Type, tns:STATUS_DATA_PrinterError_Type, tns:STATUS_DATA_ServiceOperatorError_Type, tns:STATUS_DATA_SessionError_Type, tns:STATUS_DATA_SoftwareError_Type</p>
Source	<pre><xs:complexType name="STATUS_DATA_Type" abstract="true"> <xs:annotation> <xs:documentation>Abstrakter Typ fuer STATUS_DATA welcher allgemein verwendet wird. In der Nachricht wird automatisch der richtige Typ referenziert</xs:documentation> </xs:annotation> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXBEPOBPPEB_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: POB/PEB-Konto aufbuchen/abbuchen

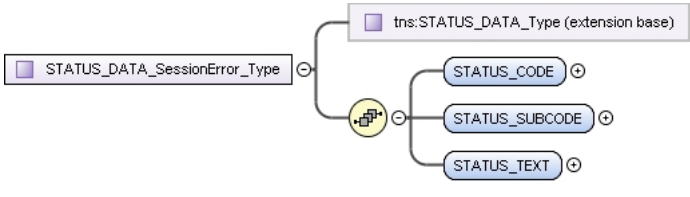
Diagram	
Used by	Element tns:TXBEPOBPEB
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , tns:TXBEKOKVP{0,1} , tns:TXTRANSABBRUCH{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXBEKOKVP, tns:TXTRANSABBRUCH
Source	<pre> <xs:complexType name="TXBEPOBPEB_Type"> <xs:annotation> <xs:documentation>Typ: POB/PEB-Konto aufbuchen/abbuchen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:element ref="kvp-dl-pv:TXBEKOKVP" minOccurs="0" /> <xs:element ref="kvp-dl-pv:TXTRANSABBRUCH" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/ext/1.7.0/XML-Schema_PE_ext-1.7.0.xsd

Complex Type tns:STATUS_DATA_OK_Type

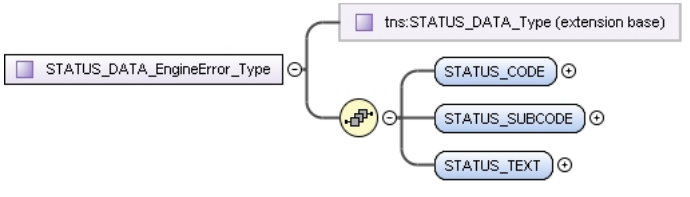
Namespace	http://vdv/ka/pe/2
Annotations	Uebergeordnete Statusdaten fuer "Kein Fehler aufgetreten"
Diagram	
Type	extension of tns:STATUS_DATA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:STATUS_DATA_Type tns:STATUS_DATA_OK_Type
Model	tns:STATUS_CODE , tns:STATUS_SUBCODE , tns:STATUS_TEXT
Children	tns:STATUS_CODE, tns:STATUS_SUBCODE, tns:STATUS_TEXT
Source	<pre> <xs:complexType name="STATUS_DATA_OK_Type"> <xs:annotation> <xs:documentation>Uebergeordnete Statusdaten fuer "Kein Fehler aufgetreten"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:STATUS_DATA_Type"> <xs:sequence> <xs:element name="STATUS_CODE" type="tns:STATUS_CODE_OK_Type" /> <xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_OK_Type" /> <xs:element name="STATUS_TEXT" type="ion:PrintableString" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:STATUS_DATA_SessionError_Type

Namespace	http://vdv/ka/pe/2
Annotations	Uebergeordnete Statusdaten fuer "Session Error"

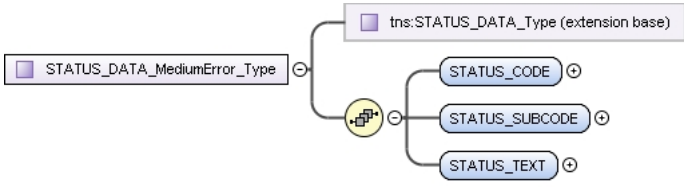
Diagram	
Type	extension of tns:STATUS_DATA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:STATUS_DATA_Type <ul style="list-style-type: none"> tns:STATUS_DATA_SessionError_Type
Model	tns:STATUS_CODE , tns:STATUS_SUBCODE , tns:STATUS_TEXT
Children	tns:STATUS_CODE, tns:STATUS_SUBCODE, tns:STATUS_TEXT
Source	<pre> <xs:complexType name="STATUS_DATA_SessionError_Type"> <xs:annotation> <xs:documentation>Uebergeordnete Statusdaten fuer "Session Error"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:STATUS_DATA_Type"> <xs:sequence> <xs:element name="STATUS_CODE" type="tns:STATUS_CODE_SessionError_Type"/> <xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_SessionError_Type"/> <xs:element name="STATUS_TEXT" type="ion:PrintableString"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:STATUS_DATA_EngineError_Type

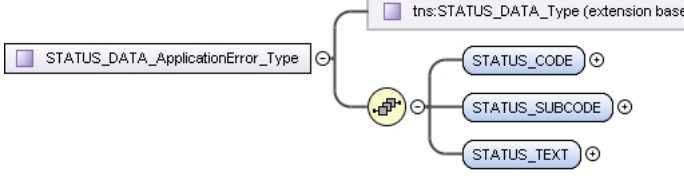
Namespace	http://vdv/ka/pe/2
Annotations	Uebergeordnete Statusdaten fuer "Engine Error"
Diagram	
Type	extension of tns:STATUS_DATA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:STATUS_DATA_Type <ul style="list-style-type: none"> tns:STATUS_DATA_EngineError_Type
Model	tns:STATUS_CODE , tns:STATUS_SUBCODE , tns:STATUS_TEXT
Children	tns:STATUS_CODE, tns:STATUS_SUBCODE, tns:STATUS_TEXT
Source	<pre> <xs:complexType name="STATUS_DATA_EngineError_Type"> <xs:annotation> <xs:documentation>Uebergeordnete Statusdaten fuer "Engine Error"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:STATUS_DATA_Type"> <xs:sequence> <xs:element name="STATUS_CODE" type="tns:STATUS_CODE_EngineError_Type"/> <xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_EngineError_Type"/> <xs:element name="STATUS_TEXT" type="ion:PrintableString"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:STATUS_DATA_MediumError_Type

Namespace	http://vdv/ka/pe/2
Annotations	Uebergeordnete Statusdaten fuer "Medium Error"

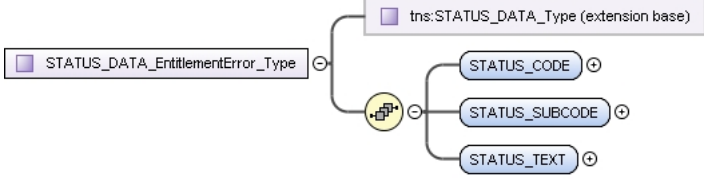
Diagram	
Type	extension of tns:STATUS_DATA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:STATUS_DATA_Type <ul style="list-style-type: none"> tns:STATUS_DATA_MediumError_Type
Model	tns:STATUS_CODE , tns:STATUS_SUBCODE , tns:STATUS_TEXT
Children	tns:STATUS_CODE, tns:STATUS_SUBCODE, tns:STATUS_TEXT
Source	<pre> <xs:complexType name="STATUS_DATA_MediumError_Type"> <xs:annotation> <xs:documentation>Uebergeordnete Statusdaten fuer "Medium Error"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:STATUS_DATA_Type"> <xs:sequence> <xs:element name="STATUS_CODE" type="tns:STATUS_CODE_MediumError_Type" /> <xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_MediumError_Type" /> <xs:element name="STATUS_TEXT" type="ion:PrintableString" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:STATUS_DATA_ApplicationError_Type

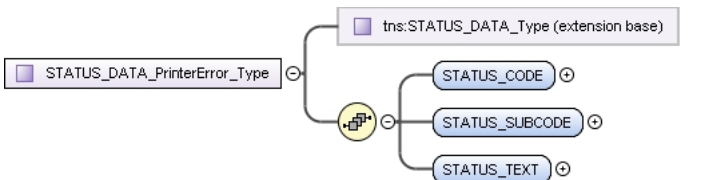
Namespace	http://vdv/ka/pe/2
Annotations	Uebergeordnete Statusdaten fuer "Application Error"
Diagram	
Type	extension of tns:STATUS_DATA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:STATUS_DATA_Type <ul style="list-style-type: none"> tns:STATUS_DATA_ApplicationError_Type
Model	tns:STATUS_CODE , tns:STATUS_SUBCODE , tns:STATUS_TEXT
Children	tns:STATUS_CODE, tns:STATUS_SUBCODE, tns:STATUS_TEXT
Source	<pre> <xs:complexType name="STATUS_DATA_ApplicationError_Type"> <xs:annotation> <xs:documentation>Uebergeordnete Statusdaten fuer "Application Error"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:STATUS_DATA_Type"> <xs:sequence> <xs:element name="STATUS_CODE" type="tns:STATUS_CODE_ApplicationError_Type" /> <xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_ApplicationError_Type" /> <xs:element name="STATUS_TEXT" type="ion:PrintableString" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:STATUS_DATA_EntitlementError_Type

Namespace	http://vdv/ka/pe/2
Annotations	Uebergeordnete Statusdaten fuer "Entitlement Error"

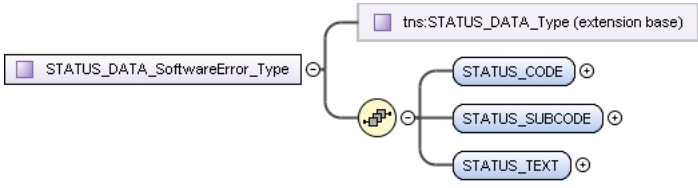
Diagram	
Type	extension of tns:STATUS_DATA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:STATUS_DATA_Type tns:STATUS_DATA_EntitlementError_Type
Model	tns:STATUS_CODE , tns:STATUS_SUBCODE , tns:STATUS_TEXT
Children	tns:STATUS_CODE, tns:STATUS_SUBCODE, tns:STATUS_TEXT
Source	<pre> <xs:complexType name="STATUS_DATA_EntitlementError_Type"> <xs:annotation> <xs:documentation>Uebergeordnete Statusdaten fuer "Entitlement Error"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:STATUS_DATA_Type"> <xs:sequence> <xs:element name="STATUS_CODE" type="tns:STATUS_CODE_EntitlementError_Type"/> <xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_EntitlementError_Type"/> <xs:element name="STATUS_TEXT" type="ion:PrintableString"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:STATUS_DATA_PrinterError_Type

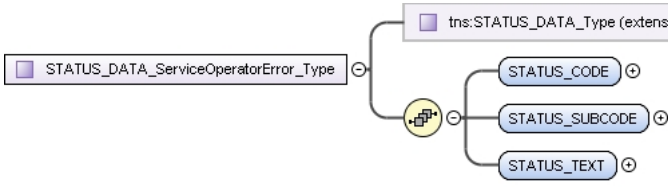
Namespace	http://vdv/ka/pe/2
Annotations	Uebergeordnete Statusdaten fuer "Printer Error"
Diagram	
Type	extension of tns:STATUS_DATA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:STATUS_DATA_Type tns:STATUS_DATA_PrinterError_Type
Model	tns:STATUS_CODE , tns:STATUS_SUBCODE , tns:STATUS_TEXT
Children	tns:STATUS_CODE, tns:STATUS_SUBCODE, tns:STATUS_TEXT
Source	<pre> <xs:complexType name="STATUS_DATA_PrinterError_Type"> <xs:annotation> <xs:documentation>Uebergeordnete Statusdaten fuer "Printer Error"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:STATUS_DATA_Type"> <xs:sequence> <xs:element name="STATUS_CODE" type="tns:STATUS_CODE_PrinterError_Type"/> <xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_PrinterError_Type"/> <xs:element name="STATUS_TEXT" type="ion:PrintableString"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:STATUS_DATA_SoftwareError_Type

Namespace	http://vdv/ka/pe/2
Annotations	Uebergeordnete Statusdaten fuer "Software Error"

Diagram	
Type	extension of tns:STATUS_DATA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:STATUS_DATA_Type <ul style="list-style-type: none"> tns:STATUS_DATA_SoftwareError_Type
Model	tns:STATUS_CODE , tns:STATUS_SUBCODE , tns:STATUS_TEXT
Children	tns:STATUS_CODE, tns:STATUS_SUBCODE, tns:STATUS_TEXT
Source	<pre> <xs:complexType name="STATUS_DATA_SoftwareError_Type"> <xs:annotation> <xs:documentation>Uebergeordnete Statusdaten fuer "Software Error"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:STATUS_DATA_Type"> <xs:sequence> <xs:element name="STATUS_CODE" type="tns:STATUS_CODE_SoftwareError_Type" /> <xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_SoftwareError_Type" /> <xs:element name="STATUS_TEXT" type="ion:PrintableString" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:STATUS_DATA_ServiceOperatorError_Type

Namespace	http://vdv/ka/pe/2
Annotations	Uebergeordnete Statusdaten fuer "Service Operator Error"
Diagram	
Type	extension of tns:STATUS_DATA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:STATUS_DATA_Type <ul style="list-style-type: none"> tns:STATUS_DATA_ServiceOperatorError_Type
Model	tns:STATUS_CODE , tns:STATUS_SUBCODE , tns:STATUS_TEXT
Children	tns:STATUS_CODE, tns:STATUS_SUBCODE, tns:STATUS_TEXT
Source	<pre> <xs:complexType name="STATUS_DATA_ServiceOperatorError_Type"> <xs:annotation> <xs:documentation>Uebergeordnete Statusdaten fuer "Service Operator Error"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:STATUS_DATA_Type"> <xs:sequence> <xs:element name="STATUS_CODE" type="tns:STATUS_CODE_ServiceOperatorError_Type" /> <xs:element name="STATUS_SUBCODE" type="tns:STATUS_SUBCODE_ServiceOperatorError_Type" /> <xs:element name="STATUS_TEXT" type="ion:PrintableString" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:ENGINE_DATA_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: ENGINE_DATA aus Spec_PE

Diagram		
Used by	Elements	tns:ERROR_Type/tns:ENGINE_DATA, tns:TXBGN_Type/tns:ENGINE_DATA, tns:TXWB-D_Type/tns:ENGINE_DATA
Model	tns:VENDOR , tns:TYPE , tns:VERSION , tns:FIRMWARE , tns:TERM_TYP_CODE , tns:MAG_COUNT , tns:ACT_MAG , tns:ACT_MAG_NAME , tns:ACT_MAG_CONTENT , tns:PRINTER	
Children	tns:ACT_MAG, tns:ACT_MAG_CONTENT, tns:ACT_MAG_NAME, tns:FIRMWARE, tns:MAG_COUNT, tns:PRINTER, tns:TERM_TYP_CODE, tns:TYPE, tns:VENDOR, tns:VERSION	
Source	<pre> <xs:complexType name="ENGINE_DATA_Type"> <xs:annotation> <xs:documentation>Typ: ENGINE_DATA aus Spec_PE</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="VENDOR" type="xs:string" nillable="true"/> <xs:element name="TYPE" type="xs:string" nillable="true"/> <xs:element name="VERSION" type="xs:string" nillable="true"/> <xs:element name="FIRMWARE" type="xs:string" nillable="true"/> <xs:element name="TERM_TYP_CODE" type="xs:unsignedInt"/> <xs:element name="MAG_COUNT" type="xs:unsignedInt"/> <xs:element name="ACT_MAG" type="xs:unsignedInt"/> <xs:element name="ACT_MAG_NAME" type="xs:string" nillable="true"/> <xs:element name="ACT_MAG_CONTENT" type="xs:unsignedInt" nillable="true"/> <xs:element name="PRINTER" type="xs:boolean"/> </xs:sequence> </xs:complexType> </pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Complex Type tns:Schluesselversionen_Type

Namespace	http://vdv/ka/pe/2	
Annotations	Typ: Datenstruktur Schluesselversionen	
Diagram		
Used by	Elements	tns:NmApplikationsdaten_Type/tns:Schluesselversionen, tns:NmBerechtigungsdaten_Type/tns:Schluesselversionen
Model	tns:K-PV-KM-MAC , tns:K-KVP-KM-MAC , tns:K-ERF-KM-MAC	
Children	tns:K-ERF-KM-MAC, tns:K-KVP-KM-MAC, tns:K-PV-KM-MAC	
Source	<pre> <xs:complexType name="Schluesselversionen_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Schluesselversionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="K-PV-KM-MAC" type="ct:OctetString1"/> <xs:element name="K-KVP-KM-MAC" type="ct:OctetString1"/> <xs:element name="K-ERF-KM-MAC" type="ct:OctetString1"/> </xs:sequence> </xs:complexType> </pre>	

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd
-----------------	---

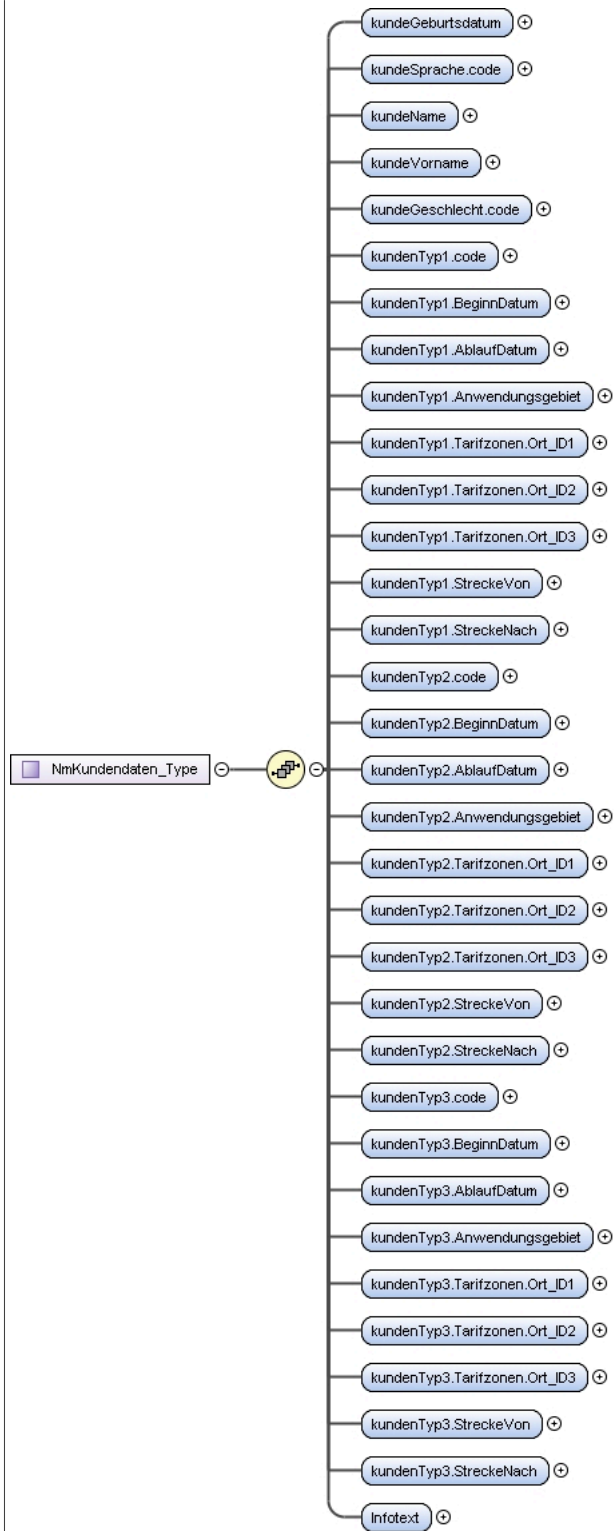
Complex Type tns:SAM-Schluessel-Info_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: SAM-Schluessel-Info
Diagram	
Used by	Element tns:TXLESKEY_Type/tns:SAM_Schluessel-Info
Model	tns:SAM_ID.samNummer , tns:LoadKey-Zaehler , tns:Schluesselname , tns:Nutzungs-Limit , tns:Nutzungs-Sequenz-Zaehler
Children	tns:LoadKey-Zaehler, tns:Nutzungs-Limit, tns:Nutzungs-Sequenz-Zaehler, tns:SAM_ID.samNummer, tns:Schluesselname
Source	<pre> <xs:complexType name="SAM-Schluessel-Info_Type"> <xs:annotation> <xs:documentation>Typ: SAM-Schluessel-Info</xs:documentation> </xs:annotation> <xs:sequence minOccurs="0" maxOccurs="unbounded"> <xs:element name="SAM_ID.samNummer" type="ct:ReferenceNumberThree" /> <xs:element name="LoadKey-Zaehler" type="ct:ReferenceNumberFour" /> <xs:sequence minOccurs="0" maxOccurs="unbounded"> <xs:element name="Schluesselname" type="ion:SymSchluessel_ID_Type" /> <xs:element name="Nutzungs-Limit" type="ct:ReferenceNumberFour" /> <xs:element name="Nutzungs-Sequenz-Zaehler" type="ct:ReferenceNumberFour" /> </xs:sequence> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:NmKundendaten_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: NmKundendaten

Diagram



Used by

Element tns:TXLESKUNDE_Type/tns:NmKundendaten

Model

tns:kundeGeburtsdatum , tns:kundeSprache.code , tns:kundeName , tns:kundeVorname , tns:kundeGeschlecht.code , tns:kundenTyp1.code , tns:kundenTyp1.BeginnDatum , tns:kundenTyp1.AblaufDatum , tns:kundenTyp1.Anwendungsgebiet , tns:kundenTyp1.Tarifzonen.Ort_ID1 , tns:kundenTyp1.Tarifzonen.Ort_ID2 , tns:kundenTyp1.Tarifzonen.Ort_ID3 , tns:kundenTyp1.StreckeVon , tns:kundenTyp1.StreckeNach , tns:kundenTyp2.code , tns:kundenTyp2.BeginnDatum , tns:kundenTyp2.AblaufDatum , tns:kundenTyp2.Anwendungsgebiet , tns:kundenTyp2.Tarifzonen.Ort_ID1 , tns:kundenTyp2.Tarifzonen.Ort_ID2 , tns:kundenTyp2.Tarifzonen.Ort_ID3 , tns:kundenTyp2.StreckeVon , tns:kundenTyp2.StreckeNach , tns:kundenTyp3.code , tns:kundenTyp3.BeginnDatum , tns:kundenTyp3.AblaufDatum , tns:kundenTyp3.Anwendungsgebiet , tns:kundenTyp3.Tarifzonen.Ort_ID1 , tns:kundenTyp3.Tarifzonen.Ort_ID2 , tns:kundenTyp3.Tarifzonen.Ort_ID3 , tns:kundenTyp3.StreckeVon , tns:kundenTyp3.StreckeNach , tns:Infotext

Children	<p>tns:Infotext, tns:kundeGeburtsdatum, tns:kundeGeschlecht.code, tns:kundeName, tns:kundeSprache.code, tns:kundeVorname, tns:kundenTyp1.AblaufDatum, tns:kundenTyp1.Anwendungsgebiet, tns:kundenTyp1.BeginnDatum, tns:kundenTyp1.StreckeNach, tns:kundenTyp1.StreckeVon, tns:kundenTyp1.Tarifzonen.Ort_ID1, tns:kundenTyp1.Tarifzonen.Ort_ID2, tns:kundenTyp1.Tarifzonen.Ort_ID3, tns:kundenTyp1.code, tns:kundenTyp2.AblaufDatum, tns:kundenTyp2.Anwendungsgebiet, tns:kundenTyp2.BeginnDatum, tns:kundenTyp2.StreckeNach, tns:kundenTyp2.StreckeVon, tns:kundenTyp2.Tarifzonen.Ort_ID1, tns:kundenTyp2.Tarifzonen.Ort_ID2, tns:kundenTyp2.Tarifzonen.Ort_ID3, tns:kundenTyp2.code, tns:kundenTyp3.AblaufDatum, tns:kundenTyp3.Anwendungsgebiet, tns:kundenTyp3.BeginnDatum, tns:kundenTyp3.StreckeNach, tns:kundenTyp3.StreckeVon, tns:kundenTyp3.Tarifzonen.Ort_ID1, tns:kundenTyp3.Tarifzonen.Ort_ID2, tns:kundenTyp3.Tarifzonen.Ort_ID3, tns:kundenTyp3.code</p>
Source	<pre> <xs:complexType name="NmKundendaten_Type"> <xs:annotation> <xs:documentation>Typ:NmKundendaten</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="kundeGeburtsdatum" type="ct:Datef"/> <xs:element name="kundeSprache.code" type="ct:INT1"/> <xs:element name="kundeName"> <xs:simpleType> <xs:restriction base="ion:PrintableString"> <xs:minLength value="0"/> <xs:maxLength value="40"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="kundeVorname"> <xs:simpleType> <xs:restriction base="ion:PrintableString"> <xs:maxLength value="40"/> <xs:minLength value="0"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="kundeGeschlecht.code" type="ct:BitString8"/> <xs:element name="kundenTyp1.code" type="ct:INT1"/> <xs:element name="kundenTyp1.BeginnDatum" type="ct:DateTimeCompact"/> <xs:element name="kundenTyp1.AblaufDatum" type="ct:DateTimeCompact"/> <xs:element name="kundenTyp1.Anwendungsgebiet" type="ct:ReferenceNumberTwo"/> <xs:element name="kundenTyp1.Tarifzonen.Ort_ID1" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp1.Tarifzonen.Ort_ID2" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp1.Tarifzonen.Ort_ID3" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp1.StreckeVon" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp1.StreckeNach" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp2.code" type="ct:INT1"/> <xs:element name="kundenTyp2.BeginnDatum" type="ct:DateTimeCompact"/> <xs:element name="kundenTyp2.AblaufDatum" type="ct:DateTimeCompact"/> <xs:element name="kundenTyp2.Anwendungsgebiet" type="ct:ReferenceNumberTwo"/> <xs:element name="kundenTyp2.Tarifzonen.Ort_ID1" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp2.Tarifzonen.Ort_ID2" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp2.Tarifzonen.Ort_ID3" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp2.StreckeVon" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp2.StreckeNach" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp3.code" type="ct:INT1"/> <xs:element name="kundenTyp3.BeginnDatum" type="ct:DateTimeCompact"/> <xs:element name="kundenTyp3.AblaufDatum" type="ct:DateTimeCompact"/> <xs:element name="kundenTyp3.Anwendungsgebiet" type="ct:ReferenceNumberTwo"/> <xs:element name="kundenTyp3.Tarifzonen.Ort_ID1" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp3.Tarifzonen.Ort_ID2" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp3.Tarifzonen.Ort_ID3" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp3.StreckeVon" type="ion:Ort_ID_Type"/> <xs:element name="kundenTyp3.StreckeNach" type="ion:Ort_ID_Type"/> <xs:element name="Infotext"> <xs:simpleType> <xs:restriction base="ion:PrintableString"> <xs:length value="40" fixed="true"/> </xs:restriction> </xs:simpleType> </xs:element> </xs:sequence> </xs:complexType> </pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:NmVerzeichniseintragAppDaten_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: NmVerzeichniseintrag Applikationsdaten

Diagram		
Used by	Element	tns:NmApplikationsverzeichnis_Type/tns:VerzeichniseintragAppDaten
Model	tns:NmSystemspezifischerVerzeichnisteil, tns:applInstanz_ID, tns:appVersion, tns:appGueltigkeitsbeginn, tns:appGueltigkeitsende, tns:appStatus, tns:appSynchronNummer	
Children	tns:NmSystemspezifischerVerzeichnisteil, tns:appGueltigkeitsbeginn, tns:appGueltigkeitsende, tns:applInstanz_ID, tns:appStatus, tns:appSynchronNummer, tns:appVersion	
Source	<pre> <xs:complexType name="NmVerzeichniseintragAppDaten_Type"> <xs:annotation> <xs:documentation>Typ: NmVerzeichniseintrag Applikationsdaten</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type"/> <xs:element name="applInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/> <xs:element name="appVersion" type="tns:VersionNumber"/> <xs:element name="appGueltigkeitsbeginn" type="ct:DateTimeCompact"/> <xs:element name="appGueltigkeitsende" type="ct:DateTimeCompact"/> <xs:element name="appStatus" type="ct:INT1"/> <xs:element name="appSynchronNummer" type="ct:INT1"/> </xs:sequence> </xs:complexType> </pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Complex Type tns:NmSystemspezifischerVerzeichnisteil_Type

Namespace	http://vdv/ka/pe/2	
Annotations	Typ: Systemspezifischer Anteil fuer den Verzeichniseintrag im Schluesselregister	
Diagram		
Used by	Elements	tns:NmVerzeichniseintragAppDaten_Type/tns:NmSystemspezifischerVerzeichnisteil, tns:NmVerzeichniseintragApplikationslogbuch_Type/tns:NmSystemspezifischerVerzeichnisteil, tns:NmVerzeichniseintragBerechtigungen_Type/tns:NmSystemspezifischerVerzeichnisteil, tns:NmVerzeichniseintragKunde_Type/tns:NmSystemspezifischerVerzeichnisteil, tns:NmVerzeichniseintragLetzteTransaktion_Type/tns:NmSystemspezifischerVerzeichnisteil, tns:NmVerzeichniseintragSchluesselregister_Type/tns:NmSystemspezifischerVerzeichnisteil
Model	tns:zeigerSeparaterDatenteil	
Children	tns:zeigerSeparaterDatenteil	
Source	<pre> <xs:complexType name="NmSystemspezifischerVerzeichnisteil_Type"> <xs:annotation> <xs:documentation>Typ: Systemspezifischer Anteil fuer den Verzeichniseintrag im Schluesselregister</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="zeigerSeparaterDatenteil" type="ct:INT1"/> </xs:sequence> </xs:complexType> </pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Complex Type tns:NmVerzeichniseintragApplikationslogbuch_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: NmVerzeichniseintrag Applikationslogbuch

Diagram	
Used by	Element tns:NmApplikationsverzeichnis_Type/tns:VerzeichniseintragAppLogbuch
Model	tns:NmSystemspezifischerVerzeichnisteil , tns:logApplikationSeqNummer
Children	tns:NmSystemspezifischerVerzeichnisteil, tns:logApplikationSeqNummer
Source	<pre> <xs:complexType name="NmVerzeichniseintragApplikationslogbuch_Type"> <xs:annotation> <xs:documentation>Typ: NmVerzeichniseintrag Applikationslogbuch</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type" /> <xs:element name="logApplikationSeqNummer" type="ct:ReferenceNumberTwo" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:NmVerzeichniseintragKunde_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: NmVerzeichniseintrag Kunde
Diagram	
Used by	Element tns:NmApplikationsverzeichnis_Type/tns:VerzeichniseintragKunde
Model	tns:NmSystemspezifischerVerzeichnisteil
Children	tns:NmSystemspezifischerVerzeichnisteil
Source	<pre> <xs:complexType name="NmVerzeichniseintragKunde_Type"> <xs:annotation> <xs:documentation>Typ: NmVerzeichniseintrag Kunde</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:NmVerzeichniseintragLetzteTransaktion_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: NmVerzeichniseintrag Letzte Transaktion
Diagram	
Used by	Element tns:NmApplikationsverzeichnis_Type/tns:LetzteTransaktion
Model	tns:logTransaktionsTyp.code , tns:NmSystemspezifischerVerzeichnisteil
Children	tns:NmSystemspezifischerVerzeichnisteil, tns:logTransaktionsTyp.code
Source	<pre> <xs:complexType name="NmVerzeichniseintragLetzteTransaktion_Type"> <xs:annotation> <xs:documentation>Typ: NmVerzeichniseintrag Letzte Transaktion</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="logTransaktionsTyp.code" type="ct:INT1" /> <xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:NmVerzeichniseintragPrioritaeten_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: NmVerzeichniseintrag Prioritaeten
Diagram	
Used by	Element tns:NmApplikationsverzeichnis_Type/tns:Prioritaeten
Model	tns:berInstanz1 , tns:berInstanz2 , tns:berInstanz3 , tns:berInstanz4 , tns:berInstanz5 , tns:berInstanz6 , tns:berInstanz7 , tns:berInstanz8 , tns:berInstanz9 , tns:berInstanz10 , tns:berInstanz11 , tns:berInstanz12 , tns:berInstanz13 , tns:berInstanz14 , tns:berInstanz15 , tns:berInstanz16
Children	tns:berInstanz1 , tns:berInstanz10 , tns:berInstanz11 , tns:berInstanz12 , tns:berInstanz13 , tns:berInstanz14 , tns:berInstanz15 , tns:berInstanz16 , tns:berInstanz2 , tns:berInstanz3 , tns:berInstanz4 , tns:berInstanz5 , tns:berInstanz6 , tns:berInstanz7 , tns:berInstanz8 , tns:berInstanz9
Source	<pre> <xs:complexType name="NmVerzeichniseintragPrioritaeten_Type"> <xs:annotation> <xs:documentation>Typ: NmVerzeichniseintrag Prioritaeten</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berInstanz1" type="ct:INT1"/> <xs:element name="berInstanz2" type="ct:INT1"/> <xs:element name="berInstanz3" type="ct:INT1"/> <xs:element name="berInstanz4" type="ct:INT1"/> <xs:element name="berInstanz5" type="ct:INT1"/> <xs:element name="berInstanz6" type="ct:INT1"/> <xs:element name="berInstanz7" type="ct:INT1"/> <xs:element name="berInstanz8" type="ct:INT1"/> <xs:element name="berInstanz9" type="ct:INT1"/> <xs:element name="berInstanz10" type="ct:INT1"/> <xs:element name="berInstanz11" type="ct:INT1"/> <xs:element name="berInstanz12" type="ct:INT1"/> <xs:element name="berInstanz13" type="ct:INT1"/> <xs:element name="berInstanz14" type="ct:INT1"/> <xs:element name="berInstanz15" type="ct:INT1"/> <xs:element name="berInstanz16" type="ct:INT1"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:NmVerzeichniseintragBerechtigungen_Type

Namespace	http://vdv/ka/pe/2
-----------	--------------------

Annotations	Typ: NmVerzeichniseintrag Berechtigungen
Diagram	
Used by	Element tns:NmApplikationsverzeichnis_Type/tns:VerzeichniseintragBerDaten
Model	tns:NmSystemspezifischerVerzeichnisteil, tns:berBerechtigung_ID, tns:prodProdukt_ID, tns:prodKeyOrganisation_ID, tns:berGueltigkeitsbeginn, tns:berGueltigkeitsende, tns:berStatus, tns:berSynchronNummer
Children	tns:NmSystemspezifischerVerzeichnisteil, tns:berBerechtigung_ID, tns:berGueltigkeitsbeginn, tns:berGueltigkeitsende, tns:berStatus, tns:berSynchronNummer, tns:prodKeyOrganisation_ID, tns:prodProdukt_ID
Source	<pre> <xs:complexType name="NmVerzeichniseintragBerechtigungen_Type"> <xs:annotation> <xs:documentation>Typ: NmVerzeichniseintrag Berechtigungen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type" /> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" /> <xs:element name="prodProdukt_ID" type="ion:EFMPprodukt_ID_Type" /> <xs:element name="prodKeyOrganisation_ID" type="ct:ReferenceNumberTwo" /> <xs:element name="berGueltigkeitsbeginn" type="ct:DateTimeCompact" /> <xs:element name="berGueltigkeitsende" type="ct:DateTimeCompact" /> <xs:element name="berStatus" type="ct:INT1" /> <xs:element name="berSynchronNummer" type="ct:ReferenceNumberOne" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:NmApplikationsverzeichnis_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: NmApplikationsverzeichnis
Diagram	
Used by	Elements tns:TXANTWORT_Type/tns:NmApplikationsverzeichnis, tns:TXBGN_Type/tns:NmApplikationsverzeichnis, tns:TXLESBER_Type/tns:NmApplikationsverzeichnis
Model	tns:VerzeichniseintragAppDaten, tns:VerzeichniseintragAppLogbuch, tns:VerzeichniseintragKunde, tns:VerzeichniseintragSchluesselregister{0,1}, tns:LetzteTransaktion, tns:Prioritaeten, tns:VerzeichniseintragBerDaten
Children	tns:LetzteTransaktion, tns:Prioritaeten, tns:VerzeichniseintragAppDaten, tns:VerzeichniseintragAppLogbuch, tns:VerzeichniseintragBerDaten, tns:VerzeichniseintragKunde, tns:VerzeichniseintragSchluesselregister
Source	<pre> <xs:complexType name="NmApplikationsverzeichnis_Type"> <xs:annotation> <xs:documentation>Typ: NmApplikationsverzeichnis</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="VerzeichniseintragAppDaten" type="tns:VerzeichniseintragAppDaten_Type" /> <xs:element name="VerzeichniseintragAppLogbuch" type="tns:VerzeichniseintragAppLogbuch_Type" /> <xs:element name="VerzeichniseintragKunde" type="tns:VerzeichniseintragKunde_Type" /> <xs:element name="VerzeichniseintragSchluesselregister" type="tns:VerzeichniseintragSchluesselregister_Type" /> <xs:element name="LetzteTransaktion" type="tns:LetzteTransaktion_Type" /> <xs:element name="Prioritaeten" type="tns:Prioritaeten_Type" /> <xs:choice base="tns:VerzeichniseintragBerDaten_Type" minOccurs="0" maxOccurs="16"> <xs:element name="VerzeichniseintragBerDaten" type="tns:VerzeichniseintragBerDaten_Type" /> </xs:choice> </xs:sequence> </xs:complexType> </pre>

	<pre> <xs:element name="VerzeichniseintragAppDaten" type="tns:NmVerzeichniseintragAppDaten_Type" /> <xs:element name="VerzeichniseintragAppLogbuch" type="tns:NmVerzeichniseintragApplikationslogbuch_Type" /> <xs:element name="VerzeichniseintragKunde" type="tns:NmVerzeichniseintragKunde_Type" /> <xs:element name="VerzeichniseintragSchluesselregister" type="tns:NmVerzeichniseintragSchluesselregister_Type" minOccurs="0"/> <xs:element name="LetzteTransaktion" type="tns:NmVerzeichniseintragLetzteTransaktion_Type" /> <xs:element name="Prioritaeten" type="tns:NmVerzeichniseintragPrioritaeten_Type" /> <xs:sequence minOccurs="0" maxOccurs="16"> <xs:element name="VerzeichniseintragBerDaten" type="tns:NmVerzeichniseintragBerechtigungen_Type" /> </xs:sequence> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:NmVerzeichniseintragSchluesselregister_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Verzeichniseintrag fuer das Schluesselregister
Diagram	
Used by	Element tns:NmApplikationsverzeichnis_Type/tns:VerzeichniseintragSchluesselregister
Model	tns:NmSystemspezifischerVerzeichnisteil, tns:Org_ID_Hersteller, tns:NM-Spezifikationsversion, tns:Herstellerversion, tns:appInstanz_ID, tns:Zufallszahl, tns:RFU1, tns:RFU2
Children	tns:Herstellerversion, tns:NM-Spezifikationsversion, tns:NmSystemspezifischerVerzeichnisteil, tns:Org_ID_Hersteller, tns:RFU1, tns:RFU2, tns:Zufallszahl, tns:appInstanz_ID
Source	<pre> <xs:complexType name="NmVerzeichniseintragSchluesselregister_Type"> <xs:annotation> <xs:documentation>Typ: Verzeichniseintrag fuer das Schluesselregister</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="NmSystemspezifischerVerzeichnisteil" type="tns:NmSystemspezifischerVerzeichnisteil_Type" /> <xs:element name="Org_ID_Hersteller" type="ka:Organisation_ID" /> <xs:element name="NM-Spezifikationsversion" type="tns:VersionNumberExtended" /> <xs:element name="Herstellerversion" type="ct:OctetString4" /> <xs:element name="appInstanz_ID" type="ion:NmApplikationInstanz_ID_Type" /> <xs:element name="Zufallszahl" type="ct:OctetString4" /> <xs:element name="RFU1" type="ct:OctetString1" /> <xs:element name="RFU2" type="ct:OctetString1" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:NmApplikationslogbuch_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: NmApplikationslogbuch Daten
Diagram	
Used by	Element tns:TXLESAPPLOG_Type/tns:NmApplikationsLogbuch
Model	tns:Transaktionsdatensatz
Children	tns:Transaktionsdatensatz

Source	<pre> <xs:complexType name="NmApplikationslogbuch_Type"> <xs:annotation> <xs:documentation>Typ: NmApplikationslogbuch Daten</xs:documentation> </xs:annotation> <xs:sequence minOccurs="0" maxOccurs="20"> <xs:element name="Transaktionsdatensatz" type="ion:Transaktionsdatensatz_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:NmApplikationsdaten_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: NmApplikationsdaten
Diagram	
Used by	Element tns:TXLESBER_Type/tns:NmApplikationsDaten
Model	tns:LetzteTransaktion , tns:Schluesselversionen , tns:Ausgabetransaktionskennung , tns:Infotext
Children	tns:Ausgabetransaktionskennung, tns:Infotext, tns:LetzteTransaktion, tns:Schluesselversionen
Source	<pre> <xs:complexType name="NmApplikationsdaten_Type"> <xs:annotation> <xs:documentation>Typ: NmApplikationsdaten</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="LetzteTransaktion" type="ion:Transaktionsdatensatz_Type" /> <xs:element name="Schluesselversionen" type="tns:Schluesselversionen_Type" /> <xs:element name="Ausgabetransaktionskennung" type="tns:SAM_Transaktion_ID_Type" /> <xs:element name="Infotext"> <xs:simpleType> <xs:restriction base="ion:PrintableString"> <xs:length value="40" fixed="true" /> </xs:restriction> </xs:simpleType> </xs:element> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:NmBerechtigungsdaten_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: NmBerechtigungsdaten
Diagram	
Used by	Element tns:TXLESBER_Type/tns:NmBerechtigungsDaten
Model	tns:berechtigungTarifbereich , tns:LetzteTransaktion , tns:Schluesselversionen , tns:Ausgabetransaktionskennung , tns:Infotext
Children	tns:Ausgabetransaktionskennung, tns:Infotext, tns:LetzteTransaktion, tns:Schluesselversionen, tns:berechtigungTarifbereich
Source	<pre> <xs:complexType name="NmBerechtigungsdaten_Type"> <xs:annotation> <xs:documentation>Typ: NmBerechtigungsdaten</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berechtigungTarifbereich" type="xs:hexBinary" /> <xs:element name="LetzteTransaktion" type="ion:Transaktionsdatensatz_Type" /> </xs:sequence> </pre>

	<pre> <xs:element name="Schluesselversionen" type="tns:Schluesselversionen_Type" /> <xs:element name="Ausgabetransaktionskennung" type="tns:SAM_Transaktion_ID_Type" /> <xs:element name="Infotext"> <xs:simpleType> <xs:restriction base="ion:PrintableString"> <xs:minLength value="0" /> <xs:maxLength value="40" /> </xs:restriction> </xs:simpleType> </xs:element> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:Schluesselregister_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Schluesselregister fuer Schluesselnamen (Schluessel-ID)
Diagram	
Used by	Element tns:TXLESKEYREG_Type/tns:Schluesselregister
Model	tns:Schluesselname*
Children	tns:Schluesselname
Source	<pre> <xs:complexType name="Schluesselregister_Type"> <xs:annotation> <xs:documentation>Typ: Schluesselregister fuer Schluesselnamen (Schluessel-ID)</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Schluesselname" type="ion:SymSchluessel_ID_Type" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXWBD_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Wer bist Du (Abfrage von Informationen)
Diagram	
Used by	Element tns:TXWBD
Model	tns:SESSION_DATA , tns:ENGINE_DATA , tns:STATUS_DATA
Children	tns:ENGINE_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXWBD_Type"> <xs:annotation> <xs:documentation>Typ: Wer bist Du (Abfrage von Informationen)</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="ENGINE_DATA" type="tns:ENGINE_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXAUTH_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Authentisierung

Diagram	
Used by	Element tns:TXAUTH
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXAUTH_Type"> <xs:annotation> <xs:documentation>Typ: Authentisierung</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXBGN_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Beginn einer Session
Diagram	
Used by	Element tns:TXBGN
Model	tns:SESSION_DATA , tns:ENGINE_DATA , tns:SAM_DATA{0,1} , tns:STATUS_DATA , tns:NmApplikationsverzeichnis{0,1}
Children	tns:ENGINE_DATA, tns:NmApplikationsverzeichnis, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXBGN_Type"> <xs:annotation> <xs:documentation>Typ: Beginn einer Session</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="ENGINE_DATA" type="tns:ENGINE_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:element name="NmApplikationsverzeichnis" type="tns:NmApplikationsverzeichnis_Type" minOccurs="0" maxOccurs="1" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXLADKEYREG_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Schluessel in Schluesselregister laden
Diagram	
Used by	Element tns:TXLADKEYREG
Model	tns:SESSION_DATA , tns:SAM_DATA{0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA

Source	<pre> <xs:complexType name="TXLADKEYREG_Type"> <xs:annotation> <xs:documentation>Typ: Schluessel in Schluesselregister laden</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Complex Type tns:TXLOEKEYREG_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Loeschen eines Schluessels im Schluesselregister oder Register loeschen
Diagram	
Used by	Element tns:TXLOEKEYREG
Model	tns:SESSION_DATA , tns:SAM_DATA{0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXLOEKEYREG_Type"> <xs:annotation> <xs:documentation>Typ: Loeschen eines Schluessels im Schluesselregister oder Register loeschen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

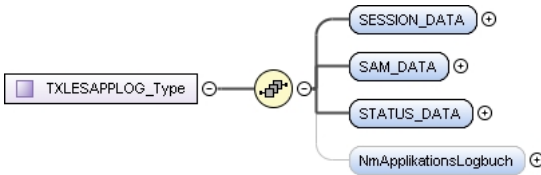
Complex Type tns:TXLESKEYREG_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Schluesselregister auslesen
Diagram	
Used by	Element tns:TXLESKEYREG
Model	tns:SESSION_DATA , tns:SAM_DATA{0,1} , tns:STATUS_DATA , tns:Schluesselregister{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:Schluesselregister
Source	<pre> <xs:complexType name="TXLESKEYREG_Type"> <xs:annotation> <xs:documentation>Typ: Schluesselregister auslesen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:element name="Schluesselregister" type="tns:Schluesselregister_Type" minOccurs="0" maxOccurs="1" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd


Complex Type tns:TXEND_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Ende einer Session
Diagram	
Used by	Element tns:TXEND
Model	tns:SESSION_DATA , tns:SAM_DATA{0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXEND_Type"> <xs:annotation> <xs:documentation>Typ: Ende einer Session</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXLESAPPROG_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Applikationslogbuch lesen
Diagram	
Used by	Element tns:TXLESAPPROG
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , tns:NmApplikationsLogbuch{0,1}
Children	tns:NmApplikationsLogbuch, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXLESAPPROG_Type"> <xs:annotation> <xs:documentation>Typ: Applikationslogbuch lesen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:element name="NmApplikationsLogbuch" type="tns:NmApplikationslogbuch_Type" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXLOEAPPROG_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Applikationslogbuch loeschen
Diagram	
Used by	Element tns:TXLOEAPPROG
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA

Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre><xs:complexType name="TXLOEAPPLLOG_Type"> <xs:annotation> <xs:documentation>Typ: Applikationslogbuch loeschen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type"/> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type"/> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXAGBKUNDE_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Kundendaten ausgeben
Diagram	
Used by	Element tns:TXAGBKUNDE
Model	tns:SESSION_DATA , tns:SAM_DATA {0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre><xs:complexType name="TXAGBKUNDE_Type"> <xs:annotation> <xs:documentation>Typ: Kundendaten ausgeben</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type"/> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1"/> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXLESKUNDE_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Kundendaten lesen
Diagram	
Used by	Element tns:TXLESKUNDE
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , tns:NmKundendaten {0,1}
Children	tns:NmKundendaten, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre><xs:complexType name="TXLESKUNDE_Type"> <xs:annotation> <xs:documentation>Typ: Kundendaten lesen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type"/> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type"/> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type"/> <xs:element name="NmKundendaten" type="tns:NmKundendaten_Type" minOccurs="0"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXLOEKUNDE_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Kundendaten loeschen
Diagram	
Used by	Element tns:TXLOEKUNDE
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXLOEKUNDE_Type"> <xs:annotation> <xs:documentation>Typ: Kundendaten loeschen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXAGBPRIOR_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Prioritaeten setzen
Diagram	
Used by	Element tns:TXAGBPRIOR
Model	tns:SESSION_DATA , tns:SAM_DATA {0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXAGBPRIOR_Type"> <xs:annotation> <xs:documentation>Typ: Prioritaeten setzen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXLOEPRIOR_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Prioritaeten loeschen
Diagram	
Used by	Element tns:TXLOEPRIOR
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXLOEPRIOR_Type"> </pre>

	<pre> <xs:annotation> <xs:documentation>Typ: Prioritaeten loeschen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXAGBPINPUC_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: PIN/PUC initialisieren
Diagram	
Used by	Element tns:TXAGBPINPUC
Model	tns:SESSION_DATA , tns:SAM_DATA {0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXAGBPINPUC_Type"> <xs:annotation> <xs:documentation>Typ: PIN/PUC initialisieren</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXPPIN_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: PIN pruefen
Diagram	
Used by	Element tns:TXPPIN
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXPPIN_Type"> <xs:annotation> <xs:documentation>Typ: PIN pruefen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXAENDPIN_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: PIN aendern

Diagram	
Used by	Element tns:TXAENDPIN
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXAENDPIN_Type"> <xs:annotation> <xs:documentation>Typ: PIN aendern</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXSPIN_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: PIN entsperren
Diagram	
Used by	Element tns:TXSPIN
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXSPIN_Type"> <xs:annotation> <xs:documentation>Typ: PIN entsperren</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXDRUCK_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Nutzermedium bedrucken
Diagram	
Used by	Element tns:TXDRUCK
Model	tns:SESSION_DATA , tns:SAM_DATA {0,1} , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXDRUCK_Type"> <xs:annotation> <xs:documentation>Typ: Nutzermedium bedrucken</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> </pre>

	<pre> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXWEBAENDN_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: WEB aufbuchen/NTP aendern
Diagram	
Used by	Element tns:TXWEBAENDN
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (tns:TXEBER tns:TXAENBER) , tns:TXTRANSABBRUCH{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXAENBER, tns:TXEBER, tns:TXTRANSABBRUCH
Source	<pre> <xs:complexType name="TXWEBAENDN_Type"> <xs:annotation> <xs:documentation>Typ: WEB aufbuchen/NTP aendern</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:choice minOccurs="0"> <xs:element ref="kvp-dl-pv:TXEBER" /> <xs:element ref="kvp-dl-pv:TXAENBER" /> </xs:choice> <xs:element ref="kvp-dl-pv:TXTRANSABBRUCH" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXSBER_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Berechtigung sperren/entsperren
Diagram	
Used by	Element tns:TXSBER
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (tns:TXSNAWA tns:TXSNAWB) , tns:TXTRANSABBRUCH{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXSNAWA, tns:TXSNAWB, tns:TXTRANSABBRUCH
Source	<pre> <xs:complexType name="TXSBER_Type"> <xs:annotation> <xs:documentation>Typ: Berechtigung sperren/entsperren</xs:documentation> </xs:annotation> <xs:sequence> </pre>

	<pre> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:choice minOccurs="0"> <xs:element ref="ion:TXSNAWA" /> <xs:element ref="ion:TXSNAWB" /> </xs:choice> <xs:element ref="kvp-dl-pv:TXTRANSABBRUCH" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXAGBBER_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Berechtigung ausgeben
Diagram	
Used by	Element tns:TXAGBBER
Model	tns:SESSION_DATA , tns:SAM_DATA {0,1} , tns:STATUS_DATA , (ah:TXAA tns:TXABER tns:TXAMBER) , tns:TXTRANSABBRUCH {0,1}
Children	ah:TXAA, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXABER, tns:TXAMBER, tns:TXTRANSABBRUCH
Source	<pre> <xs:complexType name="TXAGBBER_Type"> <xs:annotation> <xs:documentation>Typ: Berechtigung ausgeben</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" minOccurs="0" maxOccurs="1" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:choice minOccurs="0" maxOccurs="1"> <xs:element ref="ah:TXAA" /> <xs:element ref="kvp-dl-pv:TXABER" /> <xs:element ref="kvp-dl-pv:TXAMBER" /> </xs:choice> <xs:element ref="kvp-dl-pv:TXTRANSABBRUCH" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXLOEBER_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Berechtigung zuruecknehmen
Diagram	

Used by	Element tns:TXLOEBER
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (ah:TXRA tns:TXRBER tns:TXRMBER) , tns:TXTRANSABBRUCH{0,1}
Children	ah:TXRA, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXRBER, tns:TXRMBER, tns:TXTRANSABBRUCH
Source	<pre> <xs:complexType name="TXLOEBER_Type"> <xs:annotation> <xs:documentation>Typ: Berechtigung zuruecknehmen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:choice minOccurs="0" maxOccurs="1"> <xs:element ref="ah:TXRA" /> <xs:element ref="kvp-dl-pv:TXRBER" /> <xs:element ref="kvp-dl-pv:TXRMBER" /> </xs:choice> <xs:element ref="kvp-dl-pv:TXTRANSABBRUCH" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXWEBPOBPBEB_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: WEB/POB/PEB-Konto aufbuchen/abbuchen. Deprecated: Bitte TXBEWEB und TXBEPOBPBEB aus der Erweiterung 1.7.0 verwenden. Dieser Typ wird mit KA Release 3.0 entfernt.
Diagram	
Used by	Element tns:TXWEBPOBPBEB
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (tns:TXBEKOKVP tns:TXBEWEBKVP) , tns:TXTRANSABBRUCH{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXBEKOKVP, tns:TXBEWEBKVP, tns:TXTRANSABBRUCH
Source	<pre> <xs:complexType name="TXWEBPOBPBEB_Type"> <xs:annotation> <xs:documentation>Typ: WEB/POB/PEB-Konto aufbuchen/abbuchen. Deprecated: Bitte TXBEWEB und TXBEPOBPBEB aus der Erweiterung 1.7.0 verwenden. Dieser Typ wird mit KA Release 3.0 entfernt.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:choice minOccurs="0"> <xs:element ref="kvp-dl-pv:TXBEKOKVP" /> <xs:element ref="kvp-dl-pv:TXBEWEBKVP" /> </xs:choice> <xs:element ref="kvp-dl-pv:TXTRANSABBRUCH" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXPEB_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: PEB-Konto aufladen

Diagram	
Used by	Element tns:TXPEB
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , tns:TXLPEB{0,1} , tns:TXTRANSABBRUCH{0,1}
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXLPEB, tns:TXTRANSABBRUCH
Source	<pre> <xs:complexType name="TXPEB_Type"> <xs:annotation> <xs:documentation>Typ: PEB-Konto aufladen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:element ref="kvp-dl-pv:TXLPEB" minOccurs="0" /> <xs:element ref="kvp-dl-pv:TXTRANSABBRUCH" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXLPEB_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Laden eines PEB-Kontos, Antwortstruktur
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXLPEB_Type
Used by	Element tns:TXLPEB
Model	txbase , tns:ezahlungsbelegBerechtigung , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:ezahlungsbelegBerechtigung, txbase
Source	<pre> <xs:complexType name="TXLPEB_Type"> <xs:annotation> <xs:documentation>Typ: Laden eines PEB-Kontos, Antwortstruktur</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="ezahlungsbelegBerechtigung" type="ion:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXAENDBER_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Berechtigung aendern

Diagram	
Used by	Element tns:TXAENDERB
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (ah:TXAEA tns:TXAEBER_1_3_0)
Children	ah:TXAEA, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA, tns:TXAEBER_1_3_0
Source	<pre> <xs:complexType name="TXAENDERB_Type"> <xs:annotation> <xs:documentation>Typ: Berechtigung aendern</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:choice minOccurs="0"> <xs:element ref="ah:TXAEA" /> <xs:element ref="kvp-dl-pv:TXAEBER_1_3_0" /> </xs:choice> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXLESBER_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Berechtigung auslesen
Diagram	
Used by	Element tns:TXLESBER
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , (tns:NmApplikationsverzeichnis tns:NmApplikationsDaten tns:NmBerechtigungsDaten)
Children	tns:NmApplikationsDaten, tns:NmApplikationsverzeichnis, tns:NmBerechtigungsDaten, tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXLESBER_Type"> <xs:annotation> <xs:documentation>Typ: Berechtigung auslesen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:choice minOccurs="0"> <xs:element name="NmApplikationsverzeichnis" type="tns:NmApplikationsverzeichnis_Type" /> <xs:element name="NmApplikationsDaten" type="tns:NmApplikationsdaten_Type" /> <xs:element name="NmBerechtigungsDaten" type="tns:NmBerechtigungsdaten_Type" /> </xs:choice> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXAGBKEY_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: LoadKey ausfuehren
Diagram	
Used by	Element tns:TXAGBKEY
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA
Children	tns:SAM_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXAGBKEY_Type"> <xs:annotation> <xs:documentation>Typ: LoadKey ausfuehren</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXLESKEY_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: LoadKey-Zaehler auslesen
Diagram	
Used by	Element tns:TXLESKEY
Model	tns:SESSION_DATA , tns:SAM_DATA , tns:STATUS_DATA , tns:SAM_Schluessel-Info{0,1}
Children	tns:SAM_DATA, tns:SAM_Schluessel-Info, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXLESKEY_Type"> <xs:annotation> <xs:documentation>Typ: LoadKey-Zaehler auslesen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="SAM_DATA" type="tns:SAM_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:element name="SAM_Schluessel-Info" type="tns:SAM-Schluessel-Info_Type" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXAUFTRAG_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Auftragsdaten uebermitteln
Diagram	
Used by	Element tns:TXAUFTRAG
Model	tns:SESSION_DATA , tns:STATUS_DATA
Children	tns:SESSION_DATA, tns:STATUS_DATA

Source	<pre> <xs:complexType name="TXAUFTRAG_Type"> <xs:annotation> <xs:documentation>Typ: Auftragsdaten uebermitteln</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXANSCHR_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Anschreibendaten uebermitteln
Diagram	
Used by	Element tns:TXANSCHR
Model	tns:SESSION_DATA , tns:STATUS_DATA
Children	tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="TXANSCHR_Type"> <xs:annotation> <xs:documentation>Typ: Anschreibendaten uebermitteln</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:TXANTWORT_Type

Namespace	http://vdv/ka/pe/2
Annotations	Typ: Antwortdaten abfragen
Diagram	
Used by	Element tns:TXANTWORT
Model	tns:SESSION_DATA , tns:STATUS_DATA , tns:SUB_SES_ID , tns:NmApplikationsverzeichnis , ah:TXAA , tns:TXABER{0,16} , tns:TXTRANSABBRUCH*
Children	ah:TXAA, tns:NmApplikationsverzeichnis, tns:SESSION_DATA, tns:STATUS_DATA, tns:SUB_SES_ID, tns:TXABER, tns:TXTRANSABBRUCH
Source	<pre> <xs:complexType name="TXANTWORT_Type"> <xs:annotation> <xs:documentation>Typ: Antwortdaten abfragen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> <xs:sequence minOccurs="1" maxOccurs="unbounded"> <xs:element name="SUB_SES_ID"> <xs:simpleType> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> </pre>

	<pre> <xs:maxInclusive value="999999" /> </xs:restriction> </xs:simpleType> </xs:element> <xs:sequence> <xs:element name="NmApplikationsverzeichnis" type="tns:NmApplikationsverzeichnis_Type" /> <xs:element ref="ah:TXAA" /> <xs:element ref="kvp-dl-pv:TXABER" minOccurs="0" maxOccurs="16" /> <xs:element ref="kvp-dl-pv:TXTRANSABBRUCH" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Complex Type tns:ERROR_Type


Namespace	http://vdv/ka/pe/2
Annotations	Typ: Ersatzstruktur zur Fehlerausgabe
Diagram	
Used by	Element tns:ERROR
Model	tns:SESSION_DATA , tns:ENGINE_DATA , tns:STATUS_DATA
Children	tns:ENGINE_DATA, tns:SESSION_DATA, tns:STATUS_DATA
Source	<pre> <xs:complexType name="ERROR_Type"> <xs:annotation> <xs:documentation>Typ: Ersatzstruktur zur Fehlerausgabe</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="SESSION_DATA" type="tns:SESSION_DATA_Type" /> <xs:element name="ENGINE_DATA" type="tns:ENGINE_DATA_Type" /> <xs:element name="STATUS_DATA" type="tns:STATUS_DATA_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Simple Type(s)


Simple Type tns:VersionNumberExtended

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:BitString16				
Type hierarchy	<ul style="list-style-type: none"> xs:string tns:BitString16 tns:VersionNumberExtended 				
Facets	<table> <tr> <td>length</td><td>16</td></tr> <tr> <td>pattern</td><td> [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1] </td></tr> </table>	length	16	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]
length	16				
pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]				
Used by	Elements tns:NmVerzeichniseintragSchlusselregister_Type/tns:NM-Spezifikationsversion, tns:SESSION_DATA_Type/tns:KA_VERSION				
Source	<pre> <xs:simpleType name="VersionNumberExtended"> <xs:restriction base="ct:BitString16" /> </xs:simpleType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				


Simple Type `tns:VersionNumber`

Namespace	http://vdv/ka/pe/2				
Diagram					
Type	tns:BitString8				
Type hierarchy	<ul style="list-style-type: none"> xs:string <ul style="list-style-type: none"> tns:BitString8 <ul style="list-style-type: none"> tns:VersionNumber 				
Facets	<table> <tr> <td>length</td><td>8</td></tr> <tr> <td>pattern</td><td>[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1]</td></tr> </table>	length	8	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1]
length	8				
pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1]				
Used by	Element tns:NmVerzeichniseintragAppDaten_Type/tns:appVersion				
Source	<pre><xs:simpleType name="VersionNumber"> <xs:restriction base="ct:BitString8"/> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd				

Simple Type `tns:STATUS_CODE_OK_Type`

Namespace	http://vdv/ka/pe/2						
Annotations	Kein Fehler aufgetreten						
Diagram							
Type	restriction of tns:INT1						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:STATUS_CODE_OK_Type 						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	0
maxInclusive	255						
minInclusive	0						
enumeration	0						
Used by	Element tns:STATUS_DATA_OK_Type/tns:STATUS_CODE						
Source	<pre><xs:simpleType name="STATUS_CODE_OK_Type"> <xs:annotation> <xs:documentation>Kein Fehler aufgetreten</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"/> </xs:restriction> </xs:simpleType></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Simple Type `tns:STATUS_SUBCODE_OK_Type`

Namespace	http://vdv/ka/pe/2		
Annotations	Subcodes fuer den Statuscode 0		
Diagram			
Type	restriction of xs:string		
Facets	length	4	
	enumeration	0000	Kein Fehler aufgetreten
	pattern	[0-9][0-9][0-9][0-9]	
Used by	Element	tns:STATUS_DATA_OK_Type/tns:STATUS_SUBCODE	

Source	<pre> <xs:simpleType name="STATUS_SUBCODE_OK_Type"> <xs:annotation> <xs:documentation>Subcodes fuer den Statuscode 0</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="4" fixed="true" /> <xs:pattern value="[0-9][0-9][0-9][0-9]" /> <xs:enumeration value="0000"> <xs:annotation> <xs:documentation>Kein Fehler aufgetreten</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Simple Type `tns:STATUS_CODE_SessionError_Type`

Namespace	http://vdv/ka/pe/2						
Annotations	Session Error						
Diagram	<pre> graph LR A[STATUS_CODE_SessionError_Type] --- B[ct:INT1] </pre>						
Type	restriction of <code>tns:INT1</code>						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:STATUS_CODE_SessionError_Type 						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>1</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	1
maxInclusive	255						
minInclusive	0						
enumeration	1						
Used by	Element <code>tns:STATUS_DATA_SessionError_Type/tns:STATUS_CODE</code>						
Source	<pre> <xs:simpleType name="STATUS_CODE_SessionError_Type"> <xs:annotation> <xs:documentation>Session Error</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="1" /> </xs:restriction> </xs:simpleType> </pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Simple Type `tns:STATUS_SUBCODE_SessionError_Type`

Namespace	http://vdv/ka/pe/2		
Annotations	Subcodes fuer den Statuscode 1		
Diagram	<pre>graph LR A[STATUS_SUBCODE_SessionError_Type] --- B[xs:string]</pre>		
Type	restriction of xs:string		
Facets	length	4	
	enumeration	0000	Sonstiges
	enumeration	0001	nicht authentifiziert
	enumeration	0002	Benutzer/Kennwort-Kombination unbekannt
	enumeration	0003	Unbekannte Transaktion
	enumeration	0004	Parameterfehler
	enumeration	0005	Falsche Transaktionsreihenfolge
	enumeration	0006	Session besetzt
	enumeration	0007	Timeout
	enumeration	0008	Transaktion nicht unterstuetzt
	pattern	[0-9][0-9][0-9][0-9]	

Used by	Element tns:STATUS_DATA_SessionError_Type/tns:STATUS_SUBCODE
Source	<pre> <xs:simpleType name="STATUS_SUBCODE_SessionError_Type"> <xs:annotation> <xs:documentation>Subcodes fuer den Statuscode 1</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="4" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9]"/> <xs:enumeration value="0000"> <xs:annotation> <xs:documentation>Sonstiges</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0001"> <xs:annotation> <xs:documentation>nicht authentifiziert</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0002"> <xs:annotation> <xs:documentation>Benutzer/Kennwort-Kombination unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0003"> <xs:annotation> <xs:documentation>Unbekannte Transaktion</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0004"> <xs:annotation> <xs:documentation>Parameterfehler</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0005"> <xs:annotation> <xs:documentation>Falsche Transaktionsreihenfolge</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0006"> <xs:annotation> <xs:documentation>Session besetzt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0007"> <xs:annotation> <xs:documentation>Timeout</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0008"> <xs:annotation> <xs:documentation>Transaktion nicht unterstuetzt</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Simple Type tns:STATUS_CODE_EngineError_Type

Namespace	http://vdv/ka/pe/2						
Annotations	Engine Error						
Diagram	<pre> graph LR A[STATUS_CODE_EngineError_Type] --- B[ct:INT1] </pre>						
Type	restriction of tns:INT1						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:STATUS_CODE_EngineError_Type 						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>2</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	2
maxInclusive	255						
minInclusive	0						
enumeration	2						


Used by	Element tns:STATUS_DATA_EngineError_Type/tns:STATUS_CODE
Source	<pre><xs:simpleType name="STATUS_CODE_EngineError_Type"> <xs:annotation> <xs:documentation>Engine Error</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="2"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Simple Type tns:STATUS_SUBCODE_EngineError_Type

Namespace	http://vdv/ka/pe/2																													
Annotations	Subcodes fuer den Statuscode 2																													
Diagram																														
Type	restriction of xs:string																													
Facets	<table><tr><td>length</td><td>4</td><td></td></tr><tr><td>enumeration</td><td>0000</td><td>Sonstiges</td></tr><tr><td>enumeration</td><td>0001</td><td>nicht autorisiert</td></tr><tr><td>enumeration</td><td>0002</td><td>nicht bereit</td></tr><tr><td>enumeration</td><td>0003</td><td>Magazinfehler oder nicht bereit</td></tr><tr><td>enumeration</td><td>0004</td><td>SAM nicht vorhanden oder nicht bereit</td></tr><tr><td>enumeration</td><td>0005</td><td>Nicht gegenueber SAM authentifiziert</td></tr><tr><td>enumeration</td><td>0006</td><td>Alle SAMs ausgelastet</td></tr><tr><td>pattern</td><td>[0-9][0-9][0-9][0-9]</td><td></td></tr></table>			length	4		enumeration	0000	Sonstiges	enumeration	0001	nicht autorisiert	enumeration	0002	nicht bereit	enumeration	0003	Magazinfehler oder nicht bereit	enumeration	0004	SAM nicht vorhanden oder nicht bereit	enumeration	0005	Nicht gegenueber SAM authentifiziert	enumeration	0006	Alle SAMs ausgelastet	pattern	[0-9][0-9][0-9][0-9]	
length	4																													
enumeration	0000	Sonstiges																												
enumeration	0001	nicht autorisiert																												
enumeration	0002	nicht bereit																												
enumeration	0003	Magazinfehler oder nicht bereit																												
enumeration	0004	SAM nicht vorhanden oder nicht bereit																												
enumeration	0005	Nicht gegenueber SAM authentifiziert																												
enumeration	0006	Alle SAMs ausgelastet																												
pattern	[0-9][0-9][0-9][0-9]																													
Used by	Element	tns:STATUS_DATA_EngineError_Type/tns:STATUS_SUBCODE																												
Source	<pre><xs:simpleType name="STATUS_SUBCODE_EngineError_Type"> <xs:annotation> <xs:documentation>Subcodes fuer den Statuscode 2</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="4" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9]"/> <xs:enumeration value="0000"> <xs:annotation> <xs:documentation>Sonstiges</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0001"> <xs:annotation> <xs:documentation>nicht autorisiert</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0002"> <xs:annotation> <xs:documentation>nicht bereit</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0003"> <xs:annotation> <xs:documentation>Magazinfehler oder nicht bereit</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0004"> <xs:annotation> <xs:documentation>SAM nicht vorhanden oder nicht bereit</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0005"> <xs:annotation> <xs:documentation>Nicht gegenueber SAM authentifiziert</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0006"> <xs:annotation> <xs:documentation>Alle SAMs ausgelastet</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>																													

	<pre> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Simple Type `tns:STATUS_CODE_MediumError_Type`


Namespace	http://vdv/ka/pe/2						
Annotations	Medium Error						
Diagram							
Type	restriction of <code>tns:INT1</code>						
Type hierarchy	<ul style="list-style-type: none"> <code>xs:unsignedInt</code> <ul style="list-style-type: none"> <code>tns:INT1</code> <ul style="list-style-type: none"> <code>tns:STATUS_CODE_MediumError_Type</code> 						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>3</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	3
maxInclusive	255						
minInclusive	0						
enumeration	3						
Used by	Element <code>tns:STATUS_DATA_MediumError_Type/tns:STATUS_CODE</code>						
Source	<pre> <xs:simpleType name="STATUS_CODE_MediumError_Type"> <xs:annotation> <xs:documentation>Medium Error</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="3"/> </xs:restriction> </xs:simpleType> </pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Simple Type `tns:STATUS_SUBCODE_MediumError_Type`


Namespace	http://vdv/ka/pe/2		
Annotations	Subcodes fuer den Statuscode 3		
Diagram			
Type	restriction of xs:string		
Facets	length	4	
	enumeration	0000	Sonstiges
	enumeration	0001	nicht autorisiert
	enumeration	0002	Medium nicht lesbar
	enumeration	0003	Keine Applikation auf dem Medium
	enumeration	0004	Medium nicht beschreibbar
	enumeration	0005	Transaktion abgebrochen
	pattern	[0-9][0-9][0-9][0-9]	
Used by	Element	tns:STATUS_DATA_MediumError_Type/tns:STATUS_SUBCODE	
Source	<pre><xs:simpleType name="STATUS_SUBCODE_MediumError_Type"> <xs:annotation> <xs:documentation>Subcodes fuer den Statuscode 3</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="4" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9]"/> <xs:enumeration value="0000"> <xs:annotation> <xs:documentation>Sonstiges</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0001"></pre>		

	<pre> <xs:annotation> <xs:documentation>nicht autorisiert</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0002"> <xs:annotation> <xs:documentation>Medium nicht lesbar</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0003"> <xs:annotation> <xs:documentation>Keine Applikation auf dem Medium</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0004"> <xs:annotation> <xs:documentation>Medium nicht beschreibbar</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0005"> <xs:annotation> <xs:documentation>Transaktion abgebrochen</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Simple Type **tns:STATUS_CODE_ApplicationError_Type**

Namespace	http://vdv/ka/pe/2						
Annotations	Application Error						
Diagram							
Type	restriction of tns:INT1						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:STATUS_CODE_ApplicationError_Type 						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>4</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	4
maxInclusive	255						
minInclusive	0						
enumeration	4						
Used by	Element tns:STATUS_DATA_ApplicationError_Type/tns:STATUS_CODE						
Source	<pre> <xs:simpleType name="STATUS_CODE_ApplicationError_Type"> <xs:annotation> <xs:documentation>Application Error</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="4"/> </xs:restriction> </xs:simpleType> </pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						


Simple Type **tns:STATUS_SUBCODE_ApplicationError_Type**

Namespace	http://vdv/ka/pe/2		
Annotations	Subcodes fuer den Statuscode 4		
Diagram			
Type	restriction of xs:string		
Facets	length	4	
	enumeration	0000	Sonstiges
	enumeration	0001	nicht autorisiert
	enumeration	0002	Lesen nicht moeglich


	enumeration	0003	Schreiben nicht moeglich
	enumeration	0004	PIN/PUC falsch
	enumeration	0005	Schluesselregister voll
	enumeration	0006	Schluesselreferenz in Schluesselregister bereits vorhanden
	enumeration	0007	Schluesselreferenz fuer Schluesselregister nicht vorhanden
	enumeration	0008	Schluesselreferenz in Schluesselregister nicht vorhanden
	pattern	[0-9][0-9][0-9][0-9]	
Used by	Element	tns:STATUS_DATA_ApplicationError_Type/tns:STATUS_SUBCODE	
Source	<pre><xs:simpleType name="STATUS_SUBCODE_ApplicationError_Type"> <xs:annotation> <xs:documentation>Subcodes fuer den Statuscode 4</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="4" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9]"/> <xs:enumeration value="0000"> <xs:annotation> <xs:documentation>Sonstiges</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0001"> <xs:annotation> <xs:documentation>nicht autorisiert</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0002"> <xs:annotation> <xs:documentation>Lesen nicht moeglich</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0003"> <xs:annotation> <xs:documentation>Schreiben nicht moeglich</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0004"> <xs:annotation> <xs:documentation>PIN/PUC falsch</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0005"> <xs:annotation> <xs:documentation>Schluesselregister voll</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0006"> <xs:annotation> <xs:documentation>Schluesselreferenz in Schluesselregister bereits vorhanden</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0007"> <xs:annotation> <xs:documentation>Schluesselreferenz fuer Schluesselregister nicht vorhanden</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0008"> <xs:annotation> <xs:documentation>Schluesselreferenz in Schluesselregister nicht vorhanden</ xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>		
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd		

Simple Type tns:STATUS_CODE_EntitlementError_Type

Namespace	http://vdv/ka/pe/2
-----------	--------------------


Annotations	Entitlement Error						
Diagram							
Type	restriction of tns:INT1						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:STATUS_CODE_EntitlementError_Type 						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>5</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	5
maxInclusive	255						
minInclusive	0						
enumeration	5						
Used by	Element tns:STATUS_DATA_EntitlementError_Type/tns:STATUS_CODE						
Source	<pre><xs:simpleType name="STATUS_CODE_EntitlementError_Type"> <xs:annotation> <xs:documentation>Entitlement Error</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="5"/> </xs:restriction> </xs:simpleType></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Simple Type tns:STATUS_SUBCODE_EntitlementError_Type


Namespace	http://vdv/ka/pe/2																													
Annotations	Subcodes fuer den Statuscode 5																													
Diagram																														
Type	restriction of xs:string																													
Facets	<table><tr><td>length</td><td>4</td><td></td></tr><tr><td>enumeration</td><td>0000</td><td>Sonstiges</td></tr><tr><td>enumeration</td><td>0001</td><td>nicht autorisiert</td></tr><tr><td>enumeration</td><td>0002</td><td>Instanz nicht vorhanden</td></tr><tr><td>enumeration</td><td>0003</td><td>Erforderliche Schluessele nicht vorhanden</td></tr><tr><td>enumeration</td><td>0004</td><td>MAC-Fehler</td></tr><tr><td>enumeration</td><td>0005</td><td>Berechtigung ungesichert gelesen</td></tr><tr><td>enumeration</td><td>0006</td><td>Ueberschreiben/Loeschen der Daten nicht moeglich</td></tr><tr><td>pattern</td><td colspan="2">[0-9][0-9][0-9][0-9]</td></tr></table>			length	4		enumeration	0000	Sonstiges	enumeration	0001	nicht autorisiert	enumeration	0002	Instanz nicht vorhanden	enumeration	0003	Erforderliche Schluessele nicht vorhanden	enumeration	0004	MAC-Fehler	enumeration	0005	Berechtigung ungesichert gelesen	enumeration	0006	Ueberschreiben/Loeschen der Daten nicht moeglich	pattern	[0-9][0-9][0-9][0-9]	
length	4																													
enumeration	0000	Sonstiges																												
enumeration	0001	nicht autorisiert																												
enumeration	0002	Instanz nicht vorhanden																												
enumeration	0003	Erforderliche Schluessele nicht vorhanden																												
enumeration	0004	MAC-Fehler																												
enumeration	0005	Berechtigung ungesichert gelesen																												
enumeration	0006	Ueberschreiben/Loeschen der Daten nicht moeglich																												
pattern	[0-9][0-9][0-9][0-9]																													
Used by	Element	tns:STATUS_DATA_EntitlementError_Type/tns:STATUS_SUBCODE																												
Source	<pre><xs:simpleType name="STATUS_SUBCODE_EntitlementError_Type"> <xs:annotation> <xs:documentation>Subcodes fuer den Statuscode 5</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="4" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9]"/> <xs:enumeration value="0000"> <xs:annotation> <xs:documentation>Sonstiges</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0001"> <xs:annotation> <xs:documentation>nicht autorisiert</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0002"> <xs:annotation> <xs:documentation>Instanz nicht vorhanden</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0003"></pre>																													

	<pre> <xs:annotation> <xs:documentation>Erforderliche Schluessele nicht vorhanden</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0004"> <xs:annotation> <xs:documentation>MAC-Fehler</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0005"> <xs:annotation> <xs:documentation>Berechtigung ungesichert gelesen</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0006"> <xs:annotation> <xs:documentation>Ueberschreiben/Loeschen der Daten nicht moeglich</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd

Simple Type `tns:STATUS_CODE_PrinterError_Type`

Namespace	http://vdv/ka/pe/2						
Annotations	Printer Error						
Diagram							
Type	restriction of <code>tns:INT1</code>						
Type hierarchy	<ul style="list-style-type: none"> <code>xs:unsignedInt</code> <ul style="list-style-type: none"> <code>tns:INT1</code> <ul style="list-style-type: none"> <code>tns:STATUS_CODE_PrinterError_Type</code> 						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>6</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	6
maxInclusive	255						
minInclusive	0						
enumeration	6						
Used by	Element <code>tns:STATUS_DATA_PrinterError_Type/tns:STATUS_CODE</code>						
Source	<pre> <xs:simpleType name="STATUS_CODE_PrinterError_Type"> <xs:annotation> <xs:documentation>Printer Error</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="6"/> </xs:restriction> </xs:simpleType> </pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Simple Type `tns:STATUS_SUBCODE_PrinterError_Type`

Namespace	http://vdv/ka/pe/2		
Annotations	Subcodes fuer den Statuscode 6		
Diagram			
Type	restriction of xs:string		
Facets	length	4	
	enumeration	0000	Sonstiges
	enumeration	0001	nicht autorisiert
	enumeration	0002	Drucker nicht vorhanden
	enumeration	0003	Fehler beim Drucken
	enumeration	0004	Drucker Timeout


	pattern	[0-9][0-9][0-9][0-9]
Used by	Element	tns:STATUS_DATA_PrinterError_Type/tns:STATUS_SUBCODE
Source	<pre> <xs:simpleType name="STATUS_SUBCODE_PrinterError_Type"> <xs:annotation> <xs:documentation>Subcodes fuer den Statuscode 6</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="4" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9]"/> <xs:enumeration value="0000"> <xs:annotation> <xs:documentation>Sonstiges</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0001"> <xs:annotation> <xs:documentation>nicht autorisiert</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0002"> <xs:annotation> <xs:documentation>Drucker nicht vorhanden</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0003"> <xs:annotation> <xs:documentation>Fehler beim Drucken</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0004"> <xs:annotation> <xs:documentation>Drucker Timeout</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Simple Type tns:STATUS_CODE_SoftwareError_Type


Namespace	http://vdv/ka/pe/2	
Annotations	Software Error	
Diagram		
Type	restriction of tns:INT1	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:STATUS_CODE_SoftwareError_Type 	
Facets	maxInclusive	255
	minInclusive	0
	enumeration	7
Used by	Element	tns:STATUS_DATA_SoftwareError_Type/tns:STATUS_CODE
Source	<pre> <xs:simpleType name="STATUS_CODE_SoftwareError_Type"> <xs:annotation> <xs:documentation>Software Error</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="7"/> </xs:restriction> </xs:simpleType> </pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd	

Simple Type tns:STATUS_SUBCODE_SoftwareError_Type

Namespace	http://vdv/ka/pe/2
-----------	--------------------

Annotations	Subcodes fuer den Statuscode 7		
Diagram			
Type	restriction of xs:string		
Facets	length	4	
	enumeration	0000	Sonstiges
	enumeration	0001	Fehler bei Datenkonvertierung
	enumeration	0002	Interner Fehler
	enumeration	0003	Erforderliche Datei nicht verfuegbar
	enumeration	0004	Fehler bei Kryptogrammsignatur
	enumeration	0005	Fehler bei Kryptogrammentschluesselung
	enumeration	0006	Falscher LoadKey Zaehler
	pattern	[0-9][0-9][0-9][0-9]	
Used by	Element	tns:STATUS_DATA_SoftwareError_Type/tns:STATUS_SUBCODE	
Source	<pre><xs:simpleType name="STATUS_SUBCODE_SoftwareError_Type"> <xs:annotation> <xs:documentation>Subcodes fuer den Statuscode 7</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="4" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9]"/> <xs:enumeration value="0000"> <xs:annotation> <xs:documentation>Sonstiges</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0001"> <xs:annotation> <xs:documentation>Fehler bei Datenkonvertierung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0002"> <xs:annotation> <xs:documentation>Interner Fehler</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0003"> <xs:annotation> <xs:documentation>Erforderliche Datei nicht verfuegbar</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0004"> <xs:annotation> <xs:documentation>Fehler bei Kryptogrammsignatur</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0005"> <xs:annotation> <xs:documentation>Fehler bei Kryptogrammentschluesselung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0006"> <xs:annotation> <xs:documentation>Falscher LoadKey Zaehler</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>		
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd		

Simple Type tns:STATUS_CODE_ServiceOperatorError_Type

Namespace	http://vdv/ka/pe/2
Annotations	Service Operator Error
Diagram	
Type	restriction of tns:INT1

Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 <ul style="list-style-type: none"> tns:STATUS_CODE_ServiceOperatorError_Type 						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> <tr> <td>enumeration</td><td>8</td></tr> </table>	maxInclusive	255	minInclusive	0	enumeration	8
maxInclusive	255						
minInclusive	0						
enumeration	8						
Used by	Element tns:STATUS_DATA_ServiceOperatorError_Type/tns:STATUS_CODE						
Source	<pre><xs:simpleType name="STATUS_CODE_ServiceOperatorError_Type"> <xs:annotation> <xs:documentation>Service Operator Error</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="8"/> </xs:restriction> </xs:simpleType></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd						

Simple Type tns:STATUS_SUBCODE_ServiceOperatorError_Type

Namespace	http://vdv/ka/pe/2		
Annotations	Subcodes fuer den Statuscode 8		
Diagram			
Type	restriction of xs:string		
Facets	length	4	
	enumeration	0000	sonstiges
	enumeration	0001	TXANSCHR fehlt
	pattern	[0-9][0-9][0-9][0-9]	
Used by	Element	tns:STATUS_DATA_ServiceOperatorError_Type/tns:STATUS_SUBCODE	
Source	<pre><xs:simpleType name="STATUS_SUBCODE_ServiceOperatorError_Type"> <xs:annotation> <xs:documentation>Subcodes fuer den Statuscode 8</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="4" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9]"/> <xs:enumeration value="0000"> <xs:annotation> <xs:documentation>sonstiges</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="0001"> <xs:annotation> <xs:documentation>TXANSCHR fehlt</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pe/2/XML-Schema_PE.xsd		

Namespace: "http://vdv/ka/kvp-dl-pv/2"

Schema(s)

Imported schema XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Namespace	http://vdv/ka/kvp-dl-pv/2				
Properties	<table> <tr> <td>attribute form default:</td><td>unqualified</td></tr> <tr> <td>element form default:</td><td>qualified</td></tr> </table>	attribute form default:	unqualified	element form default:	qualified
attribute form default:	unqualified				
element form default:	qualified				

	version: 1.3.0
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Included schema XML-Schema_KVP_DL_PV.xsd

Namespace	http://vdv/ka/kvp-dl-pv/2
Properties	attribute form default: unqualified
	element form default: qualified
	version: 1.10.0
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element(s)

Element tns:TXBEWEBKVP

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Belastung WEB durch Kauf eines EFS (analog TXBEKOKVP)
Diagram	
Type	tns:TXBEWEBKVP_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXBEWEBKVP_Type
Properties	content: complex
Used by	Complex Types tns:TXBEWEB_Type, tns:TXWEBPOBPEB_Type
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Instance	<pre><tns:TXBEWEBKVP xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:belastungstransaktionBerechtigung>{1,1}</tns:belastungstransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXBEWEBKVP></pre>
Source	<pre><xs:element name="TXBEWEBKVP" type="tns:TXBEWEBKVP_Type"> <xs:annotation> <xs:documentation>Element: Belastung WEB durch Kauf eines EFS (analog TXBEKOKVP)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXBEWEBKVP_Type / tns:belastungstransaktionBerechtigung

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type

Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:belastungstransaktionBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:belastungstransaktionBerechtigung></pre>
Source	<pre><xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXBEWEBKOKVP_Type / tns:berNmTransaktionMAC

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluesel_ID , berMAC_KVP_Schluesel_ID
Children	berMAC_KVP, berMAC_KVP_Schluesel_ID, berMAC_PV, berMAC_PV_Schluesel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluesel_ID>{1,1}</berMAC_PV_Schluesel_ID> <berMAC_KVP_Schluesel_ID>{1,1}</berMAC_KVP_Schluesel_ID> </tns:berNmTransaktionMAC></pre>
Source	<pre><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXTRANSABBRUCH

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Daten fuer unvollstaendig ausgefuehrte NM-Transaktion
Diagram	
Type	tns:TXTRANSABBRUCH_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXTRANSABBRUCH_Type
Properties	content: complex

Used by	Complex Types tns:TXAGBBER_Type, tns:TXANTWORT_Type, tns:TXBEOBPBEB_Type, tns:TXBEWE-B_Type, tns:TXLOEBER_Type, tns:TXPEB_Type, tns:TXSBER_Type, tns:TXWEBBAENDN_Type, tns:TXWEBPOBPBEB_Type
Model	txbase , tns:AllgemeineTransaktionsdaten , tns:MKAH-PV-NM-MAC_ID{0,1} , tns:MKAH-PV-Nutzungszaehler{0,1} , tns:MKKVP--NM-MAC_ID{0,1} , tns:MKKVP-Nutzungszaehler{0,1}
Children	tns:AllgemeineTransaktionsdaten, tns:MKAH-PV-NM-MAC_ID, tns:MKAH-PV-Nutzungszaehler, tns:MKKVP--NM-MAC_ID, tns:MKKVP-Nutzungszaehler, txbase
Instance	<pre><tns:TXTRANSABBRUCH xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:AllgemeineTransaktionsdaten>{1,1}</tns:AllgemeineTransaktionsdaten> <tns:MKAH-PV-NM-MAC_ID>{0,1}</tns:MKAH-PV-NM-MAC_ID> <tns:MKAH-PV-Nutzungszaehler>{0,1}</tns:MKAH-PV-Nutzungszaehler> <tns:MKKVP--NM-MAC_ID>{0,1}</tns:MKKVP--NM-MAC_ID> <tns:MKKVP-Nutzungszaehler>{0,1}</tns:MKKVP-Nutzungszaehler> </tns:TXTRANSABBRUCH></pre>
Source	<pre><xs:element name="TXTRANSABBRUCH" type="tns:TXTRANSABBRUCH_Type"> <xs:annotation> <xs:documentation>Element: Daten fuer unvollstaendig ausgefuehrte NM-Transaktion</ </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:AllgemeineTransaktionsdaten

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: AllgemeineTransaktionsdaten
Diagram	<pre> graph LR A[AllgemeineTransaktionsdaten] --- B[logApplikationSeqNummer] A --- C[logNmTransaktion_ID] A --- D[logTransaktionsOperator_ID] A --- E[logTerminal_ID] A --- F[logTransaktionsZeitpunkt] A --- G[logTransaktionsOrt_ID] A --- H[logTransaktionsTyp.code] </pre>
Properties	content: complex
Used by	Complex Type tns:TXTRANSABBRUCH_Type
Model	tns:logApplikationSeqNummer , tns:logNmTransaktion_ID , tns:logTransaktionsOperator_ID , tns:logTerminal_ID , tns:logTransaktionsZeitpunkt , tns:logTransaktionsOrt_ID , tns:logTransaktionsTyp.code
Children	tns:logApplikationSeqNummer, tns:logNmTransaktion_ID, tns:logTerminal_ID, tns:logTransaktionsOperator_ID, tns:logTransaktionsOrt_ID, tns:logTransaktionsTyp.code, tns:logTransaktionsZeitpunkt
Instance	<pre><tns:AllgemeineTransaktionsdaten xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:logApplikationSeqNummer>{1,1}</tns:logApplikationSeqNummer> <tns:logNmTransaktion_ID>{1,1}</tns:logNmTransaktion_ID> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:logTerminal_ID>{1,1}</tns:logTerminal_ID> <tns:logTransaktionsZeitpunkt>{1,1}</tns:logTransaktionsZeitpunkt> <tns:logTransaktionsOrt_ID>{1,1}</tns:logTransaktionsOrt_ID> <tns:logTransaktionsTyp.code>{1,1}</tns:logTransaktionsTyp.code> </tns:AllgemeineTransaktionsdaten></pre>
Source	<pre><xs:element name="AllgemeineTransaktionsdaten"> <xs:annotation> <xs:documentation>Element: AllgemeineTransaktionsdaten</xs:documentation> </xs:annotation> <xs:complexType> <xs:sequence> <xs:element name="logApplikationSeqNummer" type="ct:SequenceNumberTwo"/> <xs:element name="logNmTransaktion_ID" type="tns:NmTransaktion_ID_Type"/> <xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo"/> <xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type"/> <xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact"/> <xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type"/> <xs:element name="logTransaktionsTyp.code" type="ct:INT1"/> </xs:sequence> </xs:complexType> </xs:element></pre>

	<pre></xs:sequence> </xs:complexType> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:AllgemeineTransaktionsdaten** / **tns:logApplikationSeqNummer**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:SequenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:SequenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="logApplikationSeqNummer" type="ct:SequenceNumberTwo" /></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element **tns:AllgemeineTransaktionsdaten** / **tns:logNmTransaktion_ID**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:NmTransaktion_ID_Type
Properties	content: complex
Model	tns:samSequenznummer, tns:SAM_ID.samNummer
Children	tns:SAM_ID.samNummer, tns:samSequenznummer
Instance	<pre><tns:logNmTransaktion_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:samSequenznummer>{1,1}</tns:samSequenznummer> <tns:SAM_ID.samNummer>{1,1}</tns:SAM_ID.samNummer> </tns:logNmTransaktion_ID></pre>
Source	<pre><xs:element name="logNmTransaktion_ID" type="tns:NmTransaktion_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:NmTransaktion_ID_Type** / **tns:samSequenznummer**


Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:SequenceNumberFour				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SequenceNumberFour 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				

Source	<code><xs:element name="samSequenznummer" type="ct:SequenceNumberFour" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

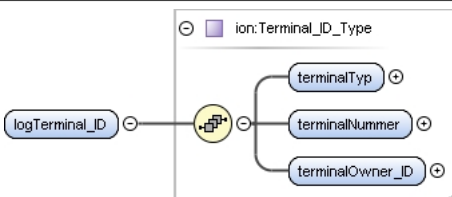
Element **tns:NmTransaktion_ID_Type** / **tns:SAM_ID.samNummer**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:SAM_ID_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree tns:SAM_ID_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<code><xs:element name="SAM_ID.samNummer" type="ion:SAM_ID_Type" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element **tns:AllgemeineTransaktionsdaten** / **tns:logTransaktionsOperator_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element **tns:AllgemeineTransaktionsdaten** / **tns:logTerminal_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Terminal_ID_Type
Properties	content: complex
Model	terminalTyp , terminalNummer , terminalOwner_ID
Children	terminalNummer, terminalOwner_ID, terminalTyp
Instance	<code><tns:logTerminal_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"></code>

	<pre><terminalTyp>{1,1}</terminalTyp> <terminalNumber>{1,1}</terminalNumber> <terminalOwner_ID>{1,1}</terminalOwner_ID> </tns:logTerminal_ID></pre>
Source	<code><xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:AllgemeineTransaktionsdaten** / **tns:logTransaktionsZeitpunkt**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:DateTimeCompact
Properties	content: simple
Facets	maxInclusive 2117-12-31T23:59:58 minInclusive 1990-01-01T00:00:00
Source	<code><xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:AllgemeineTransaktionsdaten** / **tns:logTransaktionsOrt_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNumber , ortDomaene_ID
Children	ortDomaene_ID, ortNumber, ortTyp
Instance	<pre><tns:logTransaktionsOrt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNumber>{1,1}</ortNumber> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:logTransaktionsOrt_ID></pre>
Source	<code><xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:AllgemeineTransaktionsdaten** / **tns:logTransaktionsTyp.code**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255 minInclusive 0
Source	<code><xs:element name="logTransaktionsTyp.code" type="ct:INT1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXTRANSABBRUCH_Type` / `tns:MKAH-PV-NM-MAC_ID`

Namespace	http://vdv/ka/kvp-dl-pv/2						
Diagram							
Type	<code>tns:SymSchluessel_ID_Type</code>						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	1
content:	complex						
minOccurs:	0						
maxOccurs:	1						
Model	<code>schluesselNummer</code> , <code>schluesselVersion</code> , <code>schluesselInhaber_ID</code>						
Children	<code>schluesselInhaber_ID</code> , <code>schluesselNummer</code> , <code>schluesselVersion</code>						
Instance	<pre><tns:MKAH-PV-NM-MAC_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:MKAH-PV-NM-MAC_ID></pre>						
Source	<code><xs:element name="MKAH-PV-NM-MAC_ID" type="ion:SymSchluessel_ID_Type" minOccurs="0" maxOccurs="1"/></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd						

Element `tns:TXTRANSABBRUCH_Type` / `tns:MKAH-PV-Nutzungszaehler`

Namespace	http://vdv/ka/kvp-dl-pv/2						
Diagram							
Type	<code>tns:ReferenceNumberFour</code>						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour 						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0		
maxInclusive	4294967295						
minInclusive	0						
Source	<code><xs:element name="MKAH-PV-Nutzungszaehler" type="ct:ReferenceNumberFour" minOccurs="0" maxOccurs="1"/></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd						

Element `tns:TXTRANSABBRUCH_Type` / `tns:MKKVP--NM-MAC_ID`

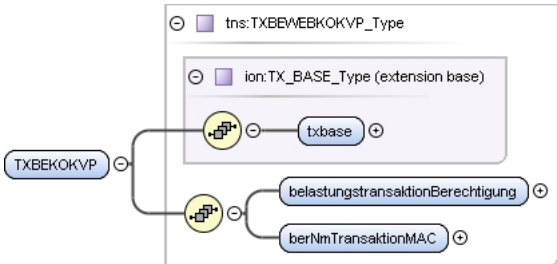
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	<code>tns:SymSchluessel_ID_Type</code>

Properties	content:	complex
	minOccurs:	0
	maxOccurs:	1
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID	
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion	
Instance	<pre><tns:MKKVP--NM-MAC_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:MKKVP--NM-MAC_ID></pre>	
Source	<pre><xs:element name="MKKVP--NM-MAC_ID" type="ion:SymSchluessel_ID_Type" minOccurs="0" maxOccurs="1"/></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	

Element tns:TXTRANSABBRUCH_Type / tns:MKKVP-Nutzungszaehler

Namespace	http://vdv/ka/kvp-dl-pv/2	
Diagram		
Type	tns:ReferenceNumberFour	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour 	
Properties	content:	simple
	minOccurs:	0
	maxOccurs:	1
Facets	maxInclusive	4294967295
	minInclusive	0
Source	<pre><xs:element name="MKKVP-Nutzungszaehler" type="ct:ReferenceNumberFour" minOccurs="0" maxOccurs="1"/></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	

Element tns:TXBEKOKVP

Namespace	http://vdv/ka/kvp-dl-pv/2	
Annotations	Element: Belastung POB/PEB durch Kauf eines EFS (analog TXBEKODL)	
Diagram		
Type	tns:TXBEWEBKOKVP_Type	
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXBEWEBKOKVP_Type 	
Properties	content:	complex
Used by	Complex Types	tns:TXBEPOBPEB_Type, tns:TXWEBPOBPEB_Type
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC	
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase	
Instance	<pre><tns:TXBEKOKVP xmlns:tns="http://vdv/ka/kvp-dl-pv/2"></pre>	

	<pre> <txbase>{1,1}</txbase> <tns:belastungstransaktionBerechtigung>{1,1}</tns:belastungstransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXBEKOKVP> </pre>
Source	<pre> <xs:element name="TXBEKOKVP" type="tns:TXBEWEBKOKVP_Type"> <xs:annotation> <xs:documentation>Element: Belastung POB/PEB durch Kauf eines EFS (analog TXBEKODL)</ </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAEBER_Type_1_3_0 / tns:tx_ber

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_BER_Type
Properties	content: complex
Model	berGueltigkeitsbeginn , berGueltigkeitsende , prodAbrechnungsVerfahren , berBezahlArt , berBezahlMittel
Children	berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren
Instance	<pre> <tns:tx_ber xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berGueltigkeitsbeginn>{1,1}</berGueltigkeitsbeginn> <berGueltigkeitsende>{1,1}</berGueltigkeitsende> <prodAbrechnungsVerfahren>{1,1}</prodAbrechnungsVerfahren> <berBezahlArt>{1,1}</berBezahlArt> <berBezahlMittel>{1,1}</berBezahlMittel> </tns:tx_ber> </pre>
Source	<pre> <xs:element name="tx_ber" type="ion:TX_BER_Type"/> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Element tns:TXAEBER_Type_1_3_0 / tns:berechtigungTarifbereichDaten

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<pre> <xs:element name="berechtigungTarifbereichDaten" type="xs:hexBinary"/> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Element tns:TXAEBER_Type_1_3_0 / tns:berBerechtigung_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	

Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Element tns:TXAEBER_Type_1_3_0 / tns:prodProdukt_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<pre><tns:prodProdukt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID></pre>
Source	<xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Element tns:TXAEBER_1_3_0

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Aenderung einer Berechtigung (nicht moeglich bei EFS). Release 1.3.0. Korrektur: fehlende Berechtigungs-ID und Produkt-ID.
Diagram	
Type	tns:TXAEBER_Type_1_3_0
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAEBER_Type_1_3_0
Properties	content: complex
Used by	Complex Type tns:TXAENDBER_Type
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereichDaten , tns:berBerechtigung_ID , tns:prodProdukt_ID

Children	tns:berBerechtigung_ID, tns:berechtigungTarifbereichDaten, tns:prodProdukt_ID, tns:tx_ber, txbase
Instance	<pre><tns:TXAEBER_1_3_0 xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:berechtigungTarifbereichDaten>{1,1}</tns:berechtigungTarifbereichDaten> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> </tns:TXAEBER_1_3_0></pre>
Source	<pre><xs:element name="TXAEBER_1_3_0" type="tns:TXAEBER_Type_1_3_0"> <xs:annotation> <xs:documentation>Element: Aenderung einer Berechtigung (nicht moeglich bei EFS). Release 1.3.0. Korrektur: fehlende Berechtigungs-ID und Produkt-ID.</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Element tns:Mitnahme_Type / tns:mitnahmeTyp


Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Profil_CODE_Type		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:Profil_CODE_Type 		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	Erwachsener
	enumeration	2	Kind
	enumeration	3	Student
	enumeration	5	Behinderter
	enumeration	6	Sehbehinderter
	enumeration	7	Hoergeschaedigter
	enumeration	8	Arbeitsloser/Sozialhilfeempfaenger
	enumeration	9	Personal
	enumeration	10	Militaeranhehoeriger
	enumeration	19	Schueler
	enumeration	20	Azubi
	enumeration	25	Senior
Source	<xs:element name="mitnahmeTyp" type="tns:Profil_CODE_Type"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:Mitnahme_Type / tns:mitnahmeAnzahl


Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:INT1		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	

Source	<code><xs:element name="mitnahmeAnzahl" type="ct:INT1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd


Element `tns:Linie_ID_Type` / `tns:linienNummer`

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	<code>tns:ReferenceNumberTwo</code>				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="linienNummer" type="ct:ReferenceNumberTwo"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element `tns:Linie_ID_Type` / `tns:linieDomaene_ID`

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	<code>tns:Organisation_ID</code>				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="linieDomaene_ID" type="ka:Organisation_ID"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element `tns:LinieVariante_ID_Type` / `tns:variantenNummer`

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	<code>tns:ReferenceNumberOne</code>				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:ReferenceNumberOne 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xs:element name="variantenNummer" type="ct:ReferenceNumberOne"/></code>				

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Element `tns:LinieVariante_ID_Type` / `tns:linie_ID`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Linie_ID_Type
Properties	content: complex
Model	tns:linienNummer , tns:linieDomaene_ID
Children	tns:linieDomaene_ID, tns:linienNummer
Instance	<pre><tns:linie_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:linienNummer>{1,1}</tns:linienNummer> <tns:linieDomaene_ID>{1,1}</tns:linieDomaene_ID> </tns:linie_ID></pre>
Source	<pre><xs:element name="linie_ID" type="tns:Linie_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:Fahrt_ID_Type` / `tns:fahrtNummer`

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:ReferenceNumberThree				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<pre><xs:element name="fahrtNummer" type="tns:ReferenceNumberThree"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element `tns:Fahrt_ID_Type` / `tns:fahrtBetreiber_ID`

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="fahrtBetreiber_ID" type="tns:Organisation_ID"/></pre>				

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Element **tns:efsviaortsliste_Type** / **tns:efsviaort_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2						
Diagram							
Type	tns:Ort_ID_Type						
Properties	<table> <tr><td>content:</td><td>complex</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>3</td></tr> </table>	content:	complex	minOccurs:	0	maxOccurs:	3
content:	complex						
minOccurs:	0						
maxOccurs:	3						
Model	ortTyp , ortNummer , ortDomaene_ID						
Children	ortDomaene_ID, ortNummer, ortTyp						
Instance	<pre><tns:efsviaort_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:efsviaort_ID></pre>						
Source	<pre><xs:element name="efsviaort_ID" type="ion:Ort_ID_Type" minOccurs="0" maxOccurs="3"/></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd						


Element **tns:TX_PP_Type** / **tns:ppLeistungsPreis**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:Amount65535				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:Amount65535 				
Properties	<table> <tr><td>content:</td><td>simple</td></tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr><td>maxInclusive</td><td>65535</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="ppLeistungsPreis" type="tns:Amount65535"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				


Element **tns:TX_PP_Type** / **tns:ppMehrwertsteuer**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:INT2				
Properties	<table> <tr><td>content:</td><td>simple</td></tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr><td>maxInclusive</td><td>65535</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="ppMehrwertsteuer" type="ct:INT2"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				


Element **tns:TX_BERLOG_Type** / **tns:berLogLinieVariante_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:LinieVariante_ID_Type
Properties	content: complex
Model	tns:variantenNummer , tns:linie_ID
Children	tns:linie_ID, tns:variantenNummer
Instance	<pre><tns:berLogLinieVariante_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:variantenNummer>{1,1}</tns:variantenNummer> <tns:linie_ID>{1,1}</tns:linie_ID> </tns:berLogLinieVariante_ID></pre>
Source	<pre><xs:element name="berLogLinieVariante_ID" type="tns:LinieVariante_ID_Type"/></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_BERLOG_Type** / **tns:berLogFahrt_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Fahrt_ID_Type
Properties	content: complex
Model	tns:fahrtNummer , tns:fahrtBetreiber_ID
Children	tns:fahrtBetreiber_ID, tns:fahrtNummer
Instance	<pre><tns:berLogFahrt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:fahrtNummer>{1,1}</tns:fahrtNummer> <tns:fahrtBetreiber_ID>{1,1}</tns:fahrtBetreiber_ID> </tns:berLogFahrt_ID></pre>
Source	<pre><xs:element name="berLogFahrt_ID" type="tns:Fahrt_ID_Type"/></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_LOG_Type** / **tns:logTransaktionsoperator_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="logTransaktionsoperator_ID" type="ka:Organisation_ID"/></pre>				

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---


Element **tns:TX_LOG_Type / tns:logTransaktionsZeitpunkt_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="logTransaktionsZeitpunkt_ID" type="ct:DateTimeCompact" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element **tns:TX_LOG_Type / tns:logTransaktionsort_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:logTransaktionsort_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:logTransaktionsort_ID></pre>
Source	<code><xs:element name="logTransaktionsort_ID" type="ion:Ort_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_LOG_Type / tns:logTransaktionsTyp_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:NmTransaktionsTyp_CODE		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:NmTransaktionsTyp_CODE		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Ausgabetransaktion - Applikation oder Berechtigung
	enumeration	2	Entwertung
	enumeration	11	CI


	enumeration	12	CO
	enumeration	15	Einzahlung - Berechtigung
	enumeration	16	CI nach Fahrtfortsetzung
	enumeration	18	NTP Aendern
	enumeration	20	Sperrtransaktion Applikation oder Berechtigung
	enumeration	21	Entsperrtransaktion Applikation oder Berechtigung
	enumeration	22	BI
	enumeration	23	BO
	enumeration	24	INOUT
	enumeration	25	Rueckgabetransaktion - Applikation oder Berechtigung
	enumeration	27	Kontrolle
	enumeration	28	Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung (POB/PEB/WEB)
	enumeration	29	Belastungstransaktion WEB mit Autoload
	enumeration	30	WEB Buchung(Laden/Entladen)
	enumeration	31	WEB-CI mit Autoload
	enumeration	32	WEB-CO mit Autoload
	enumeration	33	Kontrolle nach CI; BIBO oder Entwertung
	enumeration	34	Check personal (CPKontrolldatensatz fuer Kontrollterminal)
	enumeration	35	Auto CO
	enumeration	36	manuelles CO (nachtraeglich durch den Nutzer)
	enumeration	37	Ausgabe EFS ueber Aktionsliste
	enumeration	38	Entsperrtransaktion EFS ueber Aktionsliste
	enumeration	39	Rueckgabetransaktion EFS ueber Aktionsliste
Source	<xs:element name="logTransaktionsTyp_ID" type="ion:NmTransaktionsTyp_CODE" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TX_AFBLOG_Type / tns:afbLogFahrgastTyp

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Kundentyp_CODE_Type		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:Kundentyp_CODE_Type 		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	Erwachsener
	enumeration	2	Kind
	enumeration	3	Student
	enumeration	5	Behinderter
	enumeration	6	Sehbehinderter
	enumeration	7	Hoergeschaedigter
	enumeration	8	Arbeitsloser/Sozialhilfeempfaenger
	enumeration	9	Personal

	enumeration	10	Militaeranhehoeriger
	enumeration	19	Schueler
	enumeration	20	Azubi
	enumeration	25	Senior
Source	<xs:element name="afbLogFahrgastTyp" type="tns:Kudentyp_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TX_AFBLOG_Type / tns:afbLogVerkehrsmittelart

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Transportserviceart_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:TransportTypeCode_Type<ul style="list-style-type: none">• tns:Transportserviceart_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
Source	<xs:element name="afbLogVerkehrsmittelart" type="tns:Transportserviceart_CODE_Type"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TX_AFBLOG_Type / tns:afbLogServiceKlasse

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:ServiceKlasse_CODE_Type		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:ServiceKlasse_CODE_Type 		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	1. Klasse
	enumeration	2	2. Klasse
Source	<xs:element name="afbLogServiceKlasse" type="tns:ServiceKlasse_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TX_AFBLOG_Type / tns:afbLogDynamischerRabattParameter

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:OctetString4		
Properties	content:	simple	
Facets	length	4	

Source	<code><xs:element name="afbLogDynamischerRabattParameter" type="ct:OctetString4"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_AFBLOG_Type** / **tns:afbLogMitnahme**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Mitnahme_Type
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	tns:mitnahmeTyp , tns:mitnahmeAnzahl
Children	tns:mitnahmeAnzahl, tns:mitnahmeTyp
Instance	<pre><tns:afbLogMitnahme xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:mitnahmeTyp>{1,1}</tns:mitnahmeTyp> <tns:mitnahmeAnzahl>{1,1}</tns:mitnahmeAnzahl> </tns:afbLogMitnahme></pre>
Source	<code><xs:element name="afbLogMitnahme" type="tns:Mitnahme_Type" minOccurs="1" maxOccurs="unbounded"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_AFBLOG_Type** / **tns:txberlog**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_BERLOG_Type
Properties	content: complex
Model	tns:berLogLinieVariante_ID , tns:berLogFahrt_ID
Children	tns:berLogFahrt_ID, tns:berLogLinieVariante_ID
Instance	<pre><tns:txberlog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:berLogLinieVariante_ID>{1,1}</tns:berLogLinieVariante_ID> <tns:berLogFahrt_ID>{1,1}</tns:berLogFahrt_ID> </tns:txberlog></pre>
Source	<code><xs:element name="txberlog" type="tns:TX_BERLOG_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_AFBLOG_Type** / **tns:txlog**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	

Type	tns:TX_LOG_Type
Properties	content: complex
Model	tns:logTransaktionsoperator_ID , tns:logTransaktionsZeitpunkt_ID , tns:logTransaktionsort_ID , tns:logTransaktionsTyp_ID
Children	tns:logTransaktionsTyp_ID , tns:logTransaktionsZeitpunkt_ID , tns:logTransaktionsoperator_ID , tns:logTransaktionsort_ID
Instance	<pre><tns:txlog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:logTransaktionsoperator_ID>{1,1}</tns:logTransaktionsoperator_ID> <tns:logTransaktionsZeitpunkt_ID>{1,1}</tns:logTransaktionsZeitpunkt_ID> <tns:logTransaktionsort_ID>{1,1}</tns:logTransaktionsort_ID> <tns:logTransaktionsTyp_ID>{1,1}</tns:logTransaktionsTyp_ID> </tns:txlog></pre>
Source	<code><xs:element name="txlog" type="tns:TX_LOG_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TX_EFSLOG_Type / tns:efsFahrgastTyp

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Kundentyp_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:Kundentyp_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	Erwachsener
	enumeration	2	Kind
	enumeration	3	Student
	enumeration	5	Behinderter
	enumeration	6	Sehbehinderter
	enumeration	7	Hoergeschaedigter
	enumeration	8	Arbeitsloser/Sozialhilfeempfaenger
	enumeration	9	Personal
	enumeration	10	Militaeranhehoeriger
	enumeration	19	Schueler
	enumeration	20	Azubi
	enumeration	25	Senior
Source	<xs:element name="efsFahrgastTyp" type="tns:Kundentyp_CODE_Type"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TX_EFSLOG_Type / tns:efsVerkehrsmittelKategorie

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TransportmittelKategorie_CODE_Type
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TransportTypeCode_Type tns:TransportmittelKategorie_CODE_Type

Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="efsVerkehrsmittelKategorie" type="tns:TransportmittelKategorie_CODE_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_EFSLOG_Type** / **tns:efsLogServiceKlasse**

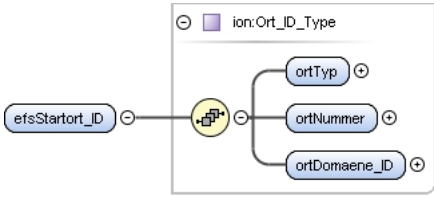
Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram	<pre> classDiagram class efsLogServiceKlasse class tnsServiceKlasse_CODE_Type["tns:ServiceKlasse_CODE_Type"] efsLogServiceKlasse -- > tnsServiceKlasse_CODE_Type </pre>		
Type	tns:ServiceKlasse_CODE_Type		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:ServiceKlasse_CODE_Type 		
Properties	content: simple		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	1. Klasse
	enumeration	2	2. Klasse
Source	<code><xs:element name="efsLogServiceKlasse" type="tns:ServiceKlasse_CODE_Type"/></code>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element **tns:TX_EFSLOG_Type** / **tns:efsServiceKlasseExtra**

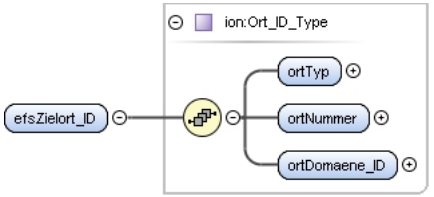
Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram	<pre> classDiagram class efsServiceKlasseExtra class tnsServiceKlasseExtra_CODE_Type["tns:ServiceKlasseExtra_CODE_Type"] efsServiceKlasseExtra -- > tnsServiceKlasseExtra_CODE_Type </pre>		
Type	tns:ServiceKlasseExtra_CODE_Type		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:ServiceKlasseExtra_CODE_Type 		
Properties	content: simple		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	Fruehstueck
	enumeration	2	Mittagessen
	enumeration	3	Abendessen
	enumeration	4	Buffet
	enumeration	5	Imbiss
Source	<code><xs:element name="efsServiceKlasseExtra" type="tns:ServiceKlasseExtra_CODE_Type"/></code>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element **tns:TX_EFSLOG_Type** / **tns:efsStartort_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:efsStartort_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:efsStartort_ID></pre>
Source	<pre><xs:element name="efsStartort_ID" type="ion:Ort_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TX_EFSLOG_Type / tns:efsZielort_ID

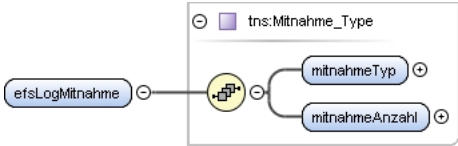
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:efsZielort_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:efsZielort_ID></pre>
Source	<pre><xs:element name="efsZielort_ID" type="ion:Ort_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TX_EFSLOG_Type / tns:efsViaOrte_IDs

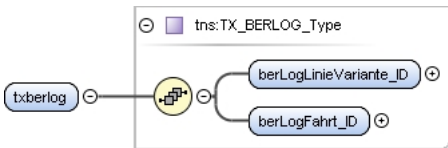
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:EFSViaOrtsListe_Type
Properties	content: complex
Model	tns:efsViaort_ID{0,3}
Children	tns:efsViaort_ID
Instance	<pre><tns:efsViaOrte_IDs xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:efsViaort_ID>{0,3}</tns:efsViaort_ID> </tns:efsViaOrte_IDs></pre>
Source	<pre><xs:element name="efsViaOrte_IDs" type="tns:EFSViaOrtsListe_Type"/></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

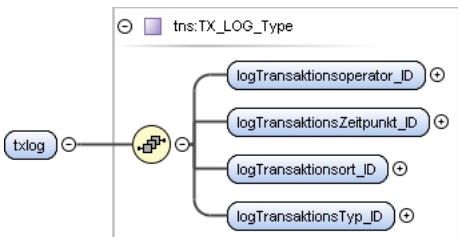
Element **tns:TX_EFSLOG_Type** / **tns:efsLogMitnahme**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Mitnahme_Type
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	tns:mitnahmeTyp, tns:mitnahmeAnzahl
Children	tns:mitnahmeAnzahl, tns:mitnahmeTyp
Instance	<pre><tns:efsLogMitnahme xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:mitnahmeTyp>{1,1}</tns:mitnahmeTyp> <tns:mitnahmeAnzahl>{1,1}</tns:mitnahmeAnzahl> </tns:efsLogMitnahme></pre>
Source	<pre><xs:element name="efsLogMitnahme" type="tns:Mitnahme_Type" minOccurs="1" maxOccurs="unbounded" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_EFSLOG_Type** / **tns:txberlog**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_BERLOG_Type
Properties	content: complex
Model	tns:berLogLinieVariante_ID, tns:berLogFahrt_ID
Children	tns:berLogFahrt_ID, tns:berLogLinieVariante_ID
Instance	<pre><tns:txberlog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:berLogLinieVariante_ID>{1,1}</tns:berLogLinieVariante_ID> <tns:berLogFahrt_ID>{1,1}</tns:berLogFahrt_ID> </tns:txberlog></pre>
Source	<pre><xs:element name="txberlog" type="tns:TX_BERLOG_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TX_EFSLOG_Type** / **tns:txlog**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	

Type	tns:TX_LOG_Type
Properties	content: complex
Model	tns:logTransaktionsoperator_ID , tns:logTransaktionsZeitpunkt_ID , tns:logTransaktionsort_ID , tns:logTransaktionsTyp_ID
Children	tns:logTransaktionsTyp_ID , tns:logTransaktionsZeitpunkt_ID , tns:logTransaktionsoperator_ID , tns:logTransaktionsort_ID
Instance	<pre><tns:txlog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:logTransaktionsoperator_ID>{1,1}</tns:logTransaktionsoperator_ID> <tns:logTransaktionsZeitpunkt_ID>{1,1}</tns:logTransaktionsZeitpunkt_ID> <tns:logTransaktionsort_ID>{1,1}</tns:logTransaktionsort_ID> <tns:logTransaktionsTyp_ID>{1,1}</tns:logTransaktionsTyp_ID> </tns:txlog></pre>
Source	<code><xs:element name="txlog" type="tns:TX_LOG_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

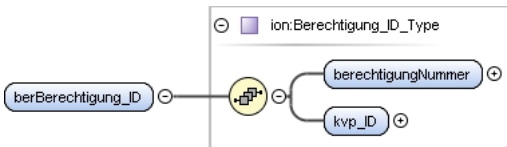
Element tns:TX_ABKEY_Type / tns:berAbleitungsdaten

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:OctetString10
Properties	content: simple
Facets	length 10
Source	<code><xs:element name="berAbleitungsdaten" type="ct:OctetString10" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASBER_Type / tns:prodProdukt_ID


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<pre><tns:prodProdukt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID></pre>
Source	<code><xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASBER_Type / tns:berBerechtigung_ID


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex

Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<code><xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd


Element **tns:TXASBER_Type** / **tns:transSelektionKriterien**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SelektionKriterien_Type
Type hierarchy	<ul style="list-style-type: none"> xs:dateTime tns:DateTime tns:SelektionKriterien_Type
Properties	content: simple
Source	<code><xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXANLN_Type** / **tns:prodAbrechnungsverfahren**


Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Abrechnungsverfahren_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:Abrechnungsverfahren_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Pre-Paid
	enumeration	2	Post-Paid
	enumeration	3	Trip-Paid
Source	<xs:element name="prodAbrechnungsverfahren" type="ion:Abrechnungsverfahren_CODE_Type" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element **tns:TXANLN_Type** / **tns:berBezahlArt**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Bezahlart_CODE_Type
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:Bezahlart_CODE_Type

Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0
Source	<xs:element name="berBezahlArt" type="ion:Bezahlart_CODE_Type"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	


Element **tns:TXANLN_Type** / **tns:prodProdukt_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2	
Diagram		
Type	tns:EFMProdukt_ID_Type	
Properties	content:	complex
Model	produktNummer{0,1} , organisationID	
Children	organisationID, produktNummer	
Instance	<pre><tns:prodProdukt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID></pre>	
Source	<xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	

Element **tns:TXANLN_Type** / **tns:berBerechtigung_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2	
Diagram		
Type	tns:Berechtigung_ID_Type	
Properties	content:	complex
Model	berechtigungNummer , kvp_ID	
Children	berechtigungNummer, kvp_ID	
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>	
Source	<xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd	

Element **tns:TXANLN_Type** / **tns:transSelektionKriterien**

Namespace	http://vdv/ka/kvp-dl-pv/2	
Diagram		
Type	tns:SelektionKriterien_Type	
Type hierarchy	<ul style="list-style-type: none"> xs:dateTime 	

	<ul style="list-style-type: none"> • tns:DateTime • tns:SelektionKriterien_Type
Properties	content: simple
Source	<code><xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXANLN_Type / tns:txpp

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_PP_Type
Properties	content: complex
Model	tns:ppLeistungsPreis, tns:ppMehrwertsteuer
Children	tns:ppLeistungsPreis, tns:ppMehrwertsteuer
Instance	<pre><tns:txpp xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:ppLeistungsPreis>{1,1}</tns:ppLeistungsPreis> <tns:ppMehrwertsteuer>{1,1}</tns:ppMehrwertsteuer> </tns:txpp></pre>
Source	<code><xs:element name="txpp" type="tns:TX_PP_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXANLN_Type / tns:txafblog


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_AFBLOG_Type
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	tns:afbLogFahrgastTyp, tns:afbLogVerkehrsmittelart, tns:afbLogServiceKlasse, tns:afbLogDynamischerRabattParameter, tns:afbLogMitnahme+, tns:txberlog, tns:txlog
Children	tns:afbLogDynamischerRabattParameter, tns:afbLogFahrgastTyp, tns:afbLogMitnahme, tns:afbLogServiceKlasse, tns:afbLogVerkehrsmittelart, tns:txberlog, tns:txlog
Instance	<pre><tns:txafblog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:afbLogFahrgastTyp>{1,1}</tns:afbLogFahrgastTyp> <tns:afbLogVerkehrsmittelart>{1,1}</tns:afbLogVerkehrsmittelart> <tns:afbLogServiceKlasse>{1,1}</tns:afbLogServiceKlasse> <tns:afbLogDynamischerRabattParameter>{1,1}</tns:afbLogDynamischerRabattParameter></pre>

	<pre> <tns:afbLogMitnahme>{1,unbounded}</tns:afbLogMitnahme> <tns:txberlog>{1,1}</tns:txberlog> <tns:txlog>{1,1}</tns:txlog> </tns:txafblog> </pre>
Source	<code><xs:element name="txafblog" type="tns:TX_AFBLOG_Type" minOccurs="1" maxOccurs="unbounded"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXAUSEFS_Type** / **tns:prodAbrechnungsverfahren**

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Abrechnungsverfahren_CODE_Type		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:Abrechnungsverfahren_CODE_Type 		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Pre-Paid
	enumeration	2	Post-Paid
	enumeration	3	Trip-Paid
Source	<code><xs:element name="prodAbrechnungsverfahren" type="ion:Abrechnungsverfahren_CODE_Type"/></code>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element **tns:TXAUSEFS_Type** / **tns:berBezahlMittel**

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:OctetString10		
Properties	content:	simple	
Facets	length	10	
Source	<xs:element name="berBezahlMittel" type="ct:OctetString10"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element **tns:TXAUSEFS_Type** / **tns:berBezahlArt**

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Bezahlart_CODE_Type		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:Bezahlart_CODE_Type 		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	

Source	<code><xs:element name="berBezahlArt" type="ion:Bezahlart_CODE_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXAUSEFS_Type` / `tns:prodProdukt_ID`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1}, organisationID
Children	organisationID, produktNummer
Instance	<pre><tns:prodProdukt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID></pre>
Source	<code><xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXAUSEFS_Type` / `tns:berBerechtigung_ID`

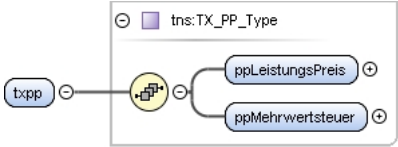
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer, kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<code><xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXAUSEFS_Type` / `tns:transSelektionKriterien`

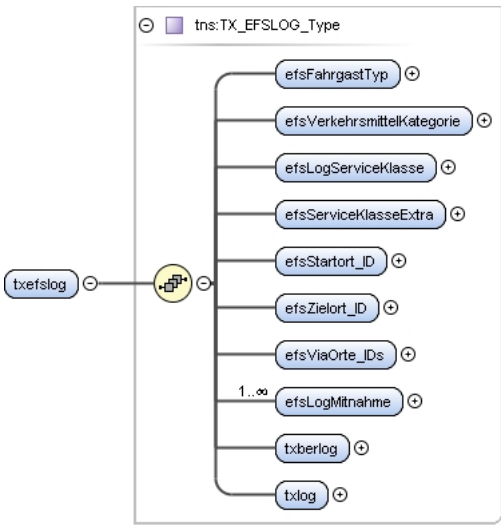
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SelektionKriterien_Type
Type hierarchy	<ul style="list-style-type: none"> xs:dateTime tns:DateTime tns:SelektionKriterien_Type
Properties	content: simple
Source	<code><xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type"/></code>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Element **tns:TXAUSEFS_Type** / **tns:txpp**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	 The diagram shows a tree structure for the tns:TX_PP_Type element. The root node is txpp , which contains two child elements: ppLeistungsPreis and ppMehrwertsteuer .
Type	tns:TX_PP_Type
Properties	content: complex
Model	tns:ppLeistungsPreis , tns:ppMehrwertsteuer
Children	tns:ppLeistungsPreis, tns:ppMehrwertsteuer
Instance	<pre><tns:txpp xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:ppLeistungsPreis>{1,1}</tns:ppLeistungsPreis> <tns:ppMehrwertsteuer>{1,1}</tns:ppMehrwertsteuer> </tns:txpp></pre>
Source	<pre><xs:element name="txpp" type="tns:TX_PP_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXAUSEFS_Type** / **tns:txefslog**


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	 The diagram shows a tree structure for the tns:TX_EFSLOG_Type element. The root node is txefslog , which contains several child elements: efsFahrgastTyp , efsVerkehrsmittelKategorie , efsLogServiceKlasse , efsServiceKlasseExtra , efsStartort_ID , efsZielort_ID , efsViaOrte_IDs , efsLogMitnahme (with a cardinality of 1..∞), txberlog , and txlog .
Type	tns:TX_EFSLOG_Type
Properties	content: complex minOccurs: 1 maxOccurs: unbounded
Model	tns:efsFahrgastTyp , tns:efsVerkehrsmittelKategorie , tns:efsLogServiceKlasse , tns:efsServiceKlasseExtra , tns:efsStartort_ID , tns:efsZielort_ID , tns:efsViaOrte_IDs , tns:efsLogMitnahme+ , tns:txberlog , tns:txlog
Children	tns:efsFahrgastTyp, tns:efsLogMitnahme, tns:efsLogServiceKlasse, tns:efsServiceKlasseExtra, tns:efsStartort_ID, tns:efsVerkehrsmittelKategorie, tns:efsViaOrte_IDs, tns:efsZielort_ID, tns:txberlog, tns:txlog
Instance	<pre><tns:txefslog xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:efsFahrgastTyp>{1,1}</tns:efsFahrgastTyp> <tns:efsVerkehrsmittelKategorie>{1,1}</tns:efsVerkehrsmittelKategorie> <tns:efsLogServiceKlasse>{1,1}</tns:efsLogServiceKlasse> <tns:efsServiceKlasseExtra>{1,1}</tns:efsServiceKlasseExtra> <tns:efsStartort_ID>{1,1}</tns:efsStartort_ID> <tns:efsZielort_ID>{1,1}</tns:efsZielort_ID> <tns:efsViaOrte_IDs>{1,1}</tns:efsViaOrte_IDs></pre>

	<pre> <tns:efsLogMitnahme>{1,unbounded}</tns:efsLogMitnahme> <tns:txberlog>{1,1}</tns:txberlog> <tns:txlog>{1,1}</tns:txlog> </tns:txefslog> </pre>
Source	<code><xs:element name="txefslog" type="tns:TX_EFSLOG_Type" minOccurs="1" maxOccurs="unbounded" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

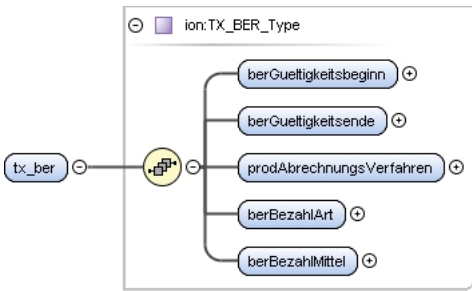
Element **tns:TXADM_Type** / **tns:transMediennummer**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:OctetString10
Properties	content: simple
Facets	length 10
Source	<code><xs:element name="transMediennummer" type="ct:OctetString10" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXADM_Type** / **tns:transappInstanz_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<pre> <tns:transappInstanz_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </tns:transappInstanz_ID> </pre>
Source	<code><xs:element name="transappInstanz_ID" type="ion:NmApplikationInstanz_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXABER_Type** / **tns:tx_ber**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_BER_Type
Properties	content: complex
Model	berGueltigkeitsbeginn , berGueltigkeitsende , prodAbrechnungsVerfahren , berBezahlArt , berBezahlMittel

Children	berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren
Instance	<pre><tns:tx_ber xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berGueltigkeitsbeginn>{1,1}</berGueltigkeitsbeginn> <berGueltigkeitsende>{1,1}</berGueltigkeitsende> <prodAbrechnungsVerfahren>{1,1}</prodAbrechnungsVerfahren> <berBezahlArt>{1,1}</berBezahlArt> <berBezahlMittel>{1,1}</berBezahlMittel> </tns:tx_ber></pre>
Source	<code><xs:element name="tx_ber" type="ion:TX_BER_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXABER_Type / tns:berechtigungTarifbereich

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<code><xs:element name="berechtigungTarifbereich" type="xs:hexBinary" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXABER_Type / tns:berechtigungTarifbereichZusatz

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	xs:hexBinary
Properties	content: simple minOccurs: 0
Source	<code><xs:element name="berechtigungTarifbereichZusatz" type="xs:hexBinary" minOccurs="0" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXABER_Type / tns:ausgabeTransaktionBerechtigung

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:ausgabeTransaktionBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:ausgabeTransaktionBerechtigung></pre>
Source	<code><xs:element name="ausgabeTransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXABER_Type / tns:berNmTransaktionMAC

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluesel_ID , berMAC_KVP_Schluesel_ID
Children	berMAC_KVP, berMAC_KVP_Schluesel_ID, berMAC_PV, berMAC_PV_Schluesel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluesel_ID>{1,1}</berMAC_PV_Schluesel_ID> <berMAC_KVP_Schluesel_ID>{1,1}</berMAC_KVP_Schluesel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXEBER_Type / tns:fahrttransaktion

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:fahrttransaktion xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:fahrttransaktion></pre>
Source	<code><xs:element name="fahrttransaktion" type="ion:Transaktionsdatensatz_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXEBER_Type / tns:berNmTransaktionMAC

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluesel_ID , berMAC_KVP_Schluesel_ID
Children	berMAC_KVP, berMAC_KVP_Schluesel_ID, berMAC_PV, berMAC_PV_Schluesel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> </tns:berNmTransaktionMAC></pre>

	<pre><berMAC_PV_Schluesssel_ID>{1,1}</berMAC_PV_Schluesssel_ID> <berMAC_KVP_Schluesssel_ID>{1,1}</berMAC_KVP_Schluesssel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXAEBER_Type** / **tns:tx_ber**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_BER_Type
Properties	content: complex
Model	berGueltigkeitsbeginn , berGueltigkeitsende , prodAbrechnungsVerfahren , berBezahlArt , berBezahlMittel
Children	berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren
Instance	<pre><tns:tx_ber xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berGueltigkeitsbeginn>{1,1}</berGueltigkeitsbeginn> <berGueltigkeitsende>{1,1}</berGueltigkeitsende> <prodAbrechnungsVerfahren>{1,1}</prodAbrechnungsVerfahren> <berBezahlArt>{1,1}</berBezahlArt> <berBezahlMittel>{1,1}</berBezahlMittel> </tns:tx_ber></pre>
Source	<code><xs:element name="tx_ber" type="ion:TX_BER_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXAEBER_Type** / **tns:berechtigungTarifbereich**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<code><xs:element name="berechtigungTarifbereich" type="xs:hexBinary"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXAENBER_Type** / **tns:fahrttransaktion**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:fahrttransaktion xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:fahrttransaktion></pre>

Source	<code><xs:element name="fahrttransaktion" type="ion:Transaktionsdatensatz_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXAENBER_Type` / `tns:berNmTransaktionMAC`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	<code>tns:berNmTransaktionMAC_Type</code>
Properties	content: complex
Model	<code>berMAC_PV</code> , <code>berMAC_KVP</code> , <code>berMAC_PV_Schlüssel_ID</code> , <code>berMAC_KVP_Schlüssel_ID</code>
Children	<code>berMAC_KVP</code> , <code>berMAC_KVP_Schlüssel_ID</code> , <code>berMAC_PV</code> , <code>berMAC_PV_Schlüssel_ID</code>
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schlüssel_ID>{1,1}</berMAC_PV_Schlüssel_ID> <berMAC_KVP_Schlüssel_ID>{1,1}</berMAC_KVP_Schlüssel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXRBER_Type` / `tns:ruecknahmeTransaktionBerechtigung`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	<code>tns:Transaktionsdatensatz_Type</code>
Properties	content: complex
Model	<code>Transaktionsdaten</code>
Children	<code>Transaktionsdaten</code>
Instance	<pre><tns:ruecknahmeTransaktionBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:ruecknahmeTransaktionBerechtigung></pre>
Source	<code><xs:element name="ruecknahmeTransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXRBER_Type` / `tns:berNmTransaktionMAC`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	

Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluessel_ID , berMAC_KVP_Schluessel_ID
Children	berMAC_KVP, berMAC_KVP_Schluessel_ID, berMAC_PV, berMAC_PV_Schluessel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluessel_ID>{1,1}</berMAC_PV_Schluessel_ID> <berMAC_KVP_Schluessel_ID>{1,1}</berMAC_KVP_Schluessel_ID> </tns:berNmTransaktionMAC></pre>
Source	<pre><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAMBER_Type / tns:tx_abkey

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_ABKEY_Type
Properties	content: complex
Model	tns:berAbleitungsdaten
Children	tns:berAbleitungsdaten
Instance	<pre><tns:tx_abkey xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:berAbleitungsdaten>{1,1}</tns:berAbleitungsdaten> </tns:tx_abkey></pre>
Source	<pre><xs:element name="tx_abkey" type="tns:TX_ABKEY_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXEMBER_Type / tns:tx_abkey


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:TX_ABKEY_Type
Properties	content: complex
Model	tns:berAbleitungsdaten
Children	tns:berAbleitungsdaten
Instance	<pre><tns:tx_abkey xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:berAbleitungsdaten>{1,1}</tns:berAbleitungsdaten> </tns:tx_abkey></pre>
Source	<pre><xs:element name="tx_abkey" type="tns:TX_ABKEY_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXRMBER_Type / tns:tx_abkey

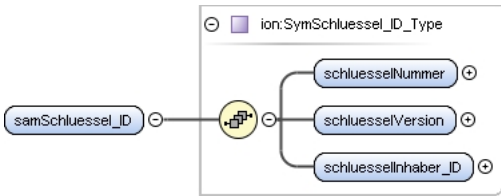
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	

Type	tns:TX_ABKEY_Type
Properties	content: complex
Model	tns:berAbleitungsdaten
Children	tns:berAbleitungsdaten
Instance	<pre><tns:tx_abkey xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:berAbleitungsdaten>{1,1}</tns:berAbleitungsdaten> </tns:tx_abkey></pre>
Source	<code><xs:element name="tx_abkey" type="tns:TX_ABKEY_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASKON_Type / tns:samSAM_ID


Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:SAM_ID_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree tns:SAM_ID_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<code><xs:element name="samSAM_ID" type="ion:SAM_ID_Type" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element tns:TXASKON_Type / tns:samSchluessel_ID


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><tns:samSchluessel_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:samSchluessel_ID></pre>
Source	<code><xs:element name="samSchluessel_ID" type="ion:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASKON_Type / tns:samLoadKeyZaehler


Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Diagram	
Type	tns:INT4
Properties	content: simple
Facets	<div>maxInclusive 4294967295</div> <div>minInclusive 0</div>
Source	<code><xs:element name="samLoadKeyZaehler" type="ct:INT4" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

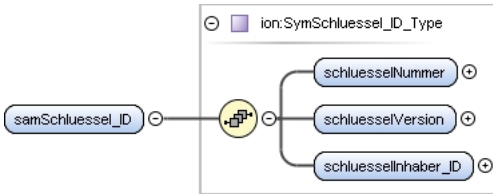
Element tns:TXASKON_Type / tns:samNutzungsLimitNeu

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:INT4
Properties	content: simple
Facets	<div>maxInclusive 4294967295</div> <div>minInclusive 0</div>
Source	<code><xs:element name="samNutzungsLimitNeu" type="ct:INT4" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXUEBERKON_Type / tns:samSAM_ID


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SAM_ID_Type
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT3 <ul style="list-style-type: none"> tns:ReferenceNumberThree <ul style="list-style-type: none"> tns:SAM_ID_Type
Properties	content: simple
Facets	<div>maxInclusive 16777215</div> <div>minInclusive 0</div>
Source	<code><xs:element name="samSAM_ID" type="ion:SAM_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXUEBERKON_Type / tns:samSchluessel_ID


Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex

Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><tns:samSchluessel_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </tns:samSchluessel_ID></pre>
Source	<code><xs:element name="samSchluessel_ID" type="ion:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

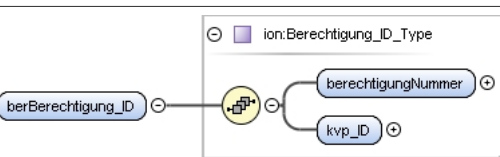
Element **tns:TXUEBERKON_Type** / **tns:samLoadKeyZaehler**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:INT4				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<code><xs:element name="samLoadKeyZaehler" type="ct:INT4" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

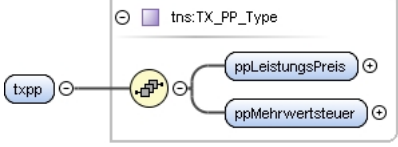
Element **tns:TXUEBERKON_Type** / **tns:samNutzungsLimitGen**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:INT4				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<code><xs:element name="samNutzungsLimitGen" type="ct:INT4" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				


Element **tns:TXBEKODL_Type** / **tns:berBerechtigung_ID**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<code><xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

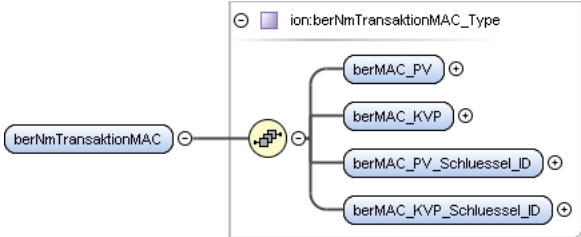
Element `tns:TXBEKODL_Type` / `tns:txpp`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	 The diagram shows a box labeled 'tns:TX_PP_Type' containing a yellow circle with a plus sign. This circle is connected to two blue rounded rectangles: 'ppLeistungsPreis' and 'ppMehrwertsteuer'. Outside the box, a blue rounded rectangle labeled 'txpp' is connected to the yellow circle.
Type	tns:TX_PP_Type
Properties	content: complex
Model	tns:ppLeistungsPreis , tns:ppMehrwertsteuer
Children	tns:ppLeistungsPreis, tns:ppMehrwertsteuer
Instance	<pre><tns:txpp xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <tns:ppLeistungsPreis>{1,1}</tns:ppLeistungsPreis> <tns:ppMehrwertsteuer>{1,1}</tns:ppMehrwertsteuer> </tns:txpp></pre>
Source	<pre><xs:element name="txpp" type="tns:TX_PP_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXBEKODL_Type` / `tns:fahrttransaktion`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	 The diagram shows a box labeled 'ion:Transaktionsdatensatz_Type' containing a yellow circle with a plus sign. This circle is connected to a blue rounded rectangle labeled 'Transaktionsdaten'. Outside the box, a blue rounded rectangle labeled 'fahrttransaktion' is connected to the yellow circle.
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex maxOccurs: unbounded
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:fahrttransaktion xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:fahrttransaktion></pre>
Source	<pre><xs:element name="fahrttransaktion" type="ion:Transaktionsdatensatz_Type" maxOccurs="unbounded"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXBEKODL_Type` / `tns:berNmTransaktionMAC`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	 The diagram shows a box labeled 'ion:berNmTransaktionMAC_Type' containing a yellow circle with a plus sign. This circle is connected to four blue rounded rectangles: 'berMAC_PV', 'berMAC_KVP', 'berMAC_PV_Schlüssel_ID', and 'berMAC_KVP_Schlüssel_ID'. Outside the box, a blue rounded rectangle labeled 'berNmTransaktionMAC' is connected to the yellow circle.
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schlüssel_ID , berMAC_KVP_Schlüssel_ID
Children	berMAC_KVP, berMAC_KVP_Schlüssel_ID, berMAC_PV, berMAC_PV_Schlüssel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"></pre>

	<pre> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluesssel_ID>{1,1}</berMAC_PV_Schluesssel_ID> <berMAC_KVP_Schluesssel_ID>{1,1}</berMAC_KVP_Schluesssel_ID> </tns:berNmTransaktionMAC> </pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXGKO_Type / tns:belastungstransaktionBerechtigung

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre> <tns:belastungstransaktionBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:belastungstransaktionBerechtigung> </pre>
Source	<code><xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXGKO_Type / tns:berNmTransaktionMAC

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluesssel_ID , berMAC_KVP_Schluesssel_ID
Children	berMAC_KVP, berMAC_KVP_Schluesssel_ID, berMAC_PV, berMAC_PV_Schluesssel_ID
Instance	<pre> <tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluesssel_ID>{1,1}</berMAC_PV_Schluesssel_ID> <berMAC_KVP_Schluesssel_ID>{1,1}</berMAC_KVP_Schluesssel_ID> </tns:berNmTransaktionMAC> </pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXGWEB_Type / tns:belastungstransaktionBerechtigung

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	

Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:belastungstransaktionBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:belastungstransaktionBerechtigung></pre>
Source	<code><xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXGWEB_Type / tns:berNmTransaktionMAC

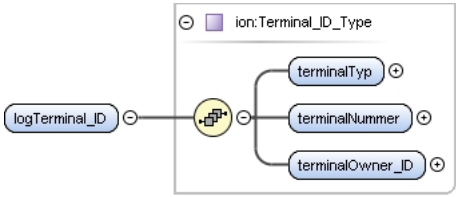
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	<pre> classDiagram class tns_berNmTransaktionMAC_Type { berMAC_PV berMAC_KVP berMAC_PV_Schlüssel_ID berMAC_KVP_Schlüssel_ID } </pre>
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schlüssel_ID , berMAC_KVP_Schlüssel_ID
Children	berMAC_KVP, berMAC_KVP_Schlüssel_ID, berMAC_PV, berMAC_PV_Schlüssel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schlüssel_ID>{1,1}</berMAC_PV_Schlüssel_ID> <berMAC_KVP_Schlüssel_ID>{1,1}</berMAC_KVP_Schlüssel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWA_Type / tns:logTransaktionsOperator_ID


Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram	<pre> classDiagram class tns_logTransaktionsOperator_ID { ct:ReferenceNumberTwo } </pre>				
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element tns:TXKNAWA_Type / tns:logTerminal_ID

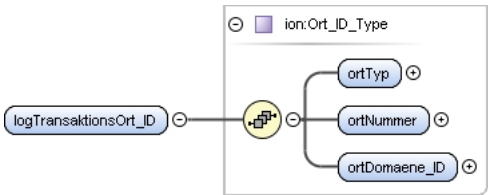
Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Diagram	
Type	tns:Terminal_ID_Type
Properties	content: complex
Model	terminalTyp , terminalNumber , terminalOwner_ID
Children	terminalNumber, terminalOwner_ID, terminalTyp
Instance	<pre><tns:logTerminal_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <terminalTyp>{1,1}</terminalTyp> <terminalNumber>{1,1}</terminalNumber> <terminalOwner_ID>{1,1}</terminalOwner_ID> </tns:logTerminal_ID></pre>
Source	<pre><xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWA_Type / tns:logTransaktionsZeitpunkt

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>2117-12-31T23:59:58</td> </tr> <tr> <td>minInclusive</td> <td>1990-01-01T00:00:00</td> </tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<pre><xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact" /></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element tns:TXKNAWA_Type / tns:logTransaktionsOrt_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNumber , ortDomaene_ID
Children	ortDomaene_ID, ortNumber, ortTyp
Instance	<pre><tns:logTransaktionsOrt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNumber>{1,1}</ortNumber> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:logTransaktionsOrt_ID></pre>
Source	<pre><xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWA_Type / tns:logValidationCode

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Diagram			
Type	tns:Validation_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:Validation_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Daten nicht authentisch
	enumeration	2	Zeitlich unguelutig
	enumeration	3	Raeumlich unguelutig
	enumeration	4	Persoenlich unguelutig (fuer personengebundene Objekte)
	enumeration	5	gesperrter SAM (nur Statische Berechtigung)
	enumeration	6	gesperrte ORG (nur Statische Berechtigung)
	enumeration	7	sym. Schluessel gesperrt oder nicht vorhanden
	enumeration	8	asym. Schuessel gesperrt oder nicht vorhanden
	enumeration	9	Status im App. Verzeichnis nicht gesetzt
	enumeration	10	Ausgabetransaktionskennung fehlt
	enumeration	11	Transportmittelkategorie abweichend vom aktuellen Verkehrsmittel
	enumeration	19	gesperrt (EN 1545-1 blocked (19))
Source	<xs:element name="logValidationCode" type="tns:Validation_CODE_Type"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TXKNAWA_Type / tns:appInstanz_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<pre><tns:appInstanz_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </tns:appInstanz_ID></pre>
Source	<code><xs:element name="appInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWB_Type / tns:logTransaktionsOperator_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:ReferenceNumberTwo

Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo
Properties	content: simple
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWB_Type / tns:logTerminal_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Terminal_ID_Type
Properties	content: complex
Model	terminalTyp , terminalNumber , terminalOwner_ID
Children	terminalNumber, terminalOwner_ID, terminalTyp
Instance	<pre><tns:logTerminal_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <terminalTyp>{1,1}</terminalTyp> <terminalNumber>{1,1}</terminalNumber> <terminalOwner_ID>{1,1}</terminalOwner_ID> </tns:logTerminal_ID></pre>
Source	<code><xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWB_Type / tns:logTransaktionsZeitpunkt

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:DateTimeCompact
Properties	content: simple
Facets	maxInclusive 2117-12-31T23:59:58
	minInclusive 1990-01-01T00:00:00
Source	<code><xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWB_Type / tns:logTransaktionsOrt_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	

Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><tns:logTransaktionsOrt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </tns:logTransaktionsOrt_ID></pre>
Source	<code><xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWB_Type / tns:logValidationCode

Namespace	http://vdv/ka/kvp-dl-pv/2		
Diagram			
Type	tns:Validation_CODE_Type		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:Validation_CODE_Type		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Daten nicht authentisch
	enumeration	2	Zeitlich ungueltig
	enumeration	3	Raeumlich ungueltig
	enumeration	4	Persoendlich ungueltig (fuer personengebundene Objekte)
	enumeration	5	gespersster SAM (nur Statische Berechtigung)
	enumeration	6	gesperrete ORG (nur Statische Berechtigung)
	enumeration	7	sym. Schluessel gesperrt oder nicht vorhanden
	enumeration	8	asym. Schuessel gesperrt oder nicht vorhanden
	enumeration	9	Status im App. Verzeichnis nicht gesetzt
	enumeration	10	Ausgabetransaktionskennung fehlt
	enumeration	11	Transportmittelkategorie abweichend vom aktuellen Verkehrsmittel
	enumeration	19	gesperret (EN 1545-1 blocked (19))
Source	<xs:element name="logValidationCode" type="tns:Validation_CODE_Type"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Element tns:TXKNAWB_Type / tns:berBerechtigung_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type

Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<code><xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXLPEB_Type` / `tns:einzahlungsbelegBerechtigung`

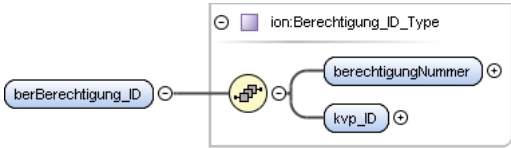
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><tns:einzahlungsbelegBerechtigung xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <Transaktionsdaten>{1,1}</Transaktionsdaten> </tns:einzahlungsbelegBerechtigung></pre>
Source	<code><xs:element name="einzahlungsbelegBerechtigung" type="ion:Transaktionsdatensatz_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXLPEB_Type` / `tns:berNmTransaktionMAC`

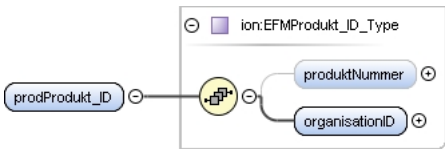
Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schluesel_ID , berMAC_KVP_Schluesel_ID
Children	berMAC_KVP, berMAC_KVP_Schluesel_ID, berMAC_PV, berMAC_PV_Schluesel_ID
Instance	<pre><tns:berNmTransaktionMAC xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluesel_ID>{1,1}</berMAC_PV_Schluesel_ID> <berMAC_KVP_Schluesel_ID>{1,1}</berMAC_KVP_Schluesel_ID> </tns:berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXSANFB_Type` / `tns:berBerechtigung_ID`

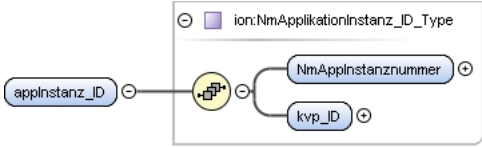
Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berBerechtigung_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berBerechtigung_ID></pre>
Source	<pre><xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSANFB_Type / tns:prodProdukt_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:EFMPProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<pre><tns:prodProdukt_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </tns:prodProdukt_ID></pre>
Source	<pre><xs:element name="prodProdukt_ID" type="ion:EFMPProdukt_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSANFA_Type / tns:appInstanz_ID

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<pre><tns:appInstanz_ID xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </tns:appInstanz_ID></pre>
Source	<pre><xs:element name="appInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXSMITB_Type** / **tns:berSperrkandidat**

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berSperrkandidat xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berSperrkandidat></pre>
Source	<pre><xs:element name="berSperrkandidat" type="ion:Berechtigung_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element **tns:TXSMITO_Type** / **tns:orgSperrkandidat**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element **tns:TXSMITS_Type** / **tns:samSperrkandidat**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:SAM_ID_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree tns:SAM_ID_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<pre><xs:element name="samSperrkandidat" type="ion:SAM_ID_Type"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element `tns:TXSFREIMITB_Type` / `tns:berSperrkandidat`

Namespace	http://vdv/ka/kvp-dl-pv/2
Diagram	
Type	tns:Berechtigung_ID_Type
Properties	content: complex
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Instance	<pre><tns:berSperrkandidat xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <berechtigungNummer>{1,1}</berechtigungNummer> <kvp_ID>{1,1}</kvp_ID> </tns:berSperrkandidat></pre>
Source	<pre><xs:element name="berSperrkandidat" type="ion:Berechtigung_ID_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element `tns:TXSFREIMITO_Type` / `tns:orgSperrkandidat`

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Element `tns:TXSFREIMITS_Type` / `tns:samSperrkandidat`

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:SAM_ID_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree tns:SAM_ID_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<pre><xs:element name="samSperrkandidat" type="ion:SAM_ID_Type"/></pre>				

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Element tns:TXADM

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Antwort auf Anfrage wegen Defektem Medium
Diagram	
Type	tns:TXADM_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXADM_Type
Properties	content: complex
Model	txbase , tns:transMediennummer , tns:transappInstanz_ID
Children	tns:transMediennummer, tns:transappInstanz_ID, txbase
Instance	<pre><tns:TXADM xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:transMediennummer>{1,1}</tns:transMediennummer> <tns:transappInstanz_ID>{1,1}</tns:transappInstanz_ID> </tns:TXADM></pre>
Source	<pre><xs:element name="TXADM" type="tns:TXADM_Type"> <xs:annotation> <xs:documentation>Element: Antwort auf Anfrage wegen Defektem Medium</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAEBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Aenderung einer Berechtigung (nicht moeglich bei EFS)
Diagram	
Type	tns:TXAEBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAEBER_Type
Properties	content: complex
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereich
Children	tns:berechtigungTarifbereich, tns:tx_ber, txbase
Instance	<pre><tns:TXAEBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:berechtigungTarifbereich>{1,1}</tns:berechtigungTarifbereich> </tns:TXAEBER></pre>

Source	<pre><xs:element name="TXAEBER" type="tns:TXAEBER_Type"> <xs:annotation> <xs:documentation>Element: Aenderung einer Berechtigung (nicht moeglich bei EFS)</ </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAENBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Aenderung der Nutzertarifparameter einer Berechtigung (nicht moeglich bei EFS)
Diagram	
Type	tns:TXAENBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAENBER_Type
Properties	content: complex
Used by	Complex Type tns:TXWEBAENDN_Type
Model	txbase , tns:fahrttransaktion , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, txbase
Instance	<pre><tns:TXAENBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:fahrttransaktion>{1,1}</tns:fahrttransaktion> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXAENBER></pre>
Source	<pre><xs:element name="TXAENBER" type="tns:TXAENBER_Type"> <xs:annotation> <xs:documentation>Element: Aenderung der Nutzertarifparameter einer Berechtigung (nicht moeglich bei EFS)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAS

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Aufforderung zum Senden
Diagram	
Type	tns:TXAS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type

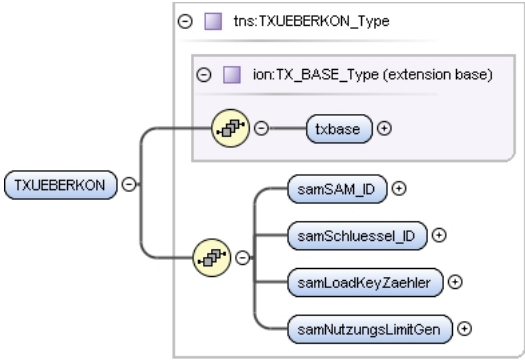
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp
Children	transSendeAuftrag, transSendeAuftragstyp, txbase
Instance	<pre><tns:TXAS xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> </tns:TXAS></pre>
Source	<pre><xs:element name="TXAS" type="ion:TXAS_Type"> <xs:annotation> <xs:documentation>Element: Aufforderung zum Senden</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASKON

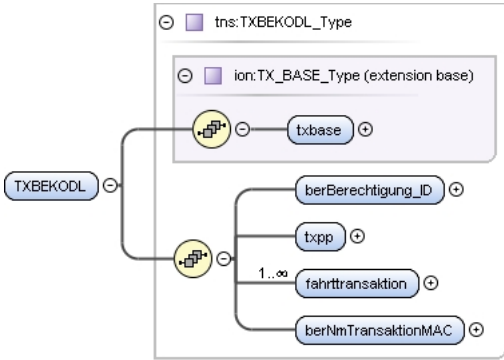
Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Anforderung eines neuen Kontingentes fuer einen PV-Schluessel im SAM
Diagram	<pre> graph TD TXASKON --> txbase TXASKON --> Choice Choice --> samSAM_ID Choice --> samSchluessel_ID Choice --> samLoadKeyZaehler Choice --> samNutzungsLimitNeu txbase --> transSendeAuftrag txbase --> transSendeAuftragstyp </pre>
Type	tns:TXASKON_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type tns:TXASKON_Type
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:samSAM_ID , tns:samSchluessel_ID , tns:samLoadKeyZaehler , tns:samNutzungsLimitNeu
Children	tns:samLoadKeyZaehler, tns:samNutzungsLimitNeu, tns:samSAM_ID, tns:samSchluessel_ID, transSendeAuftrag, transSendeAuftragstyp, txbase
Instance	<pre><tns:TXASKON xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> <tns:samSAM_ID>{1,1}</tns:samSAM_ID> <tns:samSchluessel_ID>{1,1}</tns:samSchluessel_ID> <tns:samLoadKeyZaehler>{1,1}</tns:samLoadKeyZaehler> <tns:samNutzungsLimitNeu>{1,1}</tns:samNutzungsLimitNeu> </tns:TXASKON></pre>
Source	<pre><xs:element name="TXASKON" type="tns:TXASKON_Type"> <xs:annotation> <xs:documentation>Element: Anforderung eines neuen Kontingentes fuer einen PV-Schluessel im SAM</xs:documentation> </xs:annotation> </xs:element></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Element tns:TXUEBERKON

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Genehmigung eines neuen Kontingentes fuer einen PV-Schluessel im SAM
Diagram	
Type	tns:TXUEBERKON_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXUEBERKON_Type
Properties	content: complex
Model	txbase , tns:samSAM_ID , tns:samSchluessel_ID , tns:samLoadKeyZaehler , tns:samNutzungsLimitGen
Children	tns:samLoadKeyZaehler, tns:samNutzungsLimitGen, tns:samSAM_ID, tns:samSchluessel_ID, txbase
Instance	<pre><tns:TXUEBERKON xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:samSAM_ID>{1,1}</tns:samSAM_ID> <tns:samSchluessel_ID>{1,1}</tns:samSchluessel_ID> <tns:samLoadKeyZaehler>{1,1}</tns:samLoadKeyZaehler> <tns:samNutzungsLimitGen>{1,1}</tns:samNutzungsLimitGen> </tns:TXUEBERKON></pre>
Source	<pre><xs:element name="TXUEBERKON" type="tns:TXUEBERKON_Type"> <xs:annotation> <xs:documentation>Element: Genehmigung eines neuen Kontingentes fuer einen PV-Schluessel im SAM</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXBEKODL

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Transaktionsdatensatz (vom PV an den KVP) fuer eine Belastung des Kundenkontos nach Berechnung des Leistungspreises beim PV (aufgrund uebermittelter Fahrttransaktionen vom DL).
Diagram	

Type	tns:TXBEKODL_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXBEKODL_Type
Properties	content: complex
Model	txbase , tns:berBerechtigung_ID , tns:txpp , tns:fahrttransaktion+ , tns:berNmTransaktionMAC
Children	tns:berBerechtigung_ID, tns:berNmTransaktionMAC, tns:fahrttransaktion, tns:txpp, txbase
Instance	<pre><tns:TXBEKODL xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:txpp>{1,1}</tns:txpp> <tns:fahrttransaktion>{1,unbounded}</tns:fahrttransaktion> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXBEKODL></pre>
Source	<pre><xs:element name="TXBEKODL" type="tns:TXBEKODL_Type"> <xs:annotation> <xs:documentation>Element: Transaktionsdatensatz (vom PV an den KVP) fuer eine Belastung des Kundenkontos nach Berechnung des Leistungspreises beim PV (aufgrund uebermittelter Fahrttransaktionen vom DL).</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXGKO

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Gutschrift POB/PEB nach Ruecknahme Kauf eines EFS (analog TXBEKOKVP)
Diagram	
Type	tns:TXGKO_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXGKO_Type
Properties	content: complex
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Instance	<pre><tns:TXGKO xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:belastungstransaktionBerechtigung>{1,1}</tns:belastungstransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXGKO></pre>
Source	<pre><xs:element name="TXGKO" type="tns:TXGKO_Type"> <xs:annotation> <xs:documentation>Element: Gutschrift POB/PEB nach Ruecknahme Kauf eines EFS (analog TXBEKOKVP)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXGWEB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Gutschrift WEB nach Ruecknahme eines EFS (analog TXBEKOKVP)

Diagram	
Type	tns:TXGWEB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXGWEB_Type
Properties	content: complex
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Instance	<pre><tns:TXGWEB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:belastungstransaktionBerechtigung>{1,1}</tns:belastungstransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXGWEB></pre>
Source	<pre><xs:element name="TXGWEB" type="tns:TXGWEB_Type"> <xs:annotation> <xs:documentation>Element: Gutschrift WEB nach Ruecknahme eines EFS (analog TXBEKOKVP)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXABER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Ausgabe einer Berechtigung
Diagram	
Type	tns:TXABER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXABER_Type
Properties	content: complex
Used by	Complex Types tns:TXAGBBER_Type, tns:TXANTWORT_Type
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereich , tns:berechtigungTarifbereichZusatz{0,1} , tns:ausgabeTransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:ausgabeTransaktionBerechtigung, tns:berNmTransaktionMAC, tns:berechtigungTarifbereich, tns:berechtigungTarifbereichZusatz, tns:tx_ber, txbase
Instance	<pre><tns:TXABER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:tx_ber>{1,1}</tns:tx_ber></pre>

	<pre> <tns:berechtigungTarifbereich>{1,1}</tns:berechtigungTarifbereich> <tns:berechtigungTarifbereichZusatz>{0,1}</tns:berechtigungTarifbereichZusatz> <tns:ausgabeTransaktionBerechtigung>{1,1}</tns:ausgabeTransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXABER> </pre>
Source	<pre> <xs:element name="TXABER" type="tns:TXABER_Type"> <xs:annotation> <xs:documentation>Element: Ausgabe einer Berechtigung</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXEBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Erfassung einer Berechtigungstransaktion
Diagram	
Type	tns:TXEBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXEBER_Type
Properties	content: complex
Used by	Complex Type tns:TXWEBAENDN_Type
Model	txbase , tns:fahrttransaktion , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, txbase
Instance	<pre> <tns:TXEBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:fahrttransaktion>{1,1}</tns:fahrttransaktion> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXEBER> </pre>
Source	<pre> <xs:element name="TXEBER" type="tns:TXEBER_Type"> <xs:annotation> <xs:documentation>Element: Erfassung einer Berechtigungstransaktion</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXRBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Ruecknahme einer Berechtigung
Diagram	
Type	tns:TXRBER_Type

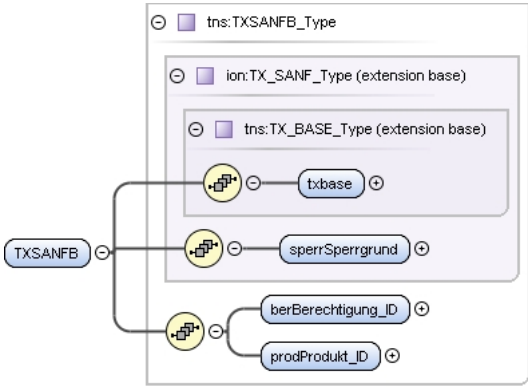
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXRBER_Type
Properties	content: complex
Used by	Complex Type tns:TXLOEBER_Type
Model	txbase , tns:ruecknahmeTransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:ruecknahmeTransaktionBerechtigung, txbase
Instance	<pre><tns:TXRBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:ruecknahmeTransaktionBerechtigung>{1,1}</tns:ruecknahmeTransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXRBER></pre>
Source	<pre><xs:element name="TXRBER" type="tns:TXRBER_Type"> <xs:annotation> <xs:documentation>Element: Ruecknahme einer Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXLPEB

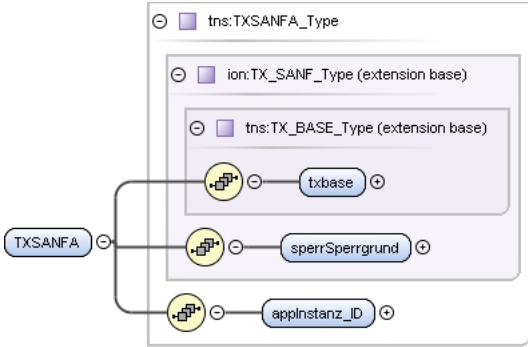
Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Laden eines PEB-Kontos
Diagram	<pre> graph TD TXLPEB --> txbase TXLPEB --> einzahlungsbelegBerechtigung TXLPEB --> berNmTransaktionMAC txbase --> ionTXBASE_Type["ion:TX_BASE_Type (extension base)"] </pre>
Type	tns:TXLPEB_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXLPEB_Type
Properties	content: complex
Used by	Complex Type tns:TXPEB_Type
Model	txbase , tns:einzahlungsbelegBerechtigung , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:einzahlungsbelegBerechtigung, txbase
Instance	<pre><tns:TXLPEB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:einzahlungsbelegBerechtigung>{1,1}</tns:einzahlungsbelegBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> </tns:TXLPEB></pre>
Source	<pre><xs:element name="TXLPEB" type="tns:TXLPEB_Type"> <xs:annotation> <xs:documentation>Element: Laden eines PEB-Kontos</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSANFB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperranforderung fuer eine Berechtigung

Diagram	
Type	tns:TXSANFB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFB_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , tns:berBerechtigung_ID , tns:prodProdukt_ID
Children	sperrSperrgrund, tns:berBerechtigung_ID, tns:prodProdukt_ID, txbase
Instance	<pre><tns:TXSANFB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> </tns:TXSANFB></pre>
Source	<pre><xs:element name="TXSANFB" type="tns:TXSANFB_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer eine Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSANFA

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperranforderung fuer eine Applikation
Diagram	
Type	tns:TXSANFA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFA_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , tns:applInstanz_ID
Children	sperrSperrgrund, tns:applInstanz_ID, txbase

Instance	<pre><tns:TXSANFA xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <tns:appInstanz_ID>{1,1}</tns:appInstanz_ID> </tns:TXSANFA></pre>
Source	<pre><xs:element name="TXSANFA" type="tns:TXSANFA_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer eine Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSAANFB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperraufhebungsanforderung fuer eine Berechtigung
Diagram	<pre> graph LR TXSAANFB_Type[tns:TXSAANFB_Type] -- extends --> TXSANFB_Type[tns:TXSANFB_Type (extension base)] TXSANFB_Type -- extends --> ion_TX_SANF_Type[ion:TX_SANF_Type (extension base)] ion_TX_SANF_Type -- extends --> TX_BASE_Type[tns:TX_BASE_Type (extension base)] TXSAANFB_Type -- contains --> txbase[txbase] TXSAANFB_Type -- contains --> sperrSperrgrund[sperrSperrgrund] TXSAANFB_Type -- contains --> choice(()) choice -- contains --> berBerechtigung_ID[berBerechtigung_ID] choice -- contains --> prodProdukt_ID[prodProdukt_ID] </pre>
Type	tns:TXSAANFB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFB_Type tns:TXSAANFB_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , tns:berBerechtigung_ID , tns:prodProdukt_ID
Children	sperrSperrgrund, tns:berBerechtigung_ID, tns:prodProdukt_ID, txbase
Instance	<pre><tns:TXSAANFB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> </tns:TXSAANFB></pre>
Source	<pre><xs:element name="TXSAANFB" type="tns:TXSAANFB_Type"> <xs:annotation> <xs:documentation>Element: Sperraufhebungsanforderung fuer eine Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSAANFA

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperraufhebungsanforderung fuer eine Applikation

Diagram	
Type	tns:TXSAANFA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFA_Type tns:TXSAANFA_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , tns:applInstanz_ID
Children	sperrSperrgrund, tns:applInstanz_ID, txbase
Instance	<pre><tns:TXSAANFA xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <tns:applInstanz_ID>{1,1}</tns:applInstanz_ID> </tns:TXSAANFA></pre>
Source	<pre><xs:element name="TXSAANFA" type="tns:TXSAANFA_Type"> <xs:annotation> <xs:documentation>Element: Sperraufhebungsanforderung fuer eine Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSMITB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperrmitteilung Berechtigung
Diagram	
Type	tns:TXSMITB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITB_Type
Properties	content: complex

Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:berSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:berSperrkandidat, txbase
Instance	<pre><tns:TXSMITB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:berSperrkandidat>{1,1}</tns:berSperrkandidat> </tns:TXSMITB></pre>
Source	<pre><xs:element name="TXSMITB" type="tns:TXSMITB_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSMITO

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperrmitteilung Organisation
Diagram	
Type	tns:TXSMITO_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type <ul style="list-style-type: none"> tns:TX_SMIT_Type <ul style="list-style-type: none"> tns:TXSMITO_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:orgSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:orgSperrkandidat, txbase
Instance	<pre><tns:TXSMITO xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:orgSperrkandidat>{1,1}</tns:orgSperrkandidat> </tns:TXSMITO></pre>
Source	<pre><xs:element name="TXSMITO" type="tns:TXSMITO_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung Organisation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSMITS

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperrmitteilung SAM

Diagram	
Type	tns:TXSMITS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITS_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:samSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:samSperrkandidat, txbase
Instance	<pre><tns:TXSMITS xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:samSperrkandidat>{1,1}</tns:samSperrkandidat> </tns:TXSMITS></pre>
Source	<pre><xs:element name="TXSMITS" type="tns:TXSMITS_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung SAM</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSFREIMITB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperrfreigabemitteilung Berechtigung
Diagram	
Type	tns:TXSFREIMITB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITB_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:berSperrkandidat

Children	sperrAnforderungBezug, sperrEntscheidung, tns:berSperrkandidat, txbase
Instance	<pre><tns:TXSFREIMITB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:berSperrkandidat>{1,1}</tns:berSperrkandidat> </tns:TXSFREIMITB></pre>
Source	<pre><xs:element name="TXSFREIMITB" type="tns:TXSFREIMITB_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung Berechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSFREIMITO

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperrfreigabemitteilung Organisation
Diagram	
Type	tns:TXSFREIMITO_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITO_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:orgSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:orgSperrkandidat, txbase
Instance	<pre><tns:TXSFREIMITO xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:orgSperrkandidat>{1,1}</tns:orgSperrkandidat> </tns:TXSFREIMITO></pre>
Source	<pre><xs:element name="TXSFREIMITO" type="tns:TXSFREIMITO_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung Organisation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXSFREIMITS

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Sperrfreigabemitteilung SAM

Diagram	
Type	tns:TXSFREIMITS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITS_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:samSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:samSperrkandidat, txbase
Instance	<pre><tns:TXSFREIMITS xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <tns:samSperrkandidat>{1,1}</tns:samSperrkandidat> </tns:TXSFREIMITS></pre>
Source	<pre><xs:element name="TXSFREIMITS" type="tns:TXSFREIMITS_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung SAM</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAUSEFS

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Auskunft-EFS Berechtigung, Anzeige fuer Servicezwecke
Diagram	
Type	tns:TXAUSEFS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAUSEFS_Type

Properties	content: complex
Model	txbase , tns:prodAbrechnungsVerfahren , tns:berBezahlMittel , tns:berBezahlArt , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien , tns:txpp , tns:txefslog+
Children	tns:berBerechtigung_ID, tns:berBezahlArt, tns:berBezahlMittel, tns:prodAbrechnungsVerfahren, tns:prodProdukt_ID, tns:transSelektionKriterien, tns:txefslog, tns:txpp, txbase
Instance	<pre><tns:TXAUSEFS xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:prodAbrechnungsVerfahren>{1,1}</tns:prodAbrechnungsVerfahren> <tns:berBezahlMittel>{1,1}</tns:berBezahlMittel> <tns:berBezahlArt>{1,1}</tns:berBezahlArt> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:transSelektionKriterien>{1,1}</tns:transSelektionKriterien> <tns:txpp>{1,1}</tns:txpp> <tns:txefslog>{1,unbounded}</tns:txefslog> </tns:TXAUSEFS></pre>
Source	<pre><xs:element name="TXAUSEFS" type="tns:TXAUSEFS_Type"> <xs:annotation> <xs:documentation>Element: Auskunft-EFS Berechtigung, Anzeige fuer Servicezwecke</ </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASBERAFB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Anforderung der Daten zur Anzeige einer Preisauskunft Fahrt AFB fuer eine Berechtigung aus dem PV System
Diagram	
Type	tns:TXASBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type <ul style="list-style-type: none"> tns:TXAS_Type <ul style="list-style-type: none"> tns:TXASBER_Type
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien
Children	tns:berBerechtigung_ID, tns:prodProdukt_ID, tns:transSelektionKriterien, transSendeAuftrag, transSendeAuftragstyp, txbase
Instance	<pre><tns:TXASBERAFB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:transSelektionKriterien>{1,1}</tns:transSelektionKriterien> </tns:TXASBERAFB></pre>
Source	<pre><xs:element name="TXASBERAFB" type="tns:TXASBER_Type"> <xs:annotation></pre>

	<pre> <xs:documentation>Element: Anforderung der Daten zur Anzeige einer Preisauskunft Fahrt AFB fuer eine Berechtigung aus dem PV System</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXASBEREFS

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Anforderung der Daten zur Anzeige einer Preisauskunft ESB (post paid) fuer eine Berechtigung aus dem PV System
Diagram	<pre> classDiagram class tnsTXASBEREFS { txbase transSendeAuftrag transSendeAuftragstyp prodProdukt_ID berBerechtigung_ID transSelektionKriterien } class tnsTXBASEType { txbase } class tnsTXASType { txbase transSendeAuftrag transSendeAuftragstyp } tnsTXASBEREFS -- > tnsTXASType tnsTXASBEREFS -- > tnsTXBASEType </pre>
Type	tns:TXASBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type tns:TXASBER_Type
Properties	content: complex
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien
Children	tns:berBerechtigung_ID , tns:prodProdukt_ID , tns:transSelektionKriterien , transSendeAuftrag , transSendeAuftragstyp , txbase
Instance	<pre> <tns:TXASBEREFS xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <transSendeAuftrag>{1,1}</transSendeAuftrag> <transSendeAuftragstyp>{1,1}</transSendeAuftragstyp> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:transSelektionKriterien>{1,1}</tns:transSelektionKriterien> </tns:TXASBEREFS> </pre>
Source	<pre> <xs:element name="TXASBEREFS" type="tns:TXASBER_Type"> <xs:annotation> <xs:documentation>Element: Anforderung der Daten zur Anzeige einer Preisauskunft ESB (post paid) fuer eine Berechtigung aus dem PV System</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXANLN

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Antwort auf Anforderung der Daten zur Anzeige einer Berechtigung aus dem PV System

Diagram	
Type	tns:TXANLN_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXANLN_Type
Properties	content: complex
Model	txbase , tns:prodAbrechnungsVerfahren , tns:berBezahlArt , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien , tns:txpp , tns:txafblog+
Children	tns:berBerechtigung_ID, tns:berBezahlArt, tns:prodAbrechnungsVerfahren, tns:prodProdukt_ID, tns:transSelektionKriterien, tns:txafblog, tns:txpp, txbase
Instance	<pre><tns:TXANLN xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:prodAbrechnungsVerfahren>{1,1}</tns:prodAbrechnungsVerfahren> <tns:berBezahlArt>{1,1}</tns:berBezahlArt> <tns:prodProdukt_ID>{1,1}</tns:prodProdukt_ID> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> <tns:transSelektionKriterien>{1,1}</tns:transSelektionKriterien> <tns:txpp>{1,1}</tns:txpp> <tns:txafblog>{1,unbounded}</tns:txafblog> </tns:TXANLN></pre>
Source	<pre><xs:element name="TXANLN" type="tns:TXANLN_Type"> <xs:annotation> <xs:documentation>Element: Antwort auf Anforderung der Daten zur Anzeige einer Berechtigung aus dem PV System</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWA

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungültigen Applikation

Diagram	
Type	tns:TXKNAWA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXKNAWA_Type
Properties	content: complex
Model	txbase , tns:logTransaktionsOperator_ID , tns:logTerminal_ID , tns:logTransaktionsZeitpunkt , tns:logTransaktionsOrt_ID , tns:logValidationCode , tns:appInstanz_ID
Children	tns:appInstanz_ID, tns:logTerminal_ID, tns:logTransaktionsOperator_ID, tns:logTransaktionsOrt_ID, tns:logTransaktionsZeitpunkt, tns:logValidationCode, txbase
Instance	<pre> <tns:TXKNAWA xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:logTerminal_ID>{1,1}</tns:logTerminal_ID> <tns:logTransaktionsZeitpunkt>{1,1}</tns:logTransaktionsZeitpunkt> <tns:logTransaktionsOrt_ID>{1,1}</tns:logTransaktionsOrt_ID> <tns:logValidationCode>{1,1}</tns:logValidationCode> <tns:appInstanz_ID>{1,1}</tns:appInstanz_ID> </tns:TXKNAWA> </pre>
Source	<pre> <xs:element name="TXKNAWA" type="tns:TXKNAWA_Type"> <xs:annotation> <xs:documentation>Element: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungultigen Applikation</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXKNAWB

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungultigen Berechtigung oder einer gueltigen statischen Berechtigung (z.B. Barcode)
Diagram	

Type	tns:TXKNAWB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXKNAWB_Type
Properties	content: complex
Model	txbase , tns:logTransaktionsOperator_ID , tns:logTerminal_ID , tns:logTransaktionsZeitpunkt , tns:logTransaktionsOrt_ID , tns:logValidationCode , tns:berBerechtigung_ID
Children	tns:berBerechtigung_ID, tns:logTerminal_ID, tns:logTransaktionsOperator_ID, tns:logTransaktionsOrt_ID, tns:logTransaktionsZeitpunkt, tns:logValidationCode, txbase
Instance	<pre><tns:TXKNAWB xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:logTransaktionsOperator_ID>{1,1}</tns:logTransaktionsOperator_ID> <tns:logTerminal_ID>{1,1}</tns:logTerminal_ID> <tns:logTransaktionsZeitpunkt>{1,1}</tns:logTransaktionsZeitpunkt> <tns:logTransaktionsOrt_ID>{1,1}</tns:logTransaktionsOrt_ID> <tns:logValidationCode>{1,1}</tns:logValidationCode> <tns:berBerechtigung_ID>{1,1}</tns:berBerechtigung_ID> </tns:TXKNAWB></pre>
Source	<pre><xs:element name="TXKNAWB" type="tns:TXKNAWB_Type"> <xs:annotation> <xs:documentation>Element: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungultigen Berechtigung oder einer gueltigen statischen Berechtigung (z.B. Barcode)</ xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXAMBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Ausgabe einer Multiberechtigung
Diagram	
Type	tns:TXAMBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXABER_Type tns:TXAMBER_Type
Properties	content: complex
Used by	Complex Type tns:TXAGBBER_Type
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereich , tns:berechtigungTarifbereichZusatz{0,1} , tns:ausgabeTransaktionBerechtigung , tns:berNmTransaktionMAC , tns:tx_abkey
Children	tns:ausgabeTransaktionBerechtigung, tns:berNmTransaktionMAC, tns:berechtigungTarifbereich, tns:berechtigungTarifbereichZusatz, tns:tx_abkey, tns:tx_ber, txbase
Instance	<pre><tns:TXAMBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"></pre>

	<pre> <txbase>{1,1}</txbase> <tns:tx_ber>{1,1}</tns:tx_ber> <tns:berechtigungTarifbereich>{1,1}</tns:berechtigungTarifbereich> <tns:berechtigungTarifbereichZusatz>{0,1}</tns:berechtigungTarifbereichZusatz> <tns:ausgabeTransaktionBerechtigung>{1,1}</tns:ausgabeTransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> <tns:tx_abkey>{1,1}</tns:tx_abkey> </tns:TXAMBER> </pre>
Source	<pre> <xs:element name="TXAMBER" type="tns:TXAMBER_Type"> <xs:annotation> <xs:documentation>Element: Ausgabe einer Multiberechtigung</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXEMBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Erfassung einer Multiberechtigung
Diagram	
Type	tns:TXEMBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXEMBER_Type tns:TXEMBER_Type
Properties	content: complex
Model	txbase , tns:fahrttransaktion , tns:berNmTransaktionMAC , tns:tx_abkey
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, tns:tx_abkey, txbase
Instance	<pre> <tns:TXEMBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:fahrttransaktion>{1,1}</tns:fahrttransaktion> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> <tns:tx_abkey>{1,1}</tns:tx_abkey> </tns:TXEMBER> </pre>
Source	<pre> <xs:element name="TXEMBER" type="tns:TXEMBER_Type"> <xs:annotation> <xs:documentation>Element: Erfassung einer Multiberechtigung</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Element tns:TXRMBER

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Element: Ruecknahme einer Multiberechtigung

Diagram	
Type	tns:TXRMBER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXRBER_Type tns:TXRMBER_Type
Properties	content: complex
Used by	Complex Type tns:TXLOEBER_Type
Model	txbase , tns:ruecknahmeTransaktionBerechtigung , tns:berNmTransaktionMAC , tns:tx_abkey
Children	tns:berNmTransaktionMAC, tns:ruecknahmeTransaktionBerechtigung, tns:tx_abkey, txbase
Instance	<pre><tns:TXRMBER xmlns:tns="http://vdv/ka/kvp-dl-pv/2"> <txbase>{1,1}</txbase> <tns:ruecknahmeTransaktionBerechtigung>{1,1}</tns:ruecknahmeTransaktionBerechtigung> <tns:berNmTransaktionMAC>{1,1}</tns:berNmTransaktionMAC> <tns:tx_abkey>{1,1}</tns:tx_abkey> </tns:TXRMBER></pre>
Source	<pre><xs:element name="TXRMBER" type="tns:TXRMBER_Type"> <xs:annotation> <xs:documentation>Element: Ruecknahme einer Multiberechtigung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type(s)

Complex Type tns:TXBEWEBKOKVP_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Gemeinsamer Typ: Belastung POB/PEB/WEB
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXBEWEBKOKVP_Type
Used by	Elements tns:TXBEKOKVP, tns:TXBEWEBKVP
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Source	<pre><xs:complexType name="TXBEWEBKOKVP_Type"> <xs:annotation> <xs:documentation>Gemeinsamer Typ: Belastung POB/PEB/WEB</xs:documentation> </xs:annotation></pre>

	<pre> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXTRANSABBRUCH_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Daten fuer unvollstaendig ausgefuehrte NM-Transaktion
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXTRANSABBRUCH_Type
Used by	Element tns:TXTRANSABBRUCH
Model	txbase , tns:AllgemeineTransaktionsdaten , tns:MKAH-PV-NM-MAC_ID{0,1} , tns:MKAH-PV-Nutzungszaehler{0,1} , tns:MKKVP--NM-MAC_ID{0,1} , tns:MKKVP-Nutzungszaehler{0,1}
Children	tns:AllgemeineTransaktionsdaten, tns:MKAH-PV-NM-MAC_ID, tns:MKAH-PV-Nutzungszaehler, tns:MKKVP--NM-MAC_ID, tns:MKKVP-Nutzungszaehler, txbase
Source	<pre> <xs:complexType name="TXTRANSABBRUCH_Type"> <xs:annotation> <xs:documentation>Typ: Daten fuer unvollstaendig ausgefuehrte NM-Transaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element ref="tns:AllgemeineTransaktionsdaten"/> <xs:element name="MKAH-PV-NM-MAC_ID" type="ion:SymSchluessel_ID_Type" minOccurs="0" maxOccurs="1"/> <xs:element name="MKAH-PV-Nutzungszaehler" type="ct:ReferenceNumberFour" minOccurs="0" maxOccurs="1"/> <xs:element name="MKKVP--NM-MAC_ID" type="ion:SymSchluessel_ID_Type" minOccurs="0" maxOccurs="1"/> <xs:element name="MKKVP-Nutzungszaehler" type="ct:ReferenceNumberFour" minOccurs="0" maxOccurs="1"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:NmTransaktion_ID_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Datenstruktur Nm_Transaktion_ID
Diagram	

Used by	Element tns:AllgemeineTransaktionsdaten/tns:logNmTransaktion_ID
Model	tns:samSequenznummer , tns:SAM_ID.samNummer
Children	tns:SAM_ID.samNummer, tns:samSequenznummer
Source	<pre><xs:complexType name="NmTransaktion_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Nm_Transaktion_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="samSequenznummer" type="ct:SequenceNumberFour" /> <xs:element name="SAM_ID.samNummer" type="ion:SAM_ID_Type" /> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXAEBER_Type_1_3_0

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Aenderung einer Berechtigung
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAEBER_Type_1_3_0
Used by	Element tns:TXAEBER_1_3_0
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereichDaten , tns:berBerechtigung_ID , tns:prodProdukt_ID
Children	tns:berBerechtigung_ID, tns:berechtigungTarifbereichDaten, tns:prodProdukt_ID, tns:tx_ber, txbase
Source	<pre><xs:complexType name="TXAEBER_Type_1_3_0"> <xs:annotation> <xs:documentation>Typ: Aenderung einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="tx_ber" type="ion:TX_BER_Type" /> <xs:element name="berechtigungTarifbereichDaten" type="xs:hexBinary" /> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" /> <xs:element name="prodProdukt_ID" type="ion:EFMPprodukt_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/ext/1.3.0/XML-Schema_KVP_DL_PV_ext-1.3.0.xsd

Complex Type tns:Mitnahme_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Datenstruktur Ort_ID
Diagram	
Used by	Elements tns:TX_AFBLOG_Type/tns:afbLogMitnahme, tns:TX_EFSLOG_Type/tns:efsLogMitnahme
Model	tns:mitnahmeTyp , tns:mitnahmeAnzahl

Children	tns:mitnahmeAnzahl, tns:mitnahmeTyp
Source	<pre><xs:complexType name="Mitnahme_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Ort_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="mitnahmeTyp" type="tns:Profil_CODE_Type"/> <xs:element name="mitnahmeAnzahl" type="ct:INT1"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:Linie_ID_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Die Linie_ID kennzeichnet eine Linie eindeutig im gesamten Geltungsbereich der Kernapplikation
Diagram	
Used by	Element tns:LinieVariante_ID_Type/tns:linie_ID
Model	tns:linienNummer, tns:linieDomaene_ID
Children	tns:linieDomaene_ID, tns:linienNummer
Source	<pre><xs:complexType name="Linie_ID_Type"> <xs:annotation> <xs:documentation>Typ: Die Linie_ID kennzeichnet eine Linie eindeutig im gesamten Geltungsbereich der Kernapplikation</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="linienNummer" type="ct:ReferenceNumberTwo"/> <xs:element name="linieDomaene_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:LinieVariante_ID_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Die LinieVariante_ID kennzeichnet eine Linienvariante eindeutig im gesamten Geltungsbereich der Kernapplikation
Diagram	
Used by	Element tns:TX_BERLOG_Type/tns:berLogLinieVariante_ID
Model	tns:variantenNummer, tns:linie_ID
Children	tns:linie_ID, tns:variantenNummer
Source	<pre><xs:complexType name="LinieVariante_ID_Type"> <xs:annotation> <xs:documentation>Typ: Die LinieVariante_ID kennzeichnet eine Linienvariante eindeutig im gesamten Geltungsbereich der Kernapplikation</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="variantenNummer" type="ct:ReferenceNumberOne"/> <xs:element name="linie_ID" type="tns:Linie_ID_Type"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:Fahrt_ID_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Annotations	Typ: Die Fahrt_ID kennzeichnet eine Fahrt eindeutig im gesamten Geltungsbereich der Kernapplikation
Diagram	
Used by	Element tns:TX_BERLOG_Type/tns:berLogFahrID
Model	tns:fahrtNummer , tns:fahrtBetreiber_ID
Children	tns:fahrtBetreiber_ID, tns:fahrtNummer
Source	<pre><xs:complexType name="FahrID_Type"> <xs:annotation> <xs:documentation>Typ: Die Fahrt_ID kennzeichnet eine Fahrt eindeutig im gesamten Geltungsbereich der Kernapplikation</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="fahrtNummer" type="ct:ReferenceNumberThree"/> <xs:element name="fahrtBetreiber_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:EFSViaOrtsListe_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Liste der Orte, die bei einer Fahrt durchfahren werden
Diagram	
Used by	Element tns:TX_EFSLOG_Type/tns:efsViaOrte_IDs
Model	tns:efsViaort_ID{0,3}
Children	tns:efsViaort_ID
Source	<pre><xs:complexType name="EFSViaOrtsListe_Type"> <xs:annotation> <xs:documentation>Typ:Liste der Orte, die bei einer Fahrt durchfahren werden</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="efsViaort_ID" type="ion:Ort_ID_Type" minOccurs="0" maxOccurs="3"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TX_PP_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Basisdaten fuer Preise
Diagram	
Used by	Elements tns:TXANLN_Type/tns:txpp, tns:TXAUSEFS_Type/tns:txpp, tns:TXBEKODL_Type/tns:txpp
Model	tns:ppLeistungsPreis , tns:ppMehrwertsteuer
Children	tns:ppLeistungsPreis, tns:ppMehrwertsteuer
Source	<pre><xs:complexType name="TX_PP_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Preise</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="ppLeistungsPreis" type="tns:Amount65535"/> <xs:element name="ppMehrwertsteuer" type="ct:INT2"/> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TX_BERLOG_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Basisdatensatz zur Anzeige von Log-Informationen einer Berechtigung
Diagram	
Used by	Elements tns:TX_AFBLOG_Type/tns:txberlog, tns:TX_EFSLOG_Type/tns:txberlog
Model	tns:berLogLinieVariante_ID , tns:berLogFahrt_ID
Children	tns:berLogFahrt_ID, tns:berLogLinieVariante_ID
Source	<pre> <xs:complexType name="TX_BERLOG_Type"> <xs:annotation> <xs:documentation>Typ:Basisdatensatz zur Anzeige von Log-Informationen einer Berechtigung</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berLogLinieVariante_ID" type="tns:LinieVariante_ID_Type" /> <xs:element name="berLogFahrt_ID" type="tns:Fahrt_ID_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TX_LOG_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Basisdatensatz zur Anzeige von Log-Informationen einer Transaktion
Diagram	
Used by	Elements tns:TX_AFBLOG_Type/tns:txlog, tns:TX_EFSLOG_Type/tns:txlog
Model	tns:logTransaktionsoperator_ID , tns:logTransaktionsZeitpunkt_ID , tns:logTransaktionsort_ID , tns:logTransaktionsTyp_ID
Children	tns:logTransaktionsTyp_ID, tns:logTransaktionsZeitpunkt_ID, tns:logTransaktionsoperator_ID, tns:logTransaktionsort_ID
Source	<pre> <xs:complexType name="TX_LOG_Type"> <xs:annotation> <xs:documentation>Typ:Basisdatensatz zur Anzeige von Log-Informationen einer Transaktion</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="logTransaktionsoperator_ID" type="ka:Organisation_ID" /> <xs:element name="logTransaktionsZeitpunkt_ID" type="ct:DateTimeCompact" /> <xs:element name="logTransaktionsort_ID" type="ion:Ort_ID_Type" /> <xs:element name="logTransaktionsTyp_ID" type="ion:NmTransaktionsTyp_CODE" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TX_AFBLOG_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Basisdatensatz zur Anzeige von Log-Informationen einer AFB

Diagram	
Used by	Element tns:TXANLN_Type/tns:txafblog
Model	tns:afbLogFahrghostTyp, tns:afbLogVerkehrsmittelart, tns:afbLogServiceKlasse, tns:afbLogDynamischerRabattParameter, tns:afbLogMitnahme+, tns:txberlog, tns:txlog
Children	tns:afbLogDynamischerRabattParameter, tns:afbLogFahrghostTyp, tns:afbLogMitnahme, tns:afbLogServiceKlasse, tns:afbLogVerkehrsmittelart, tns:txberlog, tns:txlog
Source	<pre> <xs:complexType name="TX_AFBLOG_Type"> <xs:annotation> <xs:documentation>Typ:Basisdatensatz zur Anzeige von Log-Informationen einer AFB</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="afbLogFahrghostTyp" type="tns:Kundentyp_CODE_Type"/> <xs:element name="afbLogVerkehrsmittelart" type="tns:Transportserviceart_CODE_Type"/> <xs:element name="afbLogServiceKlasse" type="tns:ServiceKlasse_CODE_Type"/> <xs:element name="afbLogDynamischerRabattParameter" type="ct:OctetString4"/> <!-- SST 1107 "List of: Mitnahme" 6.5 Tabelle 6-87 --> <xs:element name="afbLogMitnahme" type="tns:Mitnahme_Type" minOccurs="1" maxOccurs="unbounded"/> <xs:element name="txberlog" type="tns:TX_BERLOG_Type"/> <xs:element name="txlog" type="tns:TX_LOG_Type"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TX_EFSLOG_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Basisdatensatz zur Anzeige von Log-Informationen eines EFS
Diagram	
Used by	Element tns:TXAUSEFS_Type/tns:txefslog
Model	tns:efsFahrghostTyp, tns:efsVerkehrsmittelKategorie, tns:efsLogServiceKlasse, tns:efsServiceKlasseExtra, tns:efsStartort_ID, tns:efsZielort_ID, tns:efsViaOrte_IDs, tns:efsLogMitnahme+, tns:txberlog, tns:txlog
Children	tns:efsFahrghostTyp, tns:efsLogMitnahme, tns:efsLogServiceKlasse, tns:efsServiceKlasseExtra, tns:efsStartort_ID, tns:efsVerkehrsmittelKategorie, tns:efsViaOrte_IDs, tns:efsZielort_ID, tns:txberlog, tns:txlog
Source	<pre> <xs:complexType name="TX_EFSLOG_Type"> <xs:annotation> <xs:documentation>Typ:Basisdatensatz zur Anzeige von Log-Informationen eines EFS</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="efsFahrghostTyp" type="tns:Kundentyp_CODE_Type"/> <xs:element name="efsVerkehrsmittelKategorie" type="tns:Transportserviceart_CODE_Type"/> <xs:element name="efsLogServiceKlasse" type="tns:ServiceKlasse_CODE_Type"/> <xs:element name="efsServiceKlasseExtra" type="tns:ServiceKlasseExtra_CODE_Type"/> <xs:element name="efsStartort_ID" type="tns:Startort_ID_CODE_Type"/> <xs:element name="efsZielort_ID" type="tns:Zielort_ID_CODE_Type"/> <xs:element name="efsViaOrte_IDs" type="tns:ViaOrte_IDs_CODE_Type"/> <xs:element name="efsLogMitnahme" type="tns:Mitnahme_Type" minOccurs="1" maxOccurs="unbounded"/> <xs:element name="txberlog" type="tns:TX_BERLOG_Type"/> <xs:element name="txlog" type="tns:TX_LOG_Type"/> </xs:sequence> </xs:complexType> </pre>

	<pre> <xs:sequence> <xs:element name="efsFahrgastTyp" type="tns:Kudentyp_CODE_Type" /> <xs:element name="efsVerkehrsmittelKategorie" type="tns:TransportmittelKategorie_CODE_Type" /> <xs:element name="efsLogServiceKlasse" type="tns:ServiceKlasse_CODE_Type" /> <xs:element name="efsServiceKlasseExtra" type="tns:ServiceKlasseExtra_CODE_Type" /> <xs:element name="efsStartort_ID" type="ion:Ort_ID_Type" /> <xs:element name="efsZielort_ID" type="ion:Ort_ID_Type" /> <xs:element name="efsViaOrte_IDs" type="tns:EFSViaOrtsListe_Type" /> <!-- SST 1107 "List of: Mitnahme" 6.5 Tabelle 6-87 --> <xs:element name="efsLogMitnahme" type="tns:Mitnahme_Type" minOccurs="1" maxOccurs="unbounded" /> <xs:element name="txberlog" type="tns:TX_BERLOG_Type" /> <xs:element name="txlog" type="tns:TX_LOG_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TX_ABKEY_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Ableitungsdaten fuer eine Multiberechtigung
Diagram	<pre> graph LR TX_ABKEY_Type[tns:TX_ABKEY_Type] -- sequence --> berAbleitungsdaten[berAbleitungsdaten] </pre>
Used by	Elements tns:TXAMBER_Type/tns:tx_abkey, tns:TXEMBER_Type/tns:tx_abkey, tns:TXRMBER_Type/tns:tx_abkey
Model	tns:berAbleitungsdaten
Children	tns:berAbleitungsdaten
Source	<pre> <xs:complexType name="TX_ABKEY_Type"> <xs:annotation> <xs:documentation>Typ: Ableitungsdaten fuer eine Multiberechtigung</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berAbleitungsdaten" type="ct:OctetString10" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXASBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Anzeige Leistungsnachweise einer Berechtigung
Diagram	<pre> graph LR TXASBER_Type[tns:TXASBER_Type] -- extension --> TXAS_Type[ion:TXAS_Type] TXAS_Type -- extension --> TX_BASE_Type[tns:TX_BASE_Type] TX_BASE_Type -- sequence --> txbase[txbase] TXASBER_Type -- sequence --> transSendeAuftrag[transSendeAuftrag] TXASBER_Type -- sequence --> transSendeAuftragstyp[transSendeAuftragstyp] TXASBER_Type -- sequence --> prodProdukt_ID[prodProdukt_ID] TXASBER_Type -- sequence --> berBerechtigung_ID[berBerechtigung_ID] TXASBER_Type -- sequence --> transSelektionKriterien[transSelektionKriterien] </pre>
Type	extension of tns:TXAS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type tns:TXASBER_Type
Used by	Elements tns:TXASBERAFB, tns:TXASBEREFS
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien
Children	tns:berBerechtigung_ID, tns:prodProdukt_ID, tns:transSelektionKriterien, transSendeAuftrag, transSendeAuftragstyp, txbase

Source	<pre> <xs:complexType name="TXASBER_Type"> <xs:annotation> <xs:documentation>Typ:Anzeige Leistungsnachweise einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TXAS_Type"> <xs:sequence> <xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> <xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXANLN_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ:Anzeige Leistungsnachweise einer Berechtigung
Diagram	<pre> classDiagram class ionTX_BASE_Type["ion:TX_BASE_Type (extension base)"] class TXANLN_Type["TXANLN_Type"] class txbase class prodAbrechnungsVerfahren class berBezahlArt class prodProdukt_ID class berBerechtigung_ID class transSelektionKriterien class txpp class txafblog ionTX_BASE_Type --> TXANLN_Type TXANLN_Type -- txbase TXANLN_Type -- prodAbrechnungsVerfahren TXANLN_Type -- berBezahlArt TXANLN_Type -- prodProdukt_ID TXANLN_Type -- berBerechtigung_ID TXANLN_Type -- transSelektionKriterien TXANLN_Type -- txpp TXANLN_Type -- "1..∞" txafblog </pre>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXANLN_Type
Used by	Element tns:TXANLN
Model	txbase, tns:prodAbrechnungsVerfahren, tns:berBezahlArt, tns:prodProdukt_ID, tns:berBerechtigung_ID, tns:transSelektionKriterien, tns:txpp, tns:txafblog+
Children	tns:berBerechtigung_ID, tns:berBezahlArt, tns:prodAbrechnungsVerfahren, tns:prodProdukt_ID, tns:transSelektionKriterien, tns:txafblog, tns:txpp, txbase
Source	<pre> <xs:complexType name="TXANLN_Type"> <xs:annotation> <xs:documentation>Typ:Anzeige Leistungsnachweise einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="prodAbrechnungsVerfahren" type="ion:Abrechnungsverfahren_CODE_Type"/> <xs:element name="berBezahlArt" type="ion:Bezahlart_CODE_Type"/> <xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> <xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type"/> <xs:element name="txpp" type="tns:TX_PP_Type"/> <xs:element name="txafblog" type="tns:TX_AFBLOG_Type" minOccurs="1" maxOccurs="unbounded"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXAUSEFS_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Annotations	Typ:Stellt dem kontofuehrenden KVP alle zu einer EFS-Berechtigung bei einem PV erfassten Daten zur Anzeige fuer Servicezwecke zur Verfuegung
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAUSEFS_Type
Used by	Element tns:TXAUSEFS
Model	txbase , tns:prodAbrechnungsVerfahren , tns:berBezahlMittel , tns:berBezahlArt , tns:prodProdukt_ID , tns:berBerechtigung_ID , tns:transSelektionKriterien , tns:txpp , tns:txefslog+
Children	tns:berBerechtigung_ID, tns:berBezahlArt, tns:berBezahlMittel, tns:prodAbrechnungsVerfahren, tns:prodProdukt_ID, tns:transSelektionKriterien, tns:txefslog, tns:txpp, txbase
Source	<pre> <xs:complexType name="TXAUSEFS_Type"> <xs:annotation> <xs:documentation>Typ:Stellt dem kontofuehrenden KVP alle zu einer EFS-Berechtigung bei einem PV erfassten Daten zur Anzeige fuer Servicezwecke zur Verfuegung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="prodAbrechnungsVerfahren" type="ion:Abrechnungsverfahren_CODE_Type" /> <xs:element name="berBezahlMittel" type="ct:OctetString10" /> <xs:element name="berBezahlArt" type="ion:Bezahlart_CODE_Type" /> <xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type" /> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" /> <xs:element name="transSelektionKriterien" type="tns:SelektionKriterien_Type" /> <xs:element name="txpp" type="tns:TX_PP_Type" /> <xs:element name="txefslog" type="tns:TX_EFSLOG_Type" minOccurs="1" maxOccurs="unbounded" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXADM_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Antwort auf Anfrage wegen Defektem Medium
Diagram	
Type	extension of tns:TX_BASE_Type

Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXADM_Type
Used by	Element tns:TXADM
Model	txbase , tns:transMediennummer , tns:transappInstanz_ID
Children	tns:transMediennummer, tns:transappInstanz_ID, txbase
Source	<pre><xs:complexType name="TXADM_Type"> <xs:annotation> <xs:documentation>Typ: Antwort auf Anfrage wegen Defektem Medium</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="transMediennummer" type="ct:OctetString10"/> <xs:element name="transappInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXABER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Ausgabe einer Berechtigung
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXABER_Type
Used by	<div>Complex Type tns:TXAMBER_Type</div> <div>Element tns:TXABER</div>
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereich , tns:berechtigungTarifbereichZusatz{0,1} , tns:ausgabeTransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:ausgabeTransaktionBerechtigung, tns:berNmTransaktionMAC, tns:berechtigungTarifbereich, tns:berechtigungTarifbereichZusatz, tns:tx_ber, txbase
Source	<pre><xs:complexType name="TXABER_Type"> <xs:annotation> <xs:documentation>Typ: Ausgabe einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="tx_ber" type="ion:TX_BER_Type"/> <xs:element name="berechtigungTarifbereich" type="xs:hexBinary"/> <!-- Wegen TXABER in TXANTWORT in PE-Spez ist dieses Element optional --> <xs:element name="berechtigungTarifbereichZusatz" type="xs:hexBinary" minOccurs="0"/> <xs:element name="ausgabeTransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type"/> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Complex Type tns:TXEBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2				
Annotations	Typ: Erfassung einer Berechtigungstransaktion				
Diagram					
Type	extension of tns:TX_BASE_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXEBER_Type 				
Used by	<table> <tr> <td>Complex Type</td><td>tns:TXEMBER_Type</td></tr> <tr> <td>Element</td><td>tns:TXEBER</td></tr> </table>	Complex Type	tns:TXEMBER_Type	Element	tns:TXEBER
Complex Type	tns:TXEMBER_Type				
Element	tns:TXEBER				
Model	txbase , tns:fahrttransaktion , tns:berNmTransaktionMAC				
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, txbase				
Source	<pre> <xs:complexType name="TXEBER_Type"> <xs:annotation> <xs:documentation>Typ: Erfassung einer Berechtigungstransaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="fahrttransaktion" type="ion:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Complex Type tns:TXAEBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2		
Annotations	Typ: Aenderung einer Berechtigung		
Diagram			
Type	extension of tns:TX_BASE_Type		
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAEBER_Type 		
Used by	<table> <tr> <td>Element</td><td>tns:TXAEBER</td></tr> </table>	Element	tns:TXAEBER
Element	tns:TXAEBER		
Model	txbase , tns:tx_ber , tns:berechtigungTarifbereich		
Children	tns:berechtigungTarifbereich, tns:tx_ber, txbase		
Source	<pre> <xs:complexType name="TXAEBER_Type"> <xs:annotation> <xs:documentation>Typ: Aenderung einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> </pre>		

	<pre> <xs:sequence> <xs:element name="tx_ber" type="ion:TX_BER_Type"/> <xs:element name="berechtigungTarifbereich" type="xs:hexBinary"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXAENBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Aenderung der Nutzertarifparameter einer Berechtigung
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAENBER_Type
Used by	Element tns:TXAENBER
Model	txbase , tns:fahrttransaktion , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, txbase
Source	<pre> <xs:complexType name="TXAENBER_Type"> <xs:annotation> <xs:documentation>Typ: Aenderung der Nutzertarifparameter einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="fahrttransaktion" type="ion:Transaktionsdatensatz_Type"/> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXRBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Ruecknahme einer Berechtigung
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXRBER_Type
Used by	<div>Complex Type tns:TXRMBER_Type</div> <div>Element tns:TXRBER</div>
Model	txbase , tns:ruecknahmeTransaktionBerechtigung , tns:berNmTransaktionMAC

Children	tns:berNmTransaktionMAC, tns:ruecknahmeTransaktionBerechtigung, txbase
Source	<pre> <xs:complexType name="TXRBER_Type"> <xs:annotation> <xs:documentation>Typ: Ruecknahme einer Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="ruecknahmeTransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXAMBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Ausgabemeldung einer Multiberechtigung
Diagram	
Type	extension of tns:TXABER_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXABER_Type tns:TXAMBER_Type
Used by	Element tns:TXAMBER
Model	txbase, tns:tx_ber, tns:berechtigungTarifbereich, tns:berechtigungTarifbereichZusatz{0,1}, tns:ausgabeTransaktionBerechtigung, tns:berNmTransaktionMAC, tns:tx_abkey
Children	tns:ausgabeTransaktionBerechtigung, tns:berNmTransaktionMAC, tns:berechtigungTarifbereich, tns:berechtigungTarifbereichZusatz, tns:tx_abkey, tns:tx_ber, txbase
Source	<pre> <xs:complexType name="TXAMBER_Type"> <xs:annotation> <xs:documentation>Typ: Ausgabemeldung einer Multiberechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXABER_Type"> <xs:sequence> <xs:element name="tx_abkey" type="tns:TX_ABKEY_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXEMBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Annotations	Typ: Erfassung einer Multiberechtigung
Diagram	
Type	extension of tns:TXEMBER_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXEMBER_Type • tns:TXEMBER_Type
Used by	Element tns:TXEMBER
Model	txbase , tns:fahrttransaktion , tns:berNmTransaktionMAC , tns:tx_abkey
Children	tns:berNmTransaktionMAC, tns:fahrttransaktion, tns:tx_abkey, txbase
Source	<pre> <xs:complexType name="TXEMBER_Type"> <xs:annotation> <xs:documentation>Typ: Erfassung einer Multiberechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXEMBER_Type"> <xs:sequence> <xs:element name="tx_abkey" type="tns:TX_ABKEY_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXRMBER_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Ruecknahme einer Multiberechtigung
Diagram	
Type	extension of tns:TXRBER_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXRBER_Type • tns:TXRMBER_Type
Used by	Element tns:TXRMBER
Model	txbase , tns:ruecknahmeTransaktionBerechtigung , tns:berNmTransaktionMAC , tns:tx_abkey
Children	tns:berNmTransaktionMAC, tns:ruecknahmeTransaktionBerechtigung, tns:tx_abkey, txbase
Source	<pre> <xs:complexType name="TXRMBER_Type"> <xs:annotation> </pre>

	<pre> <xs:documentation>Typ: Ruecknahme einer Multiberechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXRBER_Type"> <xs:sequence> <xs:element name="tx_abkey" type="tns:TX_ABKEY_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXASKON_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Anforderung eines neuen Kontingentes fuer einen PV-Schlüssel im SAM
Diagram	
Type	extension of tns:TXAS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type tns:TXASKON_Type
Used by	Element tns:TXASKON
Model	txbase , transSendeAuftrag , transSendeAuftragstyp , tns:samSAM_ID , tns:samSchlüssel_ID , tns:samLoadKeyZaehler , tns:samNutzungsLimitNeu
Children	tns:samLoadKeyZaehler, tns:samNutzungsLimitNeu, tns:samSAM_ID, tns:samSchlüssel_ID, transSendeAuftrag, transSendeAuftragstyp, txbase
Source	<pre> <xs:complexType name="TXASKON_Type"> <xs:annotation> <xs:documentation>Typ: Anforderung eines neuen Kontingentes fuer einen PV-Schlüssel im SAM</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TXAS_Type"> <xs:sequence> <xs:element name="samSAM_ID" type="ion:SAM_ID_Type" /> <xs:element name="samSchlüssel_ID" type="ion:SymSchlüssel_ID_Type" /> <xs:element name="samLoadKeyZaehler" type="ct:INT4" /> <xs:element name="samNutzungsLimitNeu" type="ct:INT4" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXUEBERKON_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Annotations	Typ: Genehmigung eines neuen Kontingentes fuer einen PV-Schlüssel im SAM
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXUEBERKON_Type
Used by	Element tns:TXUEBERKON
Model	txbase , tns:samSAM_ID , tns:samSchlüssel_ID , tns:samLoadKeyZaehler , tns:samNutzungsLimitGen
Children	tns:samLoadKeyZaehler, tns:samNutzungsLimitGen, tns:samSAM_ID, tns:samSchlüssel_ID, txbase
Source	<pre> <xs:complexType name="TXUEBERKON_Type"> <xs:annotation> <xs:documentation>Typ: Genehmigung eines neuen Kontingentes fuer einen PV-Schlüssel im SAM</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="samSAM_ID" type="ion:SAM_ID_Type"/> <xs:element name="samSchlüssel_ID" type="ion:SymSchlüssel_ID_Type"/> <xs:element name="samLoadKeyZaehler" type="ct:INT4"/> <xs:element name="samNutzungsLimitGen" type="ct:INT4"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXBEKODL_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Transaktionsdatensatz (vom PV an den KVP) fuer eine Belastung des Kundenkontos nach Berechnung des Leistungspreises beim PV (aufgrund uebermittelter Fahrttransaktionen vom DL).
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXBEKODL_Type
Used by	Element tns:TXBEKODL
Model	txbase , tns:berBerechtigung_ID , tns:txpp , tns:fahrttransaktion+ , tns:berNmTransaktionMAC
Children	tns:berBerechtigung_ID, tns:berNmTransaktionMAC, tns:fahrttransaktion, tns:txpp, txbase
Source	<pre> <xs:complexType name="TXBEKODL_Type"> </pre>

	<pre> <xs:annotation> <xs:documentation>Typ: Transaktionsdatensatz (vom PV an den KVP) fuer eine Belastung des Kundenkontos nach Berechnung des Leistungspreises beim PV (aufgrund uebermittelter Fahrtransaktionen vom DL).</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type" /> <xs:element name="txpp" type="tns:TX_PP_Type" /> <xs:element name="fahrtransaktion" type="ion:Transaktionsdatensatz_Type" maxOccurs="unbounded" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXGKO_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Gutschrift POB/PEB
Diagram	
Type	extension of tns:TX_BASE_Type
Type hier- archy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXGKO_Type
Used by	Element tns:TXGKO
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Source	<pre> <xs:complexType name="TXGKO_Type"> <xs:annotation> <xs:documentation>Typ: Gutschrift POB/PEB</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXGWEB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Gutschrift WEB
Diagram	
Type	extension of tns:TX_BASE_Type

Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXGWEB_Type
Used by	Element tns:TXGWEB
Model	txbase , tns:belastungstransaktionBerechtigung , tns:berNmTransaktionMAC
Children	tns:belastungstransaktionBerechtigung, tns:berNmTransaktionMAC, txbase
Source	<pre><xs:complexType name="TXGWEB_Type"> <xs:annotation> <xs:documentation>Typ: Gutschrift WEB</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="belastungstransaktionBerechtigung" type="ion:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXKNAWA_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungültigen Applikation
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXKNAWA_Type
Used by	Element tns:TXKNAWA
Model	txbase , tns:logTransaktionsOperator_ID , tns:logTerminal_ID , tns:logTransaktionsZeitpunkt , tns:logTransaktionsOrt_ID , tns:logValidationCode , tns:applInstanz_ID
Children	tns:applInstanz_ID, tns:logTerminal_ID, tns:logTransaktionsOperator_ID, tns:logTransaktionsOrt_ID, tns:logTransaktionsZeitpunkt, tns:logValidationCode, txbase
Source	<pre><xs:complexType name="TXKNAWA_Type"> <xs:annotation> <xs:documentation>Typ: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungültigen Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo" /> <xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type" /> <xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact" /> <xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type" /> <xs:element name="logValidationCode" type="tns:Validation_CODE_Type" /> <xs:element name="applInstanz_ID" type="ion:NmApplikationInstanz_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd
-----------------	---

Complex Type tns:TXKNAWB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungultigen Berechtigung oder einer gueltigen statischen Berechtigung (z.B. Barcode)
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXKNAWB_Type
Used by	Element tns:TXKNAWB
Model	txbase , tns:logTransaktionsOperator_ID , tns:logTerminal_ID , tns:logTransaktionsZeitpunkt , tns:logTransaktionsOrt_ID , tns:logValidationCode , tns:berBerechtigung_ID
Children	tns:berBerechtigung_ID, tns:logTerminal_ID, tns:logTransaktionsOperator_ID, tns:logTransaktionsOrt_ID, tns:logTransaktionsZeitpunkt, tns:logValidationCode, txbase
Source	<pre> <xs:complexType name="TXKNAWB_Type"> <xs:annotation> <xs:documentation>Typ: Transaktionsdatensatz zum Nachweis der Kontrolle einer gesperrten oder ungultigen Berechtigung oder einer gueltigen statischen Berechtigung (z.B. Barcode)</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo"/> <xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type"/> <xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact"/> <xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type"/> <xs:element name="logValidationCode" type="tns:Validation_CODE_Type"/> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXLPEB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Laden eines PEB-Kontos
Diagram	
Type	extension of tns:TX_BASE_Type

Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXLPEB_Type
Used by	Element tns:TXLPEB
Model	txbase , tns:inzahlungsbelegBerechtigung , tns:berNmTransaktionMAC
Children	tns:berNmTransaktionMAC, tns:inzahlungsbelegBerechtigung, txbase
Source	<pre><xs:complexType name="TXLPEB_Type"> <xs:annotation> <xs:documentation>Typ: Laden eines PEB-Kontos</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="inzahlungsbelegBerechtigung" type="ion:Transaktionsdatensatz_Type"/> <xs:element name="berNmTransaktionMAC" type="ion:berNmTransaktionMAC_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSANFB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperranforderung fuer eine Berechtigung
Diagram	
Type	extension of tns:TX_SANF_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type • tns:TXSANFB_Type
Used by	Complex Type tns:TXSAANFB_Type Element tns:TXSANFB
Model	txbase , sperrSperrgrund , tns:berBerechtigung_ID , tns:prodProdukt_ID
Children	sperrSperrgrund, tns:berBerechtigung_ID, tns:prodProdukt_ID, txbase
Source	<pre><xs:complexType name="TXSANFB_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer eine Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SANF_Type"> <xs:sequence> <xs:element name="berBerechtigung_ID" type="ion:Berechtigung_ID_Type"/> <xs:element name="prodProdukt_ID" type="ion:EFMProdukt_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSANFA_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Annotations	Typ: Sperranforderung fuer eine Applikation				
Diagram					
Type	extension of tns:TX_SANF_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFA_Type 				
Used by	<table> <tr> <td>Complex Type</td><td>tns:TXSAANFA_Type</td></tr> <tr> <td>Element</td><td>tns:TXSANFA</td></tr> </table>	Complex Type	tns:TXSAANFA_Type	Element	tns:TXSANFA
Complex Type	tns:TXSAANFA_Type				
Element	tns:TXSANFA				
Model	txbase , sperrSperrgrund , tns:applInstanz_ID				
Children	sperrSperrgrund , tns:applInstanz_ID , txbase				
Source	<pre> <xs:complexType name="TXSANFA_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer eine Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SANF_Type"> <xs:sequence> <xs:element name="applInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Complex Type tns:TXSAANFA_Type

Namespace	http://vdv/ka/kvp-dl-pv/2		
Annotations	Typ: Sperraufhebungsanforderung fuer eine Applikation		
Diagram			
Type	extension of tns:TXSANFA_Type		
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFA_Type tns:TXSAANFA_Type 		
Used by	<table> <tr> <td>Element</td><td>tns:TXSAANFA</td></tr> </table>	Element	tns:TXSAANFA
Element	tns:TXSAANFA		
Model	txbase , sperrSperrgrund , tns:applInstanz_ID		

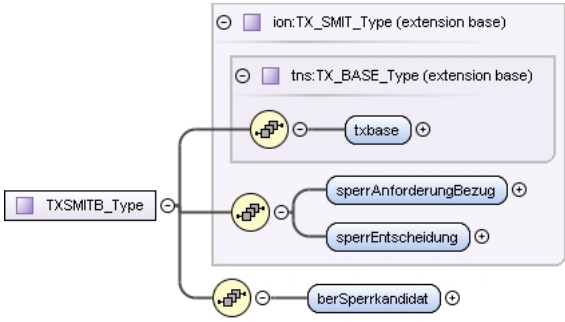
Children	sperrSperrgrund, tns:applInstanz_ID, txbase
Source	<pre><xs:complexType name="TXSAANFA_Type"> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer eine Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSANFA_Type" /> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSAANFB_Type

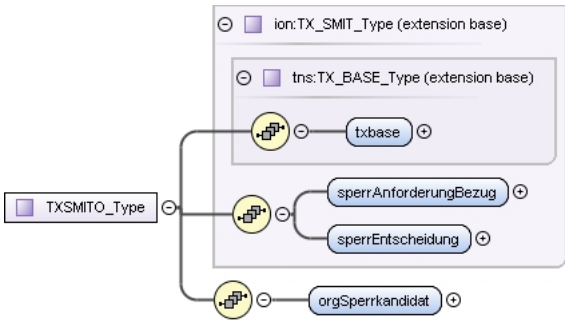
Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperraufhebungsanforderung fuer eine Berechtigung
Diagram	
Type	extension of tns:TXSANFB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type <ul style="list-style-type: none"> tns:TX_SANF_Type <ul style="list-style-type: none"> tns:TXSANFB_Type <ul style="list-style-type: none"> tns:TXSAANFB_Type
Used by	Element tns:TXSAANFB
Model	txbase , sperrSperrgrund , tns:berBerechtigung_ID , tns:prodProdukt_ID
Children	sperrSperrgrund, tns:berBerechtigung_ID, tns:prodProdukt_ID, txbase
Source	<pre><xs:complexType name="TXSAANFB_Type"> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer eine Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSANFB_Type" /> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSMITB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperrmitteilung Berechtigung

Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITB_Type
Used by	Element tns:TXSMITB
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:berSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:berSperrkandidat, txbase
Source	<pre> <xs:complexType name="TXSMITB_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="berSperrkandidat" type="ion:Berechtigung_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSMITO_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperrmitteilung Organisation
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITO_Type
Used by	Element tns:TXSMITO
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:orgSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:orgSperrkandidat, txbase
Source	<pre> <xs:complexType name="TXSMITO_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung Organisation</xs:documentation> </xs:annotation> </pre>

	<pre> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSMITS_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperrmitteilung SAM
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type <ul style="list-style-type: none"> tns:TX_SMIT_Type <ul style="list-style-type: none"> tns:TXSMITS_Type
Used by	Element tns:TXSMITS
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:samSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:samSperrkandidat, txbase
Source	<pre> <xs:complexType name="TXSMITS_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung SAM</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="samSperrkandidat" type="ion:SAM_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSFREIMITB_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperrfreigabemitteilung Berechtigung
Diagram	

Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITB_Type
Used by	Element tns:TXSFREIMITB
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:berSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:berSperrkandidat, txbase
Source	<pre><xs:complexType name="TXSFREIMITB_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung Berechtigung</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="berSperrkandidat" type="ion:Berechtigung_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSFREIMITO_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Sperrfreigabemitteilung Organisation
Diagram	<pre> graph TD TXSFREIMITO_Type[tns:TXSFREIMITO_Type] -- extends --> TX_BASE_Type[tns:TX_BASE_Type] TX_BASE_Type -- extends --> TX_SMIT_Type[ion:TX_SMIT_Type] TX_BASE_Type -- contains --> txbase[txbase] TX_BASE_Type -- contains --> sperrAnforderungBezug[sperrAnforderungBezug] TX_BASE_Type -- contains --> sperrEntscheidung[sperrEntscheidung] TXSFREIMITO_Type -- contains --> orgSperrkandidat[orgSperrkandidat] </pre>
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITO_Type
Used by	Element tns:TXSFREIMITO
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:orgSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:orgSperrkandidat, txbase
Source	<pre><xs:complexType name="TXSFREIMITO_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung Organisation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Complex Type tns:TXSFREIMITS_Type

Namespace	http://vdv/ka/kvp-dl-pv/2
-----------	---------------------------

Annotations	Typ: Sperrfreigabemitteilung SAM
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITS_Type
Used by	Element tns:TXSFREIMITS
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , tns:samSperrkandidat
Children	sperrAnforderungBezug, sperrEntscheidung, tns:samSperrkandidat, txbase
Source	<pre> <xs:complexType name="TXSFREIMITS_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung SAM</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SMIT_Type"> <xs:sequence> <xs:element name="samSperrkandidat" type="ion:SAM_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type(s)


Simple Type tns:Validation_CODE_Type

Namespace	http://vdv/ka/kvp-dl-pv/2		
Annotations	BOM 6-62 Der Validation_CODE klassifiziert den Grund der Erstellung eines Kontrollnachweises ohne Transaktionsausfuehrung mit dem Nutzermedium		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:Validation_CODE_Type 		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Daten nicht authentisch
	enumeration	2	Zeitlich ungueltig
	enumeration	3	Raeumlich ungueltig
	enumeration	4	Persoenlich ungueltig (fuer personengebundene Objekte)
	enumeration	5	gesperrter SAM (nur Statische Berechtigung)
	enumeration	6	gesperrte ORG (nur Statische Berechtigung)


	enumeration	7	sym. Schluessel gesperrt oder nicht vorhanden
	enumeration	8	asym. Schuessel gesperrt oder nicht vorhanden
	enumeration	9	Status im App. Verzeichnis nicht gesetzt
	enumeration	10	Ausgabetransaktionskennung fehlt
	enumeration	11	Transportmittelkategorie abweichend vom aktuellen Verkehrsmittel
	enumeration	19	gesperrt (EN 1545-1 blocked (19))
Used by	Elements	tns:TXKNAWA_Type/tns:logValidationCode, tns:TXKNAWB_Type/tns:logValidationCode	
Source	<pre><xs:simpleType name="Validation_CODE_Type"> <xs:annotation> <xs:documentation>BOM 6-62 Der Validation_CODE klassifiziert den Grund der Erstellung eines Kontrollnachweises ohne Transaktionsausfuehrung mit dem Nutzermedium</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Keine Angabe</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Daten nicht authentisch</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Zeitlich unguelteig</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Raeumlich unguelteig</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Persoenlich unguelteig (fuer personengebundene Objekte)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>gesperrter SAM (nur Statische Berechtigung)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation>gesperrte ORG (nur Statische Berechtigung)</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>sym. Schluessel gesperrt oder nicht vorhanden</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation>asym. Schuessel gesperrt oder nicht vorhanden</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="9"> <xs:annotation> <xs:documentation>Status im App. Verzeichnis nicht gesetzt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="10"> <xs:annotation> <xs:documentation>Ausgabetransaktionskennung fehlt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="11"> <xs:annotation> <xs:documentation>Transportmittelkategorie abweichend vom aktuellen Verkehrsmittel</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="19"> <xs:annotation></pre>		

	<pre> <xs:documentation>gesperrt (EN 1545-1 blocked (19))</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type **tns:Amount65535**

Namespace	http://vdv/ka/kvp-dl-pv/2				
Diagram					
Type	tns:INT2				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT2 <ul style="list-style-type: none"> tns:Amount65535 				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Used by	Element tns:TX_PP_Type/tns:ppLeistungsPreis				
Source	<pre> <xs:simpleType name="Amount65535"> <xs:restriction base="ct:INT2"/> </xs:simpleType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Simple Type **tns:Profil_CODE_Type**

Namespace	http://vdv/ka/kvp-dl-pv/2																																													
Annotations	Typ: klassifiziert Kunden, Objekte, etc. bzgl. tarifrelevanter Gruppen des OePV BOM 6_45																																													
Diagram																																														
Type	restriction of tns:INT1																																													
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:Profil_CODE_Type																																													
Facets	<table><tr><td>maxInclusive</td><td>255</td><td></td></tr><tr><td>minInclusive</td><td>0</td><td></td></tr><tr><td>enumeration</td><td>0</td><td>nicht spezifiziert/unbestimmt</td></tr><tr><td>enumeration</td><td>1</td><td>Erwachsener</td></tr><tr><td>enumeration</td><td>2</td><td>Kind</td></tr><tr><td>enumeration</td><td>3</td><td>Student</td></tr><tr><td>enumeration</td><td>5</td><td>Behinderter</td></tr><tr><td>enumeration</td><td>6</td><td>Sehbehinderter</td></tr><tr><td>enumeration</td><td>7</td><td>Hoergeschaedigter</td></tr><tr><td>enumeration</td><td>8</td><td>Arbeitsloser/Sozialhilfeempfaenger</td></tr><tr><td>enumeration</td><td>9</td><td>Personal</td></tr><tr><td>enumeration</td><td>10</td><td>Militaeranhehoeriger</td></tr><tr><td>enumeration</td><td>19</td><td>Schueler</td></tr><tr><td>enumeration</td><td>20</td><td>Azubi</td></tr><tr><td>enumeration</td><td>25</td><td>Senior</td></tr></table>	maxInclusive	255		minInclusive	0		enumeration	0	nicht spezifiziert/unbestimmt	enumeration	1	Erwachsener	enumeration	2	Kind	enumeration	3	Student	enumeration	5	Behinderter	enumeration	6	Sehbehinderter	enumeration	7	Hoergeschaedigter	enumeration	8	Arbeitsloser/Sozialhilfeempfaenger	enumeration	9	Personal	enumeration	10	Militaeranhehoeriger	enumeration	19	Schueler	enumeration	20	Azubi	enumeration	25	Senior
maxInclusive	255																																													
minInclusive	0																																													
enumeration	0	nicht spezifiziert/unbestimmt																																												
enumeration	1	Erwachsener																																												
enumeration	2	Kind																																												
enumeration	3	Student																																												
enumeration	5	Behinderter																																												
enumeration	6	Sehbehinderter																																												
enumeration	7	Hoergeschaedigter																																												
enumeration	8	Arbeitsloser/Sozialhilfeempfaenger																																												
enumeration	9	Personal																																												
enumeration	10	Militaeranhehoeriger																																												
enumeration	19	Schueler																																												
enumeration	20	Azubi																																												
enumeration	25	Senior																																												
Used by	Element tns:Mitnahme_Type/tns:mitnahmeTyp																																													
Source	<xs:simpleType name="Profil_CODE_Type">																																													

	<pre> <xs:annotation> <xs:documentation>Typ: klassifiziert Kunden, Objekte, etc. bzgl. tarifelevanter Gruppen des OePV BOM 6_45</xs:documentation> </xs:annotation> <!-- TODO: Fehler in BOM: Personal 7 Rechtschreibung + doppelt ?? Im anderen ist es richtig, Personal = 9, habe ich so uebernommen --> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>nicht spezifiziert/unbestimmt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Erwachsener</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Kind</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Student</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Behinderter</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation>Sehbehinderter</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>Hoergeschae digter</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation>Arbeitsloser/Sozialhilfeempfaenger</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="9"> <xs:annotation> <xs:documentation>Personal</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="10"> <xs:annotation> <xs:documentation>Militaeranhehoeriger</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="19"> <xs:annotation> <xs:documentation>Schueler</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="20"> <xs:annotation> <xs:documentation>Azubi</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="25"> <xs:annotation> <xs:documentation>Senior</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type `tns:SelektionKriterien_Type`

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Typ: Selektionskriterion in XML Datumform. BOM 1107 Tabelle 6-18, heisst dort 'XML'
Diagram	
Type	tns:DateTime
Type hierarchy	<ul style="list-style-type: none"> xs:dateTime tns:DateTime tns:SelektionKriterien_Type
Used by	Elements tns:TXANLN_Type/tns:transSelektionKriterien, tns:TXASBER_Type/tns:transSelektionKriterien, tns:TXAUSEFS_Type/tns:transSelektionKriterien
Source	<pre><xs:simpleType name="SelektionKriterien_Type"> <xs:annotation> <xs:documentation>Typ: Selektionskriterion in XML Datumform. BOM 1107 Tabelle 6-18, heisst dort 'XML' </xs:documentation> </xs:annotation> <xs:restriction base="ct:DateTime"/> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type `tns:Kudentyp_CODE_Type`

Namespace	http://vdv/ka/kvp-dl-pv/2		
Annotations	Der Kundentyp_CODE klassifiziert Kunden bzgl. typischer tarifrelevanter Kundengruppen des OePV. BOM 6-38		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:Kudentyp_CODE_Type		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	Erwachsener
	enumeration	2	Kind
	enumeration	3	Student
	enumeration	5	Behinderter
	enumeration	6	Sehbehinderter
	enumeration	7	Hoergeschaedigter
	enumeration	8	Arbeitsloser/Sozialhilfeempfaenger
	enumeration	9	Personal
	enumeration	10	Militaeranhehoeriger
	enumeration	19	Schueler
	enumeration	20	Azubi
	enumeration	25	Senior
Used by	Elements	tns:TX_AFBLOG_Type/tns:afbLogFahrgastTyp, tns:TX_EFSLOG_Type/tns:efsFahrgastTyp	
Source	<pre><xs:simpleType name="Kudentyp_CODE_Type"> <xs:annotation></pre>		

	<pre> <xs:documentation>Der Kundentyp_CODE klassifiziert Kunden bzgl. typischer tarifrelevanter Kundengruppen des OePV. BOM 6-38</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>nicht spezifiziert/unbestimmt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Erwachsener</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Kind</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Student</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Behinderter</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation>Sehbehinderter</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>Hoergeschae digter</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation>Arbeitsloser/Sozialhilfeempfaenger</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="9"> <xs:annotation> <xs:documentation>Personal</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="10"> <xs:annotation> <xs:documentation>Militaeranhehoeriger</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="19"> <xs:annotation> <xs:documentation>Schueler</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="20"> <xs:annotation> <xs:documentation>Azubi</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="25"> <xs:annotation> <xs:documentation>Senior</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type `tns:ServiceKlasse_CODE_Type`

Namespace	http://vdv/ka/kvp-dl-pv/2
Annotations	Der ServiceKlasse_CODE klassifiziert Servicequalitaeten der Transportdienstleistung. Haeufigstes Beispiel ist die Unterscheidung in 1. und 2.

	Klasse. BOM 6-49															
Diagram																
Type	restriction of tns:INT1															
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:ServiceKlasse_CODE_Type															
Facets	<table><tr><td>maxInclusive</td><td>255</td><td></td></tr><tr><td>minInclusive</td><td>0</td><td></td></tr><tr><td>enumeration</td><td>0</td><td>nicht spezifiziert/unbestimmt</td></tr><tr><td>enumeration</td><td>1</td><td>1. Klasse</td></tr><tr><td>enumeration</td><td>2</td><td>2. Klasse</td></tr></table>	maxInclusive	255		minInclusive	0		enumeration	0	nicht spezifiziert/unbestimmt	enumeration	1	1. Klasse	enumeration	2	2. Klasse
maxInclusive	255															
minInclusive	0															
enumeration	0	nicht spezifiziert/unbestimmt														
enumeration	1	1. Klasse														
enumeration	2	2. Klasse														
Used by	Elements tns:TX_AFBLOG_Type/tns:afbLogServiceKlasse, tns:TX_EFSLOG_Type/tns:efsLogServiceKlasse															
Source	<pre><xs:simpleType name="ServiceKlasse_CODE_Type"> <xs:annotation> <xs:documentation>Der ServiceKlasse_CODE klassifiziert Servicequalitaeten der Transportdienstleistung. Haeufigstes Beispiel ist die Unterscheidung in 1. und 2. Klasse. BOM 6-49</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>nicht spezifiziert/unbestimmt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>1. Klasse</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>2. Klasse</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>															
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd															

Simple Type tns:ServiceKlasseExtra_CODE_Type

Namespace	http://vdv/ka/kvp-dl-pv/2		
Annotations	Der ServiceKlasseExtra_CODE klassifiziert zusaetzliche Services/Servicequalitaeten im Zusammenhang mit der Transportdienstleistung. BOM 6-50		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:ServiceKlasseExtra_CODE_Type		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	nicht spezifiziert/unbestimmt
	enumeration	1	Fruehstueck
	enumeration	2	Mittagessen
	enumeration	3	Abendessen
	enumeration	4	Buffet

	enumeration	5	Imbiss
Used by	Element	tns:TX_EFSLOG_Type/tns:efsServiceKlasseExtra	
Source	<pre><xs:simpleType name="ServiceKlasseExtra_CODE_Type"> <xs:annotation> <xs:documentation>Der ServiceKlasseExtra_CODE klassifiziert zusaetzliche Services/ Servicequalitaeten im Zusammenhang mit der Transportdienstleistung. BOM 6-50</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>nicht spezifiziert/unbestimmt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Fruehstueck</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Mittagessen</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Abendessen</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Buffet</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Imbiss</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd		

Simple Type tns:TransportTypeCode_Type

Namespace	http://vdv/ka/kvp-dl-pv/2		
Annotations	<p>Der TransportTypeCode_Type oder TransportmittelKategorie_CODE bzw. Transportserviceart_CODE_Type (Spez BOM) klassifiziert Arten von Transportdienstleistungen im Sinne einer Qualitaetsklasse, z.B. "IC/EC", "ICE" bei der Deutschen Bahn. Diese Kategorien sind "marketinggetrieben" mit Auswirkungen auf den Preis und daher produktspezifisch.</p> <p>Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung TransportTypeEnum_Type im entsprechenden Schema (XML-Schema_KVP_DL_PV_Enums_ext-1.x.x.xsd) umgesetzt werden.</p> <p>Enumeration: Classifies types of transport services concerning quality.</p> <p>EN 1545: TransportTypeCode.</p> <p>See also Spec BOM table 6-86 and TransportTypeEnum_Type.</p>		
Diagram	<pre>classDiagram class TransportTypeCode_Type class ct_INT1 TransportTypeCode_Type -- > ct_INT1</pre>		
Type	tns:INT1		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:TransportTypeCode_Type		
Facets	maxInclusive	255	
	minInclusive	0	
Used by	Simple Types	tns:TransportmittelKategorie_CODE_Type, tns:Transportserviceart_CODE_Type	
Source	<xs:simpleType name="TransportTypeCode_Type">		

	<pre> <xs:annotation> <xs:documentation>Der TransportTypeCode_Type oder TransportmittelKategorie_CODE bzw. TransportServiceart_CODE_Type (Spez BOM) klassifiziert Arten von Transportdienstleistungen im Sinne einer Qualitaetsklasse, z.B. "IC/EC", "ICE" bei der Deutschen Bahn. Diese Kategorien sind "marketinggetrieben" mit Auswirkungen auf den Preis und daher produktspezifisch. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung TransportTypeEnum_Type im entsprechenden Schema (XML-Schema_KVP_DL_PV_Enums_ext-1.x.x.xsd) umgesetzt werden. Enumeration: Classifies types of transport services concerning quality. EN 1545: TransportTypeCode. See also Spec BOM table 6-86 and TransportTypeCodeEnum_Type.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1" /> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Simple Type tns:TransportmittelKategorie_CODE_Type

Namespace	http://vdv/ka/kvp-dl-pv/2				
Annotations	Typ, der die Kompatibilitaet zur BOM Spez. herstellt. Siehe TransportTypeCode_Type. Entfaellt demnaechst.				
Diagram	<pre> graph LR A[TransportmittelKategorie_CODE_Type] -- restriction --> B[tns:TransportTypeCode_Type] </pre>				
Type	tns:TransportTypeCode_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TransportTypeCode_Type tns:TransportmittelKategorie_CODE_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Element tns:TX_EFSLOG_Type/tns:efsVerkehrsmittelKategorie				
Source	<pre> <xs:simpleType name="TransportmittelKategorie_CODE_Type"> <xs:annotation> <xs:documentation>Typ, der die Kompatibilitaet zur BOM Spez. herstellt. Siehe TransportTypeCode_Type. Entfaellt demnaechst.</xs:documentation> </xs:annotation> <xs:restriction base="tns:TransportTypeCode_Type" /> </xs:simpleType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd				

Simple Type tns:Transportserviceart_CODE_Type

Namespace	http://vdv/ka/kvp-dl-pv/2				
Annotations	Typ, der die Kompatibilitaet zur BOM Spez. herstellt. Siehe TransportTypeCode_Type. Entfaellt demnaechst.				
Diagram	<pre> graph LR A[Transportserviceart_CODE_Type] -- restriction --> B[tns:TransportTypeCode_Type] </pre>				
Type	tns:TransportTypeCode_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TransportTypeCode_Type tns:Transportserviceart_CODE_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Element tns:TX_AFBLOG_Type/tns:afbLogVerkehrsmittelart				
Source	<pre> <xs:simpleType name="Transportserviceart_CODE_Type"> <xs:annotation> </pre>				

	<pre> <xs:documentation>Typ, der die Kompatibilitaet zur BOM Spez. herstellt. Siehe TransportTypeCode_Type. Entfaellt demnaechst.</xs:documentation> </xs:annotation> <xs:restriction base="tns:TransportTypeCode_Type" /> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/kvp-dl-pv/2/XML-Schema_KVP_DL_PV.xsd

Namespace: "http://vdv/ka/ion/2"

Schema(s)

Imported schema XML-Schema_ION.xsd

Namespace	http://vdv/ka/ion/2
Properties	attribute form default: unqualified
	element form default: unqualified
	version: 1.10.0
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element(s)

Element tns:TXB

Namespace	http://vdv/ka/ion/2
Annotations	Element: Bestaetigung einer ION-Transaktion
Diagram	
Type	tns:TXB_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXB_Type
Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre> <tns:TXB xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> </tns:TXB> </pre>
Source	<pre> <xs:element name="TXB" type="tns:TXB_Type"> <xs:annotation> <xs:documentation>Element: Bestaetigung einer ION-Transaktion</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXA**

Namespace	http://vdv/ka/ion/2
Annotations	Element: Ablehnung einer ION-Transaktion
Diagram	
Type	tns:TXA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXA_Type
Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , transAblehnungGrund
Children	transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><tns:TXA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> <transAblehnungGrund>{1,1}</transAblehnungGrund> </tns:TXA></pre>
Source	<pre><xs:element name="TXA" type="tns:TXA_Type"> <xs:annotation> <xs:documentation>Element: Ablehnung einer ION-Transaktion</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXBRequest**

Namespace	http://vdv/ka/ion/2
Annotations	Element: Mitteilung eines Verarbeitungsstatus (OK)
Diagram	
Type	tns:TXB_Type

Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_RET_Type • tns:TXB_Type
Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><tns:TXBRequest xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> </tns:TXBRequest></pre>
Source	<pre><xs:element name="TXBRequest" type="tns:TXB_Type"> <xs:annotation> <xs:documentation>Element: Mitteilung eines Verarbeitungssstatus (OK)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXARequest

Namespace	http://vdv/ka/ion/2
Annotations	Element: Mitteilung eines Verarbeitungssstatus (Fehlerhaft im Drittsystem)
Diagram	
Type	tns:TXA_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_RET_Type • tns:TXA_Type
Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , transAblehnungGrund
Children	transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><tns:TXARequest xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> <transAblehnungGrund>{1,1}</transAblehnungGrund> </tns:TXARequest></pre>
Source	<pre><xs:element name="TXARequest" type="tns:TXA_Type"> <xs:annotation> <xs:documentation>Element: Mitteilung eines Verarbeitungssstatus (Fehlerhaft im Drittsystem)</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXDEABER

Namespace	http://vdv/ka/ion/2
Annotations	Element: Dienstanfrage: "Loeschen einer Produkt-Akzeptanz von allen akzeptierenden Organisationen"
Diagram	
Type	tns:TXDEABER_Req_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXDEABER_Req_Type
Properties	content: complex
Model	txbase , prodAkzeptanzEnde , prodProdukt_ID
Children	prodAkzeptanzEnde, prodProdukt_ID, txbase
Instance	<pre><tns:TXDEABER xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <prodAkzeptanzEnde>{1,1}</prodAkzeptanzEnde> <prodProdukt_ID>{1,1}</prodProdukt_ID> </tns:TXDEABER></pre>
Source	<pre><xs:element name="TXDEABER" type="tns:TXDEABER_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage: "Loeschen einer Produkt-Akzeptanz von allen akzeptierenden Organisationen"</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITA

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrmitteilung Applikation
Diagram	
Type	tns:TXSMITA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITA_Type
Properties	content: complex nillable: false

Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSMITA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <appSperrkandidat>{1,1}</appSperrkandidat> </tns:TXSMITA></pre>
Source	<pre><xs:element name="TXSMITA" type="tns:TXSMITA_Type" nillable="false"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSFREIMITA

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrfreigabemitteilung Applikation
Diagram	
Type	tns:TXSFREIMITA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITA_Type tns:TXSFREIMITA_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSFREIMITA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <appSperrkandidat>{1,1}</appSperrkandidat> </tns:TXSFREIMITA></pre>
Source	<pre><xs:element name="TXSFREIMITA" type="tns:TXSFREIMITA_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSANFSYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperranforderung fuer einen symmetrischen Schluessel

Diagram	
Type	tns:TXSANFSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFSYMK_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Instance	<pre><tns:TXSANFSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSANFSYMK></pre>
Source	<pre><xs:element name="TXSANFSYMK" type="tns:TXSANFSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer einen symmetrischen Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSANFASYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperranforderung fuer einen asymmetrischen Schluessel
Diagram	
Type	tns:TXSANFASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFASYMK_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Instance	<pre><tns:TXSANFASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase></pre>

	<pre><sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSANFASYMK></pre>
Source	<pre><xs:element name="TXSANFASYMK" type="tns:TXSANFASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer einen asymmetrischen Schluessel</ xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSAANFSYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel
Diagram	
Type	tns:TXSAANFSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFSYMK_Type tns:TXSAANFSYMK_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Instance	<pre><tns:TXSAANFSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSAANFSYMK></pre>
Source	<pre><xs:element name="TXSAANFSYMK" type="tns:TXSAANFSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel</ xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSAANFASYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel

Diagram	
Type	tns:TXSAANFASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFASYMK_Type tns:TXSAANFASYMK_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Instance	<pre><tns:TXSAANFASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSAANFASYMK></pre>
Source	<pre><xs:element name="TXSAANFASYMK" type="tns:TXSAANFASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSFREIMITSYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrfreigabemitteilung symmetrischer Key
Diagram	
Type	tns:TXSFREIMITSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITSYMK_Type

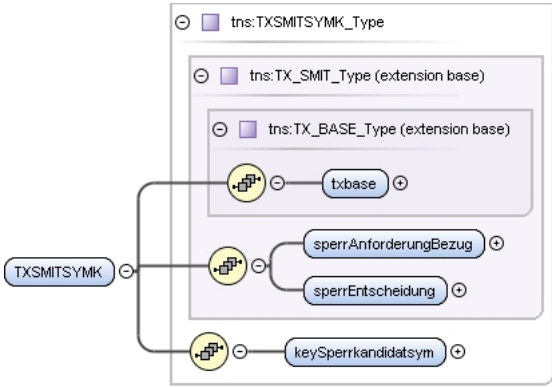
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSFREIMITASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSFREIMITASYMK></pre>
Source	<pre><xs:element name="TXSFREIMITASYMK" type="tns:TXSFREIMITASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung symmetrischer Key</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSFREIMITASYMK

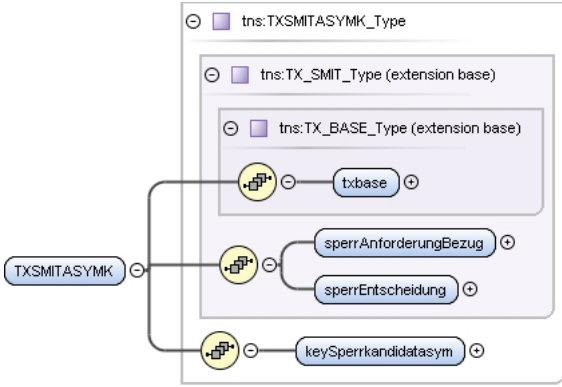
Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrfreigabemitteilung asymmetrischer Key
Diagram	
Type	tns:TXSFREIMITASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITASYMK_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSFREIMITASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSFREIMITASYMK></pre>
Source	<pre><xs:element name="TXSFREIMITASYMK" type="tns:TXSFREIMITASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung asymmetrischer Key</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITASYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrmitteilung symmetrischer Schluesel

Diagram	
Type	tns:TXSMITSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITSYMK_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSMITSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSMITSYMK></pre>
Source	<pre><xs:element name="TXSMITSYMK" type="tns:TXSMITSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung symmetrischer Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITASYMK

Namespace	http://vdv/ka/ion/2
Annotations	Element: Sperrmitteilung asymmetrischer Schluessel
Diagram	
Type	tns:TXSMITASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITASYMK_Type
Properties	content: complex
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym

Children	keySperrkandidatasymp, sperrAnforderungBezug, sperrEntscheidung, txbase
Instance	<pre><tns:TXSMITASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatasymp>{1,1}</keySperrkandidatasymp> </tns:TXSMITASYMK></pre>
Source	<pre><xs:element name="TXSMITASYMK" type="tns:TXSMITASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung asymmetrischer Schluessel</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWA

Namespace	http://vdv/ka/ion/2
Annotations	Element: Dienstanfrage "Sperrnachweis Applikation"
Diagram	
Type	tns:TXSNAWA_Req_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWA_Req_Type
Properties	content: complex
Used by	Complex Type tns:TXSBER_Type
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrtransaktionApplikation , appNmTransaktionMAC
Children	appNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionApplikation, txbase, zyklusNummer
Instance	<pre><tns:TXSNAWA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <samSperrkandidat>{1,1}</samSperrkandidat> <orgSperrkandidat>{1,1}</orgSperrkandidat> <zyklusNummer>{1,1}</zyklusNummer> <sperrtransaktionApplikation>{1,1}</sperrtransaktionApplikation> <appNmTransaktionMAC>{1,1}</appNmTransaktionMAC> </tns:TXSNAWA></pre>
Source	<pre><xs:element name="TXSNAWA" type="tns:TXSNAWA_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage "Sperrnachweis Applikation"</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWB

Namespace	http://vdv/ka/ion/2
Annotations	Element: Dienstanfrage "Sperrnachweis Berechtigung"

Diagram	
Type	tns:TXSNAWB_Req_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWB_Req_Type
Properties	content: complex
Used by	Complex Type tns:TXSBER_Type
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrtransaktionBerechtigung , berNmTransaktionMAC
Children	berNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionBerechtigung, txbase, zyklusNummer
Instance	<pre><tns:TXSNAWB xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <samSperrkandidat>{1,1}</samSperrkandidat> <orgSperrkandidat>{1,1}</orgSperrkandidat> <zyklusNummer>{1,1}</zyklusNummer> <sperrtransaktionBerechtigung>{1,1}</sperrtransaktionBerechtigung> <berNmTransaktionMAC>{1,1}</berNmTransaktionMAC> </tns:TXSNAWB></pre>
Source	<pre><xs:element name="TXSNAWB" type="tns:TXSNAWB_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage "Sperrnachweis Berechtigung"</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type(s)

Complex Type tns:TX_BASE_Type

Namespace	http://vdv/ka/ion/2
Annotations	Basisdaten fuer alle Transaktionen
Diagram	
Used by	<p>Complex Types</p> <p>ah:TXAA_Type, ah:TXAEA_Type, ah:TXKNAWDM_Type, ah:TXLKAORG_Req_Type, ah:TXLZVMORG_Req_Type, ah:TXRA_Type, tns:TXABER_Type, tns:TXADM_Type, tns:TXAEBER_Type, tns:TXAEBER_Type_1_3_0, tns:TXAENBER_Type, tns:TXANLN_Type, tns:TXAS_Type, tns:TXAUSEFS_Type, tns:TXBEKODL_Type, tns:TXBEWEBKOKVP_Type, tns:TXDEABER_Req_Type, tns:TXEBER_Type, tns:TXGKO_Type, tns:TXGWEB_Type, tns:TXKNAWA_Type, tns:TXKNAWB_Type, tns:TXLPEB_Type, tns:TXLPEB_Type, tns:TXRBBER_Type, tns:TXSNAWA_Req_Type, tns:TXSNAWB_Req_Type, tns:TXTRANSABBRUCH_Type, tns:TXUEBERKON_Type, tns:TX_RET_Type, tns:TX_SANF_Type, tns:TX_SMIT_Type</p>
Model	txbase
Children	txbase
Source	<pre><xs:complexType name="TX_BASE_Type"> <xs:annotation> <xs:documentation>Basisdaten fuer alle Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="txbase" type="tns:ION_TX_HEADER_Type"> <xs:annotation></pre>

	<pre> <xs:documentation>Fachliche Daten ueber die in der Transaktion involvierten Systeme</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:ION_TX_HEADER_Type

Namespace	http://vdv/ka/ion/2
Annotations	Routing relevante Daten des Nachrichtenkopfs von VDV KA Transaktionen
Diagram	
Used by	Element tns:TX_BASE_Type/txbase
Model	transAuftrag{0,1}, transEmpfaenger_ID, transEmpfaengerRolle, transStatus{0,1}, transTransaktion_ID, transTransaktionsTyp{0,1}, transTransaktionsZeitpunkt, transVersion{0,1}, transWiederholungsZaehler{0,1}, transSignaturTyp{0,1}, transSignaturZertifikat{0,1}, transSignatur{0,1}
Children	transAuftrag, transEmpfaengerRolle, transEmpfaenger_ID, transSignatur, transSignaturTyp, transSignaturZertifikat, transStatus, transTransaktion_ID, transTransaktionsTyp, transTransaktionsZeitpunkt, transVersion, transWiederholungsZaehler
Source	<pre> <xs:complexType name="ION_TX_HEADER_Type"> <xs:annotation> <xs:documentation>Routing relevante Daten des Nachrichtenkopfs von VDV KA Transaktionen</ xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="transAuftrag" type="xs:string" minOccurs="0" maxOccurs="1"/> <xs:element name="transEmpfaenger_ID" type="ka:Organisation_ID"> <xs:annotation> <xs:documentation>Eindeutige OrganisationsId des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element> <xs:element name="transEmpfaengerRolle" type="ka:KommunikationsParterRolle"> <xs:annotation> <xs:documentation>Rolle des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element> <xs:element name="transStatus" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transTransaktion_ID" type="tns:IONTransaktion_ID_Type"/> <xs:element name="transTransaktionsTyp" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transTransaktionsZeitpunkt" type="ct:DateTime"> <xs:annotation> <xs:documentation>Zeitpunkt der Dienstanfrage gemaess den Angaben der Dienstaufrufers. Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist moeglicherweise die Aussagekraft dieses Feldes sehr gering.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="transVersion" type="ct:BitString16" minOccurs="0" maxOccurs="1"/> <xs:element name="transWiederholungsZaehler" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transSignaturTyp" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transSignaturZertifikat" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:hexBinary"> </pre>

	<pre> <xs:length value="378" fixed="true"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="transSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:IONTransaktion_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	<p>Typ: ID fuer Transaktionen, die ueber das ION (Interoperables Netzwerk) durchgefuehrt werden. Aufgabe dieses Elements ist es, eine Korrelation zwischen der Dienstantwort und der ursprunglichen Dienstanfrage herzustellen. transSequenznummer wird initial vom Dienstafrufer vergeben und wird unveraendert fuer die Dauer der Kommunikation genutzt.</p>
Diagram	
Used by	<p>Elements</p> <p>tns:ION_TX_HEADER_Type/transTransaktion_ID, tns:TX_RET_Type/transOrigID, tns:TX_SMIT_Type/sperrAnforderungBezug</p>
Model	transSequenznummer , transSenderRolle , transSender_ID
Children	transSenderRolle, transSender_ID, transSequenznummer
Source	<pre> <xs:complexType name="IONTransaktion_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID fuer Transaktionen, die ueber das ION (Interoperables Netzwerk) durchgefuehrt werden. Aufgabe dieses Elements ist es, eine Korrelation zwischen der Dienstantwort und der ursprunglichen Dienstanfrage herzustellen. transSequenznummer wird initial vom Dienstafrufer vergeben und wird unveraendert fuer die Dauer der Kommunikation genutzt.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="transSequenznummer" type="ct:SequenceNumberFour"/> <xs:element name="transSenderRolle" type="ka:KommunikationsParterRolle"/> <xs:element name="transSender_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:Transaktionsdatensatz_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Transaktionsdatensatz
Diagram	
Used by	<p>Elements</p> <p>ah:TXAA_Type/ausgabeTransaktionApplikation, ah:TXRA_Type/ruecknahmeTransaktionApplikation, tns:NmApplikationsdaten_Type/tns:LetzteTransaktion, tns:NmApplikationslogbuch_Type/tns:Transaktionsdatensatz, tns:NmBerechtigungsdaten_Type/tns:LetzteTransaktion, tns:TXABER_Type/tns:ausgabeTransaktionBerechtigung, tns:TXAENBER_Type/tns:fahrttransaktion, tns:TXBEKODL_Type/tns:fahrttransaktion, tns:TXBEWEBKOKVP_Type/tns:belastungstransaktionBerechtigung, tns:TXEBER_Type/tns:fahrttransaktion, tns:TXGKO_Type/tns:belastungstransaktionBerechtigung, tns:TXGWEB_Type/tns:belastungstransaktionBerechtigung, tns:TXLPEB_Type/tns:einzahlungsbelegBerechtigung, tns:TXLPEB_Type/tns:einzahlungsbelegBerechtigung, tns:TXRBER_Type/tns:ruecknahmeTransaktionBerechtigung, tns:TXSNAWA_Req_Type/sperrtransaktionApplikation, tns:TXSNAWB_Req_Type/sperrtransaktionBerechtigung</p>
Model	Transaktionsdaten
Children	Transaktionsdaten
Source	<pre> <xs:complexType name="Transaktionsdatensatz_Type"> <xs:annotation> <xs:documentation>Typ: Transaktionsdatensatz</xs:documentation> </xs:annotation> </pre>

	<pre> <xs:sequence> <xs:element name="Transaktionsdaten" type="xs:hexBinary" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:berNmTransaktionMAC_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: MAC-Sicherung fuer Berechtigungs-Transaktionen
Diagram	
Used by	Elements tns:TXABER_Type/tns:berNmTransaktionMAC, tns:TXAENBER_Type/tns:berNmTransaktionMAC, tns:TXBEKODL_Type/tns:berNmTransaktionMAC, tns:TXBEWEBKOKVP_Type/tns:berNmTransaktionMAC, tns:TXEBER_Type/tns:berNmTransaktionMAC, tns:TXGKO_Type/tns:berNmTransaktionMAC, tns:TXGWEB_Type/tns:berNmTransaktionMAC, tns:TXLPEB_Type/tns:berNmTransaktionMAC, tns:TXLPEB_Type/tns:berNmTransaktionMAC, tns:TXRBER_Type/tns:berNmTransaktionMAC, tns:TXSNAWB_Req_Type/tns:berNmTransaktionMAC
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schlüssel_ID , berMAC_KVP_Schlüssel_ID
Children	berMAC_KVP, berMAC_KVP_Schlüssel_ID, berMAC_PV, berMAC_PV_Schlüssel_ID
Source	<pre> <xs:complexType name="berNmTransaktionMAC_Type"> <xs:annotation> <xs:documentation>Typ: MAC-Sicherung fuer Berechtigungs-Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berMAC_PV" type="ct:OctetString8" /> <xs:element name="berMAC_KVP" type="ct:OctetString8" /> <xs:element name="berMAC_PV_Schlüssel_ID" type="tns:SymSchlüssel_ID_Type" /> <xs:element name="berMAC_KVP_Schlüssel_ID" type="tns:SymSchlüssel_ID_Type" /> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:SymSchlüssel_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Schlüssel ID
Diagram	
Used by	Elements tns:SAM-Schlüssel-Info_Type/tns:Schlüsselname, tns:Schlüsselregister_Type/tns:Schlüsselname, tns:TXASKON_Type/tns:samSchlüssel_ID, tns:TXSANFSYMK_Type/keySperrkandidatsym, tns:TXSFREIMITSYMK_Type/keySperrkandidatsym, tns:TXSMITSYMK_Type/keySperrkandidatsym, tns:TXTRANSABBRUCH_Type/tns:MKAH-PV-NM-MAC_ID, tns:TXTRANSABBRUCH_Type/tns:MKKVP--NM-MAC_ID, tns:TXUEBERKON_Type/tns:samSchlüssel_ID, tns:appNmTransaktionMAC_Type/appMAC_AH_Schlüssel_ID, tns:appNmTransaktionMAC_Type/appMAC_KVP_Schlüssel_ID, tns:berNmTransaktionMAC_Type/berMAC_KVP_Schlüssel_ID, tns:berNmTransaktionMAC_Type/berMAC_PV_Schlüssel_ID
Model	schlüsselNummer , schlüsselVersion , schlüsselInhaber_ID
Children	schlüsselInhaber_ID, schlüsselNummer, schlüsselVersion
Source	<pre> <xs:complexType name="SymSchlüssel_ID_Type"> <xs:annotation> <xs:documentation>Typ: Schlüssel ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="schlüsselNummer" type="ct:INT1" /> <xs:element name="schlüsselVersion" type="ct:INT1" /> <xs:element name="schlüsselInhaber_ID" type="ct:ReferenceNumberTwo" /> </xs:sequence> </xs:complexType> </pre>

	<pre> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:Terminal_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Datenstruktur Terminal_ID
Diagram	
Used by	Elements ah:TXKNAWDM_Type/logTerminal_ID, tns:AllgemeineTransaktionsdaten/tns:logTerminal_ID, tns:TXKNAWA_Type/tns:logTerminal_ID, tns:TXKNAWB_Type/tns:logTerminal_ID
Model	terminalTyp , terminalNummer , terminalOwner_ID
Children	terminalNummer, terminalOwner_ID, terminalTyp
Source	<pre> <xs:complexType name="Terminal_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Terminal_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="terminalTyp" type="tns:TerminalTyp_CODE_Type"/> <xs:element name="terminalNummer" type="ct:ReferenceNumberTwo"/> <xs:element name="terminalOwner_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:Ort_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Datenstruktur Ort_ID
Diagram	
Used by	Elements ah:TXKNAWDM_Type/logTransaktionsOrt_ID, tns:AllgemeineTransaktionsdaten/tns:logTransaktionsOrt_ID, tns:EFSViaOrtsListe_Type/tns:efsViaort_ID, tns:NmKundendaten_Type/tns:kundenTyp1.StreckeNach, tns:NmKundendaten_Type/tns:kundenTyp1.StreckeVon, tns:NmKundendaten_Type/tns:kundenTyp1.Tarifzonen.Ort_ID1, tns:NmKundendaten_Type/tns:kundenTyp1.Tarifzonen.Ort_ID2, tns:NmKundendaten_Type/tns:kundenTyp1.Tarifzonen.Ort_ID3, tns:NmKundendaten_Type/tns:kundenTyp2.StreckeNach, tns:NmKundendaten_Type/tns:kundenTyp2.StreckeVon, tns:NmKundendaten_Type/tns:kundenTyp2.Tarifzonen.Ort_ID1, tns:NmKundendaten_Type/tns:kundenTyp2.Tarifzonen.Ort_ID2, tns:NmKundendaten_Type/tns:kundenTyp2.Tarifzonen.Ort_ID3, tns:NmKundendaten_Type/tns:kundenTyp3.StreckeNach, tns:NmKundendaten_Type/tns:kundenTyp3.StreckeVon, tns:NmKundendaten_Type/tns:kundenTyp3.Tarifzonen.Ort_ID1, tns:NmKundendaten_Type/tns:kundenTyp3.Tarifzonen.Ort_ID2, tns:NmKundendaten_Type/tns:kundenTyp3.Tarifzonen.Ort_ID3, tns:TXKNAWA_Type/tns:logTransaktionsOrt_ID, tns:TXKNAWB_Type/tns:logTransaktionsOrt_ID, tns:TX_EFSLOG_Type/tns:efsStartort_ID, tns:TX_EFSLOG_Type/tns:efsZielort_ID, tns:TX_LOG_Type/tns:logTransaktionsort_ID
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Source	<pre> <xs:complexType name="Ort_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Ort_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="ortTyp" type="tns:OrtsTyp_CODE_Type"/> <xs:element name="ortNummer" type="ct:ReferenceNumberThree"/> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="ortDomaene_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType> </pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd
-----------------	---

Complex Type tns:TX_BER_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Basisdaten fuer Berechtigungstransaktionen
Diagram	
Used by	Elements tns:TXABER_Type/tns:tx_ber, tns:TXAEBER_Type/tns:tx_ber, tns:TXAEBER_Type/tns:tx_ber
Model	berGueltigkeitsbeginn , berGueltigkeitsende , prodAbrechnungsVerfahren , berBezahlArt , berBezahlMittel
Children	berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren
Source	<pre><xs:complexType name="TX_BER_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Berechtigungstransaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berGueltigkeitsbeginn" type="ct:DateTimeCompact" /> <xs:element name="berGueltigkeitsende" type="ct:DateTimeCompact" /> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="prodAbrechnungsVerfahren" type="tns:Abrechnungsverfahren_CODE_Type" /> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="berBezahlArt" type="tns:Bezahlart_CODE_Type" /> <xs:element name="berBezahlMittel" type="ct:OctetString10" /> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:Berechtigung_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: ID einer Berechtigung
Diagram	
Used by	Elements tns:NmVerzeichniseintragBerechtigungen_Type/tns:berBerechtigung_ID, tns:TXAEBER_Type/tns:berBerechtigung_ID, tns:TXANLN_Type/tns:berBerechtigung_ID, tns:TXASBER_Type/tns:berBerechtigung_ID, tns:TXAUSEFS_Type/tns:berBerechtigung_ID, tns:TXBEKODL_Type/tns:berBerechtigung_ID, tns:TXKNAWB_Type/tns:berBerechtigung_ID, tns:TXSANFB_Type/tns:berBerechtigung_ID, tns:TXSFREIMITB_Type/tns:berSperrkandidat, tns:TXSMITB_Type/tns:berSperrkandidat
Model	berechtigungNummer , kvp_ID
Children	berechtigungNummer, kvp_ID
Source	<pre><xs:complexType name="Berechtigung_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID einer Berechtigung</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berechtigungNummer" type="ct:ReferenceNumberFour" /> <xs:element name="kvp_ID" type="ka:Organisation_ID" /> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:EFMProdukt_ID_Type

Namespace	http://vdv/ka/ion/2
-----------	---------------------

Annotations	Typ: Datenstruktur EFMProdukt_ID, bestehend aus Produktverantwortlichen und Produktnummer (zusammen eindeutig)
Diagram	
Used by	Elements tns:NmVerzeichniseintragBerechtigungen_Type/tns:prodProdukt_ID, tns:TXAE-BER_Type_1_3_0/tns:prodProdukt_ID, tns:TXANLN_Type/tns:prodProdukt_ID, tns:TX-ASBER_Type/tns:prodProdukt_ID, tns:TXAUSEFS_Type/tns:prodProdukt_ID, tns:TXDEABER_Re-q_Type/tns:prodProdukt_ID, tns:TXSANFB_Type/tns:prodProdukt_ID
Model	produktNumer{0,1} , organisationID
Children	organisationID, produktNumer
Source	<pre><xs:complexType name="EFMProdukt_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur EFMProdukt_ID, bestehend aus Produktverantwortlichen und Produktnummer (zusammen eindeutig)</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="produktNumer" type="ct:ReferenceNumberTwo" minOccurs="0" maxOccurs="1"/> <xs:element name="organisationID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ ion/2/XML-Schema_ION.xsd

Complex Type tns:NmApplikationInstanz_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: ID einer Applikationsinstanz auf dem Nutzermedium
Diagram	
Used by	Elements ah:TXAEA_Type/appInstanzID, tns:NmVerzeichniseintragAppDaten_Type/tns:appInstanz_ID, tns:N-mVerzeichniseintragSchlüsselregister_Type/tns:appInstanz_ID, tns:TXADM_Type/tns:transap-pInstanz_ID, tns:TXKNAWA_Type/tns:appInstanz_ID, tns:TXSANFA_Type/tns:appInstanz_ID, tns:TXSMITA_Type/appSperrkandidat, tns:TX_APP_Type/appInstanz_ID
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Source	<pre><xs:complexType name="NmApplikationInstanz_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID einer Applikationsinstanz auf dem Nutzermedium</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="NmAppInstanznummer" type="ct:ReferenceNumberFour"/> <xs:element name="kvp_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ ion/2/XML-Schema_ION.xsd

Complex Type tns:ASymSchluessel_ID_Type

Namespace	http://vdv/ka/ion/2
Annotations	Type: Identifizierungsmerkmal, das den Schluessel eindeutig bestimmt.
Diagram	
Used by	Elements tns:TXSANFASYMK_Type/keySperrkandidatasym, tns:TXSFREIMITASYMK_Type/keySperrkandi-datasym, tns:TXSMITASYMK_Type/keySperrkandidatasym
Model	signaturSchluessel
Children	signaturSchluessel
Source	<pre><xs:complexType name="ASymSchluessel_ID_Type"> <xs:annotation> <xs:documentation>Type: Identifizierungsmerkmal, das den Schluessel eindeutig bestimmt.</ xs:documentation> </xs:annotation></pre>

	<pre> <xs:sequence> <xs:element name="signaturSchluessel" type="ct:OctetString12"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:appNmTransaktionMAC_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: MAC-Sicherung fuer Applikations-Transaktionen
Diagram	
Used by	Elements ah:TXAA_Type/appNmTransaktionMAC, ah:TXRA_Type/appNmTransaktionMAC, tns:TXS-NAWA_Req_Type/appNmTransaktionMAC
Model	appMAC_AH , appMAC_KVP , appMAC_AH_Schluessel_ID , appMAC_KVP_Schluessel_ID
Children	appMAC_AH, appMAC_AH_Schluessel_ID, appMAC_KVP, appMAC_KVP_Schluessel_ID
Source	<pre> <xs:complexType name="appNmTransaktionMAC_Type"> <xs:annotation> <xs:documentation>Typ: MAC-Sicherung fuer Applikations-Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="appMAC_AH" type="ct:OctetString8"/> <xs:element name="appMAC_KVP" type="ct:OctetString8"/> <xs:element name="appMAC_AH_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/> <xs:element name="appMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_RET_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Basisdaten fuer Antworttransaktion
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type
Used by	Complex Types ah:TX_LKAORG_Type, ah:TX_LZVMORG_Type, tns:TXA_Type, tns:TXB_Type
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Source	<pre> <xs:complexType name="TX_RET_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Antworttransaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="transOrigID" type="tns:IONTransaktion_ID_Type"/> <xs:element name="transOrigSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>

	<pre> <xs:element name="transOriginalZeit" type="xs:dateTime"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_SMIT_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Basisdaten fuer Sperrmitteilungen
Diagram	<p>The diagram illustrates the structure of the <code>tns:TX_SMIT_Type</code> complex type. It is an extension of the <code>tns:TX_BASE_Type</code> (extension base). The <code>TX_SMIT_Type</code> contains three elements: <code>txbase</code>, <code>sperrAnforderungBezug</code>, and <code>sperrEntscheidung</code>. The <code>txbase</code> element is shown as a child of the <code>TX_SMIT_Type</code>, while <code>sperrAnforderungBezug</code> and <code>sperrEntscheidung</code> are shown as children of the <code>TX_BASE_Type</code> extension base.</p>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type
Used by	Complex Types tns:TXSFREIMITASYMK_Type, tns:TXSFREIMITB_Type, tns:TXSFREIMITO_Type, tns:TXSFREIMITSYMK_Type, tns:TXSFREIMITS_Type, tns:TXSMITASYMK_Type, tns:TXSMITASYMTA_Type, tns:TXSMITB_Type, tns:TXSMITO_Type, tns:TXSMITSYMK_Type, tns:TXSMITS_Type
Model	txbase , sperrAnforderungBezug , sperrEntscheidung
Children	sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre> <xs:complexType name="TX_SMIT_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Sperrmitteilungen</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="sperrAnforderungBezug" type="tns:IONTransaktion_ID_Type"/> <xs:element name="sperrEntscheidung" type="tns:Mitteilung_CODE_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TX_SANF_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Basisdaten fuer Sperranforderungen
Diagram	<p>The diagram illustrates the structure of the <code>tns:TX_SANF_Type</code> complex type. It is an extension of the <code>tns:TX_BASE_Type</code> (extension base). The <code>TX_SANF_Type</code> contains two elements: <code>txbase</code> and <code>sperrSperrgrund</code>. The <code>txbase</code> element is shown as a child of the <code>TX_SANF_Type</code>, while <code>sperrSperrgrund</code> is shown as a child of the <code>TX_BASE_Type</code> extension base.</p>
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type
Used by	Complex Types ah:TXSANFO_Type, ah:TXSANFS_Type, tns:TXSANFASYMK_Type, tns:TXSANFA_Type, tns:TXSANFB_Type, tns:TXSANFSYMK_Type
Model	txbase , sperrSperrgrund
Children	sperrSperrgrund, txbase
Source	<pre> <xs:complexType name="TX_SANF_Type"> <xs:annotation> </pre>

	<pre> <xs:documentation>Typ: Basisdaten fuer Sperranforderungen</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <!-- Wilk Hoffmann: muss spaeter aus Aufzaehlung kommen --> <xs:element name="sperrSperrgrund" type="ct:INT1" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXA_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Ablehnung einer ION-Transaktion
Diagram	
Type	extension of tns:TX_RET_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXA_Type
Used by	Elements tns:TXA, tns:TXAResponse
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , transAblehnungGrund
Children	transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Source	<pre> <xs:complexType name="TXA_Type"> <xs:annotation> <xs:documentation>Typ: Ablehnung einer ION-Transaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_RET_Type"> <xs:sequence> <xs:element name="transAblehnungGrund" type="ct:INT1"> <xs:annotation> <xs:documentation>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst, getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceResultCode'). Es wird empfohlen, fuer die vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXB_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Bestaetigung einer ION-Transaktion
Diagram	
Type	extension of tns:TX_RET_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXB_Type
Used by	Elements tns:TXB, tns:TXBRequest
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit
Children	transOrigID, transOrigSignatur, transOriginalZeit, txbase
Source	<pre><xs:complexType name="TXB_Type"> <xs:annotation> <xs:documentation>Typ: Bestaetigung einer ION-Transaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_RET_Type" /> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXAS_Type

Namespace	http://vdv/ka/ion/2				
Annotations	Typ: Aufforderung zum Senden				
Diagram					
Type	extension of tns:TX_BASE_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXAS_Type 				
Used by	<table> <tr> <td>Complex Types</td><td>tns:TXASBER_Type, tns:TXASKON_Type</td></tr> <tr> <td>Element</td><td>tns:TXAS</td></tr> </table>	Complex Types	tns:TXASBER_Type, tns:TXASKON_Type	Element	tns:TXAS
Complex Types	tns:TXASBER_Type, tns:TXASKON_Type				
Element	tns:TXAS				
Model	txbase , transSendeAuftrag , transSendeAuftragstyp				
Children	transSendeAuftrag, transSendeAuftragstyp, txbase				
Source	<pre><xs:complexType name="TXAS_Type"> <xs:annotation> <xs:documentation>Typ: Aufforderung zum Senden</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="transSendeAuftrag"> <xs:simpleType></pre>				

	<pre> <xs:restriction base="tns:PrintableString"> <xs:minLength value="0" /> <xs:maxLength value="10" /> </xs:restriction> </xs:simpleType> </xs:element> <!-- TODO Wilk Hoffmann: Wenn dann bitte mit Aufzaehlung (verschoben bis stabil)--> <xs:element name="transSendeAuftragstyp" type="tns:AuftragsTyp_CODE" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXDEABER_Req_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Dienstanfrage "Entfernen einer Produkt Akzeptanz fuer alle Organisationen"
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXDEABER_Req_Type
Used by	Element tns:TXDEABER
Model	txbase , prodAkzeptanzEnde , prodProdukt_ID
Children	prodAkzeptanzEnde, prodProdukt_ID, txbase
Source	<pre> <xs:complexType name="TXDEABER_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Entfernen einer Produkt Akzeptanz fuer alle Organisationen"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="prodAkzeptanzEnde" type="ct:Date" /> <xs:element name="prodProdukt_ID" type="tns:EFMProdukt_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSMITA_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrmitteilung Applikation
Diagram	

Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSMITA_Type
Used by	<div>Complex Type tns:TXSFREIMITA_Type</div> <div>Element tns:TXSMITA</div>
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre><xs:complexType name="TXSMITA_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="appSperrkandidat" type="tns:NmApplikationInstanz_ID_Type" nillable="false" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSFREIMITA_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrfreigabemitteilung Applikation
Diagram	<pre> classDiagram class tnsTXSMITA_Type["tns:TXSMITA_Type (extension base)"] class tnsTX_SMIT_Type["tns:TX_SMIT_Type (extension base)"] class tnsTX_BASE_Type["tns:TX_BASE_Type (extension base)"] class tnsTXSFREIMITA_Type["tns:TXSFREIMITA_Type"] class txbase class sperrAnforderungBezug class sperrEntscheidung class appSperrkandidat tnsTXSMITA_Type -- > tnsTX_SMIT_Type tnsTX_SMIT_Type -- > tnsTX_BASE_Type tnsTXSFREIMITA_Type -- > tnsTXSMITA_Type txbase -- tnsTXSMITA_Type sperrAnforderungBezug -- tnsTXSMITA_Type sperrEntscheidung -- tnsTXSMITA_Type appSperrkandidat -- tnsTXSMITA_Type </pre>
Type	extension of tns:TXSMITA_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSMITA_Type • tns:TXSFREIMITA_Type
Used by	Element tns:TXSFREIMITA
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat
Children	appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre><xs:complexType name="TXSFREIMITA_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSMITA_Type" /> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type **tns:TXSANFSYMK_Type**

Namespace	http://vdv/ka/ion/2				
Annotations	Typ: Sperranforderung fuer einen symmetrischen Schluessel				
Diagram					
Type	extension of tns:TX_SANF_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFSYMK_Type 				
Used by	<table> <tr> <td>Complex Type</td><td>tns:TXSAANFSYMK_Type</td></tr> <tr> <td>Element</td><td>tns:TXSANFSYMK</td></tr> </table>	Complex Type	tns:TXSAANFSYMK_Type	Element	tns:TXSANFSYMK
Complex Type	tns:TXSAANFSYMK_Type				
Element	tns:TXSANFSYMK				
Model	txbase , sperrSperrgrund , keySperrkandidatsym				
Children	keySperrkandidatsym, sperrSperrgrund, txbase				
Source	<pre> <xs:complexType name="TXSANFSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer einen symmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SANF_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Complex Type **tns:TXSANFASYMK_Type**

Namespace	http://vdv/ka/ion/2				
Annotations	Typ: Sperranforderung fuer einen asymmetrischen Schluessel				
Diagram					
Type	extension of tns:TX_SANF_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFASYMK_Type 				
Used by	<table> <tr> <td>Complex Type</td><td>tns:TXSAANFASYMK_Type</td></tr> <tr> <td>Element</td><td>tns:TXSANFASYMK</td></tr> </table>	Complex Type	tns:TXSAANFASYMK_Type	Element	tns:TXSANFASYMK
Complex Type	tns:TXSAANFASYMK_Type				
Element	tns:TXSANFASYMK				
Model	txbase , sperrSperrgrund , keySperrkandidatsym				

Children	keySperrkandidatsym, sperrSperrgrund, txbase
Source	<pre><xs:complexType name="TXSANFASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer einen asymmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SANF_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:ASymSchluessel_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSAANFSYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel
Diagram	
Type	extension of tns:TXSANFSYMK_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFSYMK_Type tns:TXSAANFSYMK_Type
Used by	Element tns:TXSAANFSYMK
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Source	<pre><xs:complexType name="TXSAANFSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSANFSYMK_Type" /> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSAANFASYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel

Diagram	
Type	extension of tns:TXSANFASYMK_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type • tns:TXSANFASYMK_Type • tns:TXSAANFASYMK_Type
Used by	Element tns:TXSAANFASYMK
Model	txbase , sperrSperrgrund , keySperrkandidatsym
Children	keySperrkandidatsym, sperrSperrgrund, txbase
Source	<pre> <xs:complexType name="TXSAANFASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSANFASYMK_Type"/> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSFREIMITSYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrfreigabemitteilung symmetrischer Schluessel
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SMIT_Type • tns:TXSFREIMITSYMK_Type
Used by	Element tns:TXSFREIMITSYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre> <xs:complexType name="TXSFREIMITSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung symmetrischer Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"/> </xs:complexContent> </xs:complexType> </pre>

	<pre> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSFREIMITASYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrfreigabemitteilung asymmetrischer Schluessel
Diagram	
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITASYMK_Type
Used by	Element tns:TXSFREIMITASYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre> <xs:complexType name="TXSFREIMITASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung asymmetrischer Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:ASymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSMITSYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrmitteilung symmetrischer Schuessel
Diagram	

Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITSYMK_Type
Used by	Element tns:TXSMITSYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym
Children	keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre><xs:complexType name="TXSMITSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung symmetrischer Schuessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSMITASYMK_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Sperrmitteilung asymmetrischer Schuessel
Diagram	<pre> classDiagram class tns_TX_SMIT_Type["tns:TX_SMIT_Type (extension base)"] class tns_TX_BASE_Type["tns:TX_BASE_Type (extension base)"] class tns_TXSMITASYMK_Type["tns:TXSMITASYMK_Type"] class txbase class sperrAnforderungBezug class sperrEntscheidung class keySperrkandidatasym tns_TX_BASE_Type -- txbase tns_TX_BASE_Type -- sperrAnforderungBezug tns_TX_BASE_Type -- sperrEntscheidung tns_TX_SMIT_Type -- tns_TX_BASE_Type tns_TXSMITASYMK_Type -- tns_TX_SMIT_Type tns_TXSMITASYMK_Type -- keySperrkandidatasym </pre>
Type	extension of tns:TX_SMIT_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITASYMK_Type
Used by	Element tns:TXSMITASYMK
Model	txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatasym
Children	keySperrkandidatasym, sperrAnforderungBezug, sperrEntscheidung, txbase
Source	<pre><xs:complexType name="TXSMITASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung asymmetrischer Schuessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatasym" type="tns:ASymSchluessel_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSNAWA_Req_Type

Namespace	http://vdv/ka/ion/2
-----------	---------------------

Annotations	Typ: Dienstanfrage "Sperrnachweis Applikation"
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWA_Req_Type
Used by	Element tns:TXSNAWA
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrtransaktionApplikation , appNmTransaktionMAC
Children	appNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionApplikation, txbase, zyklusNummer
Source	<pre> <xs:complexType name="TXSNAWA_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Sperrnachweis Applikation"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:choice minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Wurde eine Applikation Aufgrund einer SAM bzw. Organisationssperre durchgefuehrt, so ist die SAM bzw. Org ID in dem jeweiligen Element zu uebermitteln.</ xs:documentation> </xs:annotation> <xs:element name="samSperrkandidat" type="tns:SAM_ID_Type"/> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/> </xs:choice> <xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="sperrtransaktionApplikation" type="tns:Transaktionsdatensatz_Type"/> <xs:element name="appNmTransaktionMAC" type="tns:appNmTransaktionMAC_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Complex Type tns:TXSNAWB_Req_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ: Dienstanfrage "Sperrnachweis Berechtigung"

Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWB_Req_Type
Used by	Element tns:TXSNAWB
Model	txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrtransaktionBerechtigung , berNmTransaktionMAC
Children	berNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionBerechtigung, txbase, zyklusNummer
Source	<pre> <xs:complexType name="TXSNAWB_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Sperrnachweis Berechtigung"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:choice minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Wurde eine Applikation Aufgrund einer SAM bzw. Organisationssperre durchgefuehrt, so ist die SAM bzw. Org ID in dem jeweiligen Element zu uebermitteln.</ xs:documentation> </xs:annotation> <xs:element name="samSperrkandidat" type="tns:SAM_ID_Type" /> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID" /> </xs:choice> <xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="sperrtransaktionBerechtigung" type="tns:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="tns:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Simple Type(s)

Simple Type tns:TransSignatur_Type

Namespace	http://vdv/ka/ion/2
Annotations	Typ fuer die Signatur auf der Transaktion (altes Verfahren)
Diagram	
Type	restriction of xs:hexBinary
Facets	length 128
Used by	Elements tns:ION_TX_HEADER_Type/transSignatur, tns:TX_RET_Type/transOrigSignatur
Source	<pre> <xs:simpleType name="TransSignatur_Type"> <xs:annotation> <xs:documentation>Typ fuer die Signatur auf der Transaktion (altes Verfahren)</xs:documentation> </xs:annotation> </pre>

	<pre> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="128" fixed="true"/> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Simple Type **tns:SAM_ID_Type**

Namespace	http://vdv/ka/ion/2				
Annotations	Type: Eindeutiger Identifizierer eines Secure Application Module (SAM)				
Diagram					
Type	tns:ReferenceNumberThree				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT3 <ul style="list-style-type: none"> tns:ReferenceNumberThree <ul style="list-style-type: none"> tns:SAM_ID_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Used by	<table> <tr> <td>Elements</td><td>tns:NmTransaktion_ID_Type/tns:SAM_ID.samNummer, tns:TXASKON_Type/tns:samSAM_ID, tns:TXSFREIMITS_Type/tns:samSperrkandidat, tns:TXSMITS_Type/tns:samSperrkandidat, tns:TXSNAWA_Req_Type/samSperrkandidat, tns:TXSNAWB_Req_Type/samSperrkandidat, tns:TXUEBERKON_Type/tns:samSAM_ID</td></tr> </table>	Elements	tns:NmTransaktion_ID_Type/tns:SAM_ID.samNummer, tns:TXASKON_Type/tns:samSAM_ID, tns:TXSFREIMITS_Type/tns:samSperrkandidat, tns:TXSMITS_Type/tns:samSperrkandidat, tns:TXSNAWA_Req_Type/samSperrkandidat, tns:TXSNAWB_Req_Type/samSperrkandidat, tns:TXUEBERKON_Type/tns:samSAM_ID		
Elements	tns:NmTransaktion_ID_Type/tns:SAM_ID.samNummer, tns:TXASKON_Type/tns:samSAM_ID, tns:TXSFREIMITS_Type/tns:samSperrkandidat, tns:TXSMITS_Type/tns:samSperrkandidat, tns:TXSNAWA_Req_Type/samSperrkandidat, tns:TXSNAWB_Req_Type/samSperrkandidat, tns:TXUEBERKON_Type/tns:samSAM_ID				
Source	<pre> <xs:simpleType name="SAM_ID_Type"> <xs:annotation> <xs:documentation>Type: Eindeutiger Identifizierer eines Secure Application Module (SAM)</xs:documentation> </xs:annotation> <xs:restriction base="ct:ReferenceNumberThree"/> </xs:simpleType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Simple Type **tns:TerminalTyp_CODE_Type**


Namespace	http://vdv/ka/ion/2				
Annotations	<p>Classifies terminals. From EN 1545: DeviceTypeCode. See Spec BOM table 6-85.</p> <p>Der TerminalTyp_CODE klassifiziert Terminals.</p> <p>Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschränkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung TerminalTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</p>				
Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:TerminalTyp_CODE_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	<table> <tr> <td>Element</td><td>tns:Terminal_ID_Type/terminalTyp</td></tr> </table>	Element	tns:Terminal_ID_Type/terminalTyp		
Element	tns:Terminal_ID_Type/terminalTyp				
Source	<pre> <xs:simpleType name="TerminalTyp_CODE_Type"> <xs:annotation> <xs:documentation>Classifies terminals. From EN 1545: DeviceTypeCode. See Spec BOM table 6-85. Der TerminalTyp_CODE klassifiziert Terminals. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschränkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss </pre>				

	<p>in der Software mit Hilfe der Aufzaehlung TerminalTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation></p> <pre></xs:annotation> <xs:restriction base="ct:INT1"/> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Simple Type tns:OrtsTyp_CODE_Type

Namespace	http://vdv/ka/ion/2				
Annotations	<p>Classifies locations, see Spec BOM, table 6-69.</p> <p>Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung OrtsTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</p>				
Diagram	<pre> graph LR A[tns:OrtsTyp_CODE_Type] --- B[ct:INT1] style A fill:#f9f9f9,stroke:#333,stroke-width:1px style B fill:#f9f9f9,stroke:#333,stroke-width:1px linkStyle 0 stroke:#333,stroke-width:1px </pre>				
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:OrtsTyp_CODE_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	<table> <tr> <td>Element</td><td>tns:Ort_ID_Type/ortTyp</td></tr> </table>	Element	tns:Ort_ID_Type/ortTyp		
Element	tns:Ort_ID_Type/ortTyp				
Source	<pre><xs:simpleType name="OrtsTyp_CODE_Type"> <xs:annotation> <xs:documentation>Classifies locations, see Spec BOM, table 6-69. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung OrtsTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"/> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Simple Type tns:Abrechnungsverfahren_CODE_Type

Namespace	http://vdv/ka/ion/2		
Annotations	Der Abrechnungsverfahren_CODE klassifiziert das Verfahren der Fahrpreisabrechnung.		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:Abrechnungsverfahren_CODE_Type		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Pre-Paid
	enumeration	2	Post-Paid
	enumeration	3	Trip-Paid
Used by	Elements	tns:TXANLN_Type/tns:prodAbrechnungsverfahren, tns:TXAUSEFS_Type/tns:prodAbrechnungsverfahren, tns:TX_BER_Type/prodAbrechnungsverfahren	
Source	<xs:simpleType name="Abrechnungsverfahren_CODE_Type">		

	<pre> <xs:annotation> <xs:documentation>Der Abrechnungsverfahren_CODE klassifiziert das Verfahren der Fahrpreisabrechnung.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Keine Angabe</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Pre-Paid</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Post-Paid</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Trip-Paid</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Simple Type tns:Bezahlart_CODE_Type

Namespace	http://vdv/ka/ion/2				
Annotations	<p>Der BezahlArt_CODE klassifiziert Arten der Bezahlung (von Wertobjekten der Kernapplikation). Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung BezahlartEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</p>				
Diagram	<pre> graph LR Bezahlart_CODE_Type -- restriction --> ctINT1 </pre>				
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:Bezahlart_CODE_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Elements tns:TXANLN_Type/tns:berBezahlArt, tns:TXAUSEFS_Type/tns:berBezahlArt, tns:TX_BER_Type/berBezahlArt				
Source	<pre> <xs:simpleType name="Bezahlart_CODE_Type"> <xs:annotation> <xs:documentation>Der BezahlArt_CODE klassifiziert Arten der Bezahlung (von Wertobjekten der Kernapplikation). Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung BezahlartEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"/> </xs:simpleType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Simple Type tns:PrintableString

Namespace	http://vdv/ka/ion/2
Diagram	<pre> graph LR PrintableString -- restriction --> xsstring[xs:string] </pre>

Type	restriction of xs:string	
Facets	pattern	[-p]*
Used by	Elements	tns:Kundenroute_Type/bezeichnung, tns:Kundenroute_Type/kurzBezeichnung, tns:NmApplikationsdaten_Type/tns:Infotext, tns:NmBerechtigungsdaten_Type/tns:Infotext, tns:NmKundendaten_Type/tns:Infotext, tns:NmKundendaten_Type/tns:kundeName, tns:NmKundendaten_Type/tns:kundeVorname, tns:STATUS_DATA_ApplicationError_Type/tns:STATUS_TEXT, tns:STATUS_DATA_EngineError_Type/tns:STATUS_TEXT, tns:STATUS_DATA_EntitlementError_Type/tns:STATUS_TEXT, tns:STATUS_DATA_MediumError_Type/tns:STATUS_TEXT, tns:STATUS_DATA_OK_Type/tns:STATUS_TEXT, tns:STATUS_DATA_PrinterError_Type/tns:STATUS_TEXT, tns:STATUS_DATA_ServiceOperatorError_Type/tns:STATUS_TEXT, tns:STATUS_DATA_SessionError_Type/tns:STATUS_TEXT, tns:STATUS_DATA_SoftwareError_Type/tns:STATUS_TEXT, tns:TXAS_Type/transSendeAuftrag
Source	<pre><xs:simpleType name="PrintableString"> <xs:restriction base="xs:string"> <xs:pattern value="[-p]*"/> </xs:restriction> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	

Simple Type tns:CommonServiceResultCode

Namespace	http://vdv/ka/ion/2		
Annotations	Dienstuebergreifende Ergebniscodes. In BOM Ablehnungstype_Code bis auf Fall "0". Dieser Typ ist nicht direkt eingebunden und dient der Vollstaendigkeit der Schnittstelle.		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:CommonServiceResultCode		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	2	Daten des SOAP Headers stimmen nicht mit den Transaktionsdaten der fachlichen Nachricht ueberein.
	enumeration	3	Falsche Senderrolle
	enumeration	4	Organisations-ID des Senders ist unbekannt
	enumeration	5	Die Organisation wurde durch den AH gesperrt
	enumeration	8	Transaktion betrifft gesperrtes Objekt
	enumeration	9	Falsche Referenz
	enumeration	254	Service/Transaktion wird nicht unterstuetzt
Source	<pre><xs:simpleType name="CommonServiceResultCode"> <xs:annotation> <xs:documentation>Dienstuebergreifende Ergebniscodes. In BOM Ablehnungstype_Code bis auf Fall "0". Dieser Typ ist nicht direkt eingebunden und dient der Vollstaendigkeit der Schnittstelle.</ </xs:annotation> <xs:restriction base="ct:INT1"> <!-- <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Erfolgreich</ </xs:documentation> </xs:annotation> </xs:enumeration> --> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Daten des SOAP Headers stimmen nicht mit den Transaktionsdaten der fachlichen Nachricht ueberein.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Falsche Senderrolle</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"></pre>		

	<pre> <xs:annotation> <xs:documentation>Organisations-ID des Senders ist unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Die Organisation wurde durch den AH gesperrt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="8"> <xs:annotation> <xs:documentation>Transaktion betrifft gesperrtes Objekt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="9"> <xs:annotation> <xs:documentation>Falsche Referenz</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="254"> <xs:annotation> <xs:documentation>Service/Transaktion wird nicht unterstuetzt</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Simple Type tns:NmTransaktionsTyp_CODE

Namespace	http://vdv/ka/ion/2		
Annotations	Der NmTransaktionstyp_CODE klassifiziert Arten von Transaktionen, die mit Wertobjekten auf dem Nutzermedium auftreten		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:NmTransaktionsTyp_CODE 		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Keine Angabe
	enumeration	1	Ausgabetransaktion - Applikation oder Berechtigung
	enumeration	2	Entwertung
	enumeration	11	CI
	enumeration	12	CO
	enumeration	15	Einzahlung - Berechtigung
	enumeration	16	CI nach Fahrtfortsetzung
	enumeration	18	NTP Aendern
	enumeration	20	Sperrtransaktion Applikation oder Berechtigung
	enumeration	21	Entsperrtransaktion Applikation oder Berechtigung
	enumeration	22	BI
	enumeration	23	BO
	enumeration	24	INOUT
	enumeration	25	Rueckgabetransaktion - Applikation oder Berechtigung
	enumeration	27	Kontrolle
	enumeration	28	Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung (POB/PEB/WEB)
	enumeration	29	Belastungstransaktion WEB mit Autoload

	enumeration	30	WEB Buchung(Laden/Entladen)
	enumeration	31	WEB-CI mit Autoload
	enumeration	32	WEB-CO mit Autoload
	enumeration	33	Kontrolle nach CI; BIBO oder Entwertung
	enumeration	34	Check personal (CPKontrolldatensatz fuer Kontrollterminal)
	enumeration	35	Auto CO
	enumeration	36	manuelles CO (nachtraeglich durch den Nutzer)
	enumeration	37	Ausgabe EFS ueber Aktionsliste
	enumeration	38	Entsperrrtransaktion EFS ueber Aktionsliste
	enumeration	39	Rückgabetransaktion EFS ueber Aktionsliste
Used by	Element	tns:TX_LOG_Type/tns:logTransaktionsTyp_ID	
Source	<pre><xs:simpleType name="NmTransaktionsTyp_CODE"> <xs:annotation> <xs:documentation>Der NmTransaktionstyp_CODE klassifiziert Arten von Transaktionen, die mit Wertobjekten auf dem Nutzermedium auftreten</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Keine Angabe</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Ausgabetransaktion - Applikation oder Berechtigung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Entwertung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="11"> <xs:annotation> <xs:documentation>CI</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="12"> <xs:annotation> <xs:documentation>CO</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="15"> <xs:annotation> <xs:documentation>Einzahlung - Berechtigung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="16"> <xs:annotation> <xs:documentation>CI nach Fahrtfortsetzung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="18"> <xs:annotation> <xs:documentation>NTP Aendern</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="20"> <xs:annotation> <xs:documentation>Sperrrtransaktion Applikation oder Berechtigung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="21"> <xs:annotation> <xs:documentation>Entsperrrtransaktion Applikation oder Berechtigung</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="22"> <xs:annotation> <xs:documentation>BI</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="23"></pre>		


```

    <xs:annotation>
      <xs:documentation>BO</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="24">
    <xs:annotation>
      <xs:documentation>INOUT</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="25">
    <xs:annotation>
      <xs:documentation>Rueckgabetransaktion - Applikation oder Berechtigung</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="27">
    <xs:annotation>
      <xs:documentation>Kontrolle</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="28">
    <xs:annotation>
      <xs:documentation>Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung
(POB/PEB/WEB)</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="29">
    <xs:annotation>
      <xs:documentation>Belastungstransaktion WEB mit Autoload</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="30">
    <xs:annotation>
      <xs:documentation>WEB Buchung(Laden/Entladen)</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="31">
    <xs:annotation>
      <xs:documentation>WEB-CI mit Autoload</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="32">
    <xs:annotation>
      <xs:documentation>WEB-CO mit Autoload</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="33">
    <xs:annotation>
      <xs:documentation>Kontrolle nach CI; BIBO oder Entwertung</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="34">
    <xs:annotation>
      <xs:documentation>Check personal (CPKontrolldatensatz fuer Kontrollterminal)</
xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="35">
    <xs:annotation>
      <xs:documentation>Auto CO</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="36">
    <xs:annotation>
      <xs:documentation>manuelles CO (nachtraeglich durch den Nutzer)</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="37">
    <xs:annotation>
      <xs:documentation>Ausgabe EFS ueber Aktionsliste</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="38">
    <xs:annotation>
      <xs:documentation>Entsperrrtransaktion EFS ueber Aktionsliste</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="39">
    <xs:annotation>
      <xs:documentation>Rueckgabetransaktion EFS ueber Aktionsliste</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
</xs:restriction>


```

	<code></xs:simpleType></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Simple Type `tns:AuftragsTyp_CODE`

Namespace	http://vdv/ka/ion/2				
Annotations	Der Code des Auftrages als Aufzaehlung.				
Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:AuftragsTyp_CODE 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Element tns:TXAS_Type/transSendeAuftragstyp				
Source	<pre><xs:simpleType name="AuftragsTyp_CODE"> <xs:annotation> <xs:documentation>Der Code des Auftrages als Aufzaehlung.</xs:documentation> </xs:annotation> <!-- TODO: bitte als Aufzaehlung!!! --> <xs:restriction base="ct:INT1"/> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Simple Type `tns:Mitteilung_CODE_Type`

Namespace	http://vdv/ka/ion/2								
Annotations	Typ: Mitteilung Codes BOM 6_40								
Diagram									
Type	restriction of xs:unsignedInt								
Facets	<table> <tr> <td>enumeration</td><td>1</td></tr> <tr> <td>enumeration</td><td>2</td></tr> <tr> <td>enumeration</td><td>3</td></tr> <tr> <td>enumeration</td><td>4</td></tr> </table>	enumeration	1	enumeration	2	enumeration	3	enumeration	4
enumeration	1								
enumeration	2								
enumeration	3								
enumeration	4								
Used by	Element tns:TX_SMIT_Type/sperrEntscheidung								
Source	<pre><xs:simpleType name="Mitteilung_CODE_Type"> <xs:annotation> <xs:documentation>Typ: Mitteilung Codes BOM 6_40</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:enumeration value="1"/> <xs:enumeration value="2"/> <xs:enumeration value="3"/> <xs:enumeration value="4"/> </xs:restriction> </xs:simpleType></pre>								
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd								

Simple Type `tns:SperrlistenZyklusNummer_Type`

Namespace	http://vdv/ka/ion/2
Annotations	<p>Die sperrlistenZyklusNummer ist eine streng Monoton aufsteigende Sequenznummer.</p> <p>Sie wird in einem festen konfigurierbaren Turnus zu einem bestimmten Zeitpunkt inkrementiert (z.B. 1 mal taeglich um 1:00 Uhr).</p>

	<p>Zu einer SperrlistenZyklusNummer werden alle Sperrobjektzustaende, die zu diesem Zeitpunkt im Kose System erfasst wurden, assoziiert. Sie gilt Systemweit und ist nicht an Organisationen oder Rollen gebunden.</p> <p>Wird eine Differenzsperrliste unter Angabe der sperrlistenZyklusNummer angefordert, so werden alle Sperrobjektaenderungen zwischen dieser ZyklusNummer und der aktuellen ZyklusNummer uebertragen.</p>				
Diagram					
Type	tns:INT4				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SperrlistenZyklusNummer_Type 				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Used by	Elements tns:TXSNAWA_Req_Type/zyklusNummer, tns:TXSNAWB_Req_Type/zyklusNummer				
Source	<pre><xs:simpleType name="SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die sperrlistenZyklusNummer ist eine streng Monoton aufsteigende Sequenznummer. Sie wird in einem festen konfigurierbaren Turnus zu einem bestimmten Zeitpunkt inkrementiert (z.B. 1 mal taeglich um 1:00 Uhr). Zu einer SperrlistenZyklusNummer werden alle Sperrobjektzustaende, die zu diesem Zeitpunkt im Kose System erfasst wurden, assoziiert. Sie gilt Systemweit und ist nicht an Organisationen oder Rollen gebunden. Wird eine Differenzsperrliste unter Angabe der sperrlistenZyklusNummer angefordert, so werden alle Sperrobjektaenderungen zwischen dieser ZyklusNummer und der aktuellen ZyklusNummer uebertragen.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT4" /> </xs:simpleType></pre>				
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Namespace: "http://vdv/ka/common/types/2"

Schema(s)

Imported schema XML-Schema_Common_Types.xsd

Namespace	http://vdv/ka/common/types/2						
Properties	<table> <tr> <td>attribute form default:</td><td>unqualified</td></tr> <tr> <td>element form default:</td><td>unqualified</td></tr> <tr> <td>version:</td><td>1.10.0</td></tr> </table>	attribute form default:	unqualified	element form default:	unqualified	version:	1.10.0
attribute form default:	unqualified						
element form default:	unqualified						
version:	1.10.0						
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd						

Simple Type(s)

Simple Type tns:DateTime


Namespace	http://vdv/ka/common/types/2				
Annotations	Datum mit Uhrzeit (nutzt den Standard)				
Diagram					
Type	xs:dateTime				
Used by	<table> <tr> <td>Elements</td><td>ah:TXLKAORG_SL_DATA_Type/ErstellungsDatum, ah:TXLZVMORG_SL_DATA_Type/ErstellungsDatum, tns:ION_TX_HEADER_Type/transTransaktionsZeitpunkt, tns:SESSION_DATA_Type/tns:DATE_TIME</td></tr> <tr> <td>Simple Type</td><td>tns:SelektionKriterien_Type</td></tr> </table>	Elements	ah:TXLKAORG_SL_DATA_Type/ErstellungsDatum, ah:TXLZVMORG_SL_DATA_Type/ErstellungsDatum, tns:ION_TX_HEADER_Type/transTransaktionsZeitpunkt, tns:SESSION_DATA_Type/tns:DATE_TIME	Simple Type	tns:SelektionKriterien_Type
Elements	ah:TXLKAORG_SL_DATA_Type/ErstellungsDatum, ah:TXLZVMORG_SL_DATA_Type/ErstellungsDatum, tns:ION_TX_HEADER_Type/transTransaktionsZeitpunkt, tns:SESSION_DATA_Type/tns:DATE_TIME				
Simple Type	tns:SelektionKriterien_Type				
Source	<pre><xs:simpleType name="DateTime"> <xs:annotation> <xs:documentation>Datum mit Uhrzeit (nutzt den Standard)</xs:documentation> </xs:annotation></pre>				

	<pre><xs:restriction base="xs:dateTime" /> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd


Simple Type `tns:BitString16`

Namespace	http://vdv/ka/common/types/2				
Annotations	String mit Laenge von 16 Zeichen, die nur "0" oder "1" enthalten duerfen				
Diagram					
Type	restriction of xs:string				
Facets	<table> <tr> <td>length</td><td>16</td></tr> <tr> <td>pattern</td><td> <pre>[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]</pre> </td></tr> </table>	length	16	pattern	<pre>[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]</pre>
length	16				
pattern	<pre>[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]</pre>				
Used by	<table> <tr> <td>Simple Type</td><td>tns:VersionNumberExtended</td></tr> <tr> <td>Element</td><td>tns:ION_TX_HEADER_Type/transVersion</td></tr> </table>	Simple Type	tns:VersionNumberExtended	Element	tns:ION_TX_HEADER_Type/transVersion
Simple Type	tns:VersionNumberExtended				
Element	tns:ION_TX_HEADER_Type/transVersion				
Source	<pre><xs:simpleType name="BitString16"> <xs:annotation> <xs:documentation>String mit Laenge von 16 Zeichen, die nur "0" oder "1" enthalten duerfen</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="16" fixed="true"/> <xs:pattern value="[0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1]"/> </xs:restriction> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type `tns:Date`

Namespace	http://vdv/ka/common/types/2		
Annotations	Datum ohne Uhrzeit (nutzt den Standard)		
Diagram			
Type	xs:date		
Used by	<table> <tr> <td>Elements</td><td>tns:SAM_DATA_Type/tns:samGueltigkeitsbeginn, tns:SAM_DATA_Type/tns:samVerfalldatum, tns:TXDEABER_Req_Type/prodAkzeptanzEnde</td></tr> </table>	Elements	tns:SAM_DATA_Type/tns:samGueltigkeitsbeginn, tns:SAM_DATA_Type/tns:samVerfalldatum, tns:TXDEABER_Req_Type/prodAkzeptanzEnde
Elements	tns:SAM_DATA_Type/tns:samGueltigkeitsbeginn, tns:SAM_DATA_Type/tns:samVerfalldatum, tns:TXDEABER_Req_Type/prodAkzeptanzEnde		
Source	<pre><xs:simpleType name="Date"> <xs:annotation> <xs:documentation>Datum ohne Uhrzeit (nutzt den Standard)</xs:documentation> </xs:annotation> <xs:restriction base="xs:date" /> </xs:simpleType></pre>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd		

Simple Type `tns:ReferenceNumberTwo`

Namespace	http://vdv/ka/common/types/2
Annotations	Integer der den positiven Zahlenraum von zwei Bytes umfasst
Diagram	
Type	tns:INT2
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo

Facets	maxInclusive	65535
	minInclusive	0
Used by	Simple Type	tns:Organisation_ID
	Elements	ah:TXKNAWDM_Type/logTransaktionsOperator_ID, tns:AllgemeineTransaktionsdaten/tns:log-TransaktionsOperator_ID, tns:EFMProdukt_ID_Type/produktNummer, tns:Linie_ID_Type/tns:linienNummer, tns:NmKundendaten_Type/tns:kundenTyp1.Anwendungsgebiet, tns:NmKundendaten_Type/tns:kundenTyp2.Anwendungsgebiet, tns:NmKundendaten_Type/tns:kundenTyp3.Anwendungsgebiet, tns:NmVerzeichniseintragApplikationslogbuch_Type/tns:logApplikationSeqNummer, tns:NmVerzeichniseintragBerechtigungen_Type/tns:prodKeyOrganisation_ID, tns:Organisation_ID.organisationsNummer, tns:Organisation_Type/orgId, tns:SymSchluessel_ID_Type/schluesselInhaber_ID, tns:TXKNAWA_Type/tns:logTransaktionsOperator_ID, tns:TXKNAWB_Type/tns:logTransaktionsOperator_ID, tns:Terminal_ID_Type/terminalNummer
Source	<pre><xs:simpleType name="ReferenceNumberTwo"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT2"/> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type tns:INT2

Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum von zwei Bytes umfasst	
Diagram		
Type	restriction of xs:unsignedInt	
Facets	maxInclusive	65535
	minInclusive	0
Used by	Simple Types	tns:Amount65535, tns:ReferenceNumberTwo, tns:SequenceNumberTwo
	Element	tns:TX_PP_Type/tns:ppMehrwertsteuer
Source	<pre><xs:simpleType name="INT2"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="65535"/> </xs:restriction> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type tns:ReferenceNumberFour

Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum von vier Bytes umfasst	
Diagram		
Type	tns:INT4	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT4 <ul style="list-style-type: none"> tns:ReferenceNumberFour 	
Facets	maxInclusive	4294967295
	minInclusive	0
Used by	Elements	tns:Berechtigung_ID_Type/berechtigungNummer, tns:NmApplikationInstanz_ID_Type/NmApplInstanznummer, tns:SAM-Schluessel-Info_Type/tns:LoadKey-Zaehler, tns:SAM-Schluessel-Info_Type/tns:Nutzungs-Limit, tns:SAM-Schluessel-Info_Type/tns:Nutzungs-Se-

	quenz-Zaehler, tns:SAM_Transaktion_ID_Type/tns:samSequenznummer, tns:TXTRANSABBRUCH_Type/tns:MKAH-PV-Nutzungszaehler, tns:TXTRANSABBRUCH_Type/tns:MKKVP-Nutzungszaehler
Source	<pre><xs:simpleType name="ReferenceNumberFour"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT4"/> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type tns:INT4

Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum von vier Bytes umfasst	
Diagram	<pre>graph LR INT4[INT4] --- xs_unsignedInt[xs:unsignedInt]</pre>	
Type	restriction of xs:unsignedInt	
Facets	maxInclusive	4294967295
	minInclusive	0
Used by	Simple Types	tns:ReferenceNumberFour, tns:SequenceNumberFour, tns:SperrlistenZyklusNummer_Type
	Elements	tns:OrgIDRolleRoute_Type/interfaceVersion, tns:TXASKON_Type/tns:samLoadKeyZaehler, tns:TXASKON_Type/tns:samNutzungsLimitNeu, tns:TXUEBERKON_Type/tns:samLoadKeyZaehler, tns:TXUEBERKON_Type/tns:samNutzungsLimitGen
Source	<pre><xs:simpleType name="INT4"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="4294967295"/> </xs:restriction> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	


Simple Type tns:ReferenceNumberThree

Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum von drei Bytes umfasst	
Diagram	<pre>graph LR ReferenceNumberThree[ReferenceNumberThree] --- tns_INT3[tns:INT3]</pre>	
Type	tns:INT3	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT3 <ul style="list-style-type: none"> tns:ReferenceNumberThree 	
Facets	maxInclusive	16777215
	minInclusive	0
Used by	Elements	ah:TXSANFS_Type/samSperrkandidat, tns:Fahrt_ID_Type/tns:fahrtNummer, tns:Ort_ID_Type/ortNummer, tns:SAM-Schlüssel-Info_Type/tns:SAM_ID.samNummer, tns:SAM_Transaktion_ID_Type/tns:SAM_ID.samNummer
	Simple Type	tns:SAM_ID_Type
Source	<pre><xs:simpleType name="ReferenceNumberThree"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT3"/> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type `tns:INT3`


Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum von drei Bytes umfasst	
Diagram		
Type	restriction of <code>xs:unsignedInt</code>	
Facets	maxInclusive	16777215
	minInclusive	0
Used by	Simple Types	<code>tns:ReferenceNumberThree</code> , <code>tns:SequenceNumberThree</code>
Source	<pre><xs:simpleType name="INT3"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="16777215"/> </xs:restriction> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type `tns:INT1`


Namespace	http://vdv/ka/common/types/2	
Annotations	Integer der den positiven Zahlenraum eines Bytes umfasst	
Diagram		
Type	restriction of <code>xs:unsignedInt</code>	
Facets	maxInclusive	255
	minInclusive	0
Used by	Simple Types	<code>tns:AHErrorCode</code> , <code>tns:Abrechnungsverfahren_CODE_Type</code> , <code>tns:AuftragsTyp_CODE</code> , <code>tns:Bezahlart_CODE_Type</code> , <code>tns:CommonServiceResultCode</code> , <code>tns:KommunikationsParterRolle</code> , <code>tns:Kundentyp_CODE_Type</code> , <code>tns:NmTransaktionsTyp_CODE</code> , <code>tns:OrtsTyp_CODE_Type</code> , <code>tns:Profil_CODE_Type</code> , <code>tns:ReferenceNumberOne</code> , <code>tns:STATUS_CODE_ApplicationError_Type</code> , <code>tns:STATUS_CODE_EngineError_Type</code> , <code>tns:STATUS_CODE_EntitlementError_Type</code> , <code>tns:STATUS_CODE_MediumError_Type</code> , <code>tns:STATUS_CODE_OK_Type</code> , <code>tns:STATUS_CODE_PrinterError_Type</code> , <code>tns:STATUS_CODE_ServiceOperatorError_Type</code> , <code>tns:STATUS_CODE_SessionError_Type</code> , <code>tns:STATUS_CODE_SoftwareError_Type</code> , <code>tns:SequenceNumberOne</code> , <code>tns:ServiceKlasse-Extra_CODE_Type</code> , <code>tns:ServiceKlasse_CODE_Type</code> , <code>tns:StatusCode</code> , <code>tns:TerminalTyp_CODE_Type</code> , <code>tns:TransportTypeCode_Type</code> , <code>tns:Validation_CODE_Type</code>
	Elements	<code>tns:AllgemeineTransaktionsdaten/tns:logTransaktionsTyp.code</code> , <code>tns:ION_TX_HEADER_Type/transSignaturTyp</code> , <code>tns:ION_TX_HEADER_Type/transStatus</code> , <code>tns:ION_TX_HEADER_Type/transTransaktionsTyp</code> , <code>tns:ION_TX_HEADER_Type/transWiederholungsZaehler</code> , <code>tns:Mitnahme_Type/tns:mitnahmeAnzahl</code> , <code>tns:NmKundendaten_Type/tns:kundeSprache.code</code> , <code>tns:NmKundendaten_Type/tns:kundenTyp1.code</code> , <code>tns:NmKundendaten_Type/tns:kundenTyp2.code</code> , <code>tns:NmKundendaten_Type/tns:kundenTyp3.code</code> , <code>tns:NmSystemspezifischerVerzeichnisteil_Type/tns:zeigerSeparaterDatenteil</code> , <code>tns:NmVerzeichniseintragAppDaten_Type/tns:appStatus</code> , <code>tns:NmVerzeichniseintragAppDaten_Type/tns:appSynchronNummer</code> , <code>tns:NmVerzeichniseintragBerechtigungen_Type/tns:berStatus</code> , <code>tns:NmVerzeichniseintragLetzteTransaktion_Type/tns:logTransaktionsTyp.code</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz1</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz10</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz11</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz12</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz13</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz14</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz15</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz16</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz2</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz3</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz4</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz5</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz6</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz7</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz8</code> , <code>tns:NmVerzeichniseintragPrioritaeten_Type/tns:berInstanz9</code> , <code>tns:SymSchluessel_ID_Type/schluesselNummer</code> , <code>tns:SymSchluessel_ID_Type/schluesselVersion</code> , <code>tns:TXA_Type/transAblehnungGrund</code> , <code>tns:TX_SANF_Type/sperrSpergrund</code>
Source	<pre><xs:simpleType name="INT1"></pre>	

	<pre> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum eines Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="255"/> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type `tns:SequenceNumberFour`


Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von vier Bytes umfasst. Fachlich eine aufsteigende Sequenznummer.				
Diagram					
Type	tns:INT4				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SequenceNumberFour 				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Used by	Elements ah:TXSANFS_Type/samSequenznummer, tns:IONTransaktion_ID_Type/transSequenznummer, tns:N-mTransaktion_ID_Type/tns:samSequenznummer				
Source	<pre> <xs:simpleType name="SequenceNumberFour"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst. Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT4"/> </xs:simpleType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type `tns:OctetString8`


Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 8 Byte (16 Zeichen)
Diagram	
Type	restriction of xs:hexBinary
Facets	length 8
Used by	Elements tns:appNmTransaktionMAC_Type/appMAC_AH, tns:appNmTransaktionMAC_Type/appMAC_KVP, tns:berNmTransaktionMAC_Type/berMAC_KVP, tns:berNmTransaktionMAC_Type/berMAC_PV
Source	<pre> <xs:simpleType name="OctetString8"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 8 Byte (16 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="8" fixed="true"/> </xs:restriction> </xs:simpleType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type `tns:SequenceNumberTwo`


Namespace	http://vdv/ka/common/types/2
Annotations	Integer der den positiven Zahlenraum von zwei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.

Diagram					
Type	tns:INT2				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:SequenceNumberTwo 				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Used by	Element tns:AllgemeineTransaktionsdaten/tns:logApplikationSeqNummer				
Source	<pre><xs:simpleType name="SequenceNumberTwo"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT2" /> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				


Simple Type tns:DateTimeCompact

Namespace	http://vdv/ka/common/types/2				
Annotations	<p>Datum mit Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschaenkt, so dass ueber eine binaere Darstellung im Nutzermedium 4 Byte ausreichend sind.</p> <p>1990-01-01T:00:00:00 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02T00:00:02, da angenommen wird, dass DateTimeCompact sich aus DateCompact und TimeCompact (siehe BOM Spez.) zusammensetzt. Achtung: es wird lokale Zeit verwendet (keine Zeitzonen) um ungueltige Werte bei Abschneiden einer Zeitzoneinformation zu vermeiden!</p>				
Diagram					
Type	restriction of xs:dateTime				
Facets	<table> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Used by	<p>Elements</p> <p>ah:TXAEA_Type/appGueltigkeitsbeginn, ah:TXAEA_Type/appGueltigkeitsende, ah:TXKNAWD-M_Type/logTransaktionsZeitpunkt, tns:AllgemeineTransaktionsdaten/tns:logTransaktionsZeitpunkt, tns:NmKundendaten_Type/tns:kundenTyp1.AblaufDatum, tns:NmKundendaten_Type/tns:kundenTyp1.BeginnDatum, tns:NmKundendaten_Type/tns:kundenTyp2.AblaufDatum, tns:NmKundendaten_Type/tns:kundenTyp2.BeginnDatum, tns:NmKundendaten_Type/tns:kundenTyp3.AblaufDatum, tns:NmKundendaten_Type/tns:kundenTyp3.BeginnDatum, tns:NmVerzeichniseintragAppDaten_Type/tns:appGueltigkeitsbeginn, tns:NmVerzeichniseintragAppDaten_Type/tns:appGueltigkeitsende, tns:NmVerzeichniseintragBerechtigungen_Type/tns:berGueltigkeitsbeginn, tns:NmVerzeichniseintragBerechtigungen_Type/tns:berGueltigkeitsende, tns:TXKNAWA_Type/tns:logTransaktionsZeitpunkt, tns:TXKNAWB_Type/tns:logTransaktionsZeitpunkt, tns:TX_APP_Type/appGueltigkeitsbeginn, tns:TX_APP_Type/appGueltigkeitsende, tns:TX_BER_Type/berGueltigkeitsbeginn, tns:TX_BER_Type/berGueltigkeitsende, tns:TX_LOG_Type/tns:logTransaktionsZeitpunkt_ID</p>				
Source	<pre><xs:simpleType name="DateTimeCompact"> <xs:annotation> <xs:documentation>Datum mit Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschaenkt, so dass ueber eine binaere Darstellung im Nutzermedium 4 Byte ausreichend sind. 1990-01-01T:00:00:00 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02T00:00:02, da angenommen wird, dass DateTimeCompact sich aus DateCompact und TimeCompact (siehe BOM Spez.) zusammensetzt. Achtung: es wird lokale Zeit verwendet (keine Zeitzonen) um ungueltige Werte bei Abschneiden einer Zeitzoneinformation zu vermeiden!</xs:documentation> </xs:annotation> <xs:restriction base="xs:dateTime"> <xs:minInclusive value="1990-01-01T00:00:00"/> <xs:maxInclusive value="2117-12-31T23:59:58"/> </xs:restriction> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				


Simple Type `tns:OctetString10`

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 10 Byte (20 Zeichen)
Diagram	
Type	restriction of <code>xs:hexBinary</code>
Facets	length 10
Used by	Elements ah:TXAA_Type/nmMedium_ID.nutzermediumNummer, ah:TXKNAWDM_Type/transMediennummer, tns:TXADM_Type/tns:transMediennummer, tns:TXAUSEFS_Type/tns:berBezahlMittel, tns:TX_ABKEY_Type/tns:berAbleitungsdaten, tns:TX_BER_Type/berBezahlMittel
Source	<pre><xs:simpleType name="OctetString10"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 10 Byte (20 Zeichen)</ </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="10" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type `tns:OctetString12`


Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 12 Byte (24 Zeichen)
Diagram	
Type	restriction of <code>xs:hexBinary</code>
Facets	length 12
Used by	Element tns:ASymSchluessel_ID_Type/signaturSchluessel
Source	<pre><xs:simpleType name="OctetString12"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 12 Byte (24 Zeichen)</ </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="12" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd

Simple Type `tns:BitString1`


Namespace	http://vdv/ka/common/types/2
Annotations	String mit Laenge von 1 Zeichen, das nur "0" oder "1" enthalten darf
Diagram	
Type	restriction of <code>xs:string</code>
Facets	length 1 pattern [0-1]
Source	<pre><xs:simpleType name="BitString1"> <xs:annotation> <xs:documentation>String mit Laenge von 1 Zeichen, das nur "0" oder "1" enthalten darf</ </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="1" fixed="true"/> <xs:pattern value="[0-1]"/> </xs:restriction> </xs:simpleType></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd
-----------------	---

Simple Type `tns:BitString8`


Namespace	http://vdv/ka/common/types/2	
Annotations	String mit Laenge von 8 Zeichen, die nur "0" oder "1" enthalten duerfen	
Diagram		
Type	restriction of xs:string	
Facets	length	8
	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1]
Used by	Simple Type	tns:VersionNumber
	Elements	ah:TXAEA_Type/appVersion, ah:TXRA_Type/appVersion, tns:NmKundendaten_Type/tns:kundeGeschlecht.code, tns:TX_APP_Type/appVersion
Source	<pre><xs:simpleType name="BitString8"> <xs:annotation> <xs:documentation>String mit Laenge von 8 Zeichen, die nur "0" oder "1" enthalten duerfen</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="8" fixed="true"/> <xs:pattern value="[0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1]"/> </xs:restriction> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type `tns:DateCompact`

Namespace	http://vdv/ka/common/types/2	
Annotations	Datum ohne Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschaenkt, so dass ueber eine binaere Darstellung im Nutzermedium 2 Byte ausreichend sind. 1990-01-01 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02 (siehe BOM Spez.).	
Diagram		
Type	restriction of xs:date	
Facets	maxInclusive	2117-12-31
	minInclusive	1990-01-01
Source	<pre><xs:simpleType name="DateCompact"> <xs:annotation> <xs:documentation>Datum ohne Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschaenkt, so dass ueber eine binaere Darstellung im Nutzermedium 2 Byte ausreichend sind. 1990-01-01 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02 (siehe BOM Spez.).</xs:documentation> </xs:annotation> <xs:restriction base="xs:date"> <xs:minInclusive value="1990-01-01"/> <xs:maxInclusive value="2117-12-31"/> </xs:restriction> </xs:simpleType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd	

Simple Type `tns:Datef`


Namespace	http://vdv/ka/common/types/2	
Annotations	BCD codierte Darstellung eines Datums als "Hexstring" in der Form yyyymmdd. "00000000" ist fuer "keine Angabe". Die Einschraenkung von 00010101 bis 99991231 wie in der BOM gefordert wird ueber das Pattern abgebildet.	

Diagram					
Type	restriction of xs:string				
Facets	<table> <tr> <td>length</td><td>8</td></tr> <tr> <td>pattern</td><td>[0-9][0-9][0-9][0-9][0-1] [0-9][0-3][0-9]</td></tr> </table>	length	8	pattern	[0-9][0-9][0-9][0-9][0-1] [0-9][0-3][0-9]
length	8				
pattern	[0-9][0-9][0-9][0-9][0-1] [0-9][0-3][0-9]				
Used by	Element tns:NmKundendaten_Type/tns:kundeGeburtsdatum				
Source	<pre><xs:simpleType name="Datef"> <xs:annotation> <xs:documentation>BCD codierte Darstellung eines Datums als "Hexstring" in der Form yyyymmdd. "00000000" ist fuer "keine Angabe". Die Einschraenkung von 00010101 bis 99991231 wie in der BOM gefordert wird ueber das Pattern abgebildet.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="8" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9][0-1][0-9][0-3][0-9]"/> </xs:restriction> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				


Simple Type tns:OctetString1

Namespace	http://vdv/ka/common/types/2		
Annotations	Hexstring mit einer maximalen Laenge von 1 Byte (2 Zeichen)		
Diagram			
Type	restriction of xs:hexBinary		
Facets	<table> <tr> <td>length</td><td>1</td></tr> </table>	length	1
length	1		
Used by	Elements tns:NmVerzeichniseintragSchluesselregister_Type/tns:RFU1, tns:NmVerzeichniseintragSchluesselregister_Type/tns:RFU2, tns:Schluesselversionen_Type/tns:K-ERF-KM-MAC, tns:Schluesselversionen_Type/tns:K-KVP-KM-MAC, tns:Schluesselversionen_Type/tns:K-PV-KM-MAC		
Source	<pre><xs:simpleType name="OctetString1"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 1 Byte (2 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="1" fixed="true"/> </xs:restriction> </xs:simpleType></pre>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd		


Simple Type tns:OctetString4

Namespace	http://vdv/ka/common/types/2		
Annotations	Hexstring mit einer maximalen Laenge von 4 Byte (8 Zeichen)		
Diagram			
Type	restriction of xs:hexBinary		
Facets	<table> <tr> <td>length</td><td>4</td></tr> </table>	length	4
length	4		
Used by	Elements tns:NmVerzeichniseintragSchluesselregister_Type/tns:Herstellerversion, tns:NmVerzeichniseintragSchluesselregister_Type/tns:Zufallszahl, tns:TX_AFBLOG_Type/tns:afbLogDynamischerRabattParameter		
Source	<pre><xs:simpleType name="OctetString4"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 4 Byte (8 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="4" fixed="true"/> </xs:restriction> </xs:simpleType></pre>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd		


Simple Type `tns:OctetString128`

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 128 Byte (256 Zeichen)
Diagram	
Type	restriction of <code>xs:hexBinary</code>
Facets	length 128
Source	<pre><xs:simpleType name="OctetString128"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 128 Byte (256 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="128" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd


Simple Type `tns:OctetString200`

Namespace	http://vdv/ka/common/types/2
Annotations	Hexstring mit einer maximalen Laenge von 200 Byte (400 Zeichen)
Diagram	
Type	restriction of <code>xs:hexBinary</code>
Facets	length 200
Source	<pre><xs:simpleType name="OctetString200"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 200 Byte (400 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="200" fixed="true"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd


Simple Type `tns:ReferenceNumberOne`

Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von einem Byte umfasst				
Diagram					
Type	<code>tns:INT1</code>				
Type hierarchy	<ul style="list-style-type: none"> <code>xs:unsignedInt</code> <ul style="list-style-type: none"> <code>tns:INT1</code> <ul style="list-style-type: none"> <code>tns:ReferenceNumberOne</code> 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Used by	Elements <code>tns:LinieVariante_ID_Type/tns:variantenNummer</code> , <code>tns:NmVerzeichniseintragBerechtigungen_Type/tns:berSynchronNummer</code>				
Source	<pre><xs:simpleType name="ReferenceNumberOne"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von einem Byte umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT1"/> </xs:simpleType></pre>				
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type `tns:SequenceNumberOne`

Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von einem Byte umfasst Fachlich eine aufsteigende Sequenznummer.				
Diagram					
Type	tns:INT1				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:SequenceNumberOne 				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<pre><xs:simpleType name="SequenceNumberOne"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von einem Byte umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT1"/> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Simple Type `tns:SequenceNumberThree`

Namespace	http://vdv/ka/common/types/2				
Annotations	Integer der den positiven Zahlenraum von drei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.				
Diagram					
Type	tns:INT3				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:SequenceNumberThree 				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				
Source	<pre><xs:simpleType name="SequenceNumberThree"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT3"/> </xs:simpleType></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd				

Namespace: "http://vdv/ka/common/2"


Schema(s)

Imported schema `XML-Schema_KA_Common.xsd`

Namespace	http://vdv/ka/common/2						
Properties	<table> <tr> <td>attribute form default:</td><td>unqualified</td></tr> <tr> <td>element form default:</td><td>unqualified</td></tr> <tr> <td>version:</td><td>1.10.0</td></tr> </table>	attribute form default:	unqualified	element form default:	unqualified	version:	1.10.0
attribute form default:	unqualified						
element form default:	unqualified						
version:	1.10.0						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd						

Element(s)

Element tns:VX

Namespace	http://vdv/ka/common/2
Annotations	KA VX Nachricht Eine VX Nachricht wird bei einer asynchronen Anwendungskommunikation als Bestaetigung einer Dienstanfrage gesendet. Durch die VX Nachricht wird dem anfragenden System der Status der iniitalen Datenuebermittlung mitgeteilt.
Diagram	
Type	tns:VX_Message_Type
Properties	content: complex
Model	StatusCode , StatusText
Children	StatusCode, StatusText
Instance	<pre><tns:VX xmlns:tns="http://vdv/ka/common/2"> <StatusCode>{1,1}</StatusCode> <StatusText>{1,1}</StatusText> </tns:VX></pre>
Source	<pre><xs:element name="VX" type="tns:VX_Message_Type"> <xs:annotation> <xs:documentation>KA VX Nachricht Eine VX Nachricht wird bei einer asynchronen Anwendungskommunikation als Bestaetigung einer Dienstanfrage gesendet. Durch die VX Nachricht wird dem anfragenden System der Status der iniitalen Datenuebermittlung mitgeteilt.</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Simple Type(s)

Simple Type tns:Organisation_ID

Namespace	http://vdv/ka/common/2				
Annotations	Type: Eindeutiger Identifier einer Organisation				
Diagram					
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Used by	<p>Elements</p> <p>tns:Berechtigung_ID_Type/kvp_ID, tns:EFMProdukt_ID_Type/organisationID, tns:Fahrt_ID_Type/tns:fahrtBetreiber_ID, tns:IONTransaktion_ID_Type/transSender_ID, tns:ION_TX_HEAD-ER_Type/transEmpfaenger_ID, tns:Linie_ID_Type/tns:linieDomaene_ID, tns:NmApplikationIn-Instanz_ID_Type/kvp_ID, tns:NmVerzeichniseintragSchluesselregister_Type/tns:Org_ID_Her-steller, tns:OrgIDRolleRoute_Type/orgID, tns:Ort_ID_Type/ortDomaene_ID, tns:SAM_DA-TA_Type/tns:samOrganisations_ID, tns:TXSFREIMITO_Type/tns:orgSperrkandidat, tns:TXSMI-TO_Type/tns:orgSperrkandidat, tns:TXSNAWA_Req_Type/orgSperrkandidat, tns:TXSNAW-B_Req_Type/orgSperrkandidat, tns:TX_LOG_Type/tns:logTransaktionsoperator_ID, tns:Termi-nal_ID_Type/terminalOwner_ID</p>				
Source	<pre><xs:simpleType name="Organisation_ID"> <xs:annotation> <xs:documentation>Type: Eindeutiger Identifier einer Organisation</xs:documentation> </xs:annotation></pre>				


	<pre><xs:restriction base="ct:ReferenceNumberTwo"/> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Simple Type tns:KommunikationsParterRolle

Namespace	http://vdv/ka/common/2		
Annotations	Rolle des Kommunikationspartners: 1=KVP, 2=DL, 3=PV, 4=AH, 5=KOSES		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:KommunikationsParterRolle		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Unbekannt
	enumeration	1	KVP
	enumeration	2	DL
	enumeration	3	PV
	enumeration	4	AH
	enumeration	5	KOSES
	enumeration	254	ZVM
Used by	Elements	tns:IONTransaktion_ID_Type/transSenderRolle, tns:ION_TX_HEADER_Type/transEmpfaengerRolle, tns:Kundenrolle_Type/rollencode, tns:OrgIDRolleRoute_Type/rollencode	
Source	<pre><xs:simpleType name="KommunikationsParterRolle"> <xs:annotation> <xs:documentation>Rolle des Kommunikationspartners: 1=KVP, 2=DL, 3=PV, 4=AH, 5=KOSES</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>KVP</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>DL</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>PV</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>AH</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>KOSES</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="254"> <xs:annotation> <xs:documentation>ZVM</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre>		


	<code></xs:simpleType></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Simple Type `tns:StatusCode`

Namespace	http://vdv/ka/common/2		
Annotations	Status Codes einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:StatusCode		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.
	enumeration	1	Ungueltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.
	enumeration	2	Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.
	enumeration	3	Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.
	enumeration	4	Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.
	enumeration	5	Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.
	enumeration	6	Die asynchrone Nachricht kann nicht zwischengespeichert werden.
	enumeration	7	Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.
	enumeration	255	Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.
Used by	Element	tns:VX_Message_Type/StatusCode	
Source	<pre><xs:simpleType name="StatusCode"> <xs:annotation> <xs:documentation>Status Codes einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Ungueltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"></pre>		


	<pre> <xs:annotation> <xs:documentation>Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation>Die asynchrone Nachricht kann nicht zwischengespeichert werden.</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="255"> <xs:annotation> <xs:documentation>Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ common/2/XML-Schema_KA_Common.xsd

Simple Type tns:StatusText

Namespace	http://vdv/ka/common/2
Annotations	Textuelle Beschreibung des "Status Codes" einer KA VX Nachricht
Diagram	
Type	restriction of xs:string
Facets	maxLength 255
Used by	Element tns:VX_Message_Type/StatusText
Source	<pre> <xs:simpleType name="StatusText"> <xs:annotation> <xs:documentation>Textuelle Beschreibung des "Status Codes" einer KA VX Nachricht</ xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ common/2/XML-Schema_KA_Common.xsd

Complex Type(s)

Complex Type tns:VX_Message_Type

Namespace	http://vdv/ka/common/2
Annotations	Type: Struktur einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)
Diagram	
Used by	Element tns:VX

Model	StatusCode , StatusText
Children	StatusCode, StatusText
Source	<pre><xs:complexType name="VX_Message_Type"> <xs:annotation> <xs:documentation>Type: Struktur einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="StatusCode" type="tns:StatusCode" /> <xs:element name="StatusText" type="tns:StatusText" /> </xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd

Namespace: "http://vdv/ka/ah/2"

Schema(s)

Imported schema XML-Schema_AH.xsd

Namespace	http://vdv/ka/ah/2
Properties	attribute form default: unqualified element form default: unqualified version: 1.10.0
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element(s)

Element ah:TXAA

Namespace	http://vdv/ka/ah/2
Annotations	Element: Ausgabe einer Applikation
Diagram	
Type	ah:TXAA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type ah:TXAA_Type
Properties	content: complex
Used by	Complex Types tns:TXAGBBER_Type, tns:TXANTWORT_Type
Model	txbase , nmMedium_ID.nutzermediumNummer , tx_app , ausgabeTransaktionApplikation , appNmTransaktionMAC
Children	appNmTransaktionMAC, ausgabeTransaktionApplikation, nmMedium_ID.nutzermediumNummer, tx_app, txbase
Instance	<pre><ah:TXAA xmlns:ah="http://vdv/ka/ah/2"> <txbase>{1,1}</txbase> <nmMedium_ID.nutzermediumNummer>{1,1}</nmMedium_ID.nutzermediumNummer> <tx_app>{1,1}</tx_app> <ausgabeTransaktionApplikation>{1,1}</ausgabeTransaktionApplikation> <appNmTransaktionMAC>{1,1}</appNmTransaktionMAC> </ah:TXAA></pre>

Source	<pre><xs:element name="TXAA" type="ah:TXAA_Type"> <xs:annotation> <xs:documentation>Element: Ausgabe einer Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXRA

Namespace	http://vdv/ka/ah/2
Annotations	Element: Ruecknahme einer Applikation
Diagram	
Type	ah:TXRA_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type ah:TXRA_Type
Properties	content: complex
Used by	Complex Type tns:TXLOEBER_Type
Model	txbase , ruecknahmeTransaktionApplikation , appNmTransaktionMAC , appVersion
Children	appNmTransaktionMAC, appVersion, ruecknahmeTransaktionApplikation, txbase
Instance	<pre><ah:TXRA xmlns:ah="http://vdv/ka/ah/2"> <txbase>{1,1}</txbase> <ruecknahmeTransaktionApplikation>{1,1}</ruecknahmeTransaktionApplikation> <appNmTransaktionMAC>{1,1}</appNmTransaktionMAC> <appVersion>{1,1}</appVersion> </ah:TXRA></pre>
Source	<pre><xs:element name="TXRA" type="ah:TXRA_Type"> <xs:annotation> <xs:documentation>Element: Ruecknahme einer Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXAEA

Namespace	http://vdv/ka/ah/2
Annotations	Element: Aenderung einer Applikation
Diagram	
Type	ah:TXAEA_Type

Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type ah:TXAEA_Type
Properties	content: complex
Used by	Complex Type tns:TXAENDBER_Type
Model	txbase , appInstanzId , appGueltigkeitsende , appGueltigkeitsbeginn , appVersion
Children	appGueltigkeitsbeginn , appGueltigkeitsende , appInstanzId , appVersion , txbase
Instance	<pre><ah:TXAEA xmlns:ah="http://vdv/ka/ah/2"> <txbase>{1,1}</txbase> <appInstanzId>{1,1}</appInstanzId> <appGueltigkeitsende>{1,1}</appGueltigkeitsende> <appGueltigkeitsbeginn>{1,1}</appGueltigkeitsbeginn> <appVersion>{1,1}</appVersion> </ah:TXAEA></pre>
Source	<pre><xs:element name="TXAEA" type="ah:TXAEA_Type"> <xs:annotation> <xs:documentation>Element: Aenderung einer Applikation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXSANFO

Namespace	http://vdv/ka/ah/2
Annotations	Element: Sperranforderung fuer eine Organisation
Diagram	<pre> graph TD TXSANFO[ah:TXSANFO_Type] -- extends --> TX_SANF[ion:TX_SANF_Type (extension base)] TX_SANF -- extends --> TX_BASE[tns:TX_BASE_Type (extension base)] TX_SANF -- contains --> txbase[txbase] TX_SANF -- contains --> sperrSperrgrund[sperrSperrgrund] TX_SANF -- contains --> at_OrgID[at:Organisation_ID.organisationsNumber] </pre>
Type	ah:TXSANFO_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type ah:TXSANFO_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , tns:Organisation_ID.organisationsNumber
Children	sperrSperrgrund , tns:Organisation_ID.organisationsNumber , txbase
Instance	<pre><ah:TXSANFO xmlns:ah="http://vdv/ka/ah/2" xmlns:at="http://vdv/ka/ah/types/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <at:Organisation_ID.organisationsNumber>{1,1}</at:Organisation_ID.organisationsNumber> </ah:TXSANFO></pre>
Source	<pre><xs:element name="TXSANFO" type="ah:TXSANFO_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer eine Organisation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXSANFS

Namespace	http://vdv/ka/ah/2
-----------	--------------------

Annotations	Element: Sperranforderung fuer eine SAM
Diagram	
Type	ah:TXSANFS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type ah:TXSANFS_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , samSperrkandidat , samSequenznummer
Children	samSequenznummer, samSperrkandidat, sperrSperrgrund, txbase
Instance	<pre><ah:TXSANFS xmlns:ah="http://vdv/ka/ah/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <samSperrkandidat>{1,1}</samSperrkandidat> <samSequenznummer>{1,1}</samSequenznummer> </ah:TXSANFS></pre>
Source	<pre><xs:element name="TXSANFS" type="ah:TXSANFS_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer eine SAM</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXSAANFO

Namespace	http://vdv/ka/ah/2
Annotations	Element: Sperranforderung fuer eine Organisation
Diagram	
Type	ah:TXSAANFO_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type ah:TXSANFO_Type ah:TXSAANFO_Type

Properties	content: complex
Model	txbase , sperrSperrgrund , tns:Organisation_ID.organisationsNumber
Children	sperrSperrgrund, tns:Organisation_ID.organisationsNumber, txbase
Instance	<pre><ah:TXSAANFO xmlns:ah="http://vdv/ka/ah/2" xmlns:at="http://vdv/ka/ah/types/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <at:Organisation_ID.organisationsNumber>{1,1}</at:Organisation_ID.organisationsNumber> </ah:TXSAANFO></pre>
Source	<pre><xs:element name="TXSAANFO" type="ah:TXSAANFO_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer eine Organisation</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXSAANFS

Namespace	http://vdv/ka/ah/2
Annotations	Element: Sperraufhebungsanforderung fuer eine SAM
Diagram	
Type	ah:TXSAANFS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type ah:TXSANFS_Type ah:TXSAANFS_Type
Properties	content: complex
Model	txbase , sperrSperrgrund , samSperrkandidat , samSequenznummer
Children	samSequenznummer, samSperrkandidat, sperrSperrgrund, txbase
Instance	<pre><ah:TXSAANFS xmlns:ah="http://vdv/ka/ah/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <samSperrkandidat>{1,1}</samSperrkandidat> <samSequenznummer>{1,1}</samSequenznummer> </ah:TXSAANFS></pre>
Source	<pre><xs:element name="TXSAANFS" type="ah:TXSAANFS_Type"> <xs:annotation> <xs:documentation>Element: Sperraufhebungsanforderung fuer eine SAM</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXKNAWDM

Namespace	http://vdv/ka/ah/2
-----------	--------------------

Annotations	Element: Kontrollnachweis Defektes Medium
Diagram	
Type	ah:TXKNAWDM_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type ah:TXKNAWDM_Type
Properties	content: complex
Model	txbase , logTransaktionsOperator_ID , logTerminal_ID , logTransaktionsZeitpunkt , logTransaktionsOrt_ID , transMediennummer
Children	logTerminal_ID , logTransaktionsOperator_ID , logTransaktionsOrt_ID , logTransaktionsZeitpunkt , transMediennummer , txbase
Instance	<pre><ah:TXKNAWDM xmlns:ah="http://vdv/ka/ah/2"> <txbase>{1,1}</txbase> <logTransaktionsOperator_ID>{1,1}</logTransaktionsOperator_ID> <logTerminal_ID>{1,1}</logTerminal_ID> <logTransaktionsZeitpunkt>{1,1}</logTransaktionsZeitpunkt> <logTransaktionsOrt_ID>{1,1}</logTransaktionsOrt_ID> <transMediennummer>{1,1}</transMediennummer> </ah:TXKNAWDM></pre>
Source	<pre><xs:element name="TXKNAWDM" type="ah:TXKNAWDM_Type"> <xs:annotation> <xs:documentation>Element: Kontrollnachweis Defektes Medium</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXLKAORG

Namespace	http://vdv/ka/ah/2
Annotations	Element: Liste der Organisationen incl. deren zugeordneten Rollen
Diagram	
Type	ah:TX_LKAORG_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type ah:TX_LKAORG_Type

Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , orgListe
Children	orgListe, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><ah:TXLKAORG xmlns:ah="http://vdv/ka/ah/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> <orgListe>{1,1}</orgListe> </ah:TXLKAORG></pre>
Source	<pre><xs:element name="TXLKAORG" type="ah:TX_LKAORG_Type"> <xs:annotation> <xs:documentation>Element: Liste der Organisationen incl. deren zugeordneten Rollen</ xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXLKAORGReq

Namespace	http://vdv/ka/ah/2
Annotations	Element: Dienstanfrage: "Liste der Organisationen."
Diagram	
Type	ah:TXLKAORG_Req_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type ah:TXLKAORG_Req_Type
Properties	content: complex
Model	txbase
Children	txbase
Instance	<pre><ah:TXLKAORGReq xmlns:ah="http://vdv/ka/ah/2"> <txbase>{1,1}</txbase> </ah:TXLKAORGReq></pre>
Source	<pre><xs:element name="TXLKAORGReq" type="ah:TXLKAORG_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage: "Liste der Organisationen."</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXLZVMORG

Namespace	http://vdv/ka/ah/2
Annotations	Element: Liste der Organisationen incl. deren zugeordneten Rollen, URLs zum Zielsystem und E-Mail Adressen der Ansprechpartner

Diagram	
Type	ah:TX_LZVMORG_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type ah:TX_LZVMORG_Type
Properties	content: complex
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , orgListe
Children	orgListe, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Instance	<pre><ah:TXLZVMORG xmlns:ah="http://vdv/ka/ah/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> <orgListe>{1,1}</orgListe> </ah:TXLZVMORG></pre>
Source	<pre><xs:element name="TXLZVMORG" type="ah:TX_LZVMORG_Type"> <xs:annotation> <xs:documentation>Element: Liste der Organisationen incl. deren zugeordneten Rollen, URLs zum Zielsystem und E-Mail Adressen der Ansprechpartner</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXLZVMORGReq

Namespace	http://vdv/ka/ah/2
Annotations	Element: Dienstanfrage: "Liste der Organisationen."
Diagram	
Type	ah:TXLZVMORG_Req_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type ah:TXLZVMORG_Req_Type
Properties	content: complex
Model	txbase
Children	txbase
Instance	<pre><ah:TXLZVMORGReq xmlns:ah="http://vdv/ka/ah/2"> <txbase>{1,1}</txbase> </ah:TXLZVMORGReq></pre>
Source	<pre><xs:element name="TXLZVMORGReq" type="ah:TXLZVMORG_Req_Type"> <xs:annotation></pre>

	<pre> <xs:documentation>Element: Dienstanfrage: "Liste der Organisationen."</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type(s)

Complex Type ah:TXAA_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Ausgabe einer Applikation
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type ah:TXAA_Type
Used by	Element ah:TXAA
Model	txbase , nmMedium_ID.nutzermediumNummer , tx_app , ausgabeTransaktionApplikation , appNmTransaktionMAC
Children	appNmTransaktionMAC, ausgabeTransaktionApplikation, nmMedium_ID.nutzermediumNummer, tx_app, txbase
Source	<pre> <xs:complexType name="TXAA_Type"> <xs:annotation> <xs:documentation>Typ: Ausgabe einer Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="nmMedium_ID.nutzermediumNummer" type="ct:OctetString10"/> <xs:element name="tx_app" type="at:TX_APP_Type"/> <xs:element name="ausgabeTransaktionApplikation" type="ion:Transaktionsdatensatz_Type"/> <xs:element name="appNmTransaktionMAC" type="ion:appNmTransaktionMAC_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TXRA_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Ruecknahme einer Applikation
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type

	<ul style="list-style-type: none"> ah:TXRA_Type
Used by	Element ah:TXRA
Model	txbase , ruecknahmeTransaktionApplikation , appNmTransaktionMAC , appVersion
Children	appNmTransaktionMAC, appVersion, ruecknahmeTransaktionApplikation, txbase
Source	<pre><xs:complexType name="TXRA_Type"> <xs:annotation> <xs:documentation>Typ: Ruecknahme einer Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="ruecknahmeTransaktionApplikation" type="ion:Transaktionsdatensatz_Type"/> <xs:element name="appNmTransaktionMAC" type="ion:appNmTransaktionMAC_Type"/> <xs:element name="appVersion" type="ct:BitString8"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TXAEA_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Aenderung einer Applikation
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type ah:TXAEA_Type
Used by	Element ah:TXAEA
Model	txbase , appInstanzId , appGueltigkeitsende , appGueltigkeitsbeginn , appVersion
Children	appGueltigkeitsbeginn, appGueltigkeitsende, appInstanzId, appVersion, txbase
Source	<pre><xs:complexType name="TXAEA_Type"> <xs:annotation> <xs:documentation>Typ: Aenderung einer Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="appInstanzId" type="ion:NmApplikationInstanz_ID_Type"/> <xs:element name="appGueltigkeitsende" type="ct:DateTimeCompact"/> <xs:element name="appGueltigkeitsbeginn" type="ct:DateTimeCompact"/> <xs:element name="appVersion" type="ct:BitString8"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TXSANFO_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Sperranforderung fuer eine Organisation

Diagram					
Type	extension of tns:TX_SANF_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type ah:TXSANFO_Type 				
Used by	<table> <tr> <td>Complex Type</td><td>ah:TXSAANFO_Type</td></tr> <tr> <td>Element</td><td>ah:TXSANFO</td></tr> </table>	Complex Type	ah:TXSAANFO_Type	Element	ah:TXSANFO
Complex Type	ah:TXSAANFO_Type				
Element	ah:TXSANFO				
Model	txbase , sperrSperrgrund , tns:Organisation_ID.organisationsNummer				
Children	sperrSperrgrund, tns:Organisation_ID.organisationsNummer, txbase				
Source	<pre> <xs:complexType name="TXSANFO_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer eine Organisation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SANF_Type"> <xs:sequence> <xs:element ref="at:Organisation_ID.organisationsNummer"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd				

Complex Type ah:TXSANFS_Type

Namespace	http://vdv/ka/ah/2				
Annotations	Typ: Sperranforderung fuer eine SAM				
Diagram					
Type	extension of tns:TX_SANF_Type				
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type ah:TXSANFS_Type 				
Used by	<table> <tr> <td>Complex Type</td><td>ah:TXSAANFS_Type</td></tr> <tr> <td>Element</td><td>ah:TXSANFS</td></tr> </table>	Complex Type	ah:TXSAANFS_Type	Element	ah:TXSANFS
Complex Type	ah:TXSAANFS_Type				
Element	ah:TXSANFS				
Model	txbase , sperrSperrgrund , samSperrkandidat , samSequenznummer				
Children	samSequenznummer, samSperrkandidat, sperrSperrgrund, txbase				
Source	<pre> <xs:complexType name="TXSANFS_Type"> <xs:annotation> </pre>				

	<pre> <xs:documentation>Typ: Sperranforderung fuer eine SAM</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_SANF_Type"> <xs:sequence> <xs:element name="samSperrkandidat" type="ct:ReferenceNumberThree"/> <xs:element name="samSequenznummer" type="ct:SequenceNumberFour"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TXSAANFO_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Sperraufhebungsanforderung fuer eine Organisation
Diagram	
Type	extension of ah:TXSANFO_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type ah:TXSANFO_Type ah:TXSAANFO_Type
Used by	Element ah:TXSAANFO
Model	txbase , sperrSperrgrund , tns:Organisation_ID.organisationsNummer
Children	sperrSperrgrund, tns:Organisation_ID.organisationsNummer, txbase
Source	<pre> <xs:complexType name="TXSAANFO_Type"> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer eine Organisation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ah:TXSANFO_Type" /> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TXSAANFS_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Sperraufhebungsanforderung fuer eine SAM

Diagram	
Type	extension of ah:TXSANFS_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type ah:TXSANFS_Type ah:TXSAANFS_Type
Used by	Element ah:TXSAANFS
Model	txbase , sperrSperrgrund , samSperrkandidat , samSequenznummer
Children	samSequenznummer, samSperrkandidat, sperrSperrgrund, txbase
Source	<pre> <xs:complexType name="TXSAANFS_Type"> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer eine SAM</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ah:TXSANFS_Type" /> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TXKNAWDM_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Kontrollnachweis Defektes Medium
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type ah:TXKNAWDM_Type
Used by	Element ah:TXKNAWDM
Model	txbase , logTransaktionsOperator_ID , logTerminal_ID , logTransaktionsZeitpunkt , logTransaktionsOrt_ID , transMediennummer
Children	logTerminal_ID, logTransaktionsOperator_ID, logTransaktionsOrt_ID, logTransaktionsZeitpunkt, transMediennummer, txbase
Source	<pre> <xs:complexType name="TXKNAWDM_Type"> <xs:annotation> <xs:documentation>Typ: Kontrollnachweis Defektes Medium</xs:documentation> </xs:annotation> </pre>

	<pre> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:sequence> <xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo"/> <xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type"/> <xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact"/> <xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type"/> <xs:element name="transMediennummer" type="ct:OctetString10"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TX_LKAORG_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Liste der Organisationen incl. deren zugeordneten Rollen
Diagram	
Type	extension of tns:TX_RET_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type ah:TX_LKAORG_Type
Used by	Element ah:TXLKAORG
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , orgListe
Children	orgListe, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Source	<pre> <xs:complexType name="TX_LKAORG_Type"> <xs:annotation> <xs:documentation>Typ: Liste der Organisationen incl. deren zugeordneten Rollen</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_RET_Type"> <xs:sequence> <xs:element name="orgListe" type="ah:TXLKAORG_SL_DATA_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TXLKAORG_SL_DATA_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Organisationsliste aller Organisationen
Diagram	
Used by	Element ah:TX_LKAORG_Type/orgListe

Model	ErstellungsDatum , daten
Children	ErstellungsDatum, daten
Source	<pre> <xs:complexType name="TXLKAORG_SL_DATA_Type"> <xs:annotation> <xs:documentation>Typ: Organisationsliste aller Organisationen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="ErstellungsDatum" type="ct:DateTime"> <xs:annotation> <xs:documentation>Zeitpunkt der Listenerstellung</xs:documentation> </xs:annotation> </xs:element> <xs:element name="daten" type="xs:base64Binary" xmime:expectedContentTypes="application/vnd.vdv.ah.txlkaorglist.sl.zip"> <xs:annotation> <xs:documentation>Dieses Element enthaelt die Organisationlistenmassendaten. Die Daten liegen in einem XML Format vor, die im zip Format komprimiert sind. Die den Daten zugrundeliegende Strukturdefinition ist im Schema http://vdv/ka/ah/attachments durch das Element "TXLKAORGLIST_Resp_SL" definiert.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TXLKAORG_Req_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Dienstanfrage: "Liste der Organisationen."
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type ah:TXLKAORG_Req_Type
Used by	Element ah:TXLKAORGReq
Model	txbase
Children	txbase
Source	<pre> <xs:complexType name="TXLKAORG_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage: "Liste der Organisationen."</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type" /> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TX_LZVMORG_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Liste der Organisationen incl. deren zugeordneten Rollen, URLs zum Zielsystem und E-Mail Adressen der Ansprechpartner

Diagram	
Type	extension of tns:TX_RET_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type ah:TX_LZVMORG_Type
Used by	Element ah:TXLZVMORG
Model	txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , orgListe
Children	orgListe, transOrigID, transOrigSignatur, transOriginalZeit, txbase
Source	<pre> <xs:complexType name="TX_LZVMORG_Type"> <xs:annotation> <xs:documentation>Typ: Liste der Organisationen incl. deren zugeordneten Rollen, URLs zum Zielsystem und E-Mail Adressen der Ansprechpartner</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_RET_Type"> <xs:sequence> <xs:element name="orgListe" type="ah:TXLZVMORG_SL_DATA_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TXLZVMORG_SL_DATA_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Organisationsliste aller Organisationen
Diagram	
Used by	Element ah:TX_LZVMORG_Type/orgListe
Model	ErstellungsDatum , daten
Children	ErstellungsDatum, daten
Source	<pre> <xs:complexType name="TXLZVMORG_SL_DATA_Type"> <xs:annotation> <xs:documentation>Typ: Organisationsliste aller Organisationen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="ErstellungsDatum" type="ct:DateTime"> <xs:annotation> <xs:documentation>Zeitpunkt der Listenerstellung</xs:documentation> </xs:annotation> </xs:element> <xs:element name="daten" type="xs:base64Binary" xmime:expectedContentTypes="application/vnd.vdv.ah.txlzvmorglist.zip"> <xs:annotation> <xs:documentation>Dieses Element enthaelt die Organisationlistenmassendaten. Die Daten liegen in einem XML Format vor, die im zip Format komprimiert sind. Die den Daten zugrundeliegende Strukturdefinition ist im Schema http://vdv/ka/ah/attachments durch das Element "TXLKAZVMLIST_Resp_SL_Type" definiert.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre>

	<pre></xs:sequence> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Complex Type ah:TXLZVMORG_Req_Type

Namespace	http://vdv/ka/ah/2
Annotations	Typ: Dienst Anfrage: "Liste der Organisationen."
Diagram	
Type	extension of tns:TX_BASE_Type
Type hierarchy	<ul style="list-style-type: none"> tns:TX_BASE_Type <ul style="list-style-type: none"> ah:TXLZVMORG_Req_Type
Used by	Element ah:TXLZVMORGReq
Model	txbase
Children	txbase
Source	<pre><xs:complexType name="TXLZVMORG_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienst Anfrage: "Liste der Organisationen."</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type" /> </xs:complexContent> </xs:complexType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Namespace: "http://vdv/ka/ah/types/2"

Schema(s)

Imported schema XML-Schema_AH_Types.xsd

Namespace	http://vdv/ka/ah/types/2
Properties	attribute form default: unqualified
	element form default: unqualified
	version: 1.10.0
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Element(s)

Element tns:Organisation_ID.organisationsNumber

Namespace	http://vdv/ka/ah/types/2
Annotations	Element: Organisation_ID.organisationsNumber
Diagram	
Type	tns:ReferenceNumberTwo
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT2 <ul style="list-style-type: none"> tns:ReferenceNumberTwo
Properties	content: simple
Facets	maxInclusive 65535

	minInclusive	0
Used by	Complex Types	ah:TXSAANFO_Type, ah:TXSANFO_Type
Source	<pre><xs:element name="Organisation_ID.organisationsNumber" type="ct:ReferenceNumberTwo"> <xs:annotation> <xs:documentation>Element: Organisation_ID.organisationsNumber</xs:documentation> </xs:annotation> </xs:element></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd	

Complex Type(s)

Complex Type tns:TX_APP_Type

Namespace	http://vdv/ka/ah/types/2	
Annotations	Typ: Basisdaten fuer Applikationstransaktionen	
Diagram		
Used by	Element	ah:TXAA_Type/tx_app
Model	appInstanz_ID , appGueltigkeitsbeginn , appGueltigkeitsende , appVersion	
Children	appGueltigkeitsbeginn, appGueltigkeitsende, appInstanz_ID, appVersion	
Source	<pre><xs:complexType name="TX_APP_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Applikationstransaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="appInstanz_ID" type="ion:NmApplikationInstanz_ID_Type"/> <xs:element name="appGueltigkeitsbeginn" type="ct:DateTimeCompact"/> <xs:element name="appGueltigkeitsende" type="ct:DateTimeCompact"/> <xs:element name="appVersion" type="ct:BitString8"/> </xs:sequence> </xs:complexType></pre>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd	

Complex Type tns:Kundenroute_Type

Namespace	http://vdv/ka/ah/types/2	
Annotations	Typ: Kundenroute alle Informationen fuer eine Vermittlungsstelle, u.a. die im AHS der Org und Rolle zugewiesene URL und einen Ansprechpartner (E-Mail)	
Diagram		
Model	bezeichnung , kurzBezeichnung , email , orgIDRolleRoute+	
Children	bezeichnung, email, kurzBezeichnung, orgIDRolleRoute	
Source	<pre><xs:complexType name="Kundenroute_Type"> <xs:annotation> <xs:documentation>Typ: Kundenroute alle Informationen fuer eine Vermittlungsstelle, u.a. die im AHS der Org und Rolle zugewiesene URL und einen Ansprechpartner (E-Mail)</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="bezeichnung" type="ion:PrintableString"/> <xs:element name="kurzBezeichnung" type="ion:PrintableString" nillable="true"/> <xs:element name="email" type="tns:Email_Type" nillable="true"/> <xs:element name="orgIDRolleRoute" type="tns:OrgIDRolleRoute_Type" minOccurs="1" maxOccurs="unbounded"/> </xs:sequence></pre>	

	<code></xs:complexType></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Complex Type `tns:OrgIDRolleRoute_Type`

Namespace	http://vdv/ka/ah/types/2
Annotations	Typ: OrgIDRolleRoute beinhaltet die im AHS zu einem Kunde gespeicherte Service-Url zu einer OrgId und Rolle
Diagram	
Used by	Element <code>tns:Kundenroute_Type/orgIDRolleRoute</code>
Model	orgID , rollencode , serviceUrl , interfaceVersion
Children	interfaceVersion, orgID, rollencode, serviceUrl
Source	<pre> <xs:complexType name="OrgIDRolleRoute_Type"> <xs:annotation> <xs:documentation>Typ: OrgIDRolleRoute beinhaltet die im AHS zu einem Kunde gespeicherte Service-Url zu einer OrgId und Rolle</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="orgID" type="ka:Organisation_ID"/> <xs:element name="rollencode" type="ka:KommunikationsPartnerRolle"/> <xs:element name="serviceUrl" type="xs:anyURI" nillable="true"/> <xs:element name="interfaceVersion" type="ct:INT4" nillable="true"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Complex Type `tns:Kundenrolle_Type`

Namespace	http://vdv/ka/ah/types/2
Annotations	Typ: Kundenrolle beinhaltet nur die im AHS zugewiesene Rolle. Die Attribute IP-Adresse und Port sind obsolete und beinhalten konstante Werte
Diagram	
Used by	Element <code>tns:Organisation_Type/kommunikationsPartnerRoute</code>
Model	rollencode , ip , port
Children	ip, port, rollencode
Source	<pre> <xs:complexType name="Kundenrolle_Type"> <xs:annotation> <xs:documentation>Typ: Kundenrolle beinhaltet nur die im AHS zugewiesene Rolle. Die Attribute IP-Adresse und Port sind obsolete und beinhalten konstante Werte</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="rollencode" type="ka:KommunikationsPartnerRolle"/> <xs:element name="ip" type="tns:IP_Format"/> <xs:element name="port" type="tns:Port_Format"/> </xs:sequence> </xs:complexType> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Complex Type `tns:Organisation_Type`

Namespace	http://vdv/ka/ah/types/2
Annotations	Typ: Im AHS registrierte Organisation mit Bezeichnung, allen OrgIds und jeweiligen Rollen

Diagram	
Model	bezeichnung , kurzbezeichnung , orgId , kommunikationsPartnerRoute+
Children	bezeichnung, kommunikationsPartnerRoute, kurzbezeichnung, orgId
Source	<pre> <xs:complexType name="Organisation_Type"> <xs:annotation> <xs:documentation>Typ: Im AHS registrierte Organisation mit Bezeichnung, allen OrgIds und jeweiligen Rollen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="bezeichnung" type="xs:string"/> <xs:element name="kurzbezeichnung" type="xs:string" nillable="true"/> <xs:element name="orgId" type="ct:ReferenceNumberTwo"/> <xs:element name="kommunikationsPartnerRoute" type="tns:Kundenrolle_Type" minOccurs="1" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Simple Type(s)


Simple Type tns:IP_Format

Namespace	http://vdv/ka/ah/types/2
Diagram	
Type	restriction of xs:string
Facets	<p>pattern</p> <pre> (([1-9]?[0-9] 1[0-9] [0-9] 2[0-4][0-9] 25[0-5]) \.) { 3 } ([1-9]? [0-9] 1[0-9][0-9] 2[0-4] [0-9] 25[0-5]) </pre>
Used by	Element tns:Kundenrolle_Type/ip
Source	<pre> <xs:simpleType name="IP_Format"> <xs:restriction base="xs:string"> <xs:pattern value="(([1-9]?[0-9] 1[0-9][0-9] 2[0-4][0-9] 25[0-5]) \.) { 3 } ([1-9]?[0-9] 1[0-9][0-9] 2[0-4][0-9] 25[0-5])" /> </xs:restriction> </xs:simpleType> </pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Simple Type tns:Port_Format

Namespace	http://vdv/ka/ah/types/2
Diagram	
Type	restriction of xs:unsignedShort
Facets	<p>maxInclusive 65535</p> <p>minInclusive 0</p>
Used by	Element tns:Kundenrolle_Type/port
Source	<pre> <xs:simpleType name="Port_Format"> <xs:restriction base="xs:unsignedShort"> <xs:minInclusive value="0"/> <xs:maxInclusive value="65535"/> </xs:restriction> </xs:simpleType> </pre>
Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Simple Type `tns:Email_Type`

Namespace	http://vdv/ka/ah/types/2
Diagram	
Type	restriction of xs:string
Facets	<p>pattern</p> $\backslash w + ([- + . '] \backslash w +) * @ \backslash w + ([- .] \backslash w +) * \backslash . \backslash w + ([- .] \backslash w +) * $
Used by	Element <code>tns:Kundenroute_Type/email</code>
Source	<pre><xs:simpleType name="Email_Type"> <xs:restriction base="xs:string"> <xs:pattern value="\w+([-+.']\w+)*@\w+([-.] \w+)*\.\w+([-.] \w+)*"/> </xs:restriction> </xs:simpleType></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Simple Type `tns:AHErrorCode`

Namespace	http://vdv/ka/ah/types/2		
Annotations	Vom AH verwendete Fehlercodes.		
Diagram			
Type	restriction of tns:INT1		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:AHErrorCode		
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	100	Empfaengerrolle ist unbekannt
	enumeration	101	Empfaengerrolle ist ungleich AH
	enumeration	102	Senderrolle ist unbekannt
	enumeration	103	Senderrolle ist für diese Operation nicht berechtigt
	enumeration	104	Organisations-ID des Senders ist im AH unbekannt
	enumeration	105	Die Organisation des Senders ist im AH gesperrt
	enumeration	106	Organisations-ID des Empfängers ist AH unbekannt
	enumeration	107	Organisations-ID von Sender und Empfänger aus unterschiedlichen OrgID Bereichen/Level
	enumeration	108	Aufruf der Schnittstelle ohne WS Security nur fuer Sender OrgID aus Level 2
	enumeration	110	Sperranforderung mit gleichen Angaben ist bereits im System
	enumeration	111	Sperraufhebungsanforderung mit gleichen Angaben ist bereits im System
	enumeration	112	Sperrmitteilung mit gleichen Angaben ist bereits im System
	enumeration	113	Sperraufhebungsmitteilung mit gleichen Angaben ist bereits im System
	enumeration	115	Sperrkandidat Organisation ist AH unbekannt
	enumeration	116	Sperrkandidat Inhaber des symmetrischen Schluessels ist AH unbekannt
	enumeration	117	Sperrkandidat Inhaber des asymmetrischen Schluessels ist AH unbekannt
	enumeration	118	Sperrkandidat Applikations-KVP ist AH unbekannt
	enumeration	119	Ausgabe Applikations-KVP ist AH unbekannt
enumeration	120	Der Sperrgrund ist AH unbekannt	

	enumeration	121	Die Sperrentscheidung ist AH unbekannt
	enumeration	122	Applikationsruecknahme: Die Transaktionsdaten sind unvollstaendig
	enumeration	124	Ausgabe Applikation: Applikation bereits ausgegeben
	enumeration	125	Keine Sperranforderung fuer Sperrmitteilung gefunden
	enumeration	126	Keine Sperraufhebungsanforderung fuer Sperraufhebungsmitteilung gefunden
	enumeration	127	Aenderung Applikation: Applikation ist dem AH nicht bekannt
	enumeration	128	Entferne Applikation: Applikation ist dem AH nicht bekannt
	enumeration	129	Gueltingkeit Applikation: Applikation ist dem AH nicht bekannt
	enumeration	130	Transaktion kann keinem Objekt zugeordnet werden
	enumeration	131	Transaktion bereits verarbeitet
	enumeration	60	Die Daten der Liste konnte nicht extrahiert werden
	enumeration	61	Liste konnte nicht eingelesen werden (Formatfehler)
	enumeration	62	Liste enthielt fehlerhafte Daten (Semantikfehler)
	enumeration	63	Sonstige Probleme bei der Verarbeitung der Liste
	enumeration	255	Technischer Fehler
Source	<pre> <xs:simpleType name="AHErrorCode"> <xs:annotation> <xs:documentation>Vom AH verwendete Fehlercodes.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <!-- Allgemeine Pruefungen--> <xs:enumeration value="100"> <xs:annotation> <xs:documentation>Empfaengerrolle ist unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="101"> <xs:annotation> <xs:documentation>Empfaengerrolle ist ungleich AH</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="102"> <xs:annotation> <xs:documentation>Senderrolle ist unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="103"> <xs:annotation> <xs:documentation>Senderrolle ist für diese Operation nicht berechtigt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="104"> <xs:annotation> <xs:documentation>Organisations-ID des Senders ist im AH unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="105"> <xs:annotation> <xs:documentation>Die Organisation des Senders ist im AH gesperrt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="106"> <xs:annotation> <xs:documentation>Organisations-ID des Empfaengers ist AH unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="107"> <xs:annotation> <xs:documentation>Organisations-ID von Sender und Empfaenger aus unterschiedlichen OrgID Bereichen/Level</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="108"> <xs:annotation> </pre>		

```

        <xs:documentation>Aufruf der Schnittstelle ohne WS Security nur fuer Sender OrgId aus Level
2</xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="110">
    <xs:annotation>
        <xs:documentation>Sperranforderung mit gleichen Angaben ist bereits im System</
xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="111">
    <xs:annotation>
        <xs:documentation>Sperraufhebungsanforderung mit gleichen Angaben ist bereits im System</
xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="112">
    <xs:annotation>
        <xs:documentation>Sperrmitteilung mit gleichen Angaben ist bereits im System</
xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="113">
    <xs:annotation>
        <xs:documentation>Sperraufhebungsmitteilung mit gleichen Angaben ist bereits im System</
xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="115">
    <xs:annotation>
        <xs:documentation>Sperrkandidat Organisation ist AH unbekannt</xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="116">
    <xs:annotation>
        <xs:documentation>Sperrkandidat Inhaber des symmetrischen Schluessels ist AH unbekannt</
xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="117">
    <xs:annotation>
        <xs:documentation>Sperrkandidat Inhaber des asymmetrischen Schluessels ist AH unbekannt</
xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="118">
    <xs:annotation>
        <xs:documentation>Sperrkandidat Applikations-KVP ist AH unbekannt</xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="119">
    <xs:annotation>
        <xs:documentation>Ausgabe Applikations-KVP ist AH unbekannt</xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="120">
    <xs:annotation>
        <xs:documentation>Der Sperrgrund ist AH unbekannt</xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="121">
    <xs:annotation>
        <xs:documentation>Die Sperrentscheidung ist AH unbekannt</xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="122">
    <xs:annotation>
        <xs:documentation>Applikationsruecknahme: Die Transaktionsdaten sind unvollstaendig</
xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="124">
    <xs:annotation>
        <xs:documentation>Ausgabe Applikation: Applikation bereits ausgegeben</xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="125">
    <xs:annotation>
        <xs:documentation>Keine Sperranforderung fuer Sperrmitteilung gefunden</xs:documentation>
    </xs:annotation>
</xs:enumeration>
<xs:enumeration value="126">
    <xs:annotation>

```

```

        <xs:documentation>Keine Sperraufhebungsanforderung fuer Sperraufhebungsmitteilung gefunden</
xs:documentation>
        </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="127">
        <xs:annotation>
            <xs:documentation>Aenderung Applikation: Applikation ist dem AH nicht bekannt</
xs:documentation>
            </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="128">
            <xs:annotation>
                <xs:documentation>Entferne Applikation: Applikation ist dem AH nicht bekannt</
xs:documentation>
            </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="129">
            <xs:annotation>
                <xs:documentation>Gueltigkeit Applikation: Applikation ist dem AH nicht bekannt</
xs:documentation>
            </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="130">
            <xs:annotation>
                <xs:documentation>Transaktion kann keinem Objekt zugeordnet werden</xs:documentation>
            </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="131">
            <xs:annotation>
                <xs:documentation>Transaktion bereits verarbeitet</xs:documentation>
            </xs:annotation>
        </xs:enumeration>
        <!--Listenfehler -->
        <xs:enumeration value="60">
            <xs:annotation>
                <xs:documentation>Die Daten der Liste konnte nicht extrahiert werden</xs:documentation>
            </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="61">
            <xs:annotation>
                <xs:documentation>Liste konnte nicht eingelesen werden (Formatfehler)</xs:documentation>
            </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="62">
            <xs:annotation>
                <xs:documentation>Liste enthielt fehlerhafte Daten (Semantikfehler)</xs:documentation>
            </xs:annotation>
        </xs:enumeration>
        <xs:enumeration value="63">
            <xs:annotation>
                <xs:documentation>Sonstige Probleme bei der Verarbeitung der Liste</xs:documentation>
            </xs:annotation>
        </xs:enumeration>
        <!-- -->
        <xs:enumeration value="255">
            <xs:annotation>
                <xs:documentation>Technischer Fehler</xs:documentation>
            </xs:annotation>
        </xs:enumeration>
    </xs:restriction>
</xs:simpleType>

```

Schema loca- tion	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ ah/types/2/XML-Schema_AH_Types.xsd
----------------------	---

Namespace: ""

Element(s)

Element tns:TX_BASE_Type / txbase


Namespace	No namespace
Annotations	Fachliche Daten ueber die in der Transaktion involvierten Systeme

Diagram	
Type	tns:ION_TX_HEADER_Type
Properties	content: complex
Model	transAuftrag{0,1} , transEmpfaenger_ID , transEmpfaengerRolle , transStatus{0,1} , transTransaktion_ID , transTransaktionsTyp{0,1} , transTransaktionsZeitpunkt , transVersion{0,1} , transWiederholungsZaehler{0,1} , transSignaturTyp{0,1} , transSignaturZertifikat{0,1} , transSignatur{0,1}
Children	transAuftrag, transEmpfaengerRolle, transEmpfaenger_ID, transSignatur, transSignaturTyp, transSignaturZertifikat, transStatus, transTransaktion_ID, transTransaktionsTyp, transTransaktionsZeitpunkt, transVersion, transWiederholungsZaehler
Instance	<pre> <txbase> <transAuftrag>{0,1}</transAuftrag> <transEmpfaenger_ID>{1,1}</transEmpfaenger_ID> <transEmpfaengerRolle>{1,1}</transEmpfaengerRolle> <transStatus>{0,1}</transStatus> <transTransaktion_ID>{1,1}</transTransaktion_ID> <transTransaktionsTyp>{0,1}</transTransaktionsTyp> <transTransaktionsZeitpunkt>{1,1}</transTransaktionsZeitpunkt> <transVersion>{0,1}</transVersion> <transWiederholungsZaehler>{0,1}</transWiederholungsZaehler> <transSignaturTyp>{0,1}</transSignaturTyp> <transSignaturZertifikat>{0,1}</transSignaturZertifikat> <transSignatur>{0,1}</transSignatur> </txbase> </pre>
Source	<pre> <xs:element name="txbase" type="tns:ION_TX_HEADER_Type"> <xs:annotation> <xs:documentation>Fachliche Daten ueber die in der Transaktion involvierten Systeme</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:ION_TX_HEADER_Type / transAuftrag

Namespace	No namespace						
Diagram							
Type	xs:string						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Source	<pre> <xs:element name="transAuftrag" type="xs:string" minOccurs="0" maxOccurs="1"/> </pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						


Element **tns:ION_TX_HEADER_Type** / **transEmpfaenger_ID**

Namespace	No namespace				
Annotations	Eindeutige OrganisationsId des Nachrichtenempfaengers				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="transEmpfaenger_ID" type="ka:Organisation_ID"> <xs:annotation> <xs:documentation>Eindeutige OrganisationsId des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element **tns:ION_TX_HEADER_Type** / **transEmpfaengerRolle**

Namespace	No namespace		
Annotations	Rolle des Nachrichtenempfaengers		
Diagram			
Type	tns:KommunikationsParterRolle		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:KommunikationsParterRolle		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Unbekannt
	enumeration	1	KVP
	enumeration	2	DL
	enumeration	3	PV
	enumeration	4	AH
	enumeration	5	KOSES
	enumeration	254	ZVM
Source	<pre><xs:element name="transEmpfaengerRolle" type="ka:KommunikationsParterRolle"> <xs:annotation> <xs:documentation>Rolle des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element></pre>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd		

Element **tns:ION_TX_HEADER_Type** / **transStatus**

Namespace	No namespace
Diagram	

Type	tns:INT1
Properties	content: simple
	minOccurs: 0
	maxOccurs: 1
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="transStatus" type="ct:INT1" minOccurs="0" maxOccurs="1"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:ION_TX_HEADER_Type / transTransaktion_ID

Namespace	No namespace
Diagram	
Type	tns:IONTransaktion_ID_Type
Properties	content: complex
Model	transSequenznummer , transSenderRolle , transSender_ID
Children	transSenderRolle, transSender_ID, transSequenznummer
Instance	<pre><transTransaktion_ID> <transSequenznummer>{1,1}</transSequenznummer> <transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </transTransaktion_ID></pre>
Source	<code><xs:element name="transTransaktion_ID" type="tns:IONTransaktion_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:IONTransaktion_ID_Type / transSequenznummer


Namespace	No namespace
Diagram	
Type	tns:SequenceNumberFour
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SequenceNumberFour
Properties	content: simple
Facets	maxInclusive 4294967295
	minInclusive 0
Source	<code><xs:element name="transSequenznummer" type="ct:SequenceNumberFour"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:IONTransaktion_ID_Type / transSenderRolle


Namespace	No namespace
Diagram	
Type	tns:KommunikationsParterRolle

Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:KommunikationsParterRolle		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Unbekannt
	enumeration	1	KVP
	enumeration	2	DL
	enumeration	3	PV
	enumeration	4	AH
	enumeration	5	KOSES
	enumeration	254	ZVM
Source	<xs:element name="transSenderRolle" type="ka:KommunikationsParterRolle"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd		

Element tns:IONTransaktion_ID_Type / transSender_ID


Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 <ul style="list-style-type: none"> tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="transSender_ID" type="ka:Organisation_ID"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:ION_TX_HEADER_Type / transTransaktionsTyp


Namespace	No namespace						
Diagram							
Type	tns:INT1						
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0		
maxInclusive	255						
minInclusive	0						
Source	<code><xs:element name="transTransaktionsTyp" type="ct:INT1" minOccurs="0" maxOccurs="1"/></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:ION_TX_HEADER_Type / transTransaktionsZeitpunkt


Namespace	No namespace
-----------	--------------

Annotations	Zeitpunkt der Dienstanfrage gemaess den Angaben der Dienstaufrufers. Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist moeglicherweise die Aussagekraft dieses Feldes sehr gering.
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<pre><xs:element name="transTransaktionsZeitpunkt" type="ct:DateTime"> <xs:annotation> <xs:documentation>Zeitpunkt der Dienstanfrage gemaess den Angaben der Dienstaufrufers. Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist moeglicherweise die Aussagekraft dieses Feldes sehr gering.</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:ION_TX_HEADER_Type / transVersion

Namespace	No namespace						
Diagram							
Type	tns:BitString16						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>length</td><td>16</td></tr> <tr><td>pattern</td><td> [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1] </td></tr> </table>	length	16	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]		
length	16						
pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1]						
Source	<pre><xs:element name="transVersion" type="ct:BitString16" minOccurs="0" maxOccurs="1"/></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:ION_TX_HEADER_Type / transWiederholungsZaehler


Namespace	No namespace						
Diagram							
Type	tns:INT1						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0		
maxInclusive	255						
minInclusive	0						
Source	<pre><xs:element name="transWiederholungsZaehler" type="ct:INT1" minOccurs="0" maxOccurs="1"/></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:ION_TX_HEADER_Type / transSignaturTyp


Namespace	No namespace
Diagram	
Type	tns:INT1
Properties	content: simple

	minOccurs: 0
	maxOccurs: 1
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="transSignaturTyp" type="ct:INT1" minOccurs="0" maxOccurs="1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element **tns:ION_TX_HEADER_Type** / **transSignaturZertifikat**

Namespace	No namespace
Diagram	
Type	restriction of xs:hexBinary
Properties	content: simple
	minOccurs: 0
	maxOccurs: 1
Facets	length 378
Source	<code><xs:element name="transSignaturZertifikat" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:hexBinary"> <xs:length value="378" fixed="true" /> </xs:restriction> </xs:simpleType> </xs:element></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:ION_TX_HEADER_Type** / **transSignatur**


Namespace	No namespace
Diagram	
Type	tns:TransSignatur_Type
Properties	content: simple
	minOccurs: 0
	maxOccurs: 1
Facets	length 128
Source	<code><xs:element name="transSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:Transaktionsdatensatz_Type** / **Transaktionsdaten**


Namespace	No namespace
Diagram	
Type	xs:hexBinary
Properties	content: simple
Source	<code><xs:element name="Transaktionsdaten" type="xs:hexBinary" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:berNmTransaktionMAC_Type** / **berMAC_PV**

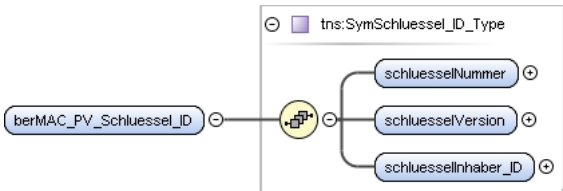
Namespace	No namespace
-----------	--------------

Diagram	
Type	tns:OctetString8
Properties	content: simple
Facets	length 8
Source	<code><xs:element name="berMAC_PV" type="ct:OctetString8"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:berNmTransaktionMAC_Type / berMAC_KVP

Namespace	No namespace
Diagram	
Type	tns:OctetString8
Properties	content: simple
Facets	length 8
Source	<code><xs:element name="berMAC_KVP" type="ct:OctetString8"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:berNmTransaktionMAC_Type / berMAC_PV_Schluessel_ID

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><berMAC_PV_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </berMAC_PV_Schluessel_ID></pre>
Source	<code><xs:element name="berMAC_PV_Schluessel_ID" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:SymSchluessel_ID_Type / schluesselNummer

Namespace	No namespace
Diagram	
Type	tns:INT1
Properties	content: simple
Facets	maxInclusive 255 minInclusive 0
Source	<code><xs:element name="schluesselNummer" type="ct:INT1" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

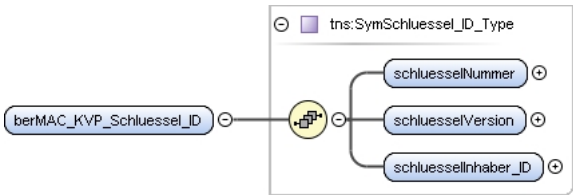
Element **tns:SymSchluessel_ID_Type** / **schluesselVersion**

Namespace	No namespace				
Diagram					
Type	tns:INT1				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xs:element name="schluesselVersion" type="ct:INT1" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element **tns:SymSchluessel_ID_Type** / **schluesselInhaber_ID**

Namespace	No namespace				
Diagram					
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="schluesselInhaber_ID" type="ct:ReferenceNumberTwo" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element **tns:berNmTransaktionMAC_Type** / **berMAC_KVP_Schluessel_ID**

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre> <berMAC_KVP_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </berMAC_KVP_Schluessel_ID> </pre>
Source	<code><xs:element name="berMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:Terminal_ID_Type** / **terminalTyp**

Namespace	No namespace
-----------	--------------

Diagram					
Type	tns:TerminalTyp_CODE_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TerminalTyp_CODE_Type 				
Properties	content: simple				
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>255</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xs:element name="terminalTyp" type="tns:TerminalTyp_CODE_Type"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				


Element tns:Terminal_ID_Type / terminalNumber

Namespace	No namespace				
Diagram					
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 				
Properties	content: simple				
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="terminalNumber" type="ct:ReferenceNumberTwo"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:Terminal_ID_Type / terminalOwner_ID


Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>65535</td> </tr> <tr> <td>minInclusive</td> <td>0</td> </tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="terminalOwner_ID" type="ka:Organisation_ID"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:Ort_ID_Type / ortTyp


Namespace	No namespace
Diagram	

Type	tns:OrtsTyp_CODE_Type
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:OrtsTyp_CODE_Type
Properties	content: simple
Facets	maxInclusive 255
	minInclusive 0
Source	<code><xs:element name="ortTyp" type="tns:OrtsTyp_CODE_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element tns:Ort_ID_Type / ortNummer

Namespace	No namespace
Diagram	
Type	tns:ReferenceNumberThree
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree
Properties	content: simple
Facets	maxInclusive 16777215
	minInclusive 0
Source	<code><xs:element name="ortNummer" type="ct:ReferenceNumberThree" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:Ort_ID_Type / ortDomaene_ID

Namespace	No namespace
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID
Properties	content: simple
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="ortDomaene_ID" type="ka:Organisation_ID" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TX_BER_Type / berGueltigkeitsbeginn

Namespace	No namespace
Diagram	
Type	tns:DateTimeCompact
Properties	content: simple

Facets	maxInclusive	2117-12-31T23:59:58
	minInclusive	1990-01-01T00:00:00
Source	<xs:element name="berGueltigkeitsbeginn" type="ct:DateTimeCompact" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	

Element tns:TX_BER_Type / berGueltigkeitsende

Namespace	No namespace	
Diagram		
Type	tns:DateTimeCompact	
Properties	content:	simple
Facets	maxInclusive	2117-12-31T23:59:58
	minInclusive	1990-01-01T00:00:00
Source	<xs:element name="berGueltigkeitsende" type="ct:DateTimeCompact" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	

Element tns:TX_BER_Type / prodAbrechnungsVerfahren


Namespace	No namespace	
Diagram		
Type	tns:Abrechnungsverfahren_CODE_Type	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:Abrechnungsverfahren_CODE_Type 	
Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0
	enumeration	0 Keine Angabe
	enumeration	1 Pre-Paid
	enumeration	2 Post-Paid
	enumeration	3 Trip-Paid
Source	<xs:element name="prodAbrechnungsVerfahren" type="tns:Abrechnungsverfahren_CODE_Type" />	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd	

Element tns:TX_BER_Type / berBezahlArt


Namespace	No namespace	
Diagram		
Type	tns:Bezahlart_CODE_Type	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:Bezahlart_CODE_Type 	
Properties	content:	simple
Facets	maxInclusive	255
	minInclusive	0

Source	<code><xs:element name="berBezahlArt" type="tns:Bezahlart_CODE_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element **tns:TX_BER_Type** / **berBezahlMittel**

Namespace	No namespace
Diagram	
Type	tns:OctetString10
Properties	content: simple
Facets	length 10
Source	<code><xs:element name="berBezahlMittel" type="ct:OctetString10"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:Berechtigung_ID_Type** / **berechtigungNummer**


Namespace	No namespace
Diagram	
Type	tns:ReferenceNumberFour
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour
Properties	content: simple
Facets	maxInclusive 4294967295 minInclusive 0
Source	<code><xs:element name="berechtigungNummer" type="ct:ReferenceNumberFour"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:Berechtigung_ID_Type** / **kvp_ID**


Namespace	No namespace
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID
Properties	content: simple
Facets	maxInclusive 65535 minInclusive 0
Source	<code><xs:element name="kvp_ID" type="ka:Organisation_ID"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:EFMProdukt_ID_Type** / **produktNummer**


Namespace	No namespace
-----------	--------------

Diagram							
Type	tns:ReferenceNumberTwo						
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>maxInclusive</td><td>65535</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0		
maxInclusive	65535						
minInclusive	0						
Source	<code><xs:element name="produktIDnummer" type="ct:ReferenceNumberTwo" minOccurs="0" maxOccurs="1"/></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element tns:EFMProdukt_ID_Type / organisationID


Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	<table> <tr><td>content:</td><td>simple</td></tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr><td>maxInclusive</td><td>65535</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="organisationID" type="ka:Organisation_ID"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:NmApplikationInstanz_ID_Type / NmAppInstanznummer


Namespace	No namespace				
Diagram					
Type	tns:ReferenceNumberFour				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour 				
Properties	<table> <tr><td>content:</td><td>simple</td></tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr><td>maxInclusive</td><td>4294967295</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<code><xs:element name="NmAppInstanznummer" type="ct:ReferenceNumberFour"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:NmApplikationInstanz_ID_Type / kvp_ID


Namespace	No namespace
-----------	--------------

Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="kvp_ID" type="ka:Organisation_ID"/></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				


Element tns:ASymSchluessel_ID_Type / signaturSchluessel

Namespace	No namespace
Diagram	
Type	tns:OctetString12
Properties	content: simple
Facets	length 12
Source	<code><xs:element name="signaturSchluessel" type="ct:OctetString12"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:appNmTransaktionMAC_Type / appMAC_AH

Namespace	No namespace
Diagram	
Type	tns:OctetString8
Properties	content: simple
Facets	length 8
Source	<code><xs:element name="appMAC_AH" type="ct:OctetString8"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:appNmTransaktionMAC_Type / appMAC_KVP

Namespace	No namespace
Diagram	
Type	tns:OctetString8
Properties	content: simple
Facets	length 8
Source	<code><xs:element name="appMAC_KVP" type="ct:OctetString8"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:appNmTransaktionMAC_Type / appMAC_AH_Schluessel_ID

Namespace	No namespace
-----------	--------------

Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><appMAC_AH_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </appMAC_AH_Schluessel_ID></pre>
Source	<code><xs:element name="appMAC_AH_Schluessel_ID" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:appNmTransaktionMAC_Type / appMAC_KVP_Schluessel_ID

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><appMAC_KVP_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </appMAC_KVP_Schluessel_ID></pre>
Source	<code><xs:element name="appMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TX_RET_Type / transOrigID

Namespace	No namespace
Diagram	
Type	tns:IONTransaktion_ID_Type
Properties	content: complex
Model	transSequenznummer , transSenderRolle , transSender_ID
Children	transSenderRolle, transSender_ID, transSequenznummer
Instance	<pre><transOrigID> <transSequenznummer>{1,1}</transSequenznummer></pre>

	<pre><transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </transOrigID></pre>
Source	<code><xs:element name="transOrigID" type="tns:IONTransaktion_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TX_RET_Type / transOrigSignatur**

Namespace	No namespace						
Diagram							
Type	tns:TransSignatur_Type						
Properties	<table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table>	content:	simple	minOccurs:	0	maxOccurs:	1
content:	simple						
minOccurs:	0						
maxOccurs:	1						
Facets	<table> <tr><td>length</td><td>128</td></tr> </table>	length	128				
length	128						
Source	<code><xs:element name="transOrigSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element **tns:TX_RET_Type / transOriginalZeit**


Namespace	No namespace		
Diagram			
Type	xs:dateTime		
Properties	<table> <tr><td>content:</td><td>simple</td></tr> </table>	content:	simple
content:	simple		
Source	<code><xs:element name="transOriginalZeit" type="xs:dateTime"/></code>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd		

Element **tns:TX_SMIT_Type / sperrAnforderungBezug**


Namespace	No namespace		
Diagram			
Type	tns:IONTransaktion_ID_Type		
Properties	<table> <tr><td>content:</td><td>complex</td></tr> </table>	content:	complex
content:	complex		
Model	transSequenznummer , transSenderRolle , transSender_ID		
Children	transSenderRolle, transSender_ID, transSequenznummer		
Instance	<pre><sperrAnforderungBezug> <transSequenznummer>{1,1}</transSequenznummer> <transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </sperrAnforderungBezug></pre>		
Source	<code><xs:element name="sperrAnforderungBezug" type="tns:IONTransaktion_ID_Type"/></code>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd		

Element **tns:TX_SMIT_Type / sperrEntscheidung**


Namespace	No namespace
-----------	--------------

Diagram									
Type	tns:Mitteilung_CODE_Type								
Properties	content: simple								
Facets	<table> <tr><td>enumeration</td><td>1</td></tr> <tr><td>enumeration</td><td>2</td></tr> <tr><td>enumeration</td><td>3</td></tr> <tr><td>enumeration</td><td>4</td></tr> </table>	enumeration	1	enumeration	2	enumeration	3	enumeration	4
enumeration	1								
enumeration	2								
enumeration	3								
enumeration	4								
Source	<code><xs:element name="sperrEntscheidung" type="tns:Mitteilung_CODE_Type" /></code>								
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd								

Element tns:TX_SANF_Type / sperrSperrgrund


Namespace	No namespace				
Diagram					
Type	tns:INT1				
Properties	content: simple				
Facets	<table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<code><xs:element name="sperrSperrgrund" type="ct:INT1" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element tns:TXA_Type / transAblehnungGrund


Namespace	No namespace				
Annotations	<p>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst, getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceResultCode'). Es wird empfohlen, fuer die vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</p>				
Diagram					
Type	tns:INT1				
Properties	content: simple				
Facets	<table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<pre> <xs:element name="transAblehnungGrund" type="ct:INT1"> <xs:annotation> <xs:documentation>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst, getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen </pre>				

	<p>numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceResultCode'). Es wird empfohlen, fuer die vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</p> <pre></xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element **tns:TXAS_Type** / **transSendeAuftrag**

Namespace	No namespace						
Diagram							
Type	restriction of tns:PrintableString						
Type hierarchy	<ul style="list-style-type: none"> xs:string tns:PrintableString 						
Properties	content: simple						
Facets	<table> <tr> <td>minLength</td><td>0</td></tr> <tr> <td>maxLength</td><td>10</td></tr> <tr> <td>pattern</td><td>[-p]*</td></tr> </table>	minLength	0	maxLength	10	pattern	[-p]*
minLength	0						
maxLength	10						
pattern	[-p]*						
Source	<pre><xs:element name="transSendeAuftrag"> <xs:simpleType> <xs:restriction base="tns:PrintableString"> <xs:minLength value="0"/> <xs:maxLength value="10"/> </xs:restriction> </xs:simpleType> </xs:element></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd						

Element **tns:TXAS_Type** / **transSendeAuftragstyp**

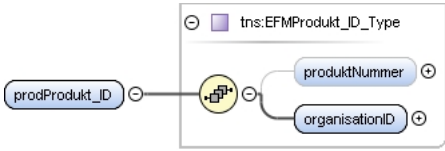
Namespace	No namespace				
Diagram					
Type	tns:AuftragsTyp_CODE				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:AuftragsTyp_CODE 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				
Source	<pre><xs:element name="transSendeAuftragstyp" type="tns:AuftragsTyp_CODE" /></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element **tns:TXDEABER_Req_Type** / **prodAkzeptanzEnde**

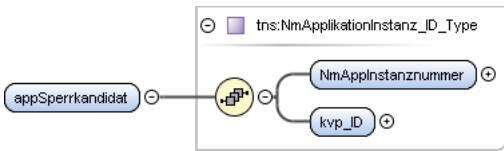
Namespace	No namespace
Diagram	
Type	tns:Date
Properties	content: simple
Source	<pre><xs:element name="prodAkzeptanzEnde" type="ct:Date" /></pre>

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd
-----------------	---

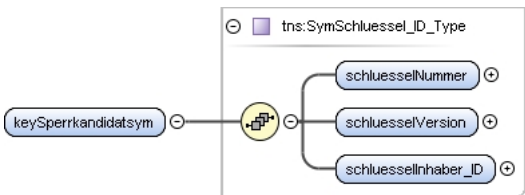
Element **tns:TXDEABER_Req_Type** / **prodProdukt_ID**

Namespace	No namespace
Diagram	
Type	tns:EFMProdukt_ID_Type
Properties	content: complex
Model	produktNummer{0,1} , organisationID
Children	organisationID, produktNummer
Instance	<pre><prodProdukt_ID> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </prodProdukt_ID></pre>
Source	<pre><xs:element name="prodProdukt_ID" type="tns:EFMProdukt_ID_Type" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXSMITA_Type** / **appSperrkandidat**

Namespace	No namespace
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex nillable: false
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<pre><appSperrkandidat> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </appSperrkandidat></pre>
Source	<pre><xs:element name="appSperrkandidat" type="tns:NmApplikationInstanz_ID_Type" nillable="false" /></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXSANFSYMK_Type** / **keySperrkandidatsym**

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion

Instance	<pre><keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </keySperrkandidatsym></pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXSANFASYMK_Type** / **keySperrkandidatsym**

Namespace	No namespace
Diagram	
Type	tns:ASymSchluessel_ID_Type
Properties	content: complex
Model	signaturSchluessel
Children	signaturSchluessel
Instance	<pre><keySperrkandidatsym> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidatsym></pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:ASymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXSFREIMITSYMK_Type** / **keySperrkandidatsym**

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </keySperrkandidatsym></pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element **tns:TXSFREIMITASYMK_Type** / **keySperrkandidatsym**

Namespace	No namespace
Diagram	
Type	tns:ASymSchluessel_ID_Type
Properties	content: complex

Model	signaturSchluessel
Children	signaturSchluessel
Instance	<pre><keySperrkandidatasy> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidatasy></pre>
Source	<code><xs:element name="keySperrkandidatasy" type="tns:ASymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITSYMK_Type / keySperrkandidatsym

Namespace	No namespace
Diagram	
Type	tns:SymSchluessel_ID_Type
Properties	content: complex
Model	schluesselNummer , schluesselVersion , schluesselInhaber_ID
Children	schluesselInhaber_ID, schluesselNummer, schluesselVersion
Instance	<pre><keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </keySperrkandidatsym></pre>
Source	<code><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSMITASYMK_Type / keySperrkandidatasy

Namespace	No namespace
Diagram	
Type	tns:ASymSchluessel_ID_Type
Properties	content: complex
Model	signaturSchluessel
Children	signaturSchluessel
Instance	<pre><keySperrkandidatasy> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidatasy></pre>
Source	<code><xs:element name="keySperrkandidatasy" type="tns:ASymSchluessel_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWA_Req_Type / samSperrkandidat

Namespace	No namespace
Diagram	
Type	tns:SAM_ID_Type
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3

	<ul style="list-style-type: none"> • tns:ReferenceNumberThree • tns:SAM_ID_Type
Properties	content: simple
Facets	maxInclusive 16777215
	minInclusive 0
Source	<code><xs:element name="samSperrkandidat" type="tns:SAM_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

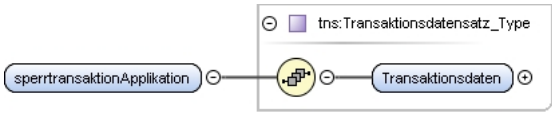
Element tns:TXSNAWA_Req_Type / orgSperrkandidat

Namespace	No namespace
Diagram	
Type	tns:Organisation_ID
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID
Properties	content: simple
Facets	maxInclusive 65535
	minInclusive 0
Source	<code><xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

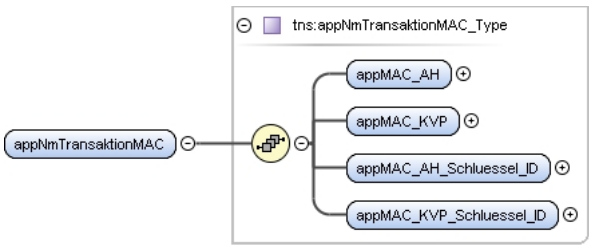
Element tns:TXSNAWA_Req_Type / zyklusNummer

Namespace	No namespace
Annotations	Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.
Diagram	
Type	tns:SperrlistenZyklusNummer_Type
Type hierarchy	<ul style="list-style-type: none"> • xs:unsignedInt • tns:INT4 • tns:SperrlistenZyklusNummer_Type
Properties	content: simple
Facets	maxInclusive 4294967295
	minInclusive 0
Source	<pre> <xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element> </pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element `tns:TXSNAWA_Req_Type` / `sperrtransaktionApplikation`

Namespace	No namespace
Diagram	
Type	<code>tns:Transaktionsdatensatz_Type</code>
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><sperrtransaktionApplikation> <Transaktionsdaten>{1,1}</Transaktionsdaten> </sperrtransaktionApplikation></pre>
Source	<code><xs:element name="sperrtransaktionApplikation" type="tns:Transaktionsdatensatz_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element `tns:TXSNAWA_Req_Type` / `appNmTransaktionMAC`


Namespace	No namespace
Diagram	
Type	<code>tns:appNmTransaktionMAC_Type</code>
Properties	content: complex
Model	appMAC_AH , appMAC_KVP , appMAC_AH_Schluessel_ID , appMAC_KVP_Schluessel_ID
Children	appMAC_AH, appMAC_AH_Schluessel_ID, appMAC_KVP, appMAC_KVP_Schluessel_ID
Instance	<pre><appNmTransaktionMAC> <appMAC_AH>{1,1}</appMAC_AH> <appMAC_KVP>{1,1}</appMAC_KVP> <appMAC_AH_Schluessel_ID>{1,1}</appMAC_AH_Schluessel_ID> <appMAC_KVP_Schluessel_ID>{1,1}</appMAC_KVP_Schluessel_ID> </appNmTransaktionMAC></pre>
Source	<code><xs:element name="appNmTransaktionMAC" type="tns:appNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element `tns:TXSNAWB_Req_Type` / `samSperrkandidat`

Namespace	No namespace				
Diagram					
Type	<code>tns:SAM_ID_Type</code>				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree tns:SAM_ID_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	16777215	minInclusive	0
maxInclusive	16777215				
minInclusive	0				

Source	<code><xs:element name="samSperrkandidat" type="tns:SAM_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd


Element **tns:TXSNAWB_Req_Type** / **orgSperrkandidat**

Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="orgSperrkandidat" type="ka:Organisation_ID" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element **tns:TXSNAWB_Req_Type** / **zyklusNummer**

Namespace	No namespace				
Annotations	Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.				
Diagram					
Type	tns:SperrlistenZyklusNummer_Type				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SperrlistenZyklusNummer_Type 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	4294967295	minInclusive	0
maxInclusive	4294967295				
minInclusive	0				
Source	<pre><xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd				

Element **tns:TXSNAWB_Req_Type** / **sperctransaktionBerechtigung**

Namespace	No namespace
Diagram	

Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><sperrtransaktionBerechtigung> <Transaktionsdaten>{1,1}</Transaktionsdaten> </sperrtransaktionBerechtigung></pre>
Source	<code><xs:element name="sperrtransaktionBerechtigung" type="tns:Transaktionsdatensatz_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:TXSNAWB_Req_Type / berNmTransaktionMAC


Namespace	No namespace
Diagram	
Type	tns:berNmTransaktionMAC_Type
Properties	content: complex
Model	berMAC_PV , berMAC_KVP , berMAC_PV_Schlüssel_ID , berMAC_KVP_Schlüssel_ID
Children	berMAC_KVP, berMAC_KVP_Schlüssel_ID, berMAC_PV, berMAC_PV_Schlüssel_ID
Instance	<pre><berNmTransaktionMAC> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schlüssel_ID>{1,1}</berMAC_PV_Schlüssel_ID> <berMAC_KVP_Schlüssel_ID>{1,1}</berMAC_KVP_Schlüssel_ID> </berNmTransaktionMAC></pre>
Source	<code><xs:element name="berNmTransaktionMAC" type="tns:berNmTransaktionMAC_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd

Element tns:VX_Message_Type / StatusCode


Namespace	No namespace		
Diagram			
Type	tns:StatusCode		
Type hierarchy	<ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:StatusCode		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.
	enumeration	1	Ungeltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.
	enumeration	2	Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.

	enumeration	3	Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.
	enumeration	4	Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.
	enumeration	5	Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.
	enumeration	6	Die asynchrone Nachricht kann nicht zwischengespeichert werden.
	enumeration	7	Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.
	enumeration	255	Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.
Source	<xs:element name="StatusCode" type="tns:StatusCode" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd		

Element tns:VX_Message_Type / StatusText

Namespace	No namespace		
Diagram			
Type	tns:StatusText		
Properties	content:	simple	
Facets	maxLength	255	
Source	<xs:element name="StatusText" type="tns:StatusText" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd		

Element ah:TXAA_Type / nmMedium_ID.nutzermediumNummer

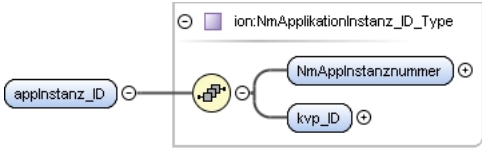
Namespace	No namespace		
Diagram			
Type	tns:OctetString10		
Properties	content:	simple	
Facets	length	10	
Source	<xs:element name="nmMedium_ID.nutzermediumNummer" type="ct:OctetString10"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd		

Element ah:TXAA_Type / tx_app


Namespace	No namespace
Diagram	<p>The diagram illustrates the structure of the <code>tx_app</code> element. It is represented as a class-like shape connected to a container labeled <code>at:TX_APP_Type</code>. This container holds four attributes: <code>appInstanz_ID</code>, <code>appGueltigkeitsbeginn</code>, <code>appGueltigkeitsende</code>, and <code>appVersion</code>. Each attribute is shown in a rounded rectangle with a small circle containing a plus sign, indicating they are optional or part of a choice.</p>
Type	tns:TX_APP_Type
Properties	content: complex
Model	appInstanz ID , appGueltigkeitsbeginn , appGueltigkeitsende , appVersion

Children	appGueltigkeitsbeginn, appGueltigkeitsende, appInstanz_ID, appVersion
Instance	<pre><tx_app> <appInstanz_ID>{1,1}</appInstanz_ID> <appGueltigkeitsbeginn>{1,1}</appGueltigkeitsbeginn> <appGueltigkeitsende>{1,1}</appGueltigkeitsende> <appVersion>{1,1}</appVersion> </tx_app></pre>
Source	<code><xs:element name="tx_app" type="at:TX_APP_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd


Element tns:TX_APP_Type / appInstanz_ID

Namespace	No namespace
Diagram	
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex
Model	NmAppInstanznummer, kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<pre><appInstanz_ID> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </appInstanz_ID></pre>
Source	<code><xs:element name="appInstanz_ID" type="ion:NmApplikationInstanz_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd


Element tns:TX_APP_Type / appGueltigkeitsbeginn

Namespace	No namespace				
Diagram					
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="appGueltigkeitsbeginn" type="ct:DateTimeCompact" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd				


Element tns:TX_APP_Type / appGueltigkeitsende

Namespace	No namespace				
Diagram					
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="appGueltigkeitsende" type="ct:DateTimeCompact" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd				

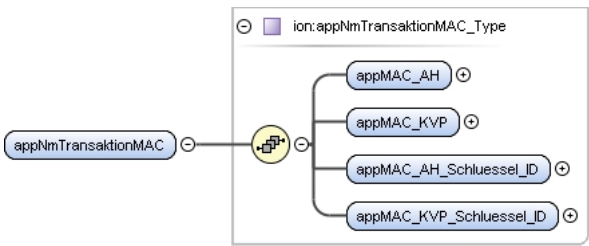
Element tns:TX_APP_Type / appVersion

Namespace	No namespace
Diagram	
Type	tns:BitString8
Properties	content: simple
Facets	<p>length 8</p> <p>pattern [0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1]</p>
Source	<code><xs:element name="appVersion" type="ct:BitString8"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd


Element ah:TXAA_Type / ausgabeTransaktionApplikation

Namespace	No namespace
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<code><ausgabeTransaktionApplikation> <Transaktionsdaten>{1,1}</Transaktionsdaten> </ausgabeTransaktionApplikation></code>
Source	<code><xs:element name="ausgabeTransaktionApplikation" type="ion:Transaktionsdatensatz_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

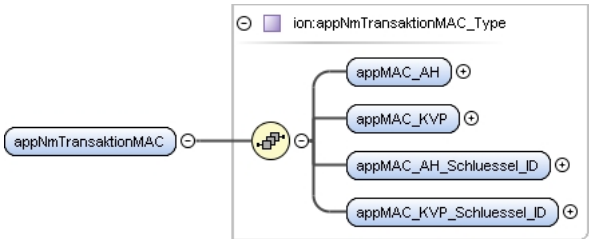
Element ah:TXAA_Type / appNmTransaktionMAC

Namespace	No namespace
Diagram	
Type	tns:appNmTransaktionMAC_Type
Properties	content: complex
Model	appMAC_AH , appMAC_KVP , appMAC_AH_Schluessel_ID , appMAC_KVP_Schluessel_ID
Children	appMAC_AH, appMAC_AH_Schluessel_ID, appMAC_KVP, appMAC_KVP_Schluessel_ID
Instance	<code><appNmTransaktionMAC> <appMAC_AH>{1,1}</appMAC_AH> <appMAC_KVP>{1,1}</appMAC_KVP> <appMAC_AH_Schluessel_ID>{1,1}</appMAC_AH_Schluessel_ID> <appMAC_KVP_Schluessel_ID>{1,1}</appMAC_KVP_Schluessel_ID> </appNmTransaktionMAC></code>
Source	<code><xs:element name="appNmTransaktionMAC" type="ion:appNmTransaktionMAC_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd


Element ah:TXRA_Type / rucknahmeTransaktionApplikation

Namespace	No namespace
Diagram	
Type	tns:Transaktionsdatensatz_Type
Properties	content: complex
Model	Transaktionsdaten
Children	Transaktionsdaten
Instance	<pre><rucknahmeTransaktionApplikation> <Transaktionsdaten>{1,1}</Transaktionsdaten> </rucknahmeTransaktionApplikation></pre>
Source	<pre><xs:element name="rucknahmeTransaktionApplikation" type="ion:Transaktionsdatensatz_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

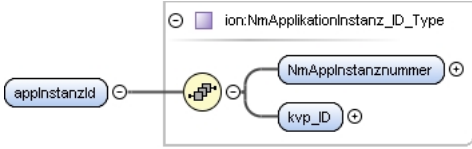
Element ah:TXRA_Type / appNmTransaktionMAC

Namespace	No namespace
Diagram	
Type	tns:appNmTransaktionMAC_Type
Properties	content: complex
Model	appMAC_AH , appMAC_KVP , appMAC_AH_Schluesssel_ID , appMAC_KVP_Schluesssel_ID
Children	appMAC_AH, appMAC_AH_Schluesssel_ID, appMAC_KVP, appMAC_KVP_Schluesssel_ID
Instance	<pre><appNmTransaktionMAC> <appMAC_AH>{1,1}</appMAC_AH> <appMAC_KVP>{1,1}</appMAC_KVP> <appMAC_AH_Schluesssel_ID>{1,1}</appMAC_AH_Schluesssel_ID> <appMAC_KVP_Schluesssel_ID>{1,1}</appMAC_KVP_Schluesssel_ID> </appNmTransaktionMAC></pre>
Source	<pre><xs:element name="appNmTransaktionMAC" type="ion:appNmTransaktionMAC_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd


Element ah:TXRA_Type / appVersion

Namespace	No namespace				
Diagram					
Type	tns:BitString8				
Properties	content: simple				
Facets	<table border="1"> <tr> <td>length</td><td>8</td></tr> <tr> <td>pattern</td><td>[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1]</td></tr> </table>	length	8	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1]
length	8				
pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1]				
Source	<pre><xs:element name="appVersion" type="ct:BitString8"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd				


Element ah:TXAEA_Type / appInstanzId

Namespace	No namespace
Diagram	 The diagram shows the 'appInstanzId' element containing a complex type 'ion:NmApplikationInstanz_ID_Type'. This type is composed of two child elements: 'NmAppInstanznummer' and 'kvp_ID'.
Type	tns:NmApplikationInstanz_ID_Type
Properties	content: complex
Model	NmAppInstanznummer , kvp_ID
Children	NmAppInstanznummer, kvp_ID
Instance	<pre><appInstanzId> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </appInstanzId></pre>
Source	<code><xs:element name="appInstanzId" type="ion:NmApplikationInstanz_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd


Element ah:TXAEA_Type / appGueltigkeitsende

Namespace	No namespace				
Diagram	 The diagram shows the 'appGueltigkeitsende' element containing a simple type 'ct:DateTimeCompact'.				
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>2117-12-31T23:59:58</td> </tr> <tr> <td>minInclusive</td> <td>1990-01-01T00:00:00</td> </tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="appGueltigkeitsende" type="ct:DateTimeCompact" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd				

Element ah:TXAEA_Type / appGueltigkeitsbeginn


Namespace	No namespace				
Diagram	 The diagram shows the 'appGueltigkeitsbeginn' element containing a simple type 'ct:DateTimeCompact'.				
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>2117-12-31T23:59:58</td> </tr> <tr> <td>minInclusive</td> <td>1990-01-01T00:00:00</td> </tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="appGueltigkeitsbeginn" type="ct:DateTimeCompact" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd				

Element ah:TXAEA_Type / appVersion


Namespace	No namespace		
Diagram	 The diagram shows the 'appVersion' element containing a simple type 'ct:BitString8'.		
Type	tns:BitString8		
Properties	content: simple		
Facets	<table border="1"> <tr> <td>length</td> <td>8</td> </tr> </table>	length	8
length	8		

	pattern	[0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1]
Source	<xs:element name="appVersion" type="ct:BitString8"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd	


Element ah:TXSANFS_Type / samSperrkandidat

Namespace	No namespace	
Diagram		
Type	tns:ReferenceNumberThree	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree 	
Properties	content:	simple
Facets	maxInclusive	16777215
	minInclusive	0
Source	<xs:element name="samSperrkandidat" type="ct:ReferenceNumberThree"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd	

Element ah:TXSANFS_Type / samSequenznummer

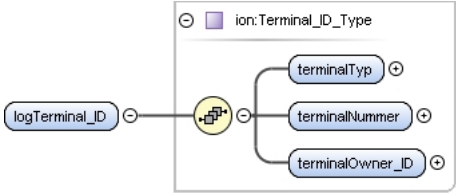
Namespace	No namespace	
Diagram		
Type	tns:SequenceNumberFour	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SequenceNumberFour 	
Properties	content:	simple
Facets	maxInclusive	4294967295
	minInclusive	0
Source	<xs:element name="samSequenznummer" type="ct:SequenceNumberFour"/>	
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd	

Element ah:TXKNAWDM_Type / logTransaktionsOperator_ID


Namespace	No namespace	
Diagram		
Type	tns:ReferenceNumberTwo	
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo 	
Properties	content:	simple
Facets	maxInclusive	65535
	minInclusive	0
Source	<xs:element name="logTransaktionsOperator_ID" type="ct:ReferenceNumberTwo"/>	

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd
-----------------	---

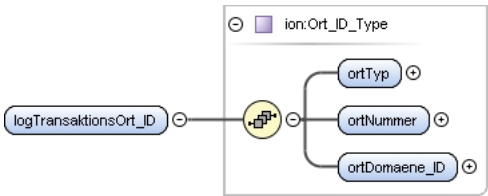
Element ah:TXKNAWDM_Type / logTerminal_ID

Namespace	No namespace
Diagram	 The diagram shows the 'logTerminal_ID' element (blue rounded rectangle) connected to a yellow circle containing a square with a plus sign. This circle is connected to three child elements: 'terminalTyp' (blue rounded rectangle), 'terminalNummer' (blue rounded rectangle), and 'terminalOwner_ID' (blue rounded rectangle). A legend box titled 'ion:Terminal_ID_Type' is shown above the children.
Type	tns:Terminal_ID_Type
Properties	content: complex
Model	terminalTyp , terminalNummer , terminalOwner_ID
Children	terminalNummer, terminalOwner_ID, terminalTyp
Instance	<pre><logTerminal_ID> <terminalTyp>{1,1}</terminalTyp> <terminalNummer>{1,1}</terminalNummer> <terminalOwner_ID>{1,1}</terminalOwner_ID> </logTerminal_ID></pre>
Source	<code><xs:element name="logTerminal_ID" type="ion:Terminal_ID_Type" /></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXKNAWDM_Type / logTransaktionsZeitpunkt


Namespace	No namespace				
Diagram	 The diagram shows the 'logTransaktionsZeitpunkt' element (blue rounded rectangle) connected to a purple rounded rectangle labeled 'ct:DateTimeCompact'.				
Type	tns:DateTimeCompact				
Properties	content: simple				
Facets	<table border="1"> <tr> <td>maxInclusive</td> <td>2117-12-31T23:59:58</td> </tr> <tr> <td>minInclusive</td> <td>1990-01-01T00:00:00</td> </tr> </table>	maxInclusive	2117-12-31T23:59:58	minInclusive	1990-01-01T00:00:00
maxInclusive	2117-12-31T23:59:58				
minInclusive	1990-01-01T00:00:00				
Source	<code><xs:element name="logTransaktionsZeitpunkt" type="ct:DateTimeCompact" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd				

Element ah:TXKNAWDM_Type / logTransaktionsOrt_ID

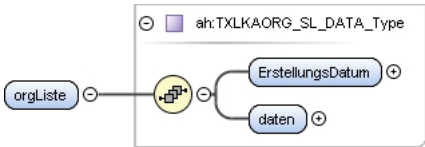
Namespace	No namespace
Diagram	 The diagram shows the 'logTransaktionsOrt_ID' element (blue rounded rectangle) connected to a yellow circle containing a square with a plus sign. This circle is connected to three child elements: 'ortTyp' (blue rounded rectangle), 'ortNummer' (blue rounded rectangle), and 'ortDomaene_ID' (blue rounded rectangle). A legend box titled 'ion:Ort_ID_Type' is shown above the children.
Type	tns:Ort_ID_Type
Properties	content: complex
Model	ortTyp , ortNummer , ortDomaene_ID
Children	ortDomaene_ID, ortNummer, ortTyp
Instance	<pre><logTransaktionsOrt_ID> <ortTyp>{1,1}</ortTyp> <ortNummer>{1,1}</ortNummer> <ortDomaene_ID>{1,1}</ortDomaene_ID> </logTransaktionsOrt_ID></pre>

Source	<code><xs:element name="logTransaktionsOrt_ID" type="ion:Ort_ID_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd


Element ah:TXKNAWDM_Type / transMediennummer

Namespace	No namespace
Diagram	
Type	tns:OctetString10
Properties	content: simple
Facets	length 10
Source	<code><xs:element name="transMediennummer" type="ct:OctetString10"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TX_LKAORG_Type / orgListe


Namespace	No namespace
Diagram	
Type	ah:TXLKAORG_SL_DATA_Type
Properties	content: complex
Model	ErstellungsDatum , daten
Children	ErstellungsDatum, daten
Instance	<pre><orgListe> <ErstellungsDatum>{1,1}</ErstellungsDatum> <daten>{1,1}</daten> </orgListe></pre>
Source	<code><xs:element name="orgListe" type="ah:TXLKAORG_SL_DATA_Type"/></code>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXLKAORG_SL_DATA_Type / ErstellungsDatum

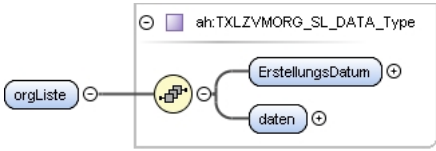
Namespace	No namespace
Annotations	Zeitpunkt der Listenerstellung
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<pre><xs:element name="ErstellungsDatum" type="ct:DateTime"> <xs:annotation> <xs:documentation>Zeitpunkt der Listenerstellung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXLKAORG_SL_DATA_Type / daten


Namespace	No namespace
Annotations	Dieses Element enthaelt die Organisationlistenmassendaten. Die Daten liegen in einem XML Format vor, die im zip Format komprimiert sind. Die den Daten zugrundeliegende Strukturdefinition ist im Schema http://vdv/ka/ah/attachments

	durch das Element "TXLKAORGLIST_Resp_SL" definiert.
Diagram	
Type	xs:base64Binary
Properties	content: simple
Source	<pre><xs:element name="daten" type="xs:base64Binary" xmlns:xmime="http://www.w3.org/2003/11/xmime" xmime:expectedContentTypes="application/vnd.vdv.ah.txlkaorglist.sl.zip"> <xs:annotation> <xs:documentation>Dieses Element enthaelt die Organisationlistenmassendaten. Die Daten liegen in einem XML Format vor, die im zip Format komprimiert sind. Die den Daten zugrundeliegende Strukturdefinition ist im Schema http://vdv/ka/ah/attachments durch das Element "TXLKAORGLIST_Resp_SL" definiert.</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd


Element ah:TX_LZVMORG_Type / orgListe

Namespace	No namespace
Diagram	
Type	ah:TXLZVMORG_SL_DATA_Type
Properties	content: complex
Model	ErstellungsDatum , daten
Children	ErstellungsDatum, daten
Instance	<pre><orgListe> <ErstellungsDatum>{1,1}</ErstellungsDatum> <daten>{1,1}</daten> </orgListe></pre>
Source	<pre><xs:element name="orgListe" type="ah:TXLZVMORG_SL_DATA_Type"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXLZVMORG_SL_DATA_Type / ErstellungsDatum


Namespace	No namespace
Annotations	Zeitpunkt der Listenerstellung
Diagram	
Type	tns:DateTime
Properties	content: simple
Source	<pre><xs:element name="ErstellungsDatum" type="ct:DateTime"> <xs:annotation> <xs:documentation>Zeitpunkt der Listenerstellung</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd

Element ah:TXLZVMORG_SL_DATA_Type / daten


Namespace	No namespace
Annotations	<p>Dieses Element enthaelt die Organisationlistenmassendaten.</p> <p>Die Daten liegen in einem XML Format vor, die im zip Format komprimiert sind.</p> <p>Die den Daten zugrundeliegende Strukturdefinition ist im Schema http://vdv/ka/ah/attachments durch das Element "TXLKAZVMLIST_Resp_SL_Type" definiert.</p>
Diagram	

Type	xs:base64Binary
Properties	content: simple
Source	<pre><xs:element name="daten" type="xs:base64Binary" xmlns:xmime="http://www.w3.org/2003/11/xmime" expectedContentType="application/vnd.vdv.ah.txlzvmorglist.zip"> <xs:annotation> <xs:documentation>Dieses Element enthaelt die Organisationlistenmassendaten. Die Daten liegen in einem XML Format vor, die im zip Format komprimiert sind. Die den Daten zugrundeliegende Strukturdefinition ist im Schema http://vdv/ka/ah/attachments durch das Element "TXLKAZVMLIST_Resp_SL_Type" definiert.</xs:documentation> </xs:annotation> </xs:element></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/2/XML-Schema_AH.xsd


Element tns:Kundenroute_Type / bezeichnung

Namespace	No namespace
Diagram	
Type	tns:PrintableString
Properties	content: simple
Facets	pattern [-p]*
Source	<pre><xs:element name="bezeichnung" type="ion:PrintableString"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Element tns:Kundenroute_Type / kurzBezeichnung

Namespace	No namespace
Diagram	
Type	tns:PrintableString
Properties	content: simple nillable: true
Facets	pattern [-p]*
Source	<pre><xs:element name="kurzBezeichnung" type="ion:PrintableString" nillable="true"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Element tns:Kundenroute_Type / email

Namespace	No namespace
Diagram	
Type	tns:Email_Type
Properties	content: simple nillable: true
Facets	pattern <pre>\w+([-.']\w+)*@\w+ +([-.]\w+)*\.\w+([-.]\w+)*</pre>
Source	<pre><xs:element name="email" type="tns:Email_Type" nillable="true"/></pre>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Element tns:Kundenroute_Type / orgIDRolleRoute

Namespace	No namespace
-----------	--------------

Diagram							
Type	tns:OrgIDRolleRoute_Type						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>1</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table>	content:	complex	minOccurs:	1	maxOccurs:	unbounded
content:	complex						
minOccurs:	1						
maxOccurs:	unbounded						
Model	orgID , rollencode , serviceUrl , interfaceVersion						
Children	interfaceVersion, orgID, rollencode, serviceUrl						
Instance	<pre><orgIDRolleRoute> <orgID>{1,1}</orgID> <rollencode>{1,1}</rollencode> <serviceUrl>{1,1}</serviceUrl> <interfaceVersion>{1,1}</interfaceVersion> </orgIDRolleRoute></pre>						
Source	<pre><xs:element name="orgIDRolleRoute" type="tns:OrgIDRolleRoute_Type" minOccurs="1" maxOccurs="unbounded" /></pre>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd						

Element tns:OrgIDRolleRoute_Type / orgID


Namespace	No namespace				
Diagram					
Type	tns:Organisation_ID				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID 				
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<pre><xs:element name="orgID" type="ka:Organisation_ID"/></pre>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd				

Element tns:OrgIDRolleRoute_Type / rollencode


Namespace	No namespace				
Diagram					
Type	tns:KommunikationsParterRolle				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:KommunikationsParterRolle 				
Properties	<table> <tr> <td>content:</td><td>simple</td></tr> </table>	content:	simple		
content:	simple				
Facets	<table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	255	minInclusive	0
maxInclusive	255				
minInclusive	0				

	enumeration	0	Unbekannt
	enumeration	1	KVP
	enumeration	2	DL
	enumeration	3	PV
	enumeration	4	AH
	enumeration	5	KOSES
	enumeration	254	ZVM
Source	<xs:element name="rollencode" type="ka:KommunikationsParterRolle"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd		


Element **tns:OrgIDRolleRoute_Type** / **serviceUrl**

Namespace	No namespace		
Diagram			
Type	xs:anyURI		
Properties	content:	simple	
	nillable:	true	
Source	<xs:element name="serviceUrl" type="xs:anyURI" nillable="true" />		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd		

Element **tns:OrgIDRolleRoute_Type** / **interfaceVersion**


Namespace	No namespace		
Diagram			
Type	tns:INT4		
Properties	content:	simple	
	nillable:	true	
Facets	maxInclusive	4294967295	
	minInclusive	0	
Source	<xs:element name="interfaceVersion" type="ct:INT4" nillable="true"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd		

Element **tns:Kundenrolle_Type** / **rollencode**


Namespace	No namespace		
Diagram			
Type	tns:KommunikationsParterRolle		
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:KommunikationsParterRolle 		
Properties	content:	simple	
Facets	maxInclusive	255	
	minInclusive	0	
	enumeration	0	Unbekannt
	enumeration	1	KVP
	enumeration	2	DL
	enumeration	3	PV

	enumeration	4	AH
	enumeration	5	KOSES
	enumeration	254	ZVM
Source	<xs:element name="rollencode" type="ka:KommunikationsParterRolle"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd		


Element tns:Kundenrolle_Type / ip

Namespace	No namespace		
Diagram			
Type	tns:IP_Format		
Properties	content:	simple	
Facets	pattern	(([1-9]?[0-9] 1[0-9][0-9] 2[0-4][0-9] 25[0-5]) \.) { 3 } ([1-9]?[0-9] 1[0-9][0-9] 2[0-4][0-9] 25[0-5])	
Source	<xs:element name="ip" type="tns:IP_Format"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd		


Element tns:Kundenrolle_Type / port

Namespace	No namespace		
Diagram			
Type	tns:Port_Format		
Properties	content:	simple	
Facets	maxInclusive	65535	
	minInclusive	0	
Source	<xs:element name="port" type="tns:Port_Format"/>		
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd		

Element tns:Organisation_Type / bezeichnung


Namespace	No namespace
Diagram	
Type	xs:string
Properties	content: simple
Source	<xs:element name="bezeichnung" type="xs:string"/>
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd

Element tns:Organisation_Type / kurzbezeichnung

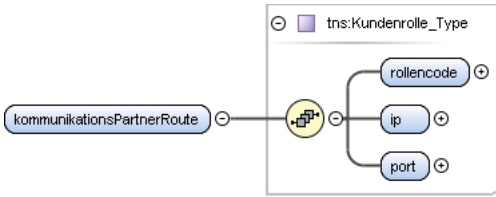
Namespace	No namespace		
Diagram			
Type	xs:string		
Properties	content:	simple	
	nillable:	true	
Source	<xs:element name="kurzbezeichnung" type="xs:string" nillable="true"/>		

Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd
-----------------	---

Element `tns:Organisation_Type / orgId`

Namespace	No namespace				
Diagram					
Type	tns:ReferenceNumberTwo				
Type hierarchy	<ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT2 <ul style="list-style-type: none"> tns:ReferenceNumberTwo 				
Properties	content: simple				
Facets	<table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table>	maxInclusive	65535	minInclusive	0
maxInclusive	65535				
minInclusive	0				
Source	<code><xs:element name="orgId" type="ct:ReferenceNumberTwo" /></code>				
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd				

Element `tns:Organisation_Type / kommunikationsPartnerRoute`

Namespace	No namespace						
Diagram							
Type	tns:Kundenrolle_Type						
Properties	<table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>1</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table>	content:	complex	minOccurs:	1	maxOccurs:	unbounded
content:	complex						
minOccurs:	1						
maxOccurs:	unbounded						
Model	rollencode , ip , port						
Children	ip, port, rollencode						
Instance	<pre><kommunikationsPartnerRoute> <rollencode>{1,1}</rollencode> <ip>{1,1}</ip> <port>{1,1}</port> </kommunikationsPartnerRoute></pre>						
Source	<code><xs:element name="kommunikationsPartnerRoute" type="tns:Kundenrolle_Type" minOccurs="1" maxOccurs="unbounded" /></code>						
Schema location	file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ah/types/2/XML-Schema_AH_Types.xsd						