

Schema documentation for XML- Schema_PKM.xsd

august 26, 2022

Table of Contents

| | |
|---|----|
| Namespace: "http://vdv/ka/pkm/1" | 13 |
| Schema(s) | 13 |
| Main schema XML-Schema_PKM.xsd | 13 |
| Element(s) | 13 |
| Element dl-km | 13 |
| Element XML-Moduldaten / status | 15 |
| Element XML-Moduldaten / version | 15 |
| Element XML-Version-Part / gueltigkeitsbeginn | 16 |
| Element XML-Version-Part / nr | 16 |
| Element XML-Version-Part / internNr | 17 |
| Element XML-Version-Part / spezifikation | 17 |
| Element XML-Version-Part / bearbeiter | 17 |
| Element XML-Version-Part / bemerkungen | 17 |
| Element XML-Version-Part / speicherzeitpunkt | 17 |
| Element XML-Version-Part / vorgaengerversion | 18 |
| Element XML-Moduldaten / organisation | 18 |
| Element XML-Organisation-Part / id | 19 |
| Element XML-Organisation-Part / name | 19 |
| Element XML-Moduldaten / namenszusatz | 19 |
| Element XML-Moduldaten / bemerkungen | 19 |
| Element XML-Moduldaten / verantwortlicher | 20 |
| Element XML-Modulkontextadapterdaten / modulkontextadapter-pool | 20 |
| Element XML-Modulkontextadapter-Pool / item | 20 |
| Element XML-Nr-Item / nr | 21 |
| Element XML-Nr-Item / name | 21 |
| Element XML-DLKM / leermodul | 21 |
| Element XML-Modultextdaten / text-matrix | 22 |
| Element XML-Ausgangstext-Matrix / text | 22 |
| Element XML-SchnittstellendatenA / sprache-pool | 22 |
| Element XML-Sprache-Pool / item | 23 |
| Element XML-SchnittstellendatenA / ausgangsschnittstelle-pool | 24 |
| Element XML-Ausgangsschnittstelle-Pool / item | 24 |
| Element XML-Ausgangsschnittstelle-Item / parameter-pool | 25 |
| Element XML-Ausgangsparameter-Pool / item | 25 |
| Element XML-SchnittstellendatenA / ausgangskontext-pool | 26 |
| Element XML-Ausgangskontext-Pool / item | 27 |
| Element XML-Name-Item / name | 27 |
| Element XML-Ausgangskontext-Item / sprache | 28 |
| Element XML-Ref-Set-1N / ref | 28 |
| Element XML-Ausgangskontext-Item / parameter | 28 |
| Element XML-DLKM-Adapterdaten / linienadapter-pool | 28 |
| Element XML-Linienadapter-Pool / item | 29 |
| Element XML-Text-Item / text-matrix | 30 |
| Element XML-DLKM-Adapterdaten / verkehrsmitteltypadapter-pool | 30 |
| Element XML-Verkehrsmitteltypadapter-Pool / item | 31 |
| Element XML-DLKM-Adapterdaten / wegevariantenadapter-pool | 31 |
| Element XML-Wegevariantenadapter-Pool / item | 32 |
| Element XML-DLKM-Adapterdaten / tarifpunktadapter-pool | 33 |
| Element XML-Tarifpunktadapter-Pool / item | 33 |
| Element XML-Tarifpunktadapter-Item / typ | 34 |
| Element XML-DLKM / kontrollmodul-pool | 34 |
| Element XML-Kontrollmodul-Pool / item | 35 |
| Element XML-Kontrollmodul-Item / moduldaten | 37 |
| Element XML-Organisationsdaten / organisation-pool | 40 |
| Element XML-Organisation-Pool / item | 40 |
| Element XML-Organisation-Item / anforderung | 41 |
| Element XML-Ergaenzungsanforderung-Pool / nr | 41 |
| Element XML-SchnittstellendatenB / sprache-pool | 41 |
| Element XML-SchnittstellendatenB / eingangsschnittstelle-pool | 42 |
| Element XML-Eingangsschnittstelle-Pool / item | 42 |

| | |
|---|----|
| Element XML-Eingangsschnittstelle-Item / parameter-pool | 43 |
| Element XML-Eingangsparameter-Pool / item | 43 |
| Element XML-SchnittstellendatenB / ausgangsschnittstelle-pool | 44 |
| Element XML-SchnittstellendatenB / ausgangskontext-pool | 45 |
| Element XML-Verarbeitungsdaten / schritt-pool | 45 |
| Element XML-Schritt-Pool / item | 46 |
| Element XML-Schritt-Item / ausgang | 47 |
| Element XML-Ausgangsschritt-Part / ausgangsdaten | 47 |
| Element XML-Ref-11 / ref | 47 |
| Element XML-Ausgangsschritt-Part / ausnahme | 48 |
| Element XML-Ref-01 / ref | 48 |
| Element XML-Ausgangsschritt-Part / nachfolger | 48 |
| Element XML-Schritt-Item / auswahl | 48 |
| Element XML-Auswahlschritt-Part / auswahldaten | 49 |
| Element XML-Auswahlschritt-Part / ausnahme | 49 |
| Element XML-Auswahlschritt-Part / nachfolger | 50 |
| Element XML-Ref-List-1N / ref | 50 |
| Element XML-Schritt-Item / berechnung | 50 |
| Element XML-Berechnungsschritt-Part / funktion | 51 |
| Element XML-Berechnungsschritt-Part / ausnahme | 51 |
| Element XML-Berechnungsschritt-Part / nachfolger | 51 |
| Element XML-Schritt-Item / entscheidung | 52 |
| Element XML-Entscheidungsschritt-Part / funktion | 52 |
| Element XML-Entscheidungsschritt-Part / ausnahme | 52 |
| Element XML-Entscheidungsschritt-Part / janachfolger | 53 |
| Element XML-Entscheidungsschritt-Part / neinnachfolger | 53 |
| Element XML-Schritt-Item / parallelisierung | 53 |
| Element XML-Parallelisierungsschritt-Part / parallel | 54 |
| Element XML-Ref-Set-0N / ref | 54 |
| Element XML-Parallelisierungsschritt-Part / nachfolger | 54 |
| Element XML-Verarbeitungsdaten / variable-pool | 55 |
| Element XML-Variable-Pool / item | 55 |
| Element XML-Verarbeitungsdaten / funktion-pool | 56 |
| Element XML-Funktion-Pool / item | 56 |
| Element XML-Funktion-Item / nr | 57 |
| Element XML-Funktion-Item / wert | 57 |
| Element XML-Value / bits | 58 |
| Element XML-Value / text | 59 |
| Element XML-Value / zahl | 59 |
| Element XML-Value / liste | 59 |
| Element XML-Value / datum | 60 |
| Element XML-Value / uhrzeit | 61 |
| Element XML-Value / zeitpunkt | 61 |
| Element XML-Value / zeitspanne | 61 |
| Element XML-Value / wahrheitswert | 61 |
| Element XML-Value / objekt | 62 |
| Element XML-Value / funktion | 62 |
| Element XML-FunctionValue / param | 64 |
| Element XML-FunctionValue / aufruf | 64 |
| Element XML-Value / undefiniert | 66 |
| Element XML-Funktion-Item / aufruf | 66 |
| Element XML-Verarbeitungsdaten / ausnahme-pool | 68 |
| Element XML-Ausnahme-Pool / item | 68 |
| Element XML-Verarbeitungsdaten / auswahldaten-pool | 69 |
| Element XML-Auswahldaten-Pool / item | 69 |
| Element XML-Sequenz-Item / sequenz-matrix | 70 |
| Element XML-Ausgangssequenz-Matrix / sequenz | 71 |
| Element XML-Ausgangssequenz-Entry / ref | 71 |
| Element XML-Ausgangssequenz-Entry / text | 71 |
| Element XML-Auswahldaten-Item / defaultoption | 72 |
| Element XML-Auswahldaten-Item / auswahloption | 72 |
| Element XML-Verarbeitungsdaten / auswahloption-pool | 72 |
| Element XML-Auswahloption-Pool / item | 73 |
| Element XML-Verarbeitungsdaten / ausgangsdaten-pool | 74 |
| Element XML-Ausgangsdaten-Pool / item | 74 |
| Element XML-PVKM-Verarbeitungsdaten / kontrollablauf | 75 |
| Element XML-Kontrollablauf-Part / pruefungvor | 75 |
| Element XML-Kontrollablauf-Part / pruefungnach | 75 |
| Element XML-PVKM-Verarbeitungsdaten / kontrollstrategie | 76 |
| Element XML-Strategie-Part / start | 76 |
| Element XML-PVKM-Produktdaten / ausgangsdatenfamilie-pool | 76 |
| Element XML-Ausgangsdatenfamilie-Pool / item | 77 |

| | |
|--|-----|
| Element XML-PVKM-Produktdaten / abhaengigkeitskriterium-pool | 78 |
| Element XML-Abhaengigkeitskriterium-Pool / item | 78 |
| Element XML-Abhaengigkeitskriterium-Item / funktion | 79 |
| Element XML-Abhaengigkeitskriterium-Item / wirksamkeit | 79 |
| Element XML-Kriterienzeitraum-Part / beginn | 80 |
| Element XML-Kriterienzeitraum-Part / ende | 80 |
| Element XML-PVKM-Produktdaten / identifikationsparameter-pool | 80 |
| Element XML-Identifikationsparameter-Pool / item | 81 |
| Element XML-Identifikationsparameter-Item / wert-pool | 81 |
| Element XML-Identifikationsparameterwert-Pool / item | 82 |
| Element XML-PVKM-Produktdaten / efmprodukt-pool | 83 |
| Element XML-PVKM-EFMPProdukt-Pool / item | 83 |
| Element XML-PVKM-EFMPProdukt-Item / kontrolldaten | 84 |
| Element XML-Produktdaten-Part / funktion | 85 |
| Element XML-Produktdaten-Part / modulkontext | 85 |
| Element XML-Produktdaten-Part / ausgangsdaten-matrix | 85 |
| Element XML-Ausgangsdaten-Matrix / ausgangsdaten | 86 |
| Element XML-Produktdaten-Part / abhaengigkeitsdaten-table | 86 |
| Element XML-Abhaengigkeitsdaten-Table / kriterium | 87 |
| Element XML-Ref-List-ON / ref | 87 |
| Element XML-Abhaengigkeitsdaten-Table / vorausgesetzt | 87 |
| Element XML-Produktdaten-Part / abhaengigkeitsausnahme-table | 87 |
| Element XML-Abhaengigkeitsausnahme-Table / kriterium | 88 |
| Element XML-Abhaengigkeitsausnahme-Table / vorausgesetzt | 88 |
| Element XML-Abhaengigkeitsausnahme-Table / ausnahme | 89 |
| Element XML-Kontrolldaten-Part / unterstuetzt | 89 |
| Element XML-PVKM-Produktdaten / tarifprodukt-pool | 89 |
| Element XML-PVKM-Tarifprodukt-Pool / item | 90 |
| Element XML-PVKM-Tarifprodukt-Item / extNr | 91 |
| Element XML-PVKM-Tarifprodukt-Item / efmprodukt | 91 |
| Element XML-PVKM-Tarifprodukt-Item / identifikation | 91 |
| Element XML-PVKM-Tarifprodukt-Item / kontrolldaten | 92 |
| Element XML-PVKM-Produktdaten / fremdprodukt-pool | 92 |
| Element XML-Fremdprodukt-Pool / item | 93 |
| Element XML-Fremdprodukt-Item / tarifstand | 94 |
| Element XML-Fremdprodukt-Item / organisation | 94 |
| Element XML-PVKM-Produktdaten / produktgruppe-pool | 94 |
| Element XML-Produktgruppe-Pool / item | 95 |
| Element XML-Produktgruppe-Item / produkt | 95 |
| Element XML-Tarifpunktdaten / tarifpunkt-pool | 96 |
| Element XML-Tarifpunkt-Pool / item | 96 |
| Element XML-Tarifpunkt-Item / typ | 97 |
| Element XML-Tarifpunkt-Item / ortsbezug | 98 |
| Element XML-Tarifpunktdaten / tarifpunktgruppe-pool | 98 |
| Element XML-Tarifpunktgruppe-Pool / item | 98 |
| Element XML-Tarifpunktgruppe-Item / tarifpunkt | 99 |
| Element XML-Verkehrsmittelliniendaten / linie-pool | 99 |
| Element XML-Linie-Pool / item | 100 |
| Element XML-Linie-Item / verkehrsmittellinienbezug | 101 |
| Element XML-Verkehrsmittelliniendaten / verkehrsmitteltyp-pool | 101 |
| Element XML-Verkehrsmitteltyp-Pool / item | 101 |
| Element XML-Verkehrsmitteltyp-Item / verkehrsmittellinienbezug | 102 |
| Element XML-Verkehrsmittelliniendaten / verkehrsmittellinienbezug-pool | 103 |
| Element XML-Verkehrsmittellinienbezug-Pool / item | 103 |
| Element XML-PVKM-Bedingungsdaten / modulkontext-pool | 104 |
| Element XML-Modulkontext-Pool / item | 104 |
| Element XML-PVKM-Bedingungsdaten / bezahlart-pool | 105 |
| Element XML-Bezahlart-Pool / item | 105 |
| Element XML-PVKM-Bedingungsdaten / mitnahmetyp-pool | 106 |
| Element XML-Mitnahmetyp-Pool / item | 107 |
| Element XML-PVKM-Bedingungsdaten / rabattmedientyp-pool | 108 |
| Element XML-Rabattmedientyp-Pool / item | 108 |
| Element XML-PVKM-Bedingungsdaten / tagesbedingung-pool | 109 |
| Element XML-Tagesbedingung-Pool / item | 109 |
| Element XML-Tagesbedingung-Item / wochentag-pool | 110 |
| Element XML-Wochentag-Pool / nr | 110 |
| Element XML-Tagesbedingung-Item / kalendertag-pool | 111 |
| Element XML-Kalendertag-Pool / datum | 111 |
| Element XML-PVKM-Bedingungsdaten / tageszeitbedingung-pool | 111 |
| Element XML-Tageszeitbedingung-Pool / item | 112 |
| Element XML-Tageszeitbedingung-Item / zeitabschnitt-pool | 113 |
| Element XML-Zeitabschnitt-Pool / item | 113 |

| | |
|---|-----|
| Element XML-Zeitabschnitt-Item / von | 113 |
| Element XML-Zeitabschnitt-Item / bis | 114 |
| Element XML-PVKM-Bedingungsdaten / modulkontextbedingung-pool | 114 |
| Element XML-Modulkontextbedingung-Pool / item | 114 |
| Element XML-Modulkontextbedingung-Item / modulkontext | 115 |
| Element XML-PVKM-Bedingungsdaten / verkehrsmittellinienbedingung-pool | 115 |
| Element XML-Verkehrsmittellinienbedingung-Pool / item | 116 |
| Element XML-Verkehrsmittellinienbedingung-Item / verkehrsmittellinienbezug | 117 |
| Element XML-Tarifpunktzuordnungsdaten / zuordnungstyp-pool | 117 |
| Element XML-Zuordnungstyp-Pool / item | 118 |
| Element XML-Tarifpunktzuordnungsdaten / zuordnungsdaten-matrix | 118 |
| Element XML-Zuordnungsdaten-Matrix / typ | 118 |
| Element XML-Zuordnungsdatentyp-Entry / vlb | 119 |
| Element XML-Zuordnungsdatenvlb-Entry / von | 120 |
| Element XML-Zuordnungsdatenvon-Entry / zu | 120 |
| Element XML-Tarifpunktzuordnungsdaten / zuordnungsausnahme-matrix | 120 |
| Element XML-Zuordnungsausnahme-Matrix / typ | 121 |
| Element XML-Zuordnungsausnahmetyp-Entry / vlb | 121 |
| Element XML-Zuordnungsausnahmevlb-Entry / von | 122 |
| Element XML-Zuordnungsausnahmevon-Entry / zu | 122 |
| Element XML-Tarifpunktbewertungsdaten / wegevariante-pool | 123 |
| Element XML-Wegevariante-Pool / item | 123 |
| Element XML-Wegevariante-Item / tarifpunktfolge-pool | 124 |
| Element XML-Tarifpunktfolge-Pool / item | 125 |
| Element XML-Tarifpunktfolge-Item / ink | 125 |
| Element XML-Tarifpunktfolge-Item / exk | 125 |
| Element XML-Tarifpunktbewertungsdaten / bewertungstyp-pool | 125 |
| Element XML-Bewertungstyp-Pool / item | 126 |
| Element XML-Tarifpunktbewertungsdaten / bewertungsdaten-pool | 127 |
| Element XML-Bewertungsdaten-Pool / item | 127 |
| Element XML-Bewertungsdaten-Item / wert | 128 |
| Element XML-Bewertungsdaten-Item / text-matrix | 129 |
| Element XML-Tarifpunktbewertungsdaten / bewertungsdaten-matrix | 129 |
| Element XML-Bewertungsdaten-Matrix / typ | 129 |
| Element XML-Bewertungsdatentyp-Entry / vlb | 130 |
| Element XML-Bewertungsdatenvlb-Entry / von | 131 |
| Element XML-Bewertungsdatenvon-Entry / nach | 131 |
| Element XML-Bewertungsdatennach-Entry / ueber | 132 |
| Element XML-Tarifpunktbewertungsdaten / bewertungsausnahme-matrix | 132 |
| Element XML-Bewertungsausnahme-Matrix / typ | 132 |
| Element XML-Bewertungsausnahmetyp-Entry / vlb | 133 |
| Element XML-Bewertungsausnahmevlb-Entry / von | 134 |
| Element XML-Bewertungsausnahmevon-Entry / nach | 134 |
| Element XML-Bewertungsausnahmenach-Entry / ueber | 135 |
| Element XML-Nummerninterpretationsdaten / nummerninterpretation-pool | 135 |
| Element XML-Nummerninterpretation-Pool / item | 136 |
| Element XML-Nummerninterpretation-Item / nummerntext-pool | 136 |
| Element XML-Nummerntext-Pool / item | 137 |
| Element XML-Tarifpunktinterpretationsdaten / bitleisteninterpretation-pool | 138 |
| Element XML-Bitleisteninterpretation-Pool / item | 138 |
| Element XML-Bitleisteninterpretation-Item / tarifpunkt | 139 |
| Element XML-Tarifpunktinterpretationsdaten / raumnummerninterpretation-pool | 139 |
| Element XML-Raumnummerninterpretation-Pool / item | 140 |
| Element XML-Raumnummerninterpretation-Item / raummodifikation-pool | 141 |
| Element XML-Raummodifikation-Pool / item | 141 |
| Element XML-Raummodifikation-Item / ink | 142 |
| Element XML-Raummodifikation-Item / exk | 143 |
| Element XML-Modulzusatzdaten / signatur | 143 |
| Element XML-Signatur-Part / type | 143 |
| Element XML-Signatur-Part / data | 143 |
| Element XML-Modulzusatzdaten / annotation | 144 |
| Element XML-Annotation-Part / data | 144 |
| Element XML-Kontrollmodul-Item / modulkontextadapter-matrix | 144 |
| Element XML-Eingangsadapter-Matrix / e | 145 |
| Element XML-Kontrollmodul-Item / linieneingangsadapter-matrix | 145 |
| Element XML-Kontrollmodul-Item / linienausgangsadapter-matrix | 145 |
| Element XML-Ausgangsadapter-Matrix / a | 146 |
| Element XML-Kontrollmodul-Item / verkehrsmitteltypeingangsadapter-matrix | 146 |
| Element XML-Kontrollmodul-Item / verkehrsmitteltypeausgangsadapter-matrix | 147 |
| Element XML-Kontrollmodul-Item / wegevarianteneingangsadapter-matrix | 147 |
| Element XML-Kontrollmodul-Item / wegevariantenausgangsadapter-matrix | 147 |
| Element XML-Kontrollmodul-Item / tarifpunkteingangsadapter-matrix | 148 |

| | |
|--|-----|
| Element XML-Kontrollmodul-Item / tarifpunktausgangsadapter-matrix | 148 |
| Element pv-km | 148 |
| Element pv-pm | 151 |
| Element XML-PVPM-Verarbeitungsdaten / loeschstrategie | 154 |
| Element XML-PVPM-Verarbeitungsdaten / verkaufsstrategie | 154 |
| Element XML-PVPM-Verarbeitungsdaten / ruecknahmesstrategie | 155 |
| Element XML-PVPM-Verarbeitungsdaten / darstellungsstrategie | 155 |
| Element XML-PVPM-Produktdaten / ausgangsdatenfamilie-pool | 155 |
| Element XML-PVPM-Produktdaten / nachfolgekriterium-pool | 156 |
| Element XML-PVPM-Produktdaten / abhaengigkeitskriterium-pool | 156 |
| Element XML-PVPM-Produktdaten / schluessel-pool | 157 |
| Element XML-Schluessel-Pool / item | 157 |
| Element XML-Schluessel-Item / id | 158 |
| Element XML-Schluessel-Item / name | 158 |
| Element XML-PVPM-Produktdaten / kontingentierung-pool | 158 |
| Element XML-Kontingentierung-Pool / item | 159 |
| Element XML-Kontingentierung-Item / kontingentdaten-table | 159 |
| Element XML-Kontingentdaten-Table / tagesbedingung | 160 |
| Element XML-Kontingentdaten-Table / tarifpunktbedingung | 160 |
| Element XML-Kontingentdaten-Table / verkehrsmittellinienbedingung | 161 |
| Element XML-Kontingentdaten-Table / spezialbedingung | 161 |
| Element XML-Kontingentdaten-Table / daten-pool | 161 |
| Element XML-Kontingentdaten-Pool / item | 162 |
| Element XML-Kontingentdaten-Item / url | 162 |
| Element XML-Kontingentierung-Item / kontingentausnahme-table | 162 |
| Element XML-Kontingentausnahme-Table / tagesbedingung | 163 |
| Element XML-Kontingentausnahme-Table / tarifpunktbedingung | 163 |
| Element XML-Kontingentausnahme-Table / verkehrsmittellinienbedingung | 163 |
| Element XML-Kontingentausnahme-Table / spezialbedingung | 164 |
| Element XML-Kontingentausnahme-Table / ausnahme | 164 |
| Element XML-PVPM-Produktdaten / identifikationsparameter-pool | 164 |
| Element XML-PVPM-Produktdaten / efmprodukt-pool | 165 |
| Element XML-PVPM-EFMPProdukt-Pool / item | 165 |
| Element XML-PVPM-EFMPProdukt-Item / schluessel | 166 |
| Element XML-PVPM-Schluessel-Part / mkpv | 167 |
| Element XML-PVPM-Schluessel-Part / mktr | 167 |
| Element XML-PVPM-Schluessel-Part / mkauth | 168 |
| Element XML-PVPM-EFMPProdukt-Item / loeschdaten | 168 |
| Element XML-Loeschdaten-Part / unterstuetztztab | 169 |
| Element XML-PVPM-EFMPProdukt-Item / darstellungsdaten | 169 |
| Element XML-Darstellungsdaten-Part / unterstuetztztab | 169 |
| Element XML-PVPM-EFMPProdukt-Item / ruecknahmedaten | 170 |
| Element XML-Ruecknahmedaten-Part / uzpdaten-table | 171 |
| Element XML-UZPDaten-Table / tagesbedingung | 171 |
| Element XML-UZPDaten-Table / zeitraumbedingung | 171 |
| Element XML-UZPDaten-Table / modulkontextbedingung | 172 |
| Element XML-UZPDaten-Table / spezialbedingung | 172 |
| Element XML-UZPDaten-Table / daten-pool | 172 |
| Element XML-UZPDaten-Pool / item | 173 |
| Element XML-RelativzeitpunktA-Part / zeitspanne | 173 |
| Element XML-RelativzeitpunktA-Part / uhrzeit | 174 |
| Element XML-Ruecknahmedaten-Part / uzpausnahme-table | 174 |
| Element XML-UZPAusnahme-Table / tagesbedingung | 174 |
| Element XML-UZPAusnahme-Table / zeitraumbedingung | 175 |
| Element XML-UZPAusnahme-Table / modulkontextbedingung | 175 |
| Element XML-UZPAusnahme-Table / spezialbedingung | 175 |
| Element XML-UZPAusnahme-Table / ausnahme | 176 |
| Element XML-Ruecknahmedaten-Part / rueckzahlungsdaten-table | 176 |
| Element XML-Rueckzahlungsdaten-Table / waehrung | 177 |
| Element XML-Rueckzahlungsdaten-Table / tagesbedingung | 177 |
| Element XML-Rueckzahlungsdaten-Table / zeitraumbedingung | 177 |
| Element XML-Rueckzahlungsdaten-Table / tarifpunktbedingung | 178 |
| Element XML-Rueckzahlungsdaten-Table / bewertungsbedingung | 178 |
| Element XML-Rueckzahlungsdaten-Table / verkehrsmittellinienbedingung | 178 |
| Element XML-Rueckzahlungsdaten-Table / mitnahmebedingung | 179 |
| Element XML-Rueckzahlungsdaten-Table / rabattmedienbedingung | 179 |
| Element XML-Rueckzahlungsdaten-Table / modulkontextbedingung | 179 |
| Element XML-Rueckzahlungsdaten-Table / spezialbedingung | 180 |
| Element XML-Rueckzahlungsdaten-Table / daten-pool | 180 |
| Element XML-Rueckzahlungsdaten-Pool / item | 180 |
| Element XML-Rueckzahlungsdaten-Item / betrag | 181 |
| Element XML-Waehrungsbetrag-Part / wert | 181 |

| | |
|---|-----|
| Element XML-Waehrungsbetrag-Part / mwstsatz | 181 |
| Element XML-Rueckzahlungsdaten-Item / gebuehr | 182 |
| Element XML-Ruecknahmedaten-Part / rueckzahlungsausnahme-table | 182 |
| Element XML-Rueckzahlungsausnahme-Table / waehrung | 183 |
| Element XML-Rueckzahlungsausnahme-Table / tagesbedingung | 184 |
| Element XML-Rueckzahlungsausnahme-Table / zeitraumbedingung | 184 |
| Element XML-Rueckzahlungsausnahme-Table / tarifpunktbedingung | 184 |
| Element XML-Rueckzahlungsausnahme-Table / bewertungsbedingung | 185 |
| Element XML-Rueckzahlungsausnahme-Table / verkehrsmittellinienbedingung | 185 |
| Element XML-Rueckzahlungsausnahme-Table / mitnahmebedingung | 185 |
| Element XML-Rueckzahlungsausnahme-Table / rabattmedienbedingung | 186 |
| Element XML-Rueckzahlungsausnahme-Table / modulkontextbedingung | 186 |
| Element XML-Rueckzahlungsausnahme-Table / spezialbedingung | 186 |
| Element XML-Rueckzahlungsausnahme-Table / ausnahme | 187 |
| Element XML-Ruecknahmedaten-Part / unterstuetzt | 187 |
| Element XML-PVPM-Produktdaten / tarifprodukt-pool | 187 |
| Element XML-PVPM-Tarifprodukt-Pool / item | 188 |
| Element XML-PVPM-Tarifprodukt-Item / extNr | 189 |
| Element XML-PVPM-Tarifprodukt-Item / efmprodukt | 189 |
| Element XML-PVPM-Tarifprodukt-Item / identifikation | 189 |
| Element XML-PVPM-Tarifprodukt-Item / loeschdaten | 190 |
| Element XML-PVPM-Tarifprodukt-Item / verkaufsdaten | 190 |
| Element XML-Verkaufsdaten-Part / nachfolgedaten-table | 192 |
| Element XML-Nachfolgedaten-Table / kriterium | 192 |
| Element XML-Nachfolgedaten-Table / vorgaenger | 192 |
| Element XML-Nachfolgedaten-Table / nachfolger | 193 |
| Element XML-Verkaufsdaten-Part / nachfolgeausnahme-table | 193 |
| Element XML-Nachfolgeausnahme-Table / kriterium | 193 |
| Element XML-Nachfolgeausnahme-Table / vorgaenger | 194 |
| Element XML-Nachfolgeausnahme-Table / ausnahme | 194 |
| Element XML-Verkaufsdaten-Part / gzrdaten-table | 194 |
| Element XML-GZRDaten-Table / tagesbedingung | 195 |
| Element XML-GZRDaten-Table / tageszeitbedingung | 195 |
| Element XML-GZRDaten-Table / tarifpunktbedingung | 196 |
| Element XML-GZRDaten-Table / bewertungsbedingung | 196 |
| Element XML-GZRDaten-Table / verkehrsmittellinienbedingung | 196 |
| Element XML-GZRDaten-Table / spezialbedingung | 197 |
| Element XML-GZRDaten-Table / daten-pool | 197 |
| Element XML-GZRDaten-Pool / item | 197 |
| Element XML-GZRDaten-Item / beginn | 198 |
| Element XML-RelativzeitpunktB-Part / zeitspanne | 198 |
| Element XML-RelativzeitpunktB-Part / uhrzeit | 199 |
| Element XML-RelativzeitpunktB-Part / unbestimmt | 199 |
| Element XML-GZRDaten-Item / ende | 199 |
| Element XML-Verkaufsdaten-Part / gzrausnahme-table | 199 |
| Element XML-GZRAusnahme-Table / tagesbedingung | 200 |
| Element XML-GZRAusnahme-Table / tageszeitbedingung | 200 |
| Element XML-GZRAusnahme-Table / tarifpunktbedingung | 201 |
| Element XML-GZRAusnahme-Table / bewertungsbedingung | 201 |
| Element XML-GZRAusnahme-Table / verkehrsmittellinienbedingung | 201 |
| Element XML-GZRAusnahme-Table / spezialbedingung | 202 |
| Element XML-GZRAusnahme-Table / ausnahme | 202 |
| Element XML-Verkaufsdaten-Part / preisanpassung | 202 |
| Element XML-Verkaufsdaten-Part / preisdaten-table | 203 |
| Element XML-Preisdaten-Table / waehrung | 204 |
| Element XML-Preisdaten-Table / bezahlartbedingung | 204 |
| Element XML-Preisdaten-Table / zahlungsintervallbedingung | 204 |
| Element XML-Preisdaten-Table / tagesbedingung | 205 |
| Element XML-Preisdaten-Table / tageszeitbedingung | 205 |
| Element XML-Preisdaten-Table / zeitraumbedingung | 205 |
| Element XML-Preisdaten-Table / tarifpunktbedingung | 206 |
| Element XML-Preisdaten-Table / bewertungsbedingung | 206 |
| Element XML-Preisdaten-Table / verkehrsmittellinienbedingung | 206 |
| Element XML-Preisdaten-Table / mitnahmebedingung | 207 |
| Element XML-Preisdaten-Table / rabattmedienbedingung | 207 |
| Element XML-Preisdaten-Table / modulkontextbedingung | 207 |
| Element XML-Preisdaten-Table / spezialbedingung | 208 |
| Element XML-Preisdaten-Table / daten-pool | 208 |
| Element XML-Preisdaten-Pool / item | 208 |
| Element XML-Verkaufsdaten-Part / preisausnahme-table | 209 |
| Element XML-Preisausnahme-Table / waehrung | 210 |
| Element XML-Preisausnahme-Table / bezahlartbedingung | 210 |

| | |
|---|-----|
| Element XML-Preisausnahme-Table / zahlungsintervallbedingung | 210 |
| Element XML-Preisausnahme-Table / tagesbedingung | 211 |
| Element XML-Preisausnahme-Table / tageszeitbedingung | 211 |
| Element XML-Preisausnahme-Table / zeitraumbedingung | 211 |
| Element XML-Preisausnahme-Table / tarifpunktbedingung | 212 |
| Element XML-Preisausnahme-Table / bewertungsbedingung | 212 |
| Element XML-Preisausnahme-Table / verkehrsmittellinienbedingung | 212 |
| Element XML-Preisausnahme-Table / mitnahmebedingung | 213 |
| Element XML-Preisausnahme-Table / rabattmedienbedingung | 213 |
| Element XML-Preisausnahme-Table / modulkontextbedingung | 213 |
| Element XML-Preisausnahme-Table / spezialbedingung | 214 |
| Element XML-Preisausnahme-Table / ausnahme | 214 |
| Element XML-Verkaufsdaten-Part / kontingentierung | 214 |
| Element XML-PVPM-Tarifprodukt-Item / darstellungsdaten | 215 |
| Element XML-PVPM-Tarifprodukt-Item / ruecknahmedaten | 215 |
| Element XML-PVPM-Produktdaten / fremdprodukt-pool | 216 |
| Element XML-PVPM-Produktdaten / produktgruppe-pool | 217 |
| Element XML-Tarifpunktreferenzdaten / tarifpunktreferenz-pool | 218 |
| Element XML-Tarifpunktreferenz-Pool / item | 218 |
| Element XML-Tarifpunktreferenz-Item / tarifpunkt | 219 |
| Element XML-PVPM-Bedingungsdaten / modulkontext-pool | 220 |
| Element XML-PVPM-Bedingungsdaten / bezahlart-pool | 220 |
| Element XML-PVPM-Bedingungsdaten / waehrung-pool | 221 |
| Element XML-Waehrung-Pool / item | 222 |
| Element XML-PVPM-Bedingungsdaten / zahlungsintervall-pool | 222 |
| Element XML-Zahlungsintervall-Pool / item | 223 |
| Element XML-PVPM-Bedingungsdaten / mitnahmetyp-pool | 224 |
| Element XML-PVPM-Bedingungsdaten / rabattmedientyp-pool | 224 |
| Element XML-PVPM-Bedingungsdaten / spezialbedingung-pool | 225 |
| Element XML-Spezialbedingung-Pool / item | 225 |
| Element XML-Spezialbedingung-Item / funktion | 226 |
| Element XML-PVPM-Bedingungsdaten / bezahlartbedingung-pool | 226 |
| Element XML-Bezahlartbedingung-Pool / item | 227 |
| Element XML-Bezahlartbedingung-Item / bezahlart | 227 |
| Element XML-PVPM-Bedingungsdaten / zahlungsintervallbedingung-pool | 228 |
| Element XML-Zahlungsintervallbedingung-Pool / item | 228 |
| Element XML-Zahlungsintervallbedingung-Item / zahlungsintervall | 229 |
| Element XML-PVPM-Bedingungsdaten / tagesbedingung-pool | 229 |
| Element XML-PVPM-Bedingungsdaten / tageszeitbedingung-pool | 230 |
| Element XML-PVPM-Bedingungsdaten / zeitraumbedingung-pool | 230 |
| Element XML-Zeitraumbedingung-Pool / item | 231 |
| Element XML-Zeitraumbedingung-Item / zeitraum-pool | 231 |
| Element XML-Zeitraum-Pool / item | 232 |
| Element XML-Zeitraum-Item / beginn | 232 |
| Element XML-Zeitraum-Item / ende | 233 |
| Element XML-PVPM-Bedingungsdaten / tarifpunktbedingung-pool | 233 |
| Element XML-Tarifpunktbedingung-Pool / item | 233 |
| Element XML-Tarifpunktbedingung-Item / von | 234 |
| Element XML-Tarifpunktbedingung-Item / nach | 235 |
| Element XML-Tarifpunktbedingung-Item / ueber | 235 |
| Element XML-PVPM-Bedingungsdaten / bewertungsbedingung-pool | 235 |
| Element XML-Bewertungsbedingung-Pool / item | 236 |
| Element XML-Bewertungsbedingung-Item / bewertungstyp | 236 |
| Element XML-Bewertungsbedingung-Item / werte | 237 |
| Element XML-PVPM-Bedingungsdaten / mitnahmebedingung-pool | 238 |
| Element XML-Mitnahmebedingung-Pool / item | 238 |
| Element XML-Mitnahmebedingung-Item / anzahl-matrix | 239 |
| Element XML-Mitnahmeanzahl-Matrix / anzahl | 239 |
| Element XML-PVPM-Bedingungsdaten / rabattmedienbedingung-pool | 240 |
| Element XML-Rabattmedienbedingung-Pool / item | 240 |
| Element XML-Rabattmedienbedingung-Item / rabattmedientyp | 241 |
| Element XML-PVPM-Bedingungsdaten / modulkontextbedingung-pool | 241 |
| Element XML-PVPM-Bedingungsdaten / verkehrsmittellinienbedingung-pool | 242 |
| Element kvp-pm | 242 |
| Element XML-KVPPM / leermodul | 244 |
| Element XML-KVPPM-Verarbeitungsdaten / loeschablauf | 245 |
| Element XML-Loeschablauf-Part / loeschwartezeit | 245 |
| Element XML-KVPPM-Verarbeitungsdaten / verkaufsstrategie | 245 |
| Element XML-KVPPM-Verarbeitungsdaten / ruecknahmestrategie | 246 |
| Element XML-KVPPM-Produktdaten / schluessel-pool | 246 |
| Element XML-KVPPM-Adapterdaten / linienadapter-pool | 246 |
| Element XML-KVPPM-Adapterdaten / verkehrsmitteltypadapter-pool | 247 |

| | |
|--|-----|
| Element XML-KVPPM-Adapterdaten / wegevariantenadapter-pool | 248 |
| Element XML-KVPPM-Adapterdaten / tarifpunktadapter-pool | 248 |
| Element XML-KVPPM-Adapterdaten / tarifpunktreferenzadapter-pool | 249 |
| Element XML-Tarifpunktreferenzadapter-Pool / item | 249 |
| Element XML-Tarifpunktreferenzadapter-Item / typ | 250 |
| Element XML-KVPPM-Adapterdaten / bezahlartadapter-pool | 250 |
| Element XML-Bezahlartadapter-Pool / item | 251 |
| Element XML-KVPPM-Adapterdaten / waehrungsadapter-pool | 251 |
| Element XML-KVPPM-Adapterdaten / waehrungsadapter-Pool / item | 252 |
| Element XML-KVPPM-Adapterdaten / zahlungsintervalladapter-pool | 253 |
| Element XML-Zahlungsintervalladapter-Pool / item | 253 |
| Element XML-KVPPM-Adapterdaten / mitnahmetypadapter-pool | 254 |
| Element XML-Mitnahmetypadapter-Pool / item | 255 |
| Element XML-KVPPM-Adapterdaten / rabattmedientypadapter-pool | 256 |
| Element XML-Rabattmedientypadapter-Pool / item | 256 |
| Element XML-KVPPM-Adapterdaten / identifikationsparameteradapter-pool | 257 |
| Element XML-Identifikationsparameteradapter-Pool / item | 257 |
| Element XML-Identifikationsparameteradapter-Item / wert-pool | 258 |
| Element XML-Identifikationsparameterwertadapter-Pool / item | 259 |
| Element XML-KVPPM / produktmodul-pool | 259 |
| Element XML-Produktmodul-Pool / item | 260 |
| Element XML-Produktmodul-Item / moduldaten | 262 |
| Element XML-Produktmodul-Item / produktadapter-matrix | 265 |
| Element XML-Produktadapter-Matrix / item | 265 |
| Element XML-Produktadapter-Entry / nr | 266 |
| Element XML-Produktadapter-Entry / schluessel | 267 |
| Element XML-KVPPM-Schluessel-Part / mkkvp | 267 |
| Element XML-Produktadapter-Entry / loeschmodulkontext | 267 |
| Element XML-Produktadapter-Entry / verkaufsmodulkontext | 268 |
| Element XML-Produktadapter-Entry / darstellungsmodulkontext | 268 |
| Element XML-Produktadapter-Entry / ruecknahmepool | 268 |
| Element XML-Produktadapter-Entry / preisanpassung-pool | 269 |
| Element XML-Preisanpassung-Pool / item | 269 |
| Element XML-Preisanpassung-Item / betrag | 269 |
| Element XML-Produktmodul-Item / modulkontextadapter-matrix | 269 |
| Element XML-Produktmodul-Item / linieneingangsadapter-matrix | 270 |
| Element XML-Produktmodul-Item / linienausgangsadapter-matrix | 270 |
| Element XML-Produktmodul-Item / verkehrsmitteltypeingangsadapter-matrix | 270 |
| Element XML-Produktmodul-Item / verkehrsmitteltypausgangsadapter-matrix | 271 |
| Element XML-Produktmodul-Item / wegevarianteneingangsadapter-matrix | 271 |
| Element XML-Produktmodul-Item / wegevariantenausgangsadapter-matrix | 271 |
| Element XML-Produktmodul-Item / tarifpunkteingangsadapter-matrix | 272 |
| Element XML-Produktmodul-Item / tarifpunktausgangsadapter-matrix | 272 |
| Element XML-Produktmodul-Item / tarifpunktreferenzeingangsadapter-matrix | 272 |
| Element XML-Produktmodul-Item / tarifpunktreferenzausgangsadapter-matrix | 273 |
| Element XML-Produktmodul-Item / bezahlarteingangsadapter-matrix | 273 |
| Element XML-Produktmodul-Item / bezahlartausgangsadapter-matrix | 273 |
| Element XML-Produktmodul-Item / waehrungseingangsadapter-matrix | 274 |
| Element XML-Produktmodul-Item / waehrungsausgangsadapter-matrix | 274 |
| Element XML-Produktmodul-Item / zahlungsintervalleingangsadapter-matrix | 274 |
| Element XML-Produktmodul-Item / zahlungsintervallausgangsadapter-matrix | 275 |
| Element XML-Produktmodul-Item / mitnahmetypausgangsadapter-matrix | 275 |
| Element XML-Produktmodul-Item / mitnahmetypeingangsadapter-matrix | 275 |
| Element XML-Produktmodul-Item / rabattmedientypeingangsadapter-matrix | 276 |
| Element XML-Produktmodul-Item / rabattmedientypausgangsadapter-matrix | 276 |
| Element XML-Produktmodul-Item / identifikationsparameterwerteingangsadapter-matrix | 276 |
| Element XML-Produktmodul-Item / identifikationsparameterwertausgangsadapter-matrix | 277 |
| Element XML-Nachfolgekriterium-Item / funktion | 277 |
| Element XML-Nachfolgekriterium-Item / vorgaenger | 277 |
| Element XML-Nachfolgekriterium-Item / wirksamkeit | 278 |
| Element XML-Nachfolgekriterium-Pool / item | 278 |
| Complex Type(s) | 279 |
| Complex Type XML-DLKM | 279 |
| Complex Type XML-Version-Part | 281 |
| Complex Type XML-Organisation-Part | 282 |
| Complex Type XML-Modulkontextadapter-Pool | 282 |
| Complex Type XML-Pool | 282 |
| Complex Type XML-Modulkontextadapter-Item | 283 |
| Complex Type XML-Nr-Item | 284 |
| Complex Type XML-Item | 284 |
| Complex Type XML-VoidValue | 284 |
| Complex Type XML-Ausgangstext-Matrix | 284 |

| | |
|--|-----|
| Complex Type XML-Ausgangstext-Entry | 285 |
| Complex Type XML-Sprache-Pool | 285 |
| Complex Type XML-Sprache-Item | 286 |
| Complex Type XML-Ausgangsschnittstelle-Pool | 286 |
| Complex Type XML-Ausgangsschnittstelle-Item | 287 |
| Complex Type XML-Ausgangsparameter-Pool | 288 |
| Complex Type XML-Ausgangsparameter-Item | 288 |
| Complex Type XML-Ausgangskontext-Pool | 289 |
| Complex Type XML-Ausgangskontext-Item | 289 |
| Complex Type XML-Name-Item | 290 |
| Complex Type XML-Ref-Set-1N | 290 |
| Complex Type XML-Linienadapter-Pool | 291 |
| Complex Type XML-Linienadapter-Item | 291 |
| Complex Type XML-Text-Item | 292 |
| Complex Type XML-Verkehrsmitteltypadapter-Pool | 293 |
| Complex Type XML-Verkehrsmitteltypadapter-Item | 293 |
| Complex Type XML-Wegevariantenadapter-Pool | 294 |
| Complex Type XML-Wegevariantenadapter-Item | 295 |
| Complex Type XML-Tarifpunktadapter-Pool | 295 |
| Complex Type XML-Tarifpunktadapter-Item | 296 |
| Complex Type XML-Kontrollmodul-Pool | 297 |
| Complex Type XML-Kontrollmodul-Item | 297 |
| Complex Type XML-PVKM | 298 |
| Complex Type XML-Organisation-Pool | 300 |
| Complex Type XML-Organisation-Item | 300 |
| Complex Type XML-Ergaenzungsanforderung-Pool | 301 |
| Complex Type XML-Eingangsschnittstelle-Pool | 301 |
| Complex Type XML-Eingangsschnittstelle-Item | 302 |
| Complex Type XML-Eingangsparameter-Pool | 302 |
| Complex Type XML-Eingangsparameter-Item | 303 |
| Complex Type XML-Schritt-Pool | 304 |
| Complex Type XML-Schritt-Item | 304 |
| Complex Type XML-Ausgangsschritt-Part | 305 |
| Complex Type XML-Ref-11 | 305 |
| Complex Type XML-Ref-01 | 306 |
| Complex Type XML-Auswahlschritt-Part | 306 |
| Complex Type XML-Ref-List-1N | 306 |
| Complex Type XML-Berechnungsschritt-Part | 307 |
| Complex Type XML-Entscheidungsschritt-Part | 307 |
| Complex Type XML-Parallelisierungsschritt-Part | 307 |
| Complex Type XML-Ref-Set-0N | 308 |
| Complex Type XML-Variable-Pool | 308 |
| Complex Type XML-Variable-Item | 309 |
| Complex Type XML-Funktion-Pool | 309 |
| Complex Type XML-Funktion-Item | 310 |
| Complex Type XML-ArrayValue | 310 |
| Complex Type XML-ObjectValue | 311 |
| Complex Type XML-FunctionValue | 312 |
| Complex Type XML-Ausnahme-Pool | 313 |
| Complex Type XML-Ausnahme-Item | 313 |
| Complex Type XML-Auswahldaten-Pool | 314 |
| Complex Type XML-Auswahldaten-Item | 314 |
| Complex Type XML-Sequenz-Item | 315 |
| Complex Type XML-Ausgangssequenz-Matrix | 316 |
| Complex Type XML-Ausgangssequenz-Entry | 316 |
| Complex Type XML-Auswahloption-Pool | 316 |
| Complex Type XML-Auswahloption-Item | 317 |
| Complex Type XML-Ausgangsdaten-Pool | 318 |
| Complex Type XML-Ausgangsdaten-Item | 318 |
| Complex Type XML-Kontrollablauf-Part | 319 |
| Complex Type XML-Strategie-Part | 319 |
| Complex Type XML-Ausgangsdatenfamilie-Pool | 319 |
| Complex Type XML-Ausgangsdatenfamilie-Item | 320 |
| Complex Type XML-Abhaengigkeitskriterium-Pool | 321 |
| Complex Type XML-Abhaengigkeitskriterium-Item | 321 |
| Complex Type XML-Kriterienzeitraum-Part | 322 |
| Complex Type XML-Identifikationsparameter-Pool | 322 |
| Complex Type XML-Identifikationsparameter-Item | 323 |
| Complex Type XML-Identifikationsparameterwert-Pool | 323 |
| Complex Type XML-Identifikationsparameterwert-Item | 324 |
| Complex Type XML-PVKM-EFMProdukt-Pool | 324 |
| Complex Type XML-PVKM-EFMProdukt-Item | 325 |

| | |
|---|-----|
| Complex Type XML-Kontrolldaten-Part | 326 |
| Complex Type XML-Produktdaten-Part | 326 |
| Complex Type XML-Ausgangsdaten-Matrix | 327 |
| Complex Type XML-Ausgangsdaten-Entry | 327 |
| Complex Type XML-Abhaengigkeitsdaten-Table | 328 |
| Complex Type XML-Ref-List-ON | 328 |
| Complex Type XML-Abhaengigkeitsausnahme-Table | 329 |
| Complex Type XML-PVKM-Tarifprodukt-Pool | 329 |
| Complex Type XML-PVKM-Tarifprodukt-Item | 330 |
| Complex Type XML-Fremdprodukt-Pool | 331 |
| Complex Type XML-Fremdprodukt-Item | 332 |
| Complex Type XML-Produktgruppe-Pool | 333 |
| Complex Type XML-Produktgruppe-Item | 333 |
| Complex Type XML-Tarifpunkt-Pool | 334 |
| Complex Type XML-Tarifpunkt-Item | 334 |
| Complex Type XML-Tarifpunktgruppe-Pool | 335 |
| Complex Type XML-Tarifpunktgruppe-Item | 336 |
| Complex Type XML-Linie-Pool | 336 |
| Complex Type XML-Linie-Item | 337 |
| Complex Type XML-Verkehrsmitteltyp-Pool | 338 |
| Complex Type XML-Verkehrsmitteltyp-Item | 338 |
| Complex Type XML-Verkehrsmittellinienbezug-Pool | 339 |
| Complex Type XML-Verkehrsmittellinienbezug-Item | 340 |
| Complex Type XML-Modulkontext-Pool | 340 |
| Complex Type XML-Modulkontext-Item | 341 |
| Complex Type XML-Bezahlart-Pool | 341 |
| Complex Type XML-Bezahlart-Item | 342 |
| Complex Type XML-Mitnahmetyp-Pool | 342 |
| Complex Type XML-Mitnahmetyp-Item | 343 |
| Complex Type XML-Rabattmedientyp-Pool | 344 |
| Complex Type XML-Rabattmedientyp-Item | 344 |
| Complex Type XML-Tagesbedingung-Pool | 345 |
| Complex Type XML-Tagesbedingung-Item | 346 |
| Complex Type XML-Wochentag-Pool | 346 |
| Complex Type XML-Kalendertag-Pool | 347 |
| Complex Type XML-Tageszeitbedingung-Pool | 347 |
| Complex Type XML-Tageszeitbedingung-Item | 348 |
| Complex Type XML-Zeitabschnitt-Pool | 348 |
| Complex Type XML-Zeitabschnitt-Item | 348 |
| Complex Type XML-Modulkontextbedingung-Pool | 349 |
| Complex Type XML-Modulkontextbedingung-Item | 349 |
| Complex Type XML-Verkehrsmittellinienbedingung-Pool | 350 |
| Complex Type XML-Verkehrsmittellinienbedingung-Item | 350 |
| Complex Type XML-Zuordnungstyp-Pool | 351 |
| Complex Type XML-Zuordnungstyp-Item | 352 |
| Complex Type XML-Zuordnungsdaten-Matrix | 352 |
| Complex Type XML-Zuordnungsdatentyp-Entry | 352 |
| Complex Type XML-Zuordnungsdatenvlb-Entry | 353 |
| Complex Type XML-Zuordnungsdatenvon-Entry | 353 |
| Complex Type XML-Zuordnungsausnahme-Matrix | 354 |
| Complex Type XML-Zuordnungsausnahmetyp-Entry | 354 |
| Complex Type XML-Zuordnungsausnahmevlb-Entry | 354 |
| Complex Type XML-Zuordnungsausnahmevon-Entry | 355 |
| Complex Type XML-Zuordnungsausnahmezu-Entry | 355 |
| Complex Type XML-Wegevariante-Pool | 356 |
| Complex Type XML-Wegevariante-Item | 356 |
| Complex Type XML-Tarifpunktfolge-Pool | 357 |
| Complex Type XML-Tarifpunktfolge-Item | 357 |
| Complex Type XML-Bewertungstyp-Pool | 358 |
| Complex Type XML-Bewertungstyp-Item | 358 |
| Complex Type XML-Bewertungsdaten-Pool | 359 |
| Complex Type XML-Bewertungsdaten-Item | 360 |
| Complex Type XML-Bewertungsdaten-Matrix | 360 |
| Complex Type XML-Bewertungsdatentyp-Entry | 360 |
| Complex Type XML-Bewertungsdatenvlb-Entry | 361 |
| Complex Type XML-Bewertungsdatenvon-Entry | 361 |
| Complex Type XML-Bewertungsdatennach-Entry | 362 |
| Complex Type XML-Bewertungsdatenueber-Entry | 362 |
| Complex Type XML-Bewertungsausnahme-Matrix | 363 |
| Complex Type XML-Bewertungsausnahmetyp-Entry | 363 |
| Complex Type XML-Bewertungsausnahmevlb-Entry | 364 |
| Complex Type XML-Bewertungsausnahmevon-Entry | 364 |

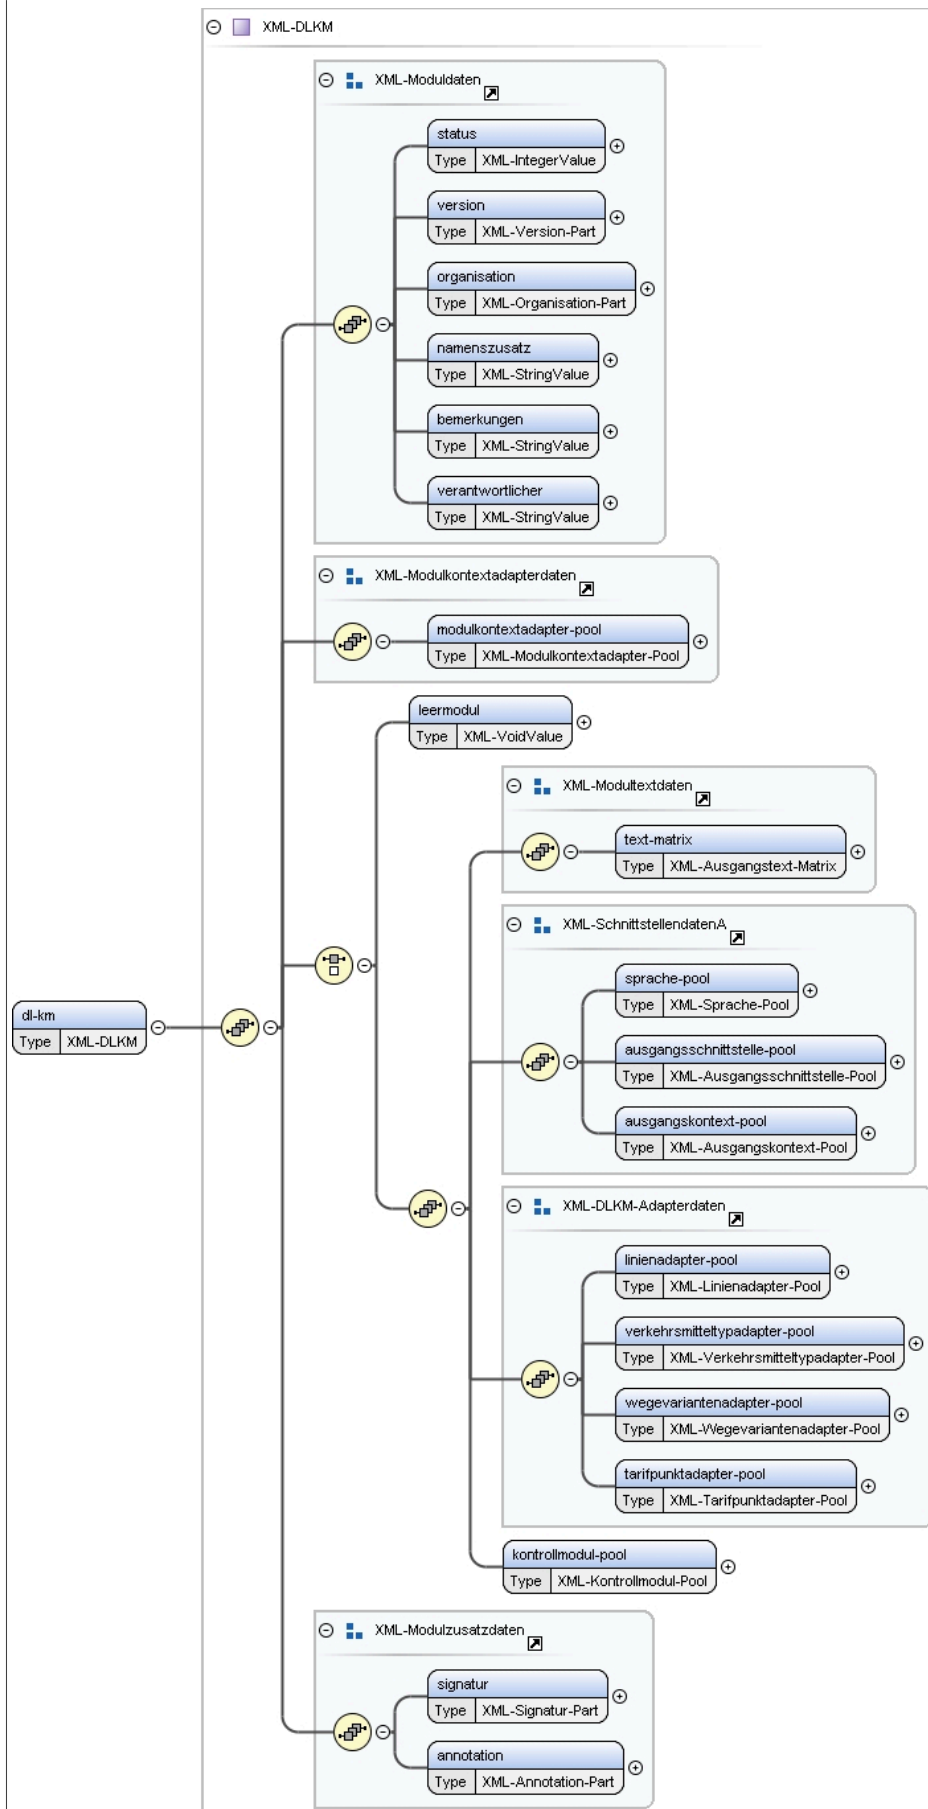
| | |
|--|-----|
| Complex Type XML-Bewertungsausnahmenach-Entry | 365 |
| Complex Type XML-Bewertungsausnahmeueber-Entry | 365 |
| Complex Type XML-Nummerninterpretation-Pool | 365 |
| Complex Type XML-Nummerninterpretation-Item | 366 |
| Complex Type XML-Nummerntext-Pool | 367 |
| Complex Type XML-Nummerntext-Item | 367 |
| Complex Type XML-Bitleisteninterpretation-Pool | 368 |
| Complex Type XML-Bitleisteninterpretation-Item | 368 |
| Complex Type XML-Raumnummerninterpretation-Pool | 369 |
| Complex Type XML-Raumnummerninterpretation-Item | 370 |
| Complex Type XML-Raummodifikation-Pool | 370 |
| Complex Type XML-Raummodifikation-Item | 371 |
| Complex Type XML-Signatur-Part | 371 |
| Complex Type XML-Annotation-Part | 372 |
| Complex Type XML-Eingangsadapter-Matrix | 372 |
| Complex Type XML-Eingangsadapter-Entry | 372 |
| Complex Type XML-Ausgangsadapter-Matrix | 373 |
| Complex Type XML-Ausgangsadapter-Entry | 373 |
| Complex Type XML-PVPM | 374 |
| Complex Type XML-Schluessel-Pool | 376 |
| Complex Type XML-Schluessel-Item | 377 |
| Complex Type XML-Kontingentierung-Pool | 377 |
| Complex Type XML-Kontingentierung-Item | 378 |
| Complex Type XML-Kontingentdaten-Table | 378 |
| Complex Type XML-Kontingentdaten-Pool | 379 |
| Complex Type XML-Kontingentdaten-Item | 379 |
| Complex Type XML-Kontingentausnahme-Table | 379 |
| Complex Type XML-PVPM-EFMProdukt-Pool | 380 |
| Complex Type XML-PVPM-EFMProdukt-Item | 381 |
| Complex Type XML-PVPM-Schluessel-Part | 381 |
| Complex Type XML-Loeschdaten-Part | 382 |
| Complex Type XML-Darstellungsdaten-Part | 382 |
| Complex Type XML-Ruecknahmedaten-Part | 383 |
| Complex Type XML-UZPDaten-Table | 384 |
| Complex Type XML-UZPDaten-Pool | 385 |
| Complex Type XML-UZPDaten-Item | 385 |
| Complex Type XML-RelativzeitpunktA-Part | 386 |
| Complex Type XML-UZPAusnahme-Table | 386 |
| Complex Type XML-Rueckzahlungsdaten-Table | 386 |
| Complex Type XML-Rueckzahlungsdaten-Pool | 387 |
| Complex Type XML-Rueckzahlungsdaten-Item | 388 |
| Complex Type XML-Waehrungsbetrag-Part | 388 |
| Complex Type XML-Rueckzahlungsausnahme-Table | 388 |
| Complex Type XML-PVPM-Tarifprodukt-Pool | 389 |
| Complex Type XML-PVPM-Tarifprodukt-Item | 390 |
| Complex Type XML-Verkaufsdaten-Part | 391 |
| Complex Type XML-Nachfolgedaten-Table | 392 |
| Complex Type XML-Nachfolgeausnahme-Table | 392 |
| Complex Type XML-GZRDaten-Table | 393 |
| Complex Type XML-GZRDaten-Pool | 393 |
| Complex Type XML-GZRDaten-Item | 394 |
| Complex Type XML-RelativzeitpunktB-Part | 394 |
| Complex Type XML-GZRAusnahme-Table | 394 |
| Complex Type XML-Preisdaten-Table | 395 |
| Complex Type XML-Preisdaten-Pool | 396 |
| Complex Type XML-Preisdaten-Item | 397 |
| Complex Type XML-Preisausnahme-Table | 397 |
| Complex Type XML-Tarifpunktreferenz-Pool | 398 |
| Complex Type XML-Tarifpunktreferenz-Item | 399 |
| Complex Type XML-Waehrung-Pool | 400 |
| Complex Type XML-Waehrung-Item | 401 |
| Complex Type XML-Zahlungsintervall-Pool | 402 |
| Complex Type XML-Zahlungsintervall-Item | 402 |
| Complex Type XML-Spezialbedingung-Pool | 403 |
| Complex Type XML-Spezialbedingung-Item | 403 |
| Complex Type XML-Bezahlartbedingung-Pool | 404 |
| Complex Type XML-Bezahlartbedingung-Item | 404 |
| Complex Type XML-Zahlungsintervallbedingung-Pool | 405 |
| Complex Type XML-Zahlungsintervallbedingung-Item | 406 |
| Complex Type XML-Zeitraumbedingung-Pool | 406 |
| Complex Type XML-Zeitraumbedingung-Item | 407 |
| Complex Type XML-Zeitraum-Pool | 407 |

| | |
|---|-----|
| Complex Type XML-Zeitraum-Item | 408 |
| Complex Type XML-Tarifpunktbedingung-Pool | 408 |
| Complex Type XML-Tarifpunktbedingung-Item | 408 |
| Complex Type XML-Bewertungsbedingung-Pool | 409 |
| Complex Type XML-Bewertungsbedingung-Item | 410 |
| Complex Type XML-Mitnahmebedingung-Pool | 410 |
| Complex Type XML-Mitnahmebedingung-Item | 411 |
| Complex Type XML-Mitnahmeanzahl-Matrix | 411 |
| Complex Type XML-Mitnahmeanzahl-Entry | 412 |
| Complex Type XML-Rabattmedienbedingung-Pool | 412 |
| Complex Type XML-Rabattmedienbedingung-Item | 413 |
| Complex Type XML-KVPPM | 413 |
| Complex Type XML-Loeschablauf-Part | 415 |
| Complex Type XML-Tarifpunktreferenzadapter-Pool | 415 |
| Complex Type XML-Tarifpunktreferenzadapter-Item | 416 |
| Complex Type XML-Bezahlartadapter-Pool | 417 |
| Complex Type XML-Bezahlartadapter-Item | 417 |
| Complex Type XML-Waehrungsadapter-Pool | 418 |
| Complex Type XML-Waehrungsadapter-Item | 418 |
| Complex Type XML-Zahlungsintervalladapter-Pool | 419 |
| Complex Type XML-Zahlungsintervalladapter-Item | 420 |
| Complex Type XML-Mitnahmetypadapter-Pool | 420 |
| Complex Type XML-Mitnahmetypadapter-Item | 421 |
| Complex Type XML-Rabattmedientypadapter-Pool | 421 |
| Complex Type XML-Rabattmedientypadapter-Item | 422 |
| Complex Type XML-Identifikationsparameteradapter-Pool | 423 |
| Complex Type XML-Identifikationsparameteradapter-Item | 423 |
| Complex Type XML-Identifikationsparameterwertadapter-Pool | 424 |
| Complex Type XML-Identifikationsparameterwertadapter-Item | 424 |
| Complex Type XML-Produktmodul-Pool | 425 |
| Complex Type XML-Produktmodul-Item | 426 |
| Complex Type XML-Produktadapter-Matrix | 428 |
| Complex Type XML-Produktadapter-Entry | 429 |
| Complex Type XML-KVPPM-Schluessel-Part | 430 |
| Complex Type XML-Preisanpassung-Pool | 430 |
| Complex Type XML-Preisanpassung-Item | 430 |
| Complex Type XML-Nachfolgekriterium-Item | 430 |
| Complex Type XML-Nachfolgekriterium-Pool | 431 |
| Simple Type(s) | 432 |
| Simple Type XML-IntegerValue | 432 |
| Simple Type XML-DatetimeValue | 432 |
| Simple Type XML-StringValue | 432 |
| Simple Type XML-Ref | 433 |
| Simple Type XML-BitsValue | 433 |
| Simple Type XML-DateValue | 433 |
| Simple Type XML-TimeValue | 434 |
| Simple Type XML-DurationValue | 434 |
| Simple Type XML-BooleanValue | 434 |
| Element Group(s) | 434 |
| Element Group XML-Moduldaten | 434 |
| Element Group XML-Modulkontextadapterdaten | 435 |
| Element Group XML-Modultextdaten | 435 |
| Element Group XML-SchnittstellendatenA | 436 |
| Element Group XML-DLKM-Adapterdaten | 436 |
| Element Group XML-Organisationsdaten | 436 |
| Element Group XML-SchnittstellendatenB | 437 |
| Element Group XML-Verarbeitungsdaten | 437 |
| Element Group XML-Value | 438 |
| Element Group XML-PVKM-Verarbeitungsdaten | 439 |
| Element Group XML-PVKM-Produktdaten | 439 |
| Element Group XML-Tarifpunktdaten | 439 |
| Element Group XML-Verkehrsmittelliniendaten | 440 |
| Element Group XML-PVKM-Bedingungsdaten | 440 |
| Element Group XML-Tarifpunktzuordnungsdaten | 441 |
| Element Group XML-Tarifpunktbewertungsdaten | 441 |
| Element Group XML-Nummerninterpretationsdaten | 442 |
| Element Group XML-Tarifpunktinterpretationsdaten | 442 |
| Element Group XML-Modulzusatzdaten | 442 |
| Element Group XML-PVPM-Verarbeitungsdaten | 443 |
| Element Group XML-PVPM-Produktdaten | 443 |
| Element Group XML-Tarifpunktreferenzdaten | 444 |
| Element Group XML-PVPM-Bedingungsdaten | 444 |

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Properties | attribute form default: unqualified |
| | element form default: qualified |
| | version: 1.5.0 |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | |
|-----------------|---|
| Type | XML-DLKM |
| Properties | content: complex |
| Model | status , version , organisation , namenszusatz , bemerkungen , verantwortlicher , modulkontextadapter-pool , (leermodul (text-matrix , sprache-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , linienadapter-pool , verkehrsmitteltypadapter-pool , wegevariantenadapter-pool , tarifpunktadapter-pool , kontrollmodul-pool)) , signatur , annotation |
| Children | annotation, ausgangskontext-pool, ausgangsschnittstelle-pool, bemerkungen, kontrollmodul-pool, leermodul, linienadapter-pool, modulkontextadapter-pool, namenszusatz, organisation, signatur, sprache-pool, status, tarifpunktadapter-pool, text-matrix, verantwortlicher, verkehrsmitteltypadapter-pool, version, wegevariantenadapter-pool |
| Instance | <pre><dl-km xmlns="http://vdv/ka/pkm/1"> <status>{1,1}</status> <version>{1,1}</version> <organisation>{1,1}</organisation> <namenszusatz>{1,1}</namenszusatz> <bemerkungen>{1,1}</bemerkungen> <verantwortlicher>{1,1}</verantwortlicher> <modulkontextadapter-pool key="">{1,1}</modulkontextadapter-pool> <leermodul>{1,1}</leermodul> <text-matrix>{1,1}</text-matrix> <sprache-pool key="">{1,1}</sprache-pool> <ausgangsschnittstelle-pool key="">{1,1}</ausgangsschnittstelle-pool> <ausgangskontext-pool key="">{1,1}</ausgangskontext-pool> <linienadapter-pool key="">{1,1}</linienadapter-pool> <verkehrsmitteltypadapter-pool key="">{1,1}</verkehrsmitteltypadapter-pool> <wegevariantenadapter-pool key="">{1,1}</wegevariantenadapter-pool> <tarifpunktadapter-pool key="">{1,1}</tarifpunktadapter-pool> <kontrollmodul-pool key="">{1,1}</kontrollmodul-pool> <signatur>{1,1}</signatur> <annotation>{1,1}</annotation> </dl-km></pre> |
| Source | <xs:element name="dl-km" type="XML-DLKM"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Moduldaten / status

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre> classDiagram class status { Type XML-IntegerValue } status --> XML-IntegerValue </pre> |
| Type | XML-IntegerValue |
| Properties | content: simple |
| Source | <xs:element name="status" type="XML-IntegerValue"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Moduldaten / version

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-Version-Part |
| Properties | content: complex |
| Model | gueltigkeitsbeginn , nr , internNr , spezifikation , bearbeiter , bemerkungen , speicherzeitpunkt , vorgaengerversion {0,1} |
| Children | bearbeiter, bemerkungen, gueltigkeitsbeginn, internNr, nr, speicherzeitpunkt, spezifikation, vorgaengerversion |
| Instance | <pre><version xmlns="http://vdv/ka/pkm/1"> <gueltigkeitsbeginn>{1,1}</gueltigkeitsbeginn> <nr>{1,1}</nr> <internNr>{1,1}</internNr> <spezifikation>{1,1}</spezifikation> <bearbeiter>{1,1}</bearbeiter> <bemerkungen>{1,1}</bemerkungen> <speicherzeitpunkt>{1,1}</speicherzeitpunkt> <vorgaengerversion>{0,1}</vorgaengerversion> </version></pre> |
| Source | <code><xs:element name="version" type="XML-Version-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Version-Part / gueltigkeitsbeginn


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-DatetimeValue |
| Properties | content: simple |
| Facets | pattern <code>\-?\d+-\d+-\d+T\d+:\d+:\d+([\/\-\]\d+:\d+)?</code> |
| Source | <code><xs:element name="gueltigkeitsbeginn" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Version-Part / nr


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-IntegerValue |

| | |
|-----------------|---|
| Properties | content: simple |
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |


Element XML-Version-Part / internNr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-IntegerValue |
| Properties | content: simple |
| Source | <code><xs:element name="internNr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |


Element XML-Version-Part / spezifikation

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-IntegerValue |
| Properties | content: simple |
| Source | <code><xs:element name="spezifikation" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |


Element XML-Version-Part / bearbeiter

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <code><xs:element name="bearbeiter" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Version-Part / bemerkungen

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <code><xs:element name="bemerkungen" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Version-Part / speicherzeitpunkt

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-DatetimeValue |

| | |
|-----------------|---|
| Properties | content: simple |
| Facets | pattern $\backslash-?\backslash d+-\backslash d+-\backslash d+T\backslash d+:\backslash d+:\backslash d+([\backslash+ \backslash-]\backslash d+:\backslash d+)?$ |
| Source | <code><xs:element name="speicherzeitpunkt" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Version-Part / vorgaengerversion

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Version-Part |
| Properties | content: complex minOccurs: 0 |
| Model | gueltigkeitsbeginn , nr , internNr , spezifikation , bearbeiter , bemerkungen , speicherzeitpunkt , vorgaengerversion{0,1} |
| Children | bearbeiter, bemerkungen, gueltigkeitsbeginn, internNr, nr, speicherzeitpunkt, spezifikation, vorgaengerversion |
| Instance | <pre><vorgaengerversion xmlns="http://vdv/ka/pkm/1"> <gueltigkeitsbeginn>{1,1}</gueltigkeitsbeginn> <nr>{1,1}</nr> <internNr>{1,1}</internNr> <spezifikation>{1,1}</spezifikation> <bearbeiter>{1,1}</bearbeiter> <bemerkungen>{1,1}</bemerkungen> <speicherzeitpunkt>{1,1}</speicherzeitpunkt> <vorgaengerversion>{0,1}</vorgaengerversion> </vorgaengerversion></pre> |
| Source | <code><xs:element name="vorgaengerversion" type="XML-Version-Part" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Moduldaten / organisation

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Organisation-Part |
| Properties | content: complex |
| Model | id , name |
| Children | id, name |
| Instance | <pre><organisation xmlns="http://vdv/ka/pkm/1"> <id>{1,1}</id> <name>{1,1}</name> </organisation></pre> |
| Source | <code><xs:element name="organisation" type="XML-Organisation-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Organisation-Part / id

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-IntegerValue |
| Properties | content: simple |
| Source | <code><xs:element name="id" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Organisation-Part / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Moduldaten / namenszusatz

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <code><xs:element name="namenszusatz" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Moduldaten / bemerkungen

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <code><xs:element name="bemerkungen" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Moduldaten / verantwortlicher

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <code><xs:element name="verantwortlicher" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Modulkontextadapterdaten / modulkontextadapter-pool

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | |
|-----------------|---|----------|------|-----|-----|---------|----------|--|--|--|
| Diagram | | | | | | | | | | |
| Type | XML-Modulkontextadapter-Pool | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Modulkontextadapter-Pool | | | | | | | | | |
| Properties | content: | complex | | | | | | | | |
| Model | item+ | | | | | | | | | |
| Children | item | | | | | | | | | |
| Instance | <pre><modulkontextadapter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{1,unbounded}</item> </modulkontextadapter-pool></pre> | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td></tr></tbody></table> | QName | Type | Use | key | XML-Ref | required | | | |
| QName | Type | Use | | | | | | | | |
| key | XML-Ref | required | | | | | | | | |
| Source | <pre><xs:element name="modulkontextadapter-pool" type="XML-Modulkontextadapter-Pool" /></pre> | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | |

Element XML-Modulkontextadapter-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} |
| Diagram | |

| | | | | | |
|-----------------|---|----------|---------|------------|-----------|
| Type | XML-Modulkontextadapter-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Modulkontextadapter-Item | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | nr , name | | | | |
| Children | name, nr | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> </item></pre> | | | | |
| Source | <pre><xs:element name="item" type="XML-Modulkontextadapter-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | |

Element XML-Nr-Item / nr

| | | | |
|-----------------|--|----------|--------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Nr-Item / name

| | | | |
|-----------------|--|----------|--------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-DLKM / leermodul

| | | | |
|-----------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-VoidValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | | | |
| Source | <pre><xs:element name="leermodul" type="XML-VoidValue"/></pre> | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Modultextdaten / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/1"> <text ref="">{0, unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ausgangstext-Matrix / text

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | |
|-----------------|---|----------|--|----------|---------|------------|---|------------|-----------|----------|--|
| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | |
| Diagram | | | | | | | | | | | |
| Type | XML-Ausgangstext-Entry | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:string<ul style="list-style-type: none">• XML-StringValue<ul style="list-style-type: none">• XML-Ausgangstext-Entry | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded | | |
| content: | complex | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | | | QName | Type | Use | | ref | XML-Ref | required | |
| QName | Type | Use | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | |
| Source | <pre><xs:element name="text" type="XML-Ausgangstext-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | |

Element XML-SchnittstellendatenA / sprache-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-Sprache-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Sprache-Pool | | | |
| Properties | content: | complex | | |
| Model | item+ | | | |
| Children | item | | | |
| Instance | <pre><sprache-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{1,unbounded}</item> </sprache-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="sprache-pool" type="XML-Sprache-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Sprache-Pool / item

| | | | | | |
|----------------|---|----------|---------|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Sprache-Item type. It is a complex type with a base type of XML-Nr-Item. It has two children: 'nr' of type XML-IntegerValue and 'name' of type XML-StringValue. It is part of a sequence of 'item' elements of type XML-Sprache-Item, with a cardinality of 1..∞.</p> | | | | |
| Type | XML-Sprache-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Sprache-Item | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | nr , name | | | | |
| Children | name, nr | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> </item></pre> | | | | |

| | |
|-----------------|---|
| Source | <pre><xs:element name="item" type="XML-Sprache-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-SchnittstellendatenA / ausgangsschnittstelle-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the UML structure of the XML-Ausgangsschnittstelle-Pool. It shows a base type XML-Pool with an extension XML-Ausgangsschnittstelle-Pool. The extension has an attribute 'key' of type XML-Ref and a sequence of 'item' elements (0..∞) of type XML-Ausgangsschnittstelle-Item.</p> | | | |
| Type | XML-Ausgangsschnittstelle-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangsschnittstelle-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausgangsschnittstelle-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </ausgangsschnittstelle-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausgangsschnittstelle-pool" type="XML-Ausgangsschnittstelle-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Ausgangsschnittstelle-Pool / item

| | | | | |
|-------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Ausgangsschnittstelle-Item | | | |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Ausgangsschnittstelle-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , parameter-pool | | | | | | |
| Children | name, nr, parameter-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <parameter-pool key="">{1,1}</parameter-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausgangsschnittstelle-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Ausgangsschnittstelle-Item / parameter-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Ausgangsschnittstelle-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangsschnittstelle-Item | | | |
| Properties | content: complex | | | |
| Model | item+ | | | |
| Children | item | | | |
| Instance | <pre><parameter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{1,unbounded}</item> </parameter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="parameter-pool" type="XML-Ausgangsschnittstelle-Item" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Ausgangsschnittstelle-Item / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} |

| | | | | | |
|-----------------|---|----------|---------|------------|-----------|
| Diagram | | | | | |
| Type | XML-Ausgangsparameter-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Ausgangsparameter-Item | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | nr, name | | | | |
| Children | name, nr | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> </item></pre> | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausgangsparameter-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | |

Element XML-SchnittstellendatenA / ausgangskontext-pool

| | | | |
|----------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Ausgangskontext-Pool | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangskontext-Pool | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | item* | | |
| Children | item | | |
| Instance | <pre><ausgangskontext-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </ausgangskontext-pool></pre> | | |

| Attributes | QName | Type | Use | |
|-----------------|---|---------|----------|--|
| | key | XML-Ref | required | |
| Source | <xs:element name="ausgangskontext-pool" type="XML-Ausgangskontext-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Ausgangskontext-Pool / item

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Ausgangskontext-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Ausgangskontext-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , sprache , parameter | | | | | | |
| Children | name, parameter, sprache | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <sprache>{1,1}</sprache> <parameter>{1,1}</parameter> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausgangskontext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Name-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre>classDiagram class name { Type XML-String/Value } class XMLString_Value { } name -- XMLString_Value</pre> |
| Type | XML-String/Value |
| Properties | content: simple |
| Source | <xs:element name="name" type="XML-String/Value" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ausgangskontext-Item / sprache

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><sprache xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </sprache></pre> |
| Source | <pre><xs:element name="sprache" type="XML-Ref-Set-1N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ref-Set-1N / ref

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Sortiert nach Inhalt} |
| Diagram | |
| Type | XML-Ref |
| Properties | content: simple maxOccurs: unbounded |
| Facets | minInclusive 1 |
| Source | <pre><xs:element name="ref" type="XML-Ref" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ausgangskontext-Item / parameter

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><parameter xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </parameter></pre> |
| Source | <pre><xs:element name="parameter" type="XML-Ref-Set-1N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-DLKM-Adapterdaten / linienadapter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| Diagram | <pre>classDiagram class XML_Pool { <<base>> } class XML_Linienadapter_Pool { <<extension base=XML_Pool>> } class XML_Linienadapter_Item { } class XML_Linienadapter_Pool { key XML-Ref item XML-Linienadapter-Item 0..∞ } XML_Pool < -- XML_Linienadapter_Pool XML_Linienadapter_Pool --> XML_Linienadapter_Item : 0..∞</pre> | | | | | | | | |
|-----------------|---|----------|------|-----|--|-----|---------|----------|--|
| Type | XML-Linienadapter-Pool | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Linienadapter-Pool | | | | | | | | |
| Properties | content: complex | | | | | | | | |
| Model | item* | | | | | | | | |
| Children | item | | | | | | | | |
| Instance | <pre><linienadapter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </linienadapter-pool></pre> | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| key | XML-Ref | required | | | | | | | |
| Source | <pre><xs:element name="linienadapter-pool" type="XML-Linienadapter-Pool"/></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | |

Element XML-Linienadapter-Pool / item

| | | | | |
|----------------|--|---------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Linienadapter-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Linienadapter-Item | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |

| | |
|-----------------|---|
| | maxOccurs: unbounded |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Linienadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Text-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/1"> <text ref="#">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-DLKM-Adapterdaten / verkehrsmitteltypadapter-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Verkehrsmitteltypadapter-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Verkehrsmitteltypadapter-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><verkehrsmitteltypadapter-pool key="#" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </verkehrsmitteltypadapter-pool></pre> |

| Attributes | QName | Type | Use | |
|-----------------|---|---------|----------|--|
| | key | XML-Ref | required | |
| Source | <xs:element name="verkehrsmitteltypadapter-pool" type="XML-Verkehrsmitteltypadapter-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Verkehrsmitteltypadapter-Pool / item

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Verkehrsmitteltypadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-IntegerValueXML-StringValueXML-Text-Item<ul style="list-style-type: none">XML-Ausgangstext-MatrixXML-Verkehrsmitteltypadapter-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Verkehrsmitteltypadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-DLKM-Adapterdaten / wegevariantenadapter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

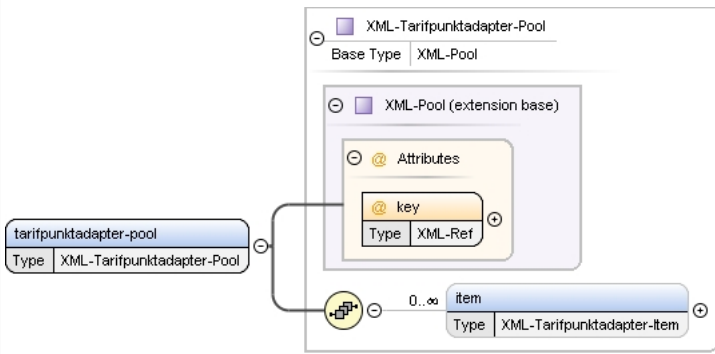
| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | <p>The diagram illustrates the UML structure of the XML-Wegevariantenadapter-Pool. It is a base type XML-Pool with an extension XML-Wegevariantenadapter-Pool. The extension has a key attribute of type XML-Ref and a sequence of 0..∞ items of type XML-Wegevariantenadapter-Item.</p> | | | |
| Type | XML-Wegevariantenadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Wegevariantenadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><wegevariantenadapter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </wegevariantenadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="wegevariantenadapter-pool" type="XML-Wegevariantenadapter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Wegevariantenadapter-Pool / item

| | | | | |
|----------------|---|---------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Wegevariantenadapter-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Wegevariantenadapter-Item | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |

| | |
|-----------------|--|
| | maxOccurs: unbounded |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Wegevariantenadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-DLKM-Adapterdaten / tarifpunktadapter-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |
| Type | XML-Tarifpunktadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tarifpunktadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktadapter-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tarifpunktadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunktadapter-pool" type="XML-Tarifpunktadapter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Tarifpunktadapter-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} |

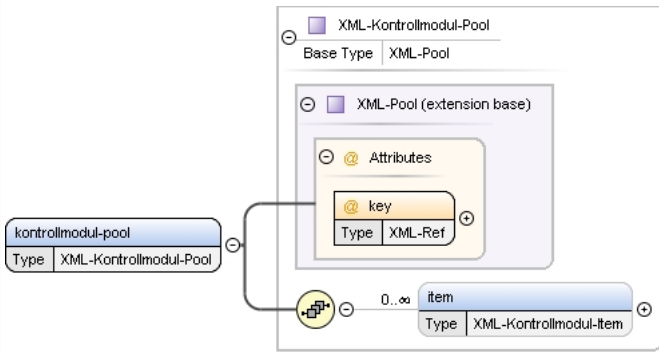
| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Tarifpunktadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Tarifpunktadapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , typ | | | | | | |
| Children | name, nr, text-matrix, typ | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <typ>{1,1}</typ> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tarifpunktadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktadapter-Item / typ

| | | | |
|-----------------|---|----------|--------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Source | <pre><xs:element name="typ" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-DLKM / kontrollmodul-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram |  | | | |
| Type | XML-Kontrollmodul-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Kontrollmodul-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><kontrollmodul-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </kontrollmodul-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="kontrollmodul-pool" type="XML-Kontrollmodul-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Kontrollmodul-Pool / item

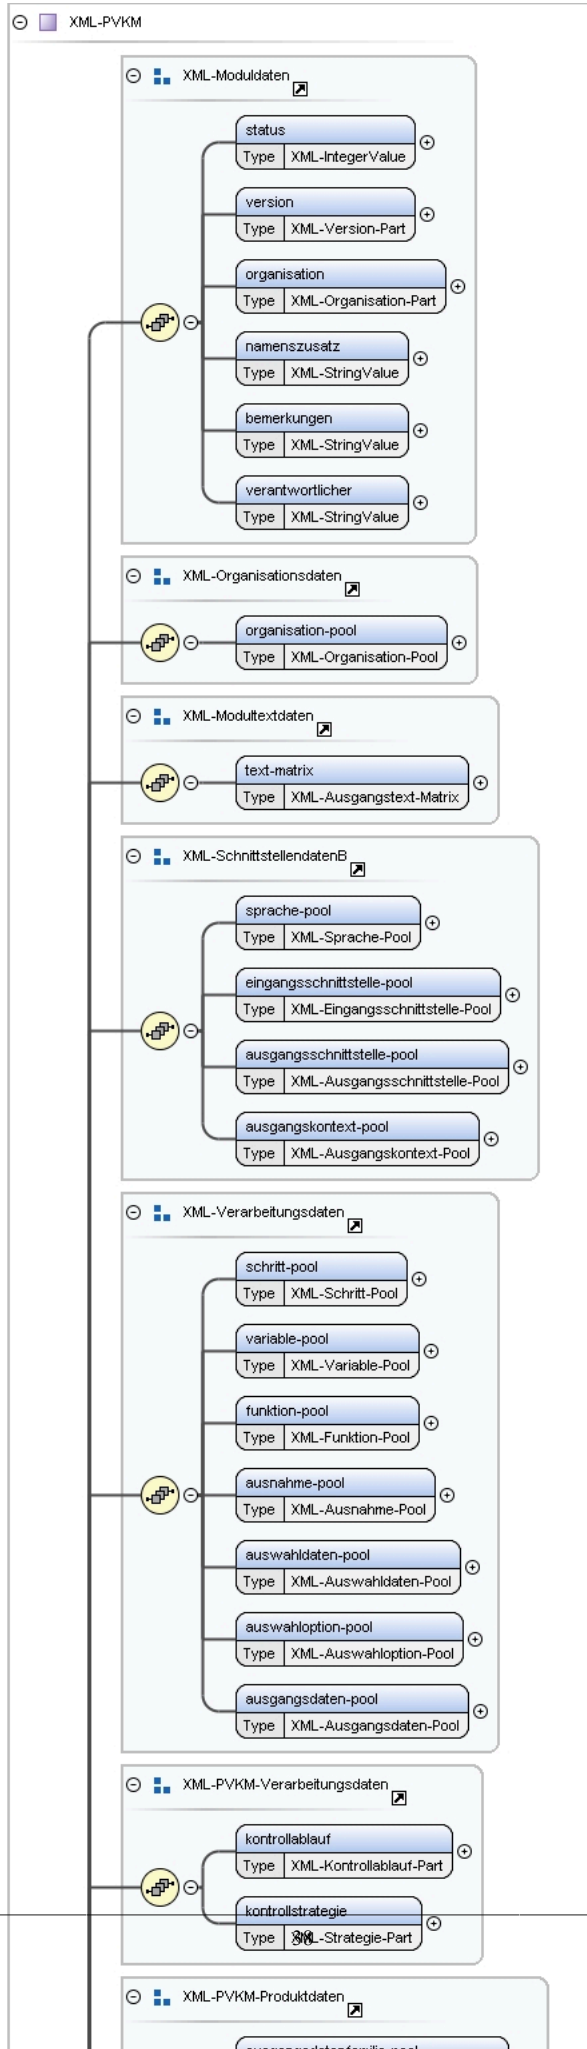
| | |
|-------------|-------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implies key Attribute} |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Kontrollmodul-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Kontrollmodul-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | moduldaten, modulkontextadapter-matrix, linieneingangsadapter-matrix, linienausgangsadapter-matrix, verkehrsmitteltypeingangsadapter-matrix, verkehrsmitteltypausgangsadapter-matrix, wegevarianteneingangsadapter-matrix, wegevariantenausgangsadapter-matrix, tarifpunkteingangsadapter-matrix, tarifpunktausgangsadapter-matrix | | | | | | |
| Children | linienausgangsadapter-matrix, linieneingangsadapter-matrix, moduldaten, modulkontextadapter-matrix, tarifpunktausgangsadapter-matrix, tarifpunkteingangsadapter-matrix, verkehrsmitteltypausgangsadapter-matrix, verkehrsmitteltypeingangsadapter-matrix, wegevarianteneingangsadapter-matrix, wegevariantenausgangsadapter-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <moduldaten>{1,1}</moduldaten> <modulkontextadapter-matrix>{1,1}</modulkontextadapter-matrix> <linieneingangsadapter-matrix>{1,1}</linieneingangsadapter-matrix> <linienausgangsadapter-matrix>{1,1}</linienausgangsadapter-matrix> <verkehrsmitteltypeingangsadapter-matrix>{1,1}</verkehrsmitteltypeingangsadapter-matrix> <verkehrsmitteltypausgangsadapter-matrix>{1,1}</verkehrsmitteltypausgangsadapter-matrix> <wegevarianteneingangsadapter-matrix>{1,1}</wegevarianteneingangsadapter-matrix> <wegevariantenausgangsadapter-matrix>{1,1}</wegevariantenausgangsadapter-matrix> <tarifpunkteingangsadapter-matrix>{1,1}</tarifpunkteingangsadapter-matrix> <tarifpunktausgangsadapter-matrix>{1,1}</tarifpunktausgangsadapter-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Kontrollmodul-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element **XML-Kontrollmodul-Item** / **moduldaten**

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | |
|------------|---|
| Type | XML-PVKM |
| Properties | content: complex |
| Model | status , version , organisation , namenszusatz , bemerkungen , verantwortlicher , organisation-pool , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , kontrollablauf , kontrollstrategie , ausgangsdatenfamilie-pool , abhaengigkeitskriterium-pool , identifikationsparameter-pool , efmprodukt-pool , tarifprodukt-pool , fremdprodukt-pool , produktgruppe-pool , tarifpunkt-pool , tarifpunktgruppe-pool , linie-pool , verkehrsmitteltyp-pool , verkehrsmittellinienbezug-pool , modulkontext-pool , bezahlart-pool , mitnahmetyp-pool , rabattmedientyp-pool , tagesbedingung-pool , tageszeitbedingung-pool , modulkontextbedingung-pool , verkehrsmittellinienbedingung-pool , zuordnungstyp-pool , zuordnungsdaten-matrix , zuordnungsausnahme-matrix , wegevariante-pool , bewertungstyp-pool , bewertungsdaten-pool , bewertungsdaten-matrix , bewertungsausnahme-matrix , nummerninterpretation-pool , bitleisteninterpretation-pool , raumnummerninterpretation-pool , signatur , annotation |
| Children | abhaengigkeitskriterium-pool , annotation , ausgangsdaten-pool , ausgangsdatenfamilie-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bemerkungen , bewertungsausnahme-matrix , bewertungsdaten-matrix , bewertungsdaten-pool , bewertungstyp-pool , bezahlart-pool , bitleisteninterpretation-pool , efmprodukt-pool , eingangsschnittstelle-pool , fremdprodukt-pool , funktion-pool , identifikationsparameter-pool , kontrollablauf , kontrollstrategie , linie-pool , mitnahmetyp-pool , modulkontext-pool , modulkontextbedingung-pool , namenszusatz , nummerninterpretation-pool , organisation , organisation-pool , produktgruppe-pool , rabattmedientyp-pool , raumnummerninterpretation-pool , schritt-pool , signatur , sprache-pool , status , tagesbedingung-pool , tageszeitbedingung-pool , tarifprodukt-pool , tarifpunkt-pool , tarifpunktgruppe-pool , text-matrix , variable-pool , verantwortlicher , verkehrsmittellinienbedingung-pool , verkehrsmittellinienbezug-pool , verkehrsmitteltyp-pool , version , wegevariante-pool , zuordnungsausnahme-matrix , zuordnungsdaten-matrix , zuordnungstyp-pool |
| Instance | <pre> <moduldaten xmlns="http://vdv/ka/pkm/1"> <status>{1,1}</status> <version>{1,1}</version> <organisation>{1,1}</organisation> <namenszusatz>{1,1}</namenszusatz> <bemerkungen>{1,1}</bemerkungen> <verantwortlicher>{1,1}</verantwortlicher> <organisation-pool>{1,1}</organisation-pool> <text-matrix>{1,1}</text-matrix> <sprache-pool key="">{1,1}</sprache-pool> <eingangsschnittstelle-pool key="">{1,1}</eingangsschnittstelle-pool> <ausgangsschnittstelle-pool key="">{1,1}</ausgangsschnittstelle-pool> <ausgangskontext-pool key="">{1,1}</ausgangskontext-pool> <schritt-pool key="">{1,1}</schritt-pool> <variable-pool key="">{1,1}</variable-pool> <funktion-pool key="">{1,1}</funktion-pool> <ausnahme-pool key="">{1,1}</ausnahme-pool> <auswahldaten-pool key="">{1,1}</auswahldaten-pool> <auswahloption-pool key="">{1,1}</auswahloption-pool> <ausgangsdaten-pool key="">{1,1}</ausgangsdaten-pool> <kontrollablauf>{1,1}</kontrollablauf> <kontrollstrategie>{1,1}</kontrollstrategie> <ausgangsdatenfamilie-pool key="">{1,1}</ausgangsdatenfamilie-pool> <abhaengigkeitskriterium-pool key="">{1,1}</abhaengigkeitskriterium-pool> <identifikationsparameter-pool key="">{1,1}</identifikationsparameter-pool> <efmprodukt-pool key="">{1,1}</efmprodukt-pool> <tarifprodukt-pool key="">{1,1}</tarifprodukt-pool> <fremdprodukt-pool key="">{1,1}</fremdprodukt-pool> <produktgruppe-pool key="">{1,1}</produktgruppe-pool> <tarifpunkt-pool key="">{1,1}</tarifpunkt-pool> <tarifpunktgruppe-pool key="">{1,1}</tarifpunktgruppe-pool> <linie-pool key="">{1,1}</linie-pool> <verkehrsmitteltyp-pool key="">{1,1}</verkehrsmitteltyp-pool> <verkehrsmittellinienbezug-pool key="">{1,1}</verkehrsmittellinienbezug-pool> <modulkontext-pool key="">{1,1}</modulkontext-pool> <bezahlart-pool key="">{1,1}</bezahlart-pool> <mitnahmetyp-pool key="">{1,1}</mitnahmetyp-pool> <rabattmedientyp-pool key="">{1,1}</rabattmedientyp-pool> <tagesbedingung-pool key="">{1,1}</tagesbedingung-pool> <tageszeitbedingung-pool key="">{1,1}</tageszeitbedingung-pool> <modulkontextbedingung-pool key="">{1,1}</modulkontextbedingung-pool> <verkehrsmittellinienbedingung-pool key="">{1,1}</verkehrsmittellinienbedingung-pool> <zuordnungstyp-pool key="">{1,1}</zuordnungstyp-pool> <zuordnungsdaten-matrix>{1,1}</zuordnungsdaten-matrix> <zuordnungsausnahme-matrix>{1,1}</zuordnungsausnahme-matrix> <wegevariante-pool key="">{1,1}</wegevariante-pool> <bewertungstyp-pool key="">{1,1}</bewertungstyp-pool> <bewertungsdaten-pool key="">{1,1}</bewertungsdaten-pool> <bewertungsdaten-matrix>{1,1}</bewertungsdaten-matrix> <bewertungsausnahme-matrix>{1,1}</bewertungsausnahme-matrix> <nummerninterpretation-pool key="">{1,1}</nummerninterpretation-pool> <bitleisteninterpretation-pool key="">{1,1}</bitleisteninterpretation-pool> <raumnummerninterpretation-pool key="">{1,1}</raumnummerninterpretation-pool> <signatur>{1,1}</signatur> <annotation>{1,1}</annotation> </pre> |

| | |
|-----------------|---|
| | </moduldaten> |
| Source | <xs:element name="moduldaten" type="XML-PVKM" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Organisationsdaten / organisation-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Organisation-Pool |
| Properties | content: complex |
| Model | item+ |
| Children | item |
| Instance | <pre><organisation-pool xmlns="http://vdv/ka/pkm/1"> <item>{1,unbounded}</item> </organisation-pool></pre> |
| Source | <xs:element name="organisation-pool" type="XML-Organisation-Pool" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Organisation-Pool / item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Sortiert nach erstem Element} |
| Diagram | |
| Type | XML-Organisation-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Organisation-Part XML-Organisation-Item |
| Properties | content: complex maxOccurs: unbounded |
| Model | id , name , anforderung |
| Children | anforderung, id, name |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <id>{1,1}</id> <name>{1,1}</name> <anforderung>{1,1}</anforderung> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Organisation-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Organisation-Item / anforderung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ergaenzungsanforderung-Pool |
| Properties | content: complex |
| Model | nr+ |
| Children | nr |
| Instance | <pre><anforderung xmlns="http://vdv/ka/pkm/1"> <nr>{1,unbounded}</nr> </anforderung></pre> |
| Source | <pre><xs:element name="anforderung" type="XML-Ergaenzungsanforderung-Pool"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ergaenzungsanforderung-Pool / nr

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Sortiert nach Inhalt} |
| Diagram | |
| Type | XML-IntegerValue |
| Properties | content: simple maxOccurs: unbounded |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-SchnittstellendatenB / sprache-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Sprache-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Sprache-Pool |
| Properties | content: complex |
| Model | item+ |
| Children | item |

| | | | | |
|-----------------|---|-------------|------------|--|
| Instance | <pre><sprache-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{1,unbounded}</item> </sprache-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="sprache-pool" type="XML-Sprache-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-SchnittstellendatenB / eingangsschnittstelle-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Eingangsschnittstelle-Pool. It shows a base type XML-Pool, which is extended by XML-Pool (extension base). The XML-Pool (extension base) has an attribute key of type XML-Ref. The main element, eingangsschnittstelle-pool, is of type XML-Eingangsschnittstelle-Pool and contains a sequence of item elements (0..∞) of type XML-Eingangsschnittstelle-Item.</p> | | | |
| Type | XML-Eingangsschnittstelle-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eingangsschnittstelle-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><eingangsschnittstelle-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </eingangsschnittstelle-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="eingangsschnittstelle-pool" type="XML-Eingangsschnittstelle-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Eingangsschnittstelle-Pool / item

| | | | | |
|-------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Type | XML-Eingangsschnittstelle-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Eingangsschnittstelle-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , parameter-pool | | | | | | |
| Children | name, nr, parameter-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <parameter-pool key="">{1,1}</parameter-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Eingangsschnittstelle-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Eingangsschnittstelle-Item / parameter-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Eingangsschnittstelle-Item. It is a complex type with a base type XML-Pool. The XML-Pool has an extension base XML-Pool (extension base). The XML-Pool has an attribute key of type XML-Ref. The XML-Pool has a child element item of type XML-Eingangsschnittstelle-Item. The XML-Eingangsschnittstelle-Item has a child element parameter-pool of type XML-Eingangsschnittstelle-Item. The parameter-pool has a child element item of type XML-Eingangsschnittstelle-Item.</p> | | | |
| Type | XML-Eingangsschnittstelle-Item | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Eingangsschnittstelle-Item | | | |
| Properties | content: | complex | | |
| Model | item+ | | | |
| Children | item | | | |
| Instance | <pre><parameter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{1,unbounded}</item> </parameter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="parameter-pool" type="XML-Eingangsschnittstelle-Item" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Eingangsschnittstelle-Item / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} |

| | | | | | |
|-----------------|---|----------|---------|------------|-----------|
| Diagram | | | | | |
| Type | XML-Eingangsparameter-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Eingangsparameter-Item | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | nr, name | | | | |
| Children | name, nr | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> </item></pre> | | | | |
| Source | <pre><xs:element name="item" type="XML-Eingangsparameter-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | |

Element XML-SchnittstellendatenB / ausgangsschnittstelle-pool

| | | | |
|----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Ausgangsschnittstelle-Pool | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangsschnittstelle-Pool | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | item* | | |
| Children | item | | |
| Instance | <pre><ausgangsschnittstelle-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </ausgangsschnittstelle-pool></pre> | | |

| Attributes | QName | Type | Use | |
|-----------------|---|---------|----------|--|
| | key | XML-Ref | required | |
| Source | <xs:element name="ausgangsschnittstelle-pool" type="XML-Ausgangsschnittstelle-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-SchnittstellendatenB / ausgangskontext-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the XML schema structure. At the top, a box labeled 'XML-Ausgangskontext-Pool' is shown as a 'Base Type' of 'XML-Pool'. Below it, 'XML-Pool (extension base)' is shown, which contains an 'Attributes' section with a 'key' attribute of type 'XML-Ref'. The main element 'ausgangskontext-pool' is shown as a 'Type' of 'XML-Ausgangskontext-Pool'. It contains a sequence of 'item' elements of type 'XML-Ausgangskontext-Item', with a cardinality of '0..∞'.</p> | | | |
| Type | XML-Ausgangskontext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangskontext-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausgangskontext-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </ausgangskontext-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="ausgangskontext-pool" type="XML-Ausgangskontext-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Verarbeitungsdaten / schritt-pool

| | | | | |
|----------------|--|---------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Schritt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Schritt-Pool | | | |
| Properties | content: | complex | | |

| Model | item+ | | | |
|-----------------|---|---------|----------|--|
| Children | item | | | |
| Instance | <pre><schritt-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{1,unbounded}</item> </schritt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="schritt-pool" type="XML-Schritt-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Schritt-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut} |
| Diagram | <p>The diagram illustrates the UML class hierarchy for XML-Schritt-Item. At the top is XML-Schritt-Item, which has a base type XML-Name-Item. XML-Name-Item has a base type XML-Item. XML-Item has a base type XML-Item (extension base). XML-Item (extension base) has a base type XML-Item. XML</p> |

Element XML-Schritt-Item / Ausgang

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsschritt-Part |
| Properties | content: complex |
| Model | ausgangsdaten , ausnahme , nachfolger |
| Children | ausgangsdaten, ausnahme, nachfolger |
| Instance | <pre><ausgang xmlns="http://vdv/ka/pkm/1"> <ausgangsdaten>{1,1}</ausgangsdaten> <ausnahme>{1,1}</ausnahme> <nachfolger>{1,1}</nachfolger> </ausgang></pre> |
| Source | <code><xs:element name="ausgang" type="XML-Ausgangsschritt-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ausgangsschritt-Part / ausgangsdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><ausgangsdaten xmlns="http://vdv/ka/pkm/1"> <ref>{1,1}</ref> </ausgangsdaten></pre> |
| Source | <code><xs:element name="ausgangsdaten" type="XML-Ref-11" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ref-11 / ref

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref |
| Properties | content: simple |
| Facets | minInclusive 1 |
| Source | <code><xs:element name="ref" type="XML-Ref" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ausgangsschritt-Part / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-Ref-01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ref-01 / ref

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref |
| Properties | content: simple |
| minOccurs: | 0 |
| Facets | minInclusive 1 |
| Source | <pre><xs:element name="ref" type="XML-Ref" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ausgangsschritt-Part / nachfolger

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><nachfolger xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </nachfolger></pre> |
| Source | <pre><xs:element name="nachfolger" type="XML-Ref-01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Schritt-Item / auswahl

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Auswahlschritt-Part |
| Properties | content: complex |
| Model | auswahldaten , ausnahme , nachfolger |
| Children | ausnahme, auswahldaten, nachfolger |
| Instance | <pre><auswahl xmlns="http://vdv/ka/pkm/1"> <auswahldaten>{1,1}</auswahldaten> <ausnahme>{1,1}</ausnahme> <nachfolger>{1,1}</nachfolger> </auswahl></pre> |
| Source | <code><xs:element name="auswahl" type="XML-Auswahlschritt-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Auswahlschritt-Part / auswahldaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><auswahldaten xmlns="http://vdv/ka/pkm/1"> <ref>{1,1}</ref> </auswahldaten></pre> |
| Source | <code><xs:element name="auswahldaten" type="XML-Ref-11" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Auswahlschritt-Part / ausnahme

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </ausnahme></pre> |
| Source | <code><xs:element name="ausnahme" type="XML-Ref-01" /></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Auswahlschritt-Part / nachfolger

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><nachfolger xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </nachfolger></pre> |
| Source | <pre><xs:element name="nachfolger" type="XML-Ref-List-1N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ref-List-1N / ref

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref |
| Properties | content: simple maxOccurs: unbounded |
| Facets | minInclusive 1 |
| Source | <pre><xs:element name="ref" type="XML-Ref" maxOccurs="unbounded" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Schritt-Item / berechnung

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Berechnungsschritt-Part |
| Properties | content: complex |
| Model | funktion , ausnahme , nachfolger |
| Children | ausnahme, funktion, nachfolger |
| Instance | <pre><berechnung xmlns="http://vdv/ka/pkm/1"> <funktion>{1,1}</funktion> <ausnahme>{1,1}</ausnahme> <nachfolger>{1,1}</nachfolger> </berechnung></pre> |

| | |
|-----------------|---|
| Source | <code><xs:element name="berechnung" type="XML-Berechnungsschritt-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Berechnungsschritt-Part / funktion

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/1"> <ref>{1,1}</ref> </funktion></pre> |
| Source | <code><xs:element name="funktion" type="XML-Ref-11" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Berechnungsschritt-Part / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </ausnahme></pre> |
| Source | <code><xs:element name="ausnahme" type="XML-Ref-01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Berechnungsschritt-Part / nachfolger

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><nachfolger xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </nachfolger></pre> |
| Source | <code><xs:element name="nachfolger" type="XML-Ref-01" /></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Schritt-Item / entscheidung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Entscheidungsschritt-Part |
| Properties | content: complex |
| Model | funktion , ausnahme , janachfolger , neinnachfolger |
| Children | ausnahme, funktion, janachfolger, neinnachfolger |
| Instance | <pre><entscheidung xmlns="http://vdv/ka/pkm/1"> <funktion>{1,1}</funktion> <ausnahme>{1,1}</ausnahme> <janachfolger>{1,1}</janachfolger> <neinnachfolger>{1,1}</neinnachfolger> </entscheidung></pre> |
| Source | <code><xs:element name="entscheidung" type="XML-Entscheidungsschritt-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Entscheidungsschritt-Part / funktion

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/1"> <ref>{1,1}</ref> </funktion></pre> |
| Source | <code><xs:element name="funktion" type="XML-Ref-11"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Entscheidungsschritt-Part / ausnahme

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-Ref-01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Entscheidungsschritt-Part / janachfolger

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><janachfolger xmlns="http://vdv/ka/pkm/1"> <ref>{1,1}</ref> </janachfolger></pre> |
| Source | <pre><xs:element name="janachfolger" type="XML-Ref-11"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Entscheidungsschritt-Part / neinnachfolger

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><neinnachfolger xmlns="http://vdv/ka/pkm/1"> <ref>{1,1}</ref> </neinnachfolger></pre> |
| Source | <pre><xs:element name="neinnachfolger" type="XML-Ref-11"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Schritt-Item / parallelisierung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Parallelisierungsschritt-Part |
| Properties | content: complex |
| Model | parallel , nachfolger |
| Children | nachfolger, parallel |
| Instance | <pre><parallelisierung xmlns="http://vdv/ka/pkm/1"> <parallel>{1,1}</parallel> <nachfolger>{1,1}</nachfolger> </parallelisierung></pre> |
| Source | <code><xs:element name="parallelisierung" type="XML-Parallelisierungsschritt-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Parallelisierungsschritt-Part / parallel

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><parallel xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </parallel></pre> |
| Source | <code><xs:element name="parallel" type="XML-Ref-Set-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ref-Set-0N / ref

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Sortiert nach Inhalt} |
| Diagram | |
| Type | XML-Ref |
| Properties | content: simple minOccurs: 0 maxOccurs: unbounded |
| Facets | minInclusive 1 |
| Source | <pre><xs:element name="ref" type="XML-Ref" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Parallelisierungsschritt-Part / nachfolger

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><nachfolger xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </nachfolger></pre> |
| Source | <pre><xs:element name="nachfolger" type="XML-Ref-01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verarbeitungsdaten / variable-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Variable-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Variable-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><variable-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </variable-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="variable-pool" type="XML-Variable-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Variable-Pool / item

| | | | | |
|-------------|------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram | | | | |
| Type | XML-Variable-Item | | | |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Variable-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name | | | | | | |
| Children | name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Variable-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Verarbeitungsdaten / funktion-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Funktion-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Funktion-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><funktion-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </funktion-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="funktion-pool" type="XML-Funktion-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Funktion-Pool / item

| | |
|-------------|---------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Funktion-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Funktion-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , (nr wert aufruf) | | | | | | |
| Children | aufruf, name, nr, wert | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <nr>{1,1}</nr> <wert>{1,1}</wert> <aufruf ref="">{1,1}</aufruf> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Funktion-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Funktion-Item / nr

| | | | |
|-----------------|---|----------|--------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Funktion-Item / wert

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|


| | |
|-----------------|---|
| Diagram | |
| Properties | content: complex |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne wahrheitswert objekt funktion undefiniert |
| Children | bits, datum, funktion, liste, objekt, text, uhrzeit, undefiniert, wahrheitswert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><wert xmlns="http://vdv/ka/pkm/1"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <wahrheitswert>{1,1}</wahrheitswert> <objekt ref="">{1,1}</objekt> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </wert></pre> |
| Source | <pre><xs:element name="wert"> <xs:complexType> <xs:group ref="XML-Value" /> </xs:complexType> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Value / bits


| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-BitsValue |
| Properties | content: simple |

| | |
|-----------------|---|
| Source | <code><xs:element name="bits" type="XML-BitsValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Value / text

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <code><xs:element name="text" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

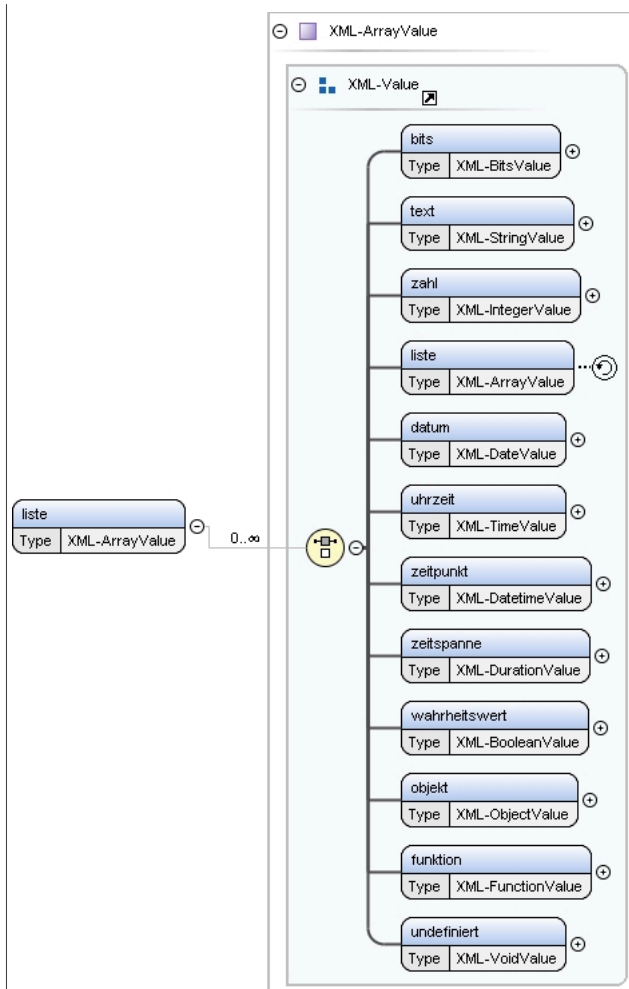
Element XML-Value / zahl

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-IntegerValue |
| Properties | content: simple |
| Source | <code><xs:element name="zahl" type="XML-IntegerValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Value / liste

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram




| | |
|-----------------|---|
| Type | XML-ArrayValue |
| Properties | content: complex |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne wahrheitswert objekt funktion undefiniert |
| Children | bits, datum, funktion, liste, objekt, text, uhrzeit, undefiniert, wahrheitswert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre> <liste xmlns="http://vdv/ka/pkm/1"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <wahrheitswert>{1,1}</wahrheitswert> <objekt ref="">{1,1}</objekt> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </liste> </pre> |
| Source | <xs:element name="liste" type="XML-ArrayValue"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Value / datum


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-DateValue |

| | |
|-----------------|---|
| Properties | content: simple |
| Facets | pattern \-?\d+-\d+-\d+ |
| Source | <code><xs:element name="datum" type="XML-DateValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |


Element XML-Value / uhrzeit

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-TimeValue |
| Properties | content: simple |
| Facets | pattern \d+:\d+:\d+([\/\-\]\d+:\d+)? |
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Value / zeitpunkt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-DatetimeValue |
| Properties | content: simple |
| Facets | pattern \-?\d+-\d+-\d+T\d+:\d+:\d+([\/\-\]\d+:\d+)? |
| Source | <code><xs:element name="zeitpunkt" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Value / zeitspanne

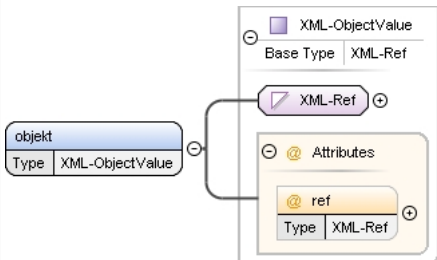
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-DurationValue |
| Properties | content: simple |
| Facets | pattern ([\/\-\]P(\d+Y)?(\d+M)?(\d+D)?(T(\d+H)?(\d+M)?(\d+S)?)? |
| Source | <code><xs:element name="zeitspanne" type="XML-DurationValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Value / wahrheitswert

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |

| | |
|-----------------|---|
| Type | XML-BooleanValue |
| Properties | content: simple |
| Source | <code><xs:element name="wahrheitswert" type="XML-BooleanValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

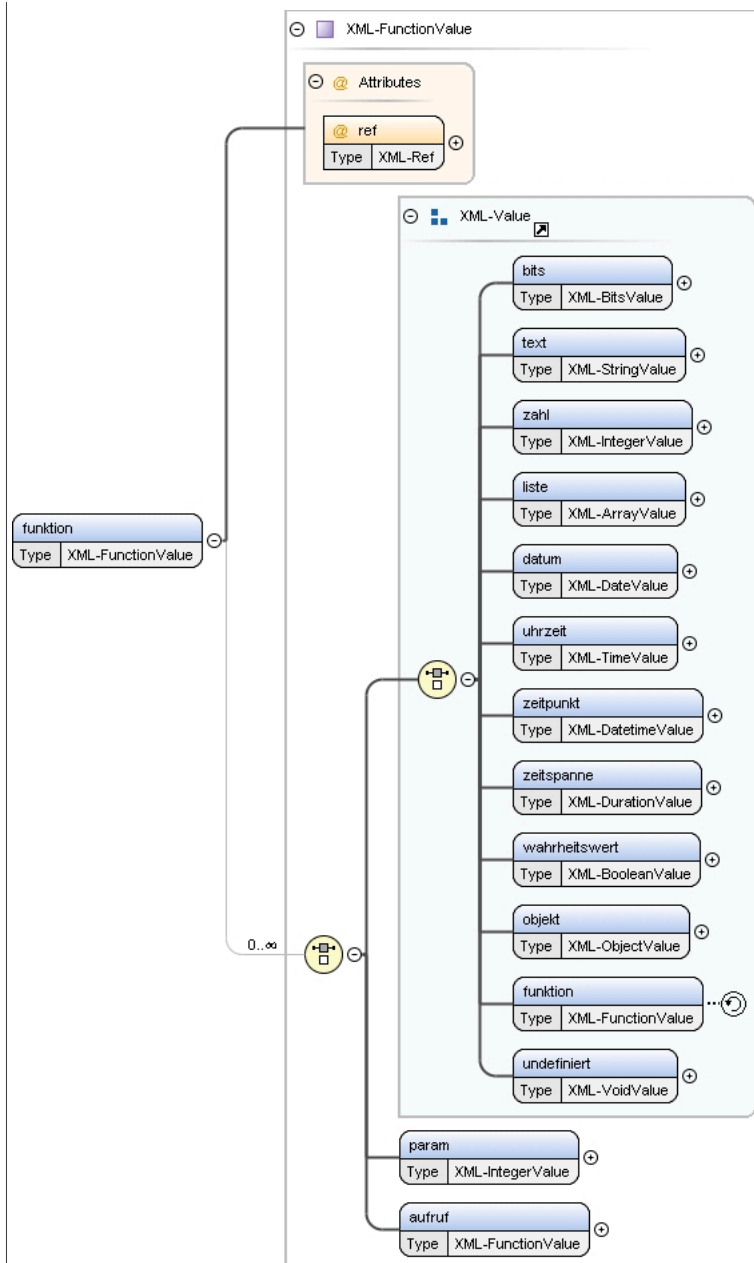
Element XML-Value / objekt

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | XML-ObjectValue | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">xs:int<ul style="list-style-type: none">XML-Ref<ul style="list-style-type: none">XML-ObjectValue | | | | | | | | | | | |
| Properties | content: complex | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>optional</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | optional | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | optional | | | | | | | | | | |
| Source | <xs:element name="objekt" type="XML-ObjectValue"/> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Value / funktion

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | |
|------------|---|
| Type | XML-FunctionValue |
| Properties | content: complex |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne wahrheitswert objekt funktion undefiniert param aufruf |
| Children | aufruf, bits, datum, funktion, liste, objekt, param, text, uhrzeit, undefiniert, wahrheitswert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre> <funktion ref="" xmlns="http://vdv/ka/pkm/1"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <wahrheitswert>{1,1}</wahrheitswert> <objekt ref="">{1,1}</objekt> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </funktion> </pre> |

| Attributes | QName | Type | Use | |
|-----------------|---|---------|----------|--|
| | ref | XML-Ref | required | |
| Source | <xs:element name="funktion" type="XML-FunctionValue" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

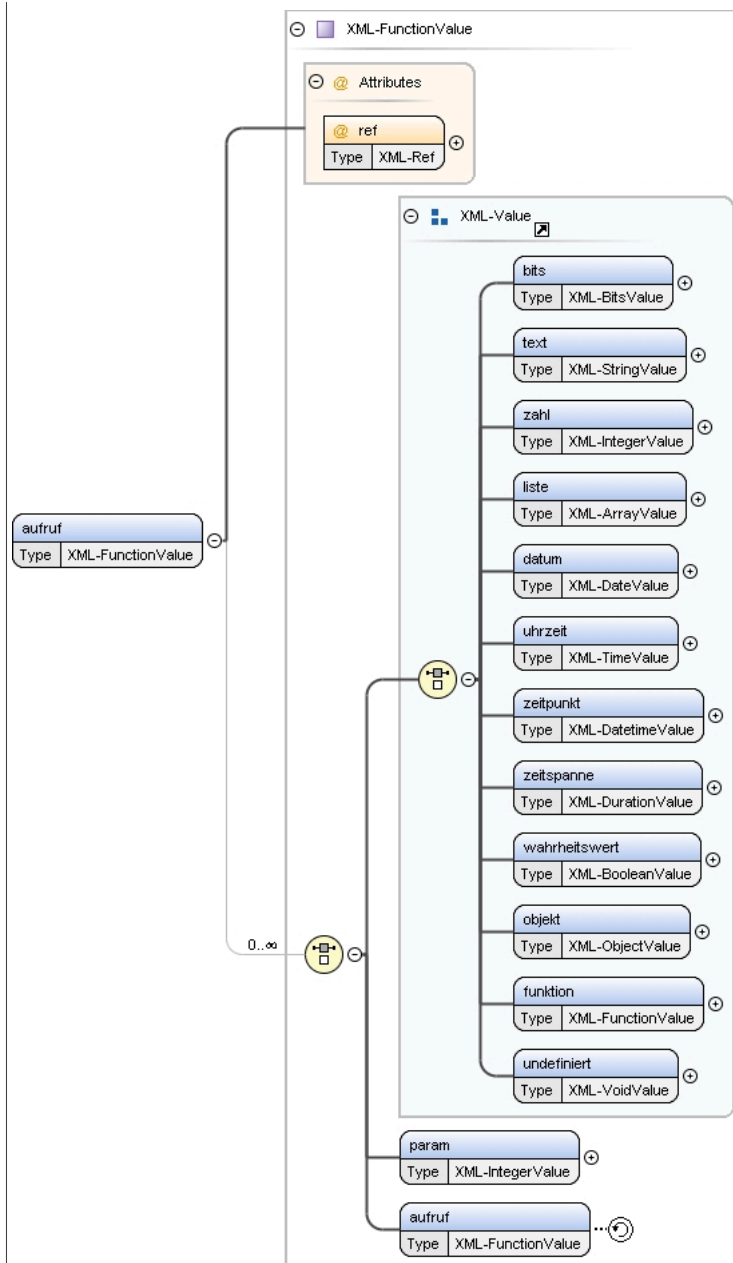
Element XML-FunctionValue / param

| | | | | |
|-----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <pre> classDiagram class param { Type XML-IntegerValue } param --> XML-IntegerValue </pre> | | | |
| Type | XML-IntegerValue | | | |
| Properties | content: simple | | | |
| Source | <xs:element name="param" type="XML-IntegerValue" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-FunctionValue / aufruf

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

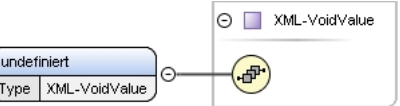
Diagram



| | |
|------------|---|
| Type | XML-FunctionValue |
| Properties | content: complex |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne wahrheitswert objekt funktion undefiniert param aufruf |
| Children | aufruf, bits, datum, funktion, liste, objekt, param, text, uhrzeit, undefiniert, wahrheitswert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre> <aufruf ref="" xmlns="http://vdv/ka/pkm/1"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <wahrheitswert>{1,1}</wahrheitswert> <objekt ref="">{1,1}</objekt> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </aufruf> </pre> |

| Attributes | QName | Type | Use | |
|-----------------|---|---------|----------|--|
| | ref | XML-Ref | required | |
| Source | <xs:element name="aufruf" type="XML-FunctionValue"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

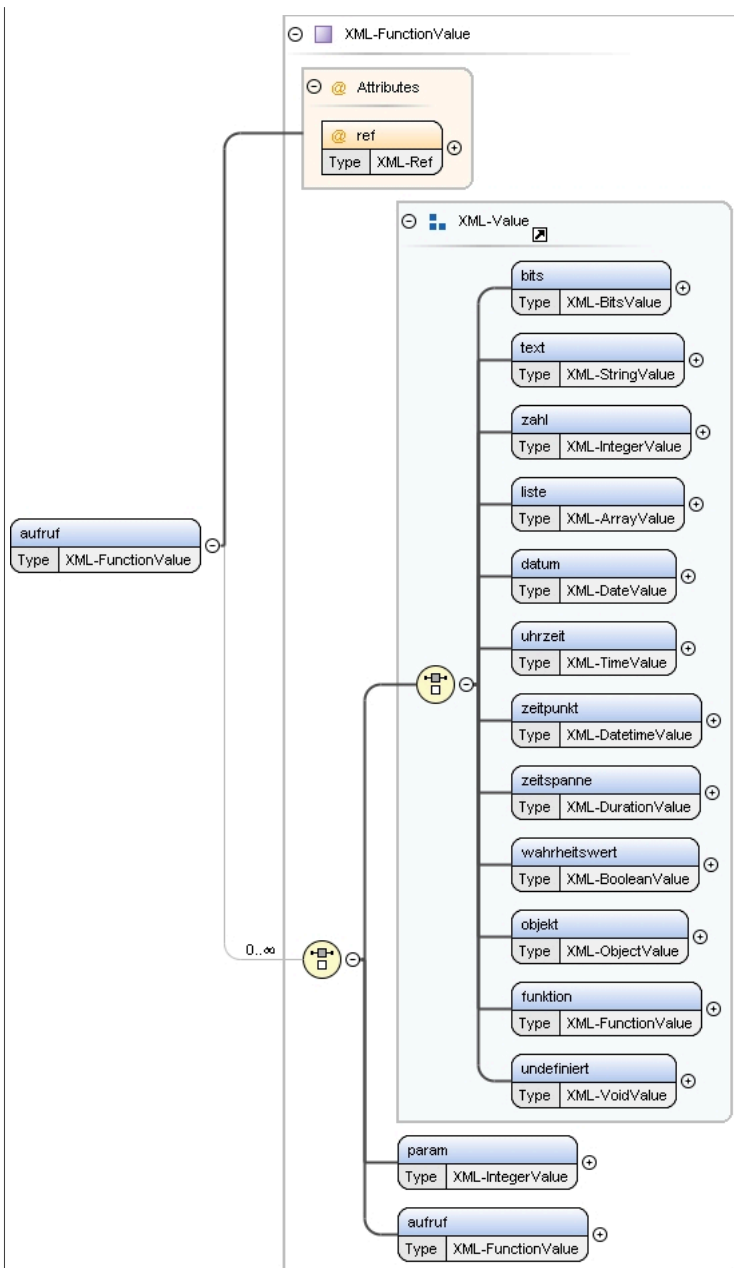
Element XML-Value / undefiniert

| | | | |
|-----------------|---|---------|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram |  | | |
| Type | XML-VoidValue | | |
| Properties | content: | complex | |
| Model | | | |
| Source | <xs:element name="undefiniert" type="XML-VoidValue"/> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Funktion-Item / aufruf

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | |
|------------|---|
| Type | XML-FunctionValue |
| Properties | content: complex |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne wahrheitswert objekt funktion undefiniert param aufruf |
| Children | aufruf, bits, datum, funktion, liste, objekt, param, text, uhrzeit, undefiniert, wahrheitswert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre> <aufruf ref="" xmlns="http://vdv/ka/pkm/1"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <wahrheitswert>{1,1}</wahrheitswert> <objekt ref="">{1,1}</objekt> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </aufruf> </pre> |

| Attributes | QName | Type | Use | |
|-----------------|---|---------|----------|--|
| | ref | XML-Ref | required | |
| Source | <xs:element name="aufruf" type="XML-FunctionValue" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Verarbeitungsdaten / ausnahme-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Ausnahme-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausnahme-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausnahme-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </ausnahme-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="ausnahme-pool" type="XML-Ausnahme-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Ausnahme-Pool / item

| | | | | |
|-------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Type | XML-Ausnahme-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Ausnahme-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausnahme-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Verarbeitungsdaten / auswahldaten-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Auswahldaten-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Auswahldaten-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><auswahldaten-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </auswahldaten-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="auswahldaten-pool" type="XML-Auswahldaten-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Auswahldaten-Pool / item

| | |
|-------------|---------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Auswahldaten-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Sequenz-Item XML-Auswahldaten-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , sequenz-matrix , defaultoption , auswahloption | | | | | | |
| Children | auswahloption, defaultoption, name, sequenz-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <sequenz-matrix>{1,1}</sequenz-matrix> <defaultoption>{1,1}</defaultoption> <auswahloption>{1,1}</auswahloption> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Auswahldaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Sequenz-Item / sequenz-matrix

| | | | |
|------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Ausgangssequenz-Matrix | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | sequenz* | | |
| Children | sequenz | | |
| Instance | <pre><sequenz-matrix xmlns="http://vdv/ka/pkm/1"> <sequenz ref="">{0,unbounded}</sequenz> </sequenz-matrix></pre> | | |

| | |
|-----------------|---|
| Source | <code><xs:element name="sequenz-matrix" type="XML-Ausgangssequenz-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ausgangssequenz-Matrix / sequenz

| | | | | |
|-----------------|---|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | | | | |
| Type | XML-Ausgangssequenz-Entry | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| | maxOccurs: | unbounded | | |
| Model | ref text | | | |
| Children | ref, text | | | |
| Instance | <pre><sequenz ref="" xmlns="http://vdv/ka/pkm/1"> <ref>{1,1}</ref> <text>{1,1}</text> </sequenz></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="sequenz" type="XML-Ausgangssequenz-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Ausgangssequenz-Entry / ref

| | | | |
|-----------------|---|--------|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Ref | | |
| Properties | content: | simple | |
| Facets | minInclusive | 1 | |
| Source | <code><xs:element name="ref" type="XML-Ref" /></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Ausgangssequenz-Entry / text

| | | | |
|-----------|---------------------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |

| | |
|-----------------|---|
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <code><xs:element name="text" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Auswahldaten-Item / defaultoption

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <code><defaultoption xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </defaultoption></code> |
| Source | <code><xs:element name="defaultoption" type="XML-Ref-01"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Auswahldaten-Item / auswahloption

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <code><auswahloption xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </auswahloption></code> |
| Source | <code><xs:element name="auswahloption" type="XML-Ref-List-1N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verarbeitungsdaten / auswahloption-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Auswahloption-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Auswahloption-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><auswahloption-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </auswahloption-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="auswahloption-pool" type="XML-Auswahloption-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Auswahloption-Pool / item

| | | | |
|-----------------|--|-----------|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Implizites key Attribut} | | |
| Diagram | <p>The diagram illustrates the type hierarchy for XML-Auswahloption-Item. It shows a series of extension bases: XML-Item (extension base) is the base for XML-Name-Item (extension base), which is the base for XML-Sequenz-Item (extension base), which is the base for XML-Auswahloption-Item. The XML-Auswahloption-Item is also shown with two attributes: 'name' (Type: XML-StringValue) and 'sequenz-matrix' (Type: XML-Ausgangssequenz-Matrix). The 'name' attribute is marked with a cardinality of 1..1, and the 'sequenz-matrix' attribute is marked with a cardinality of 1..1.</p> | | |
| Type | XML-Auswahloption-Item | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Sequenz-Item<ul style="list-style-type: none">XML-Auswahloption-Item | | |
| Properties | content: | complex | |
| | minOccurs: | 0 | |
| | maxOccurs: | unbounded | |
| Model | name , sequenz-matrix | | |
| Children | name, sequenz-matrix | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <sequenz-matrix>{1,1}</sequenz-matrix> </item></pre> | | |
| Source | <pre><xs:element name="item" type="XML-Auswahloption-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Verarbeitungsdaten / ausgangsdaten-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the UML model for the XML-Ausgangsdaten-Pool. It shows a base type XML-Pool with an extension XML-Ausgangsdaten-Pool. The extension has an attribute key of type XML-Ref. The diagram also shows the cardinality 0..∞ and the item type XML-Ausgangsdaten-Item.</p> | | | |
| Type | XML-Ausgangsdaten-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Ausgangsdaten-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausgangsdaten-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </ausgangsdaten-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="ausgangsdaten-pool" type="XML-Ausgangsdaten-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Ausgangsdaten-Pool / item

| | | | | |
|----------------|---|---------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram | | | | |
| Type | XML-Ausgangsdaten-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Sequenz-Item XML-Ausgangsdaten-Item | | | |
| Properties | content: | complex | | |

| | |
|-----------------|---|
| | minOccurs: 0 maxOccurs: unbounded |
| Model | name , sequenz-matrix |
| Children | name, sequenz-matrix |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <sequenz-matrix>{1,1}</sequenz-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Ausgangsdaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Verarbeitungsdaten / kontrollablauf

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Kontrollablauf-Part |
| Properties | content: complex |
| Model | pruefungvor , pruefungnach |
| Children | pruefungnach, pruefungvor |
| Instance | <pre><kontrollablauf xmlns="http://vdv/ka/pkm/1"> <pruefungvor>{1,1}</pruefungvor> <pruefungnach>{1,1}</pruefungnach> </kontrollablauf></pre> |
| Source | <pre><xs:element name="kontrollablauf" type="XML-Kontrollablauf-Part" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontrollablauf-Part / pruefungvor

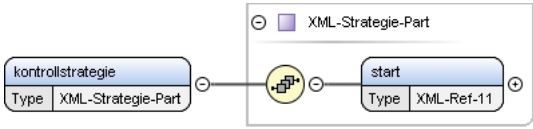
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-DurationValue |
| Properties | content: simple |
| Facets | pattern: [\+ \-] P (\d + Y) ? (\d + M) ? (\d + D) ? (T (\d + H) ? (\d + M) ? (\d + S) ?) ? |
| Source | <pre><xs:element name="pruefungvor" type="XML-DurationValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontrollablauf-Part / pruefungnach

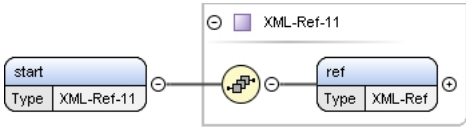
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-DurationValue |

| | |
|-----------------|---|
| Properties | content: simple |
| Facets | pattern [\\+\\-]P(\\d+Y)?(\\d+M)?(\\d+D)?(T(\\d+H)?(\\d+M)?(\\d+S)?)? |
| Source | <code><xs:element name="pruefungnach" type="XML-DurationValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Verarbeitungsdaten / kontrollstrategie

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Strategie-Part |
| Properties | content: complex |
| Model | start |
| Children | start |
| Instance | <pre><kontrollstrategie xmlns="http://vdv/ka/pkm/1"> <start>{1,1}</start> </kontrollstrategie></pre> |
| Source | <code><xs:element name="kontrollstrategie" type="XML-Strategie-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Strategie-Part / start

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><start xmlns="http://vdv/ka/pkm/1"> <ref>{1,1}</ref> </start></pre> |
| Source | <code><xs:element name="start" type="XML-Ref-11"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Produktdaten / ausgangsdatenfamilie-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | <pre>classDiagram class XML_Ausgangsdatenfamilie_Pool { Base Type XML-Pool } class XML_Pool { XML-Pool (extension base) } class Attributes { key XML-Ref } class XML_Ausgangsdatenfamilie_Item { Type XML-Ausgangsdatenfamilie-Item } XML_Ausgangsdatenfamilie_Pool -- XML_Pool XML_Pool -- Attributes Attributes -- key : XML-Ref XML_Ausgangsdatenfamilie_Pool -- "0..∞" XML_Ausgangsdatenfamilie_Item</pre> | | | |
| Type | XML-Ausgangsdatenfamilie-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangsdatenfamilie-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausgangsdatenfamilie-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </ausgangsdatenfamilie-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausgangsdatenfamilie-pool" type="XML-Ausgangsdatenfamilie-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Ausgangsdatenfamilie-Pool / item

| | | | | | | | |
|----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Ausgangsdatenfamilie-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Ausgangsdatenfamilie-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name | | | | | | |
| Children | name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausgangsdatenfamilie-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |

| | |
|-----------------|---|
| | <pre></xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Produktdaten / abhaengigkeitskriterium-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Abhaengigkeitskriterium-Pool. It is an extension of the XML-Pool base type. The extension has a key attribute of type XML-Ref and a complex content model consisting of an item element of type XML-Abhaengigkeitskriterium-Item. The item element has a cardinality of 0..∞.</p> | | | |
| Type | XML-Abhaengigkeitskriterium-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Abhaengigkeitskriterium-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><abhaengigkeitskriterium-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </abhaengigkeitskriterium-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="abhaengigkeitskriterium-pool" type="XML-Abhaengigkeitskriterium-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Abhaengigkeitskriterium-Pool / item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram | | | | |
| Type | XML-Abhaengigkeitskriterium-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item | | | |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| | <ul style="list-style-type: none"> XML-Abhaengigkeitskriterium-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , funktion , wirksamkeit | | | | | | |
| Children | funktion, name, wirksamkeit | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <funktion>{1,1}</funktion> <wirksamkeit>{1,1}</wirksamkeit> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Abhaengigkeitskriterium-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |


Element XML-Abhaengigkeitskriterium-Item / funktion

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </funktion></pre> |
| Source | <pre><xs:element name="funktion" type="XML-Ref-01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |


Element XML-Abhaengigkeitskriterium-Item / wirksamkeit

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Kriterienzeitraum-Part |
| Properties | content: complex |
| Model | beginn , ende |
| Children | beginn, ende |
| Instance | <pre><wirksamkeit xmlns="http://vdv/ka/pkm/1"> <beginn>{1,1}</beginn> <ende>{1,1}</ende> </wirksamkeit></pre> |
| Source | <pre><xs:element name="wirksamkeit" type="XML-Kriterienzeitraum-Part"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kriterienzeitraum-Part / beginn

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-DatetimeValue |
| Properties | content: simple |
| Facets | pattern $\backslash-?\backslash d+-\backslash d+-\backslash d+T\backslash d+:\backslash d+:\backslash d+([\backslash +\backslash -]\backslash d+:\backslash d+)?$ |
| Source | <code><xs:element name="beginn" type="XML-DatetimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kriterienzeitraum-Part / ende

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-DatetimeValue |
| Properties | content: simple |
| Facets | pattern $\backslash-?\backslash d+-\backslash d+-\backslash d+T\backslash d+:\backslash d+:\backslash d+([\backslash +\backslash -]\backslash d+:\backslash d+)?$ |
| Source | <code><xs:element name="ende" type="XML-DatetimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Produktdaten / identifikationsparameter-pool

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|----------------|---|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Identifikationsparameter-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Identifikationsparameter-Pool | | | | | | | | | | | |
| Properties | content: | complex | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><identifikationsparameter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </identifikationsparameter-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="identifikationsparameter-pool" type="XML-Identifikationsparameter-Pool"/></pre> | | | | | | | | | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Identifikationsparameter-Pool / item

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Identifikationsparameter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Identifikationsparameter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name, wert-pool | | | | | | |
| Children | name, nr, wert-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <wert-pool key="">{1,1}</wert-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Identifikationsparameter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Identifikationsparameter-Item / wert-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Identifikationsparameterwert-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Identifikationsparameterwert-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><wert-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </wert-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="wert-pool" type="XML-Identifikationsparameterwert-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Identifikationsparameterwert-Pool / item

| | | | |
|----------------|--|-----------|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | |
| Diagram | | | |
| Type | XML-Identifikationsparameterwert-Item | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Text-Item<ul style="list-style-type: none">XML-Identifikationsparameterwert-Item | | |
| Properties | content: | complex | |
| | minOccurs: | 0 | |
| | maxOccurs: | unbounded | |
| Model | nr, name, text-matrix | | |
| Children | name, nr, text-matrix | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | |
| Source | <pre><xs:element name="item" type="XML-Identifikationsparameterwert-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation></pre> | | |

| | |
|-----------------|---|
| | <code></xs:element></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Produktdaten / efmprodukt-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-PVKM-EFMPProdukt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-PVKM-EFMPProdukt-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><efmprodukt-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </efmprodukt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="efmprodukt-pool" type="XML-PVKM-EFMPProdukt-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVKM-EFMPProdukt-Pool / item

| | | | | |
|-------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Type | XML-PVKM-EFMProdukt-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-PVKM-EFMProdukt-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , kontrolldaten{0,1} | | | | | | |
| Children | kontrolldaten, name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <kontrolldaten>{0,1}</kontrolldaten> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-PVKM-EFMProdukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-PVKM-EFMProdukt-Item / kontrolldaten

| | | | | | |
|----------------|--|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/1 | | | | |
| Diagram | | | | | |
| Type | XML-Kontrolldaten-Part | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produkttypen-Part XML-Kontrolldaten-Part | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , unterstuetztztab | | | | |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab | | | | |
| Instance | <pre><kontrolldaten xmlns="http://vdv/ka/pkm/1"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table></pre> | | | | |

| | |
|-----------------|---|
| | <pre><abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> <unterstuetzt-tab>{1,1}</unterstuetzt-tab> </kontrolldaten></pre> |
| Source | <code><xs:element name="kontrolldaten" type="XML-Kontrolldaten-Part" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktdaten-Part / funktion

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </funktion></pre> |
| Source | <code><xs:element name="funktion" type="XML-Ref-01"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktdaten-Part / modulkontext

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontext xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </modulkontext></pre> |
| Source | <code><xs:element name="modulkontext" type="XML-Ref-Set-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktdaten-Part / ausgangsdaten-matrix

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsdaten-Matrix |
| Properties | content: complex |
| Model | ausgangsdaten* |
| Children | ausgangsdaten |
| Instance | <code><ausgangsdaten-matrix xmlns="http://vdv/ka/pkm/1"></code> |

| | |
|-----------------|---|
| | <pre><ausgangsdaten ref="">{0,unbounded}</ausgangsdaten> </ausgangsdaten-matrix></pre> |
| Source | <pre><xs:element name="ausgangsdaten-matrix" type="XML-Ausgangsdaten-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ausgangsdaten-Matrix / ausgangsdaten

| | | | |
|-----------------|---|-------------|------------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |
| Diagram | | | |
| Type | XML-Ausgangsdaten-Entry | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Ausgangsdaten-Entry | | |
| Properties | content: | complex | |
| | minOccurs: | 0 | |
| | maxOccurs: | unbounded | |
| Attributes | QName | Type | Use |
| | ref | XML-Ref | required |
| Source | <pre><xs:element name="ausgangsdaten" type="XML-Ausgangsdaten-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Produktdaten-Part / abhaengigkeitsdaten-table

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre>classDiagram class abhaengigkeitsdaten-table { Type XML-Abhaengigkeitsdaten-Table } class XML-Abhaengigkeitsdaten-Table { kriterium XML-Ref-List-0N vorausgesetzt XML-Ref-List-0N } abhaengigkeitsdaten-table -- XML-Abhaengigkeitsdaten-Table</pre> |
| Type | XML-Abhaengigkeitsdaten-Table |
| Properties | content: complex |
| Model | kriterium , vorausgesetzt |
| Children | kriterium, vorausgesetzt |
| Instance | <pre><abhaengigkeitsdaten-table xmlns="http://vdv/ka/pkm/1"> <kriterium>{1,1}</kriterium> <vorausgesetzt>{1,1}</vorausgesetzt> </abhaengigkeitsdaten-table></pre> |
| Source | <pre><xs:element name="abhaengigkeitsdaten-table" type="XML-Abhaengigkeitsdaten-Table" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeitsdaten-Table / kriterium

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><kriterium xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </kriterium></pre> |
| Source | <pre><xs:element name="kriterium" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ref-List-0N / ref

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref |
| Properties | content: simple |
| | minOccurs: 0 |
| | maxOccurs: unbounded |
| Facets | minInclusive 1 |
| Source | <pre><xs:element name="ref" type="XML-Ref" minOccurs="0" maxOccurs="unbounded" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeitsdaten-Table / vorausgesetzt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorausgesetzt xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </vorausgesetzt></pre> |
| Source | <pre><xs:element name="vorausgesetzt" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktdaten-Part / abhaengigkeitsausnahme-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Abhaengigkeitsausnahme-Table |
| Properties | content: complex |
| Model | kriterium , vorausgesetzt , ausnahme |
| Children | ausnahme, kriterium, vorausgesetzt |
| Instance | <pre><abhaengigkeitsausnahme-table xmlns="http://vdv/ka/pkm/1"> <kriterium>{1,1}</kriterium> <vorausgesetzt>{1,1}</vorausgesetzt> <ausnahme>{1,1}</ausnahme> </abhaengigkeitsausnahme-table></pre> |
| Source | <code><xs:element name="abhaengigkeitsausnahme-table" type="XML-Abhaengigkeitsausnahme-Table"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeitsausnahme-Table / kriterium


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><kriterium xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </kriterium></pre> |
| Source | <code><xs:element name="kriterium" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeitsausnahme-Table / vorausgesetzt


| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorausgesetzt xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </vorausgesetzt></pre> |
| Source | <code><xs:element name="vorausgesetzt" type="XML-Ref-List-0N"/></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

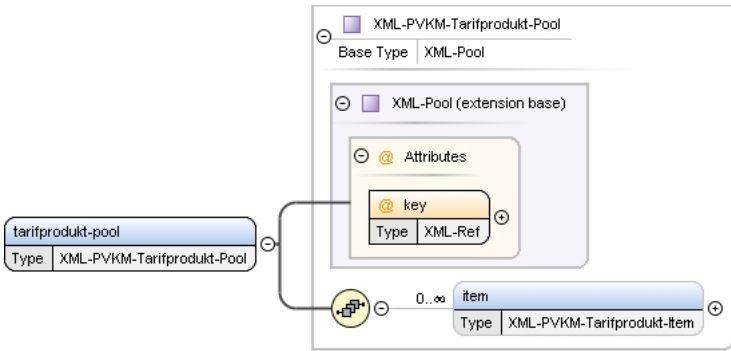
Element XML-Abhaengigkeitsausnahme-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontrolldaten-Part / unterstuetztab

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-DateValue |
| Properties | content: simple |
| Facets | pattern \-?\d+-\d+-\d+ |
| Source | <pre><xs:element name="unterstuetztab" type="XML-DateValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Produktdaten / tarifprodukt-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-PVKM-Tarifprodukt-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-PVKM-Tarifprodukt-Pool |
| Properties | content: complex |
| Model | item* |

| | | | | |
|-----------------|---|---------|----------|--|
| Children | item | | | |
| Instance | <pre><tarifprodukt-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tarifprodukt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <code><xs:element name="tarifprodukt-pool" type="XML-PVKM-Tarifprodukt-Pool"/></code> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVKM-Tarifprodukt-Pool / item

| | | | | | | | |
|----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-PVKM-Tarifprodukt-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">• XML-Item<ul style="list-style-type: none">• XML-Nr-Item<ul style="list-style-type: none">• XML-Text-Item<ul style="list-style-type: none">• XML-PVKM-Tarifprodukt-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , extNr , efmprodukt , identifikation , kontrolldaten{0,1} | | | | | | |
| Children | efmprodukt, extNr, identifikation, kontrolldaten, name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <extNr>{1,1}</extNr> <efmprodukt>{1,1}</efmprodukt></pre> | | | | | | |

| | |
|-----------------|---|
| | <pre> <identifikation>{1,1}</identifikation> <kontrolldaten>{0,1}</kontrolldaten> </item> </pre> |
| Source | <pre> <xs:element name="item" type="XML-PVKM-Tarifprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Implizites key Attribut, Sortiert nach erstem Element</xs:documentation> </xs:annotation> </xs:element> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Tarifprodukt-Item / extNr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <pre> <xs:element name="extNr" type="XML-StringValue"/> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Tarifprodukt-Item / efmprodukt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre> <efmprodukt xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </efmprodukt> </pre> |
| Source | <pre> <xs:element name="efmprodukt" type="XML-Ref-01"/> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Tarifprodukt-Item / identifikation

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre> <identifikation xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </identifikation> </pre> |
| Source | <pre> <xs:element name="identifikation" type="XML-Ref-Set-1N"/> </pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-PVKM-Tarifprodukt-Item / kontrolldaten

| | | | | | |
|-----------------|---|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/1 | | | | |
| Diagram | | | | | |
| Type | XML-Kontrolldaten-Part | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produkttypen-Teil XML-Kontrolldaten-Part | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , unterstuetztzab | | | | |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztzab | | | | |
| Instance | <pre><kontrolldaten xmlns="http://vdv/ka/pkm/1"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> <unterstuetztzab>{1,1}</unterstuetztzab> </kontrolldaten></pre> | | | | |
| Source | <xs:element name="kontrolldaten" type="XML-Kontrolldaten-Part" minOccurs="0"/> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | |

Element XML-PVKM-Produktdaten / fremdprodukt-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Fremdprodukt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Fremdprodukt-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><fremdprodukt-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </fremdprodukt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="fremdprodukt-pool" type="XML-Fremdprodukt-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Fremdprodukt-Pool / item

| | | | | | | | |
|----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Fremdprodukt-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Text-Item<ul style="list-style-type: none">XML-Fremdprodukt-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , tarifstand , organisation | | | | | | |
| Children | name, nr, organisation, tarifstand, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1.1}</text-matrix></pre> | | | | | | |

| | |
|-----------------|--|
| | <pre><tarifstand>{1,1}</tarifstand> <organisation>{1,1}</organisation> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Fremdprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Implizites key Attribut, Sortiert nach erstem Element</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Fremdprodukt-Item / tarifstand

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <pre><xs:element name="tarifstand" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Fremdprodukt-Item / organisation

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Organisation-Part |
| Properties | content: complex |
| Model | id, name |
| Children | id, name |
| Instance | <pre><organisation xmlns="http://vdv/ka/pkm/1"> <id>{1,1}</id> <name>{1,1}</name> </organisation></pre> |
| Source | <pre><xs:element name="organisation" type="XML-Organisation-Part"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Produktdaten / produktgruppe-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |


| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Produktgruppe-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Produktgruppe-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><produktgruppe-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </produktgruppe-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="produktgruppe-pool" type="XML-Produktgruppe-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Produktgruppe-Pool / item

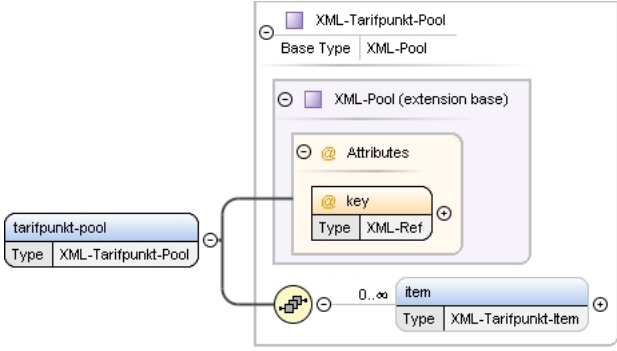
| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Produktgruppe-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Produktgruppe-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , produkt | | | | | | |
| Children | name, produkt | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <produkt>{1,1}</produkt> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Produktgruppe-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Produktgruppe-Item / produkt

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Ref-Set-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><produkt xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </produkt></pre> |
| Source | <pre><xs:element name="produkt" type="XML-Ref-Set-1N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Tarifpunktdaten / tarifpunkt-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |
| Type | XML-Tarifpunkt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Tarifpunkt-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunkt-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tarifpunkt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunkt-pool" type="XML-Tarifpunkt-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Tarifpunkt-Pool / item

| | |
|-------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Tarifpunkt-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Tarifpunkt-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , typ , ortsbezug | | | | | | |
| Children | name , nr , ortsbezug , text-matrix , typ | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <typ>{1,1}</typ> <ortsbezug>{1,1}</ortsbezug> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tarifpunkt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunkt-Item / typ

| | | | |
|-----------------|---|----------|--------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Source | <pre><xs:element name="typ" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Tarifpunkt-Item / ortsbezug

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <code><xs:element name="ortsbezug" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Tarifpunktdaten / tarifpunktgruppe-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Tarifpunktgruppe-Pool element. It shows a base type XML-Pool, which is extended by XML-Pool (extension base). The extension base contains an attribute key of type XML-Ref. The main element XML-Tarifpunktgruppe-Pool is shown with a cardinality of 0..∞ and a sequence of items of type XML-Tarifpunktgruppe-Item.</p> | | | |
| Type | XML-Tarifpunktgruppe-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Tarifpunktgruppe-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktgruppe-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tarifpunktgruppe-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="tarifpunktgruppe-pool" type="XML-Tarifpunktgruppe-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Tarifpunktgruppe-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implies key Attribut} |
| Diagram | |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Type | XML-Tarifpunktgruppe-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Tarifpunktgruppe-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , tarifpunkt | | | | | | |
| Children | name, tarifpunkt | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <tarifpunkt>{1,1}</tarifpunkt> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tarifpunktgruppe-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktgruppe-Item / tarifpunkt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><tarifpunkt xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </tarifpunkt></pre> |
| Source | <pre><xs:element name="tarifpunkt" type="XML-Ref-Set-1N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkehrsmittelliniendaten / linie-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Linie-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Linie-Pool (extension base) |

| | | | | |
|-----------------|---|---------|----------|--|
| | <ul style="list-style-type: none">XML-Linie-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><linie-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </linie-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="linie-pool" type="XML-Linie-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Linie-Pool / item

| | | | | | | | |
|----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | <pre>classDiagram class XML_Linie_Item["XML-Linie-Item"] { Base Type } class XML_Text_Item["XML-Text-Item (extension base)"] { Base Type } class XML_Nr_Item["XML-Nr-Item (extension base)"] { Base Type } class XML_Item["XML-Item (extension base)"] { nr XML-IntegerValue name XML-StringValue } class XML_Integer_Value["XML-IntegerValue"] { Type } class XML_String_Value["XML-StringValue"] { Type } class XML_Ausgangstext_Matrix["XML-Ausgangstext-Matrix"] { Type } class XML_Ref_01["XML-Ref-01"] { Type } class item { Type } XML_Linie_Item -- > XML_Text_Item XML_Text_Item -- > XML_Nr_Item XML_Nr_Item -- > XML_Item XML_Item -- XML_Integer_Value XML_Item -- XML_String_Value XML_Item -- XML_Ausgangstext_Matrix XML_Item -- XML_Ref_01 item -- XML_Integer_Value item -- XML_String_Value item -- XML_Ausgangstext_Matrix item -- XML_Ref_01</pre> | | | | | | |
| Type | XML-Linie-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">• XML-Item<ul style="list-style-type: none">• XML-Nr-Item<ul style="list-style-type: none">• XML-Text-Item<ul style="list-style-type: none">• XML-Linie-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , verkehrsmittellinienbezug | | | | | | |
| Children | name, nr, text-matrix, verkehrsmittellinienbezug | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <verkehrsmittellinienbezug>{1,1}</verkehrsmittellinienbezug> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Linie-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |

| | |
|-----------------|---|
| | <pre></xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Linie-Item / verkehrsmittellinienbezug

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbezug xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </verkehrsmittellinienbezug></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbezug" type="XML-Ref-01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkehrsmittelliniendaten / verkehrsmitteltyp-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Verkehrsmitteltyp-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Verkehrsmitteltyp-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><verkehrsmitteltyp-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </verkehrsmitteltyp-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="verkehrsmitteltyp-pool" type="XML-Verkehrsmitteltyp-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Verkehrsmitteltyp-Pool / item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Verkehrsmitteltyp-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Verkehrsmitteltyp-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , verkehrsmittellinienbezug | | | | | | |
| Children | name, nr, text-matrix, verkehrsmittellinienbezug | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <verkehrsmittellinienbezug>{1,1}</verkehrsmittellinienbezug> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Verkehrsmitteltyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Verkehrsmitteltyp-Item / verkehrsmittellinienbezug

| | | | |
|------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Ref-01 | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | ref{0,1} | | |
| Children | ref | | |
| Instance | <pre><verkehrsmittellinienbezug xmlns="http://vdv/ka/pkm/1"></pre> | | |

| | |
|-----------------|---|
| | <code><ref>{0,1}</ref></code> <code></verkehrsmittellinienbezug></code> |
| Source | <code><xs:element name="verkehrsmittellinienbezug" type="XML-Ref-01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkehrsmittelliniendaten / verkehrsmittellinienbezug-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the <code>XML-Verkehrsmittellinienbezug-Pool</code> type. It is a base type <code>XML-Pool</code> with an extension <code>XML-Verkehrsmittellinienbezug-Pool</code>. The extension has a key attribute of type <code>XML-Ref</code> and a sequence of 0..∞ items of type <code>XML-Verkehrsmittellinienbezug-Item</code>.</p> | | | |
| Type | XML-Verkehrsmittellinienbezug-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Verkehrsmittellinienbezug-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><verkehrsmittellinienbezug-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </verkehrsmittellinienbezug-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <code><xs:element name="verkehrsmittellinienbezug-pool" type="XML-Verkehrsmittellinienbezug-Pool" /></code> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Verkehrsmittellinienbezug-Pool / item

| | | | | |
|----------------|---|---------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram | | | | |
| Type | XML-Verkehrsmittellinienbezug-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Verkehrsmittellinienbezug-Item | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |

| | |
|-----------------|---|
| | maxOccurs: unbounded |
| Model | name |
| Children | name |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Verkehrsmittellinienbezug-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVKM-Bedingungsdaten / modulkontext-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Modulkontext-Pool type. It shows a base type XML-Pool with an extension XML-Modulkontext-Pool. The extension has a key attribute of type XML-Ref. The main element 'modulkontext-pool' is of type XML-Modulkontext-Pool and contains a sequence of 'item' elements (0..∞) of type XML-Modulkontext-Item.</p> | | | |
| Type | XML-Modulkontext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Modulkontext-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><modulkontext-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </modulkontext-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="modulkontext-pool" type="XML-Modulkontext-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Modulkontext-Pool / item

| | | | | |
|-------------|---------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implizites key Attribut} | | | |
| Diagram | | | | |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Type | XML-Modulkontext-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Modulkontext-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name | | | | | | |
| Children | name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Modulkontext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-PVKM-Bedingungsdaten / bezahlart-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Bezahlart-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Bezahlart-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bezahlart-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </bezahlart-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bezahlart-pool" type="XML-Bezahlart-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Bezahlart-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Bezahlart-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> • XML-Item • XML-Nr-Item • XML-Text-Item • XML-Bezahlart-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name, text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bezahlart-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-PVKM-Bedingungsdaten / mitnahmetyp-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Mitnahmetyp-Pool |
| Type hierarchy | <ul style="list-style-type: none"> • XML-Pool |

| | | | | |
|-----------------|---|---------|----------|--|
| | <ul style="list-style-type: none">XML-Mitnahmetyp-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><mitnahmetyp-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </mitnahmetyp-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="mitnahmetyp-pool" type="XML-Mitnahmetyp-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Mitnahmetyp-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Mitnahmetyp-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Text-Item<ul style="list-style-type: none">XML-Mitnahmetyp-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Mitnahmetyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-PVKM-Bedingungsdaten / rabattmedientyp-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Rabattmedientyp-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Rabattmedientyp-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><rabattmedientyp-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </rabattmedientyp-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="rabattmedientyp-pool" type="XML-Rabattmedientyp-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Rabattmedientyp-Pool / item

| | | | |
|----------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | |
| Diagram | | | |
| Type | XML-Rabattmedientyp-Item | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item | | |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| | <ul style="list-style-type: none"> XML-Rabattmedientyp-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Rabattmedientyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-PVKM-Bedingungsdaten / tagesbedingung-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Tagesbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tagesbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tagesbedingung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tagesbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tagesbedingung-pool" type="XML-Tagesbedingung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Tagesbedingung-Pool / item

| | |
|-------------|---------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut} |


| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Tagesbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Tagesbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , wochentag-pool , kalendertag-pool | | | | | | |
| Children | kalendertag-pool, name, wochentag-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <wochentag-pool>{1,1}</wochentag-pool> <kalendertag-pool>{1,1}</kalendertag-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tagesbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tagesbedingung-Item / wochentag-pool

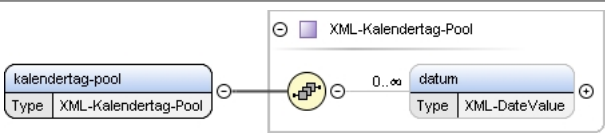
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Wochentag-Pool |
| Properties | content: complex |
| Model | nr* |
| Children | nr |
| Instance | <pre><wochentag-pool xmlns="http://vdv/ka/pkm/1"> <nr>{0,unbounded}</nr> </wochentag-pool></pre> |
| Source | <pre><xs:element name="wochentag-pool" type="XML-Wochentag-Pool" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Wochentag-Pool / nr


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | | | | |
|-----------------|--|----------|--------|------------|---|------------|-----------|
| Annotations | {Sortiert nach Inhalt} | | | | | | |
| Diagram |  The diagram shows a box labeled 'nr' with 'Type XML-IntegerValue' below it. A line connects this box to a purple box labeled 'XML-IntegerValue'. | | | | | | |
| Type | XML-IntegerValue | | | | | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | simple | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | simple | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tagesbedingung-Item / kalendertag-pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  The diagram shows a box labeled 'kalendertag-pool' with 'Type XML-Kalendertag-Pool' below it. A line connects this box to a yellow circle containing a plus sign. This circle is connected to a box labeled 'datum' with 'Type XML-DateValue' below it. The connection between the circle and the 'datum' box is labeled '0..∞'. Above the 'datum' box is a purple box labeled 'XML-Kalendertag-Pool'. |
| Type | XML-Kalendertag-Pool |
| Properties | content: complex |
| Model | datum* |
| Children | datum |
| Instance | <pre><kalendertag-pool xmlns="http://vdv/ka/pkm/1"> <datum>{0,unbounded}</datum> </kalendertag-pool></pre> |
| Source | <pre><xs:element name="kalendertag-pool" type="XML-Kalendertag-Pool" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kalendertag-Pool / datum

| | | | | | | | |
|-----------------|--|----------|----------------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Sortiert nach Inhalt} | | | | | | |
| Diagram |  The diagram shows a box labeled 'datum' with 'Type XML-DateValue' below it. A line connects this box to a purple box labeled 'XML-DateValue'. | | | | | | |
| Type | XML-DateValue | | | | | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | simple | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | simple | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Facets | <table> <tr><td>pattern</td><td>\-?\d+-\d+-\d+</td></tr> </table> | pattern | \-?\d+-\d+-\d+ | | | | |
| pattern | \-?\d+-\d+-\d+ | | | | | | |
| Source | <pre><xs:element name="datum" type="XML-DateValue" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-PVKM-Bedingungsdaten / tageszeitbedingung-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | <p>The diagram shows the structure of the XML-Tageszeitbedingung-Pool type. It is a complex type that extends the XML-Pool type. It has a key attribute of type XML-Ref. It contains a sequence of 'item' elements of type XML-Tageszeitbedingung-Item, with a cardinality of 0..∞.</p> | | | |
| Type | XML-Tageszeitbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tageszeitbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tageszeitbedingung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tageszeitbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tageszeitbedingung-pool" type="XML-Tageszeitbedingung-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Tageszeitbedingung-Pool / item

| | | | | | | | |
|----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut} | | | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Tageszeitbedingung-Item type. It is a complex type that extends the XML-Item type. The XML-Item type is shown as a base type with a 'name' attribute of type XML-String/Value. The XML-Tageszeitbedingung-Item type is shown as an extension base with a 'zeitabschnitt-pool' element of type XML-Zeitabschnitt-Pool. The cardinality for both the 'name' attribute and the 'zeitabschnitt-pool' element is 0..1.</p> | | | | | | |
| Type | XML-Tageszeitbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Tageszeitbedingung-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , zeitabschnitt-pool | | | | | | |
| Children | name, zeitabschnitt-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <zeitabschnitt-pool>{1,1}</zeitabschnitt-pool> </item></pre> | | | | | | |

| | |
|-----------------|--|
| | </item> |
| Source | <pre><xs:element name="item" type="XML-Tageszeitbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Tageszeitbedingung-Item / zeitabschnitt-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Zeitabschnitt-Pool |
| Properties | content: complex |
| Model | item+ |
| Children | item |
| Instance | <pre><zeitabschnitt-pool xmlns="http://vdv/ka/pkm/1"> <item>{1,unbounded}</item> </zeitabschnitt-pool></pre> |
| Source | <pre><xs:element name="zeitabschnitt-pool" type="XML-Zeitabschnitt-Pool"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Zeitabschnitt-Pool / item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Sortiert nach erstem Element} |
| Diagram | |
| Type | XML-Zeitabschnitt-Item |
| Properties | content: complex maxOccurs: unbounded |
| Model | von , bis |
| Children | bis, von |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <von>{1,1}</von> <bis>{1,1}</bis> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Zeitabschnitt-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Zeitabschnitt-Item / von

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | | |
|-----------------|---|-------------------------------------|
| Type | XML-TimeValue | |
| Properties | content: | simple |
| Facets | pattern | \d+:\d+:\d+(\[\+ \- \] \d+:\d+)+)? |
| Source | <xs:element name="von" type="XML-TimeValue"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Element XML-Zeitabschnitt-Item / bis

| | | |
|-----------------|---|-------------------------------------|
| Namespace | http://vdv/ka/pkm/1 | |
| Diagram | | |
| Type | XML-TimeValue | |
| Properties | content: | simple |
| Facets | pattern | \d+:\d+:\d+(\[\+ \- \] \d+:\d+)+)? |
| Source | <xs:element name="bis" type="XML-TimeValue"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Element XML-PVKM-Bedingungsdaten / modulkontextbedingung-pool

| Namespace | http://vdv/ka/pkm/1 | | | | | | | |
|-----------------|---|----------|------|-----|-----|---------|----------|--|
| Diagram | | | | | | | | |
| Type | XML-Modulkontextbedingung-Pool | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Modulkontextbedingung-Pool | | | | | | | |
| Properties | content: | complex | | | | | | |
| Model | item* | | | | | | | |
| Children | item | | | | | | | |
| Instance | <pre><modulkontextbedingung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </modulkontextbedingung-pool></pre> | | | | | | | |
| Attributes | <table> <thead> <tr> <th>QName</th><th>Type</th><th>Use</th></tr> </thead> <tbody> <tr> <td>key</td><td>XML-Ref</td><td>required</td></tr> </tbody> </table> | QName | Type | Use | key | XML-Ref | required | |
| QName | Type | Use | | | | | | |
| key | XML-Ref | required | | | | | | |
| Source | <xs:element name="modulkontextbedingung-pool" type="XML-Modulkontextbedingung-Pool"/> | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | |

Element XML-Modulkontextbedingung-Pool / item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Modulkontextbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Modulkontextbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , modulkontext | | | | | | |
| Children | modulkontext, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <modulkontext>{1,1}</modulkontext> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Modulkontextbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Modulkontextbedingung-Item / modulkontext

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Ref-Set-1N | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | ref+ | | |
| Children | ref | | |
| Instance | <pre><modulkontext xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </modulkontext></pre> | | |
| Source | <pre><xs:element name="modulkontext" type="XML-Ref-Set-1N"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-PVKM-Bedingungsdaten / verkehrsmittellinienbedingung-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| Diagram | <p>The diagram illustrates the structure of the XML-Verkehrsmittellinienbedingung-Pool. It is a complex type that extends the XML-Pool. The extension has a key attribute of type XML-Ref and a sequence of 0..∞ items of type XML-Verkehrsmittellinienbedingung-Item.</p> | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|
| Type | XML-Verkehrsmittellinienbedingung-Pool | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Verkehrsmittellinienbedingung-Pool | | | | | | | | |
| Properties | content: complex | | | | | | | | |
| Model | item* | | | | | | | | |
| Children | item | | | | | | | | |
| Instance | <pre><verkehrsmittellinienbedingung-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </verkehrsmittellinienbedingung-pool></pre> | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| key | XML-Ref | required | | | | | | | |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung-pool" type="XML-Verkehrsmittellinienbedingung-Pool" /></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | |

Element XML-Verkehrsmittellinienbedingung-Pool / item

| | | | | | | | |
|----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implicit key Attribut} | | | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Verkehrsmittellinienbedingung-Item. It is a base type with two extensions: XML-Name-Item and XML-Item (extension base). XML-Name-Item has a child 'name' of type XML-StringValue. XML-Item (extension base) has a child 'verkehrsmittellinienbezug' of type XML-Ref-Set-1N. The main type XML-Verkehrsmittellinienbedingung-Item has a child 'item' of type XML-Verkehrsmittellinienbedingung-Item.</p> | | | | | | |
| Type | XML-Verkehrsmittellinienbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Verkehrsmittellinienbedingung-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , verkehrsmittellinienbezug | | | | | | |
| Children | name, verkehrsmittellinienbezug | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name></pre> | | | | | | |

| | |
|-----------------|---|
| | <pre><verkehrsmittellinienbezug>{1,1}</verkehrsmittellinienbezug> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Verkehrsmittellinienbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkehrsmittellinienbedingung-Item / verkehrsmittellinienbezug

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbezug xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </verkehrsmittellinienbezug></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbezug" type="XML-Ref-Set-1N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Tarifpunktzuordnungsdaten / zuordnungstyp-pool

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | |
|-----------------|---|----------|------|-----|-----|---------|----------|--|--|--|
| Diagram | | | | | | | | | | |
| Type | XML-Zuordnungstyp-Pool | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Zuordnungstyp-Pool | | | | | | | | | |
| Properties | content: | complex | | | | | | | | |
| Model | item* | | | | | | | | | |
| Children | item | | | | | | | | | |
| Instance | <pre><zuordnungstyp-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </zuordnungstyp-pool></pre> | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td></tr></tbody></table> | QName | Type | Use | key | XML-Ref | required | | | |
| QName | Type | Use | | | | | | | | |
| key | XML-Ref | required | | | | | | | | |
| Source | <pre><xs:element name="zuordnungstyp-pool" type="XML-Zuordnungstyp-Pool" /></pre> | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | |

Element XML-Zuordnungstyp-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implicit key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Zuordnungstyp-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Zuordnungstyp-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name | | | | | | |
| Children | name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Zuordnungstyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicit key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktzuordnungsdaten / zuordnungsdaten-matrix

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Zuordnungsdaten-Matrix | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | typ* | | |
| Children | typ | | |
| Instance | <pre><zuordnungsdaten-matrix xmlns="http://vdv/ka/pkm/1"> <typ ref="#">{0,unbounded}</typ> </zuordnungsdaten-matrix></pre> | | |
| Source | <pre><xs:element name="zuordnungsdaten-matrix" type="XML-Zuordnungsdaten-Matrix" /></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Zuordnungsdaten-Matrix / typ

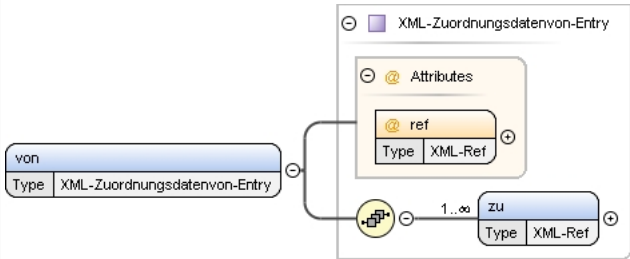
| | |
|-------------|---------------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Sortiert nach erstem Attribut} |

| Diagram | <p>The diagram illustrates the structure of the XML-Zuordnungsdatentyp-Entry. It is a complex type named 'typ' that contains a sequence of two elements: a 'ref' (reference) and a 'v1b' (value). The 'ref' element is of type 'XML-Zuordnungsdatentyp-Entry' and is required. The 'v1b' element is of type 'XML-Zuordnungsdatenv1b-Entry' and has a cardinality of 1..∞, indicating it is optional and can occur multiple times.</p> | | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|----------|--|
| Type | XML-Zuordnungsdatentyp-Entry | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded | | |
| content: | complex | | | | | | | | |
| minOccurs: | 0 | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | |
| Model | v1b+ | | | | | | | | |
| Children | v1b | | | | | | | | |
| Instance | <pre><typ ref=" " xmlns="http://vdv/ka/pkm/1"> <v1b ref=" ">{1,unbounded}</v1b> </typ></pre> | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| ref | XML-Ref | required | | | | | | | |
| Source | <pre><xs:element name="typ" type="XML-Zuordnungsdatentyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | |


Element XML-Zuordnungsdatentyp-Entry / v1b

| | | | | |
|-----------------|---|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | <p>The diagram illustrates the structure of the <code>XML-Zuordnungsdatenvlb-Entry</code> type. It is a complex type containing a sequence of two elements: a <code>ref</code> (referencing <code>XML-Zuordnungsdatenvlb-Entry</code>) and a <code>von</code> (referencing <code>XML-Zuordnungsdatenvon-Entry</code>). The <code>von</code> element has a cardinality of <code>1..∞</code>.</p> | | | |
| Type | XML-Zuordnungsdatenvlb-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Model | von+ | | | |
| Children | von | | | |
| Instance | <pre><v1b ref=" " xmlns="http://vdv/ka/pkm/1"> <von ref=" ">{1,unbounded}</von> </v1b></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="v1b" type="XML-Zuordnungsdatenvlb-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema PKM.xsd | | | |


Element XML-Zuordnungsdatenvon-Entry / von

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|----------|---------|------------|-----------|--|--|--|--|
| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | | |
| Diagram |  | | | | | | | | | | | |
| Type | XML-Zuordnungsdatenvon-Entry | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | | content: | complex | maxOccurs: | unbounded | | | | |
| content: | complex | | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | | |
| Model | zu+ | | | | | | | | | | | |
| Children | zu | | | | | | | | | | | |
| Instance | <pre><von ref=" " xmlns="http://vdv/ka/pkm/1"> <zu>{1,unbounded}</zu> </von></pre> | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="von" type="XML-Zuordnungsdatenvon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Zuordnungsdatenvon-Entry / zu

| | | | |
|-----------------|--|-----------|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |
| Diagram |  | | |
| Type | XML-Ref | | |
| Properties | content: | simple | |
| | maxOccurs: | unbounded | |
| Facets | minInclusive | 1 | |
| Source | <pre><xs:element name="zu" type="XML-Ref" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Tarifpunktzuordnungsdaten / zuordnungsausnahme-matrix

| | | | | |
|-----------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |
| Type | XML-Zuordnungsdatenvon-Entry | | | |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | typ* |
| Children | typ |
| Instance | <pre><zuordnungsausnahme-matrix xmlns="http://vdv/ka/pkm/1"> <typ ref="">{0,unbounded}</typ> </zuordnungsausnahme-matrix></pre> |
| Source | <pre><xs:element name="zuordnungsausnahme-matrix" type="XML-Zuordnungsausnahme-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Zuordnungsausnahme-Matrix / typ

| | | | |
|-----------------|---|--------------|----------------------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |
| Diagram | | | |
| Type | XML-Zuordnungsausnahmetyp-Entry | | |
| Properties | content: complex | minOccurs: 0 | maxOccurs: unbounded |
| Model | vlib+ | | |
| Children | vlib | | |
| Instance | <pre><typ ref="" xmlns="http://vdv/ka/pkm/1"> <vlib ref="">{1,unbounded}</vlib> </typ></pre> | | |
| Attributes | QName | Type | Use |
| | ref | XML-Ref | required |
| Source | <pre><xs:element name="typ" type="XML-Zuordnungsausnahmetyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Zuordnungsausnahmetyb-Entry / vlib

| | | | |
|-------------|---------------------------------|----------------------|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |
| Diagram | | | |
| Type | XML-Zuordnungsausnahmetyb-Entry | | |
| Properties | content: complex | maxOccurs: unbounded | |

| Model | von+ | | | |
|-----------------|---|---------|----------|--|
| Children | von | | | |
| Instance | <pre><vlb ref=" " xmlns="http://vdv/ka/pkm/1"> <von ref=" ">{1,unbounded}</von> </vlb></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="vlb" type="XML-Zuordnungsausnahmevlb-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Zuordnungsausnahmevlb-Entry / von

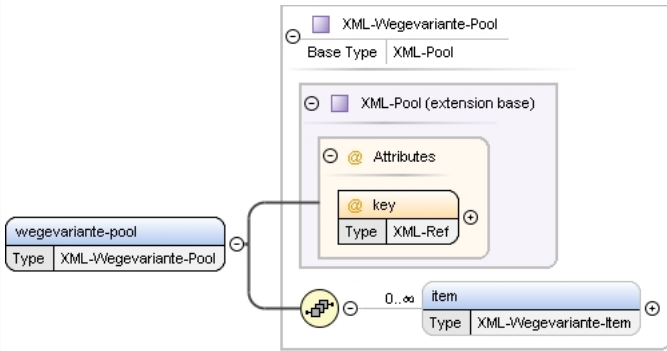
| | | | | |
|-----------------|---|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | | | | |
| Type | XML-Zuordnungsausnahmevon-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Model | zu+ | | | |
| Children | zu | | | |
| Instance | <pre><von ref=" " xmlns="http://vdv/ka/pkm/1"> <zu ref=" ">{1,unbounded}</zu> </von></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="von" type="XML-Zuordnungsausnahmevon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Zuordnungsausnahmezu-Entry / zu

| | | | | |
|-------------|---------------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | | | | |

| | | | |
|-----------------|--|-----------|----------|
| Type | XML-Zuordnungsausnahmezue-Entry | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Zuordnungsausnahmezue-Entry | | |
| Properties | content: | complex | |
| | maxOccurs: | unbounded | |
| Attributes | QName | Type | Use |
| | ref | XML-Ref | required |
| Source | <pre><xs:element name="zu" type="XML-Zuordnungsausnahmezue-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Tarifpunktbewertungsdaten / wegevariante-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |
| Type | XML-Wegevariante-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Wegevariante-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><wegevariante-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </wegevariante-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="wegevariante-pool" type="XML-Wegevariante-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Wegevariante-Pool / item

| | |
|-------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Wegevariante-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Wegevariante-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , tarifpunktfolge-pool | | | | | | |
| Children | name, nr, tarifpunktfolge-pool, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <tarifpunktfolge-pool>{1,1}</tarifpunktfolge-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Wegevariante-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Wegevariante-Item / tarifpunktfolge-pool

| | | | |
|------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Tarifpunktfolge-Pool | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | item* | | |
| Children | item | | |
| Instance | <pre><tarifpunktfolge-pool xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tarifpunktfolge-pool></pre> | | |

| | |
|-----------------|---|
| Source | <code><xs:element name="tarifpunktfolge-pool" type="XML-Tarifpunktfolge-Pool" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Tarifpunktfolge-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Tarifpunktfolge-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | ink exk | | | | | | |
| Children | exk, ink | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <ink>{1,1}</ink> <exk>{1,1}</exk> </item></pre> | | | | | | |
| Source | <code><xs:element name="item" type="XML-Tarifpunktfolge-Item" minOccurs="0" maxOccurs="unbounded" /></code> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktfolge-Item / ink

| | | | |
|-----------------|---|--------------|--------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Ref | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Facets | <table> <tr> <td>minInclusive</td><td>1</td></tr> </table> | minInclusive | 1 |
| minInclusive | 1 | | |
| Source | <code><xs:element name="ink" type="XML-Ref" /></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Tarifpunktfolge-Item / exk

| | | | |
|-----------------|---|--------------|--------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Ref | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Facets | <table> <tr> <td>minInclusive</td><td>1</td></tr> </table> | minInclusive | 1 |
| minInclusive | 1 | | |
| Source | <code><xs:element name="exk" type="XML-Ref" /></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Tarifpunktbeurteilungsdaten / bewertungstyp-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | <p>The diagram shows the structure of the XML-Bewertungstyp-Pool type. It is a complex type that extends the XML-Pool (extension base). It has a key attribute of type XML-Ref and a sequence of 0..∞ items of type XML-Bewertungstyp-Item.</p> | | | |
| Type | XML-Bewertungstyp-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Bewertungstyp-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bewertungstyp-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </bewertungstyp-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bewertungstyp-pool" type="XML-Bewertungstyp-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungstyp-Pool / item

| | | | | | | | |
|----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut} | | | | | | |
| Diagram | <p>The diagram illustrates the type hierarchy and structure of the XML-Bewertungstyp-Item. It is a complex type that extends XML-Item. The hierarchy is as follows: XML-Item (extension base) extends XML-Name-Item (extension base), which in turn extends XML-Bewertungstyp-Item. The XML-Item (extension base) has a name attribute of type XML-StringValue. The XML-Bewertungstyp-Item has a content model of complex, minOccurs=0, and maxOccurs=unbounded.</p> | | | | | | |
| Type | XML-Bewertungstyp-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Bewertungstyp-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name | | | | | | |
| Children | name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bewertungstyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |

| | |
|-----------------|---|
| | <pre></xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Tarifpunktbewertungsdaten / bewertungsdaten-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <pre>classDiagram class XML_Pool { Base Type } class XML_Bewertungsdaten_Pool { XML-Ref } class XML_Bewertungsdaten_Item { XML-Ref } XML_Pool < -- XML_Bewertungsdaten_Pool XML_Bewertungsdaten_Pool --> XML_Bewertungsdaten_Item : 0..∞</pre> | | | |
| Type | XML-Bewertungsdaten-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Bewertungsdaten-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bewertungsdaten-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </bewertungsdaten-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bewertungsdaten-pool" type="XML-Bewertungsdaten-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsdaten-Pool / item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram | | | | |
| Type | XML-Bewertungsdaten-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Bewertungsdaten-Item | | | |

| | |
|-----------------|---|
| Properties | content: complex |
| | minOccurs: 0 |
| | maxOccurs: unbounded |
| Model | name , wert , text-matrix |
| Children | name, text-matrix, wert |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <wert>{1,1}</wert> <text-matrix>{1,1}</text-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Bewertungsdaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>[Implizites key Attribut]</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Bewertungsdaten-Item / wert

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Properties | content: complex |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne wahrheitswert objekt funktion undefiniert |
| Children | bits, datum, funktion, liste, objekt, text, uhrzeit, undefiniert, wahrheitswert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><wert xmlns="http://vdv/ka/pkm/1"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit></pre> |

| | |
|-----------------|--|
| | <pre> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <wahrheitswert>{1,1}</wahrheitswert> <objekt ref="">{1,1}</objekt> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </wert> </pre> |
| Source | <pre> <xs:element name="wert"> <xs:complexType> <xs:group ref="XML-Value" /> </xs:complexType> </xs:element> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Bewertungsdaten-Item / text-matrix

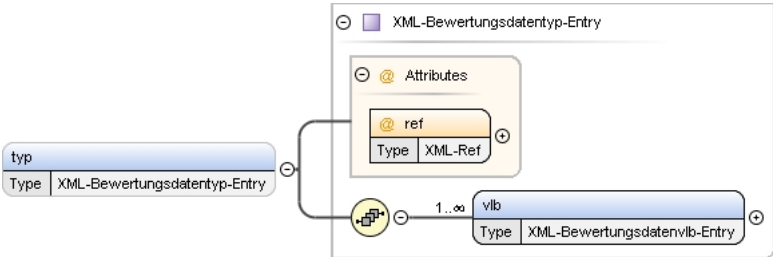
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre> <text-matrix xmlns="http://vdv/ka/pkm/1"> <text ref="">{0,unbounded}</text> </text-matrix> </pre> |
| Source | <pre> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Tarifpunktbewertungsdaten / bewertungsdaten-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Bewertungsdaten-Matrix |
| Properties | content: complex |
| Model | typ* |
| Children | typ |
| Instance | <pre> <bewertungsdaten-matrix xmlns="http://vdv/ka/pkm/1"> <typ ref="">{0,unbounded}</typ> </bewertungsdaten-matrix> </pre> |
| Source | <pre> <xs:element name="bewertungsdaten-matrix" type="XML-Bewertungsdaten-Matrix" /> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Bewertungsdaten-Matrix / typ

| | |
|-------------|---------------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Sortiert nach erstem Attribut} |

| Diagram |  | | | | | | | | | | | |
|-----------------|--|----------|------|-----|----------|---------|------------|----------|------------|-----------|--|--|
| Type | XML-Bewertungsdatentyp-Entry | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | | |
| Model | v1b+ | | | | | | | | | | | |
| Children | v1b | | | | | | | | | | | |
| Instance | <pre><typ ref=" " xmlns="http://vdv/ka/pkm/1"> <v1b ref=" ">{1,unbounded}</v1b> </typ></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="typ" type="XML-Bewertungsdatentyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Bewertungsdatentyp-Entry / v1b

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|-----------|--|--|--|--|
| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Bewertungsdatenvlb-Entry type. It shows a container element 'v1b' of type 'XML-Bewertungsdatenvlb-Entry'. Inside this container, there is an 'Attributes' section with a 'ref' attribute pointing to 'XML-Ref'. Below the attributes, there is a 'von' element of type 'XML-Bewertungsdatenvon-Entry' with a cardinality of 1..∞. The diagram also shows a reference from the 'v1b' container to the 'XML-Bewertungsdatenvlb-Entry' type.</p> | | | | | | | | | | | |
| Type | XML-Bewertungsdatenvlb-Entry | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | | content: | complex | maxOccurs: | unbounded | | | | |
| content: | complex | | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | | |
| Model | von+ | | | | | | | | | | | |
| Children | von | | | | | | | | | | | |
| Instance | <pre><v1b ref=" " xmlns="http://vdv/ka/pkm/1"> <von ref=" ">{1,unbounded}</von> </v1b></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="v1b" type="XML-Bewertungsdatenvlb-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Bewertungsdatenvlb-Entry / von

| | | | |
|-----------------|--|-----------|----------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Bewertungsdatenvon-Entry element. It shows a container box for 'XML-Bewertungsdatenvon-Entry' which contains an 'Attributes' section. The 'Attributes' section includes a 'ref' attribute of type 'XML-Ref'. Below the container, there is a 'von' element (Type: XML-Bewertungsdatenvon-Entry) and a 'nach' element (Type: XML-Bewertungsdannach-Entry). The 'nach' element is connected to the 'von' element via a line with a multiplicity of '1..∞' and a reference icon, indicating a required reference to the 'nach' element.</p> | | |
| Type | XML-Bewertungsdatenvon-Entry | | |
| Properties | content: | complex | |
| | maxOccurs: | unbounded | |
| Model | nach+ | | |
| Children | nach | | |
| Instance | <pre><von ref=" " xmlns="http://vdv/ka/pkm/1"> <nach ref=" ">{1,unbounded}</nach> </von></pre> | | |
| Attributes | QName | Type | Use |
| | ref | XML-Ref | required |
| Source | <pre><xs:element name="von" type="XML-Bewertungsdatenvon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Bewertungsdatenvon-Entry / nach

| | | | |
|-------------|--|-----------|----------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Bewertungsdatennach-Entry element. It shows a container box for 'XML-Bewertungsdatennach-Entry' with an 'Attributes' section containing a 'ref' attribute of type 'XML-Ref'. Below the container, a 'nach' element (Type: XML-Bewertungsdatennach-Entry) is connected to a 'ueber' element (Type: XML-Bewertungsdatenueber-Entry) via a 1..∞ cardinality constraint.</p> | | |
| Type | XML-Bewertungsdatennach-Entry | | |
| Properties | content: | complex | |
| | maxOccurs: | unbounded | |
| Model | ueber+ | | |
| Children | ueber | | |
| Instance | <pre><nach ref=" " xmlns="http://vdv/ka/pkm/1"> <ueber ref=" ">{1,unbounded}</ueber> </nach></pre> | | |
| Attributes | QName | Type | Use |
| | ref | XML-Ref | required |
| Source | <pre><xs:element name="nach" type="XML-Bewertungsdatennach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |

| | |
|-----------------|---|
| | <pre></xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Bewertungsdatennach-Entry / ueber

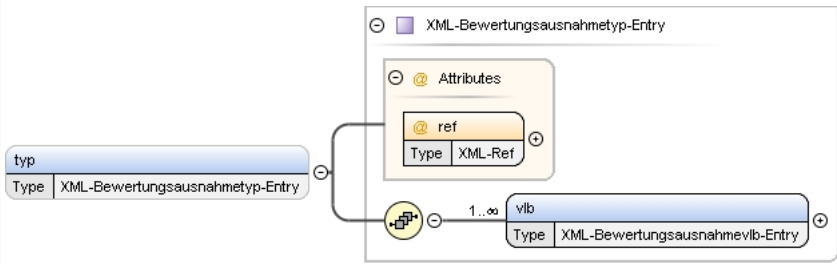
| | | | |
|-----------------|---|-------------|------------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |
| Diagram | | | |
| Type | XML-Bewertungsdatennach-Entry | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Bewertungsdatennach-Entry | | |
| Properties | content: | complex | |
| | maxOccurs: | unbounded | |
| Attributes | QName | Type | Use |
| | ref | XML-Ref | required |
| Source | <pre><xs:element name="ueber" type="XML-Bewertungsdatennach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Tarifpunktbewertungsdaten / bewertungsausnahme-matrix

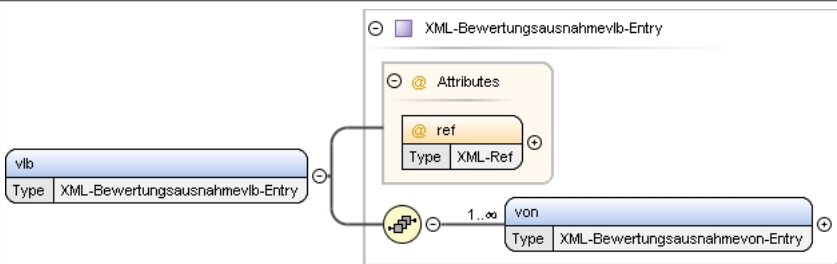
| | | | |
|-----------------|---|---------|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | <pre>graph LR subgraph Matrix [XML-Bewertungsausnahme-Matrix] direction TB MatrixBox[bewertungsausnahme-matrix] MatrixBox --> TypBox[typ] TypBox --> AttributesBox[Attributes] AttributesBox --> Ref[ref] end MatrixBox --- Type1[Type XML-Bewertungsausnahme-Matrix] TypBox --- Type2[Type XML-Bewertungsausnahmetyp-Entry] Ref --- Type3[Type XML-Ref]</pre> | | |
| Type | XML-Bewertungsausnahme-Matrix | | |
| Properties | content: | complex | |
| Model | typ* | | |
| Children | typ | | |
| Instance | <pre><bewertungsausnahme-matrix xmlns="http://vdv/ka/pkm/1"> <typ ref="">{0,unbounded}</typ> </bewertungsausnahme-matrix></pre> | | |
| Source | <pre><xs:element name="bewertungsausnahme-matrix" type="XML-Bewertungsausnahme-Matrix" /></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Bewertungsausnahme-Matrix / typ

| | | | |
|-------------|---------------------------------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |

| | | | | |
|-----------------|---|-----------|----------|--|
| Diagram |  | | | |
| Type | XML-Bewertungsausnahmetyp-Entry | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| | maxOccurs: | unbounded | | |
| Model | vib+ | | | |
| Children | vib | | | |
| Instance | <pre><typ ref=" " xmlns="http://vdv/ka/pkm/1"> <vib ref=" ">{1,unbounded}</vib> </typ></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="typ" type="XML-Bewertungsausnahmetyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsausnahmetyp-Entry / vib

| | | | | |
|-----------------|---|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram |  | | | |
| Type | XML-Bewertungsausnahmevib-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Model | von+ | | | |
| Children | von | | | |
| Instance | <pre><vib ref=" " xmlns="http://vdv/ka/pkm/1"> <von ref=" ">{1,unbounded}</von> </vib></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="vib" type="XML-Bewertungsausnahmevib-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsausnahmevon-Entry / von

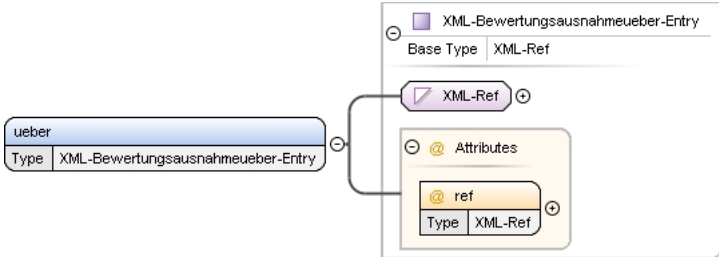
| | | | | |
|-----------------|--|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Bewertungsausnahmevon-Entry element. It shows a container box for 'XML-Bewertungsausnahmevon-Entry' with an 'Attributes' section containing a 'ref' attribute of type 'XML-Ref'. To the left is a box for 'von' of type 'XML-Bewertungsausnahmevon-Entry'. To the right is a box for 'nach' of type 'XML-Bewertungsausnahmenach-Entry'. A line with a multiplicity of 1..∞ connects the 'nach' box to the 'ref' attribute.</p> | | | |
| Type | XML-Bewertungsausnahmevon-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Model | nach+ | | | |
| Children | nach | | | |
| Instance | <pre><von ref=" " xmlns="http://vdv/ka/pkm/1"> <nach ref=" ">{1,unbounded}</nach> </von></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="von" type="XML-Bewertungsausnahmevon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsausnahmenach-Entry / nach

| | | | | |
|-------------|---|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Bewertungsausnahmenach-Entry. It features a main container box labeled 'XML-Bewertungsausnahmenach-Entry'. Inside this container, there is an 'Attributes' section containing a 'ref' attribute of type 'XML-Ref'. To the left of the container is a box for the 'nach' element, also of type 'XML-Bewertungsausnahmenach-Entry'. To the right is a box for the 'ueber' element, of type 'XML-Bewertungsausnahmeueber-Entry'. A line with a multiplicity of '1..∞' connects the 'ueber' element to the 'ref' attribute, indicating that the 'ueber' element is repeated for each 'ref' attribute.</p> | | | |
| Type | XML-Bewertungsausnahmenach-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Model | ueber+ | | | |
| Children | ueber | | | |
| Instance | <pre><nach ref=" " xmlns="http://vdv/ka/pkm/1"> <ueber ref=" ">{1,unbounded}</ueber> </nach></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="nach" type="XML-Bewertungsausnahmenach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |

| | |
|-----------------|---|
| | <code></xs:element></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Bewertungsausnahmenach-Entry / ueber

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | |
|-----------------|---|----------|------|----------|---------|------------|-----------|----------|--|--|--|
| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | |
| Diagram |  | | | | | | | | | | |
| Type | XML-Bewertungsausnahmeueber-Entry | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:int• XML-Ref• XML-Bewertungsausnahmeueber-Entry | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | content: | complex | maxOccurs: | unbounded | | | | |
| content: | complex | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | |
| QName | Type | Use | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | |
| Source | <pre><xs:element name="ueber" type="XML-Bewertungsausnahmeueber-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | |

Element XML-Nummerninterpretationsdaten / nummerninterpretation-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre>graph TD subgraph XML_Pool [XML-Pool] direction TB XML_Pool -- Base Type --> XML_Pool XML_Pool -- extension base --> XML_Pool XML_Pool -- Attributes --> XML_Pool XML_Pool -- key --> XML_Pool XML_Pool -- Type --> XML_Pool end XML_Pool -- key --> XML_Ref[XML-Ref] XML_Pool -- Type --> XML_Ref XML_Pool -- 0..∞ --> item item -- Type --> XML_Nummerninterpretation_Item[XML-Nummerninterpretation-Item]</pre> |
| Type | XML-Nummerninterpretation-Pool |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Nummerninterpretation-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><nummerninterpretation-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </nummerninterpretation-pool></pre> |

| Attributes | QName | Type | Use | |
|-----------------|---|---------|----------|--|
| | key | XML-Ref | required | |
| Source | <xs:element name="nummerninterpretation-pool" type="XML-Nummerninterpretation-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Nummerninterpretation-Pool / item

| | | | |
|-----------------|---|-----------|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | |
| Diagram | <p>The diagram illustrates the structure of the <code>XML-Nummerninterpretation-Item</code> type. It shows a base type hierarchy where <code>XML-Nummerninterpretation-Item</code> is the base type for <code>XML-Nr-Item</code> (extension base), which in turn is the base type for <code>XML-Item</code> (extension base). The <code>XML-Item</code> class is shown with three child elements: <code>nr</code> (Type: <code>XML-IntegerValue</code>), <code>name</code> (Type: <code>XML-StringValue</code>), and <code>nummerntext-pool</code> (Type: <code>XML-Nummerntext-Pool</code>). The <code>nr</code> and <code>name</code> elements are optional (indicated by a circle with a plus sign), while the <code>nummerntext-pool</code> element is mandatory (indicated by a circle with a plus sign). The <code>XML-Nummerninterpretation-Item</code> class is also shown with a mandatory (circle with a plus sign) and optional (circle with a plus sign) relationship to the <code>XML-Item</code> class.</p> | | |
| Type | XML-Nummerninterpretation-Item | | |
| Type hierarchy | <ul style="list-style-type: none">• XML-Item<ul style="list-style-type: none">• XML-Nr-Item<ul style="list-style-type: none">• XML-Nummerninterpretation-Item | | |
| Properties | content: | complex | |
| | minOccurs: | 0 | |
| | maxOccurs: | unbounded | |
| Model | nr , name , nummerntext-pool | | |
| Children | name, nr, nummerntext-pool | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <nummerntext-pool key="">{1,1}</nummerntext-pool> </item></pre> | | |
| Source | <pre><xs:element name="item" type="XML-Nummerninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Nummerninterpretation-Item / nummerntext-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | <p>The diagram illustrates the UML class structure for XML-Nummerntext-Pool. It shows a base type XML-Pool with an extension XML-Nummerntext-Pool. XML-Nummerntext-Pool has a key attribute of type XML-Ref and a sequence of 0..∞ items of type XML-Nummerntext-Item.</p> | | | |
| Type | XML-Nummerntext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Nummerntext-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><nummerntext-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </nummerntext-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="nummerntext-pool" type="XML-Nummerntext-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Nummerntext-Pool / item

| | | | | |
|----------------|--|---------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Nummerntext-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Nummerntext-Item | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |

| | |
|-----------------|---|
| | maxOccurs: unbounded |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Nummerntext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Tarifpunktinterpretationsdaten / bitleisteninterpretation-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the <code>XML-Bitleisteninterpretation-Pool</code> type. It is a base type <code>XML-Pool</code> with an extension base. It has an attribute <code>key</code> of type <code>XML-Ref</code>. It contains a sequence of <code>item</code> elements (0..∞) of type <code>XML-Bitleisteninterpretation-Item</code>.</p> | | | |
| Type | XML-Bitleisteninterpretation-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Bitleisteninterpretation-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bitleisteninterpretation-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </bitleisteninterpretation-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bitleisteninterpretation-pool" type="XML-Bitleisteninterpretation-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Bitleisteninterpretation-Pool / item

| | |
|-------------|---------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Bitleisteninterpretation-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Bitleisteninterpretation-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , tarifpunkt | | | | | | |
| Children | name, tarifpunkt | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <tarifpunkt>{1,1}</tarifpunkt> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bitleisteninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Bitleisteninterpretation-Item / tarifpunkt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><tarifpunkt xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </tarifpunkt></pre> |
| Source | <pre><xs:element name="tarifpunkt" type="XML-Ref-List-1N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Tarifpunktinterpretationsdaten / raumnummerninterpretation-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

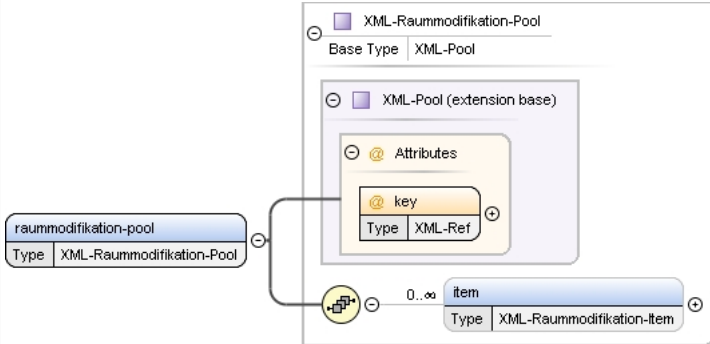
| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | <p>The diagram illustrates the structure of the XML-Raumnummerninterpretation-Pool. It is a complex type that extends the XML-Pool base type. The extension includes an attribute named 'key' of type XML-Ref and a sequence of 'item' elements. The 'item' elements are of type XML-Raumnummerninterpretation-Item and are optional, with a cardinality of 0 to infinity (0..∞). The diagram also shows the base type XML-Pool and the extension XML-Raumnummerninterpretation-Pool, along with the attribute 'key' and the 'item' element.</p> | | | |
| Type | XML-Raumnummerninterpretation-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Raumnummerninterpretation-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><raumnummerninterpretation-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </raumnummerninterpretation-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="raumnummerninterpretation-pool" type="XML-Raumnummerninterpretation-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Raumnummerninterpretation-Pool / item

| | | | | | | | |
|----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut} | | | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Raumnummerninterpretation-Item. It is a complex type that extends the XML-Name-Item. The extension is defined by the XML-Raumnummerninterpretation-Item type. The content model consists of one or more 'name' elements (type XML-StringValue) and one or more 'raummodifikation-pool' elements (type XML-Raummodifikation-Pool). The 'name' element is optional (indicated by a circle with a cross) and has a cardinality of 1..1. The 'raummodifikation-pool' element is optional (indicated by a circle with a cross) and has a cardinality of 1..1. The 'name' element is also optional (indicated by a circle with a cross) and has a cardinality of 1..1. The 'raummodifikation-pool' element is optional (indicated by a circle with a cross) and has a cardinality of 1..1.</p> | | | | | | |
| Type | XML-Raumnummerninterpretation-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Raumnummerninterpretation-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , raummodifikation-pool | | | | | | |
| Children | name, raummodifikation-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <raummodifikation-pool key="">{1,1}</raummodifikation-pool> </item></pre> | | | | | | |

| | |
|-----------------|---|
| | </item> |
| Source | <pre><xs:element name="item" type="XML-Raumnummerninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Raumnummerninterpretation-Item / raummodifikation-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |
| Type | XML-Raummodifikation-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Raummodifikation-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><raummodifikation-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </raummodifikation-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="raummodifikation-pool" type="XML-Raummodifikation-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Raummodifikation-Pool / item

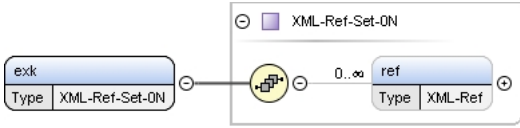
| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Raummodifikation-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Raummodifikation-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , ink , exk | | | | | | |
| Children | exk, ink, name, nr | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <ink>{1,1}</ink> <exk>{1,1}</exk> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Raummodifikation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

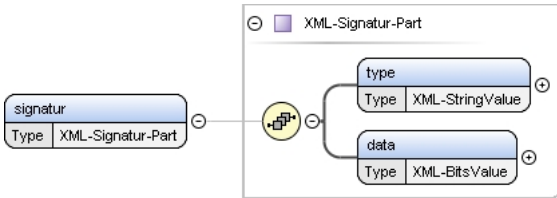
Element XML-Raummodifikation-Item / ink

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Ref-Set-0N | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | ref* | | |
| Children | ref | | |
| Instance | <pre><ink xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </ink></pre> | | |
| Source | <pre><xs:element name="ink" type="XML-Ref-Set-0N" /></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |


Element XML-Raummodifikation-Item / exk

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-Set-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><exk xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </exk></pre> |
| Source | <pre><xs:element name="exk" type="XML-Ref-Set-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Modulzusatzdaten / signatur


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Signatur-Part |
| Properties | content: complex |
| Model | type, data |
| Children | data, type |
| Instance | <pre><signatur xmlns="http://vdv/ka/pkm/1"> <type>{1,1}</type> <data>{1,1}</data> </signatur></pre> |
| Source | <pre><xs:element name="signatur" type="XML-Signatur-Part" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Signatur-Part / type

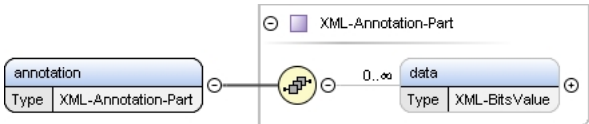
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <pre><xs:element name="type" type="XML-StringValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Signatur-Part / data


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-BitsValue |
| Properties | content: simple |
| Source | <code><xs:element name="data" type="XML-BitsValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

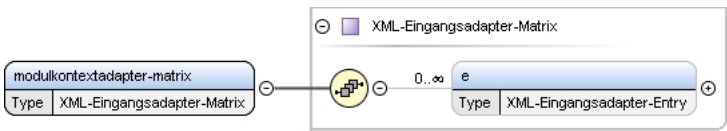
Element XML-Modulzusatzdaten / annotation

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Annotation-Part |
| Properties | content: complex |
| Model | data* |
| Children | data |
| Instance | <code><annotation xmlns="http://vdv/ka/pkm/1"> <data>{0,unbounded}</data> </annotation></code> |
| Source | <code><xs:element name="annotation" type="XML-Annotation-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Annotation-Part / data

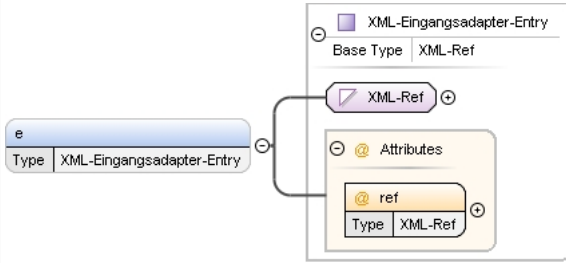
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-BitsValue |
| Properties | content: simple minOccurs: 0 maxOccurs: unbounded |
| Source | <code><xs:element name="data" type="XML-BitsValue" minOccurs="0" maxOccurs="unbounded" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontrollmodul-Item / modulkontextadapter-matrix

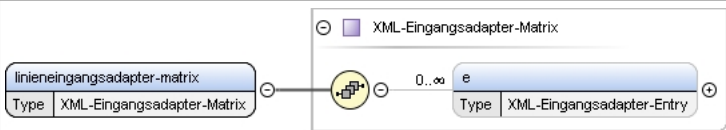
| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <code><modulkontextadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </modulkontextadapter-matrix></code> |

| | |
|-----------------|---|
| Source | <code><xs:element name="modulkontextadapter-matrix" type="XML-Eingangsadapter-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Eingangsadapter-Matrix / e


| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | |
|-----------------|---|----------|--|----------|---------|------------|---|------------|-----------|----------|--|
| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | |
| Diagram |  | | | | | | | | | | |
| Type | XML-Eingangsadapter-Entry | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:int<ul style="list-style-type: none">• XML-Ref<ul style="list-style-type: none">• XML-Eingangsadapter-Entry | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded | | |
| content: | complex | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | | | QName | Type | Use | | ref | XML-Ref | required | |
| QName | Type | Use | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | |
| Source | <pre><xs:element name="e" type="XML-Eingangsadapter-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | |

Element XML-Kontrollmodul-Item / linieneingangsadapter-matrix

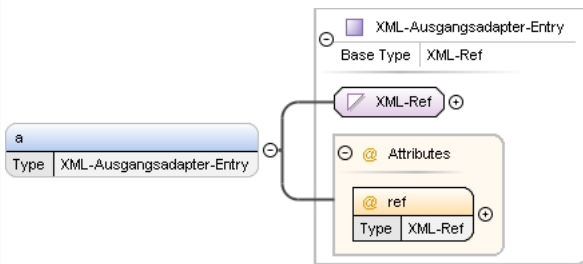
| | | | |
|-----------------|---|---------|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram |  | | |
| Type | XML-Eingangsadapter-Matrix | | |
| Properties | content: | complex | |
| Model | e* | | |
| Children | e | | |
| Instance | <pre><linieneingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </linieneingangsadapter-matrix></pre> | | |
| Source | <pre><xs:element name="linieneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema PKM.xsd | | |

Element XML-Kontrollmodul-Item / linienausgangsadapter-matrix

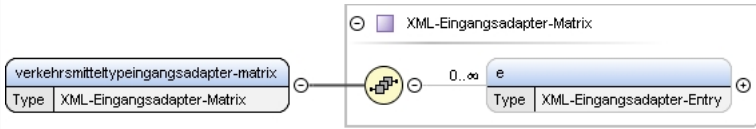
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram |  The diagram shows a box for 'linienausgangsadapter-matrix' with type 'XML-Ausgangsadapter-Matrix'. It is connected to a circle containing a plus sign and a minus sign, which is then connected to a box for 'a' with type 'XML-Ausgangsadapter-Entry'. The cardinality '0..∞' is indicated between the circle and the 'a' box. |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><linienausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </linienausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="linienausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ausgangsadapter-Matrix / a

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | |
|-----------------|--|----------|------|----------|---------|------------|---------|------------|-----------|--|--|
| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | |
| Diagram |  The diagram shows a box for 'a' with type 'XML-Ausgangsadapter-Entry'. It is connected to a circle containing a plus sign and a minus sign, which is then connected to a box for 'XML-Ref' with type 'XML-Ref'. The cardinality '0..∞' is indicated between the circle and the 'XML-Ref' box. Below the 'XML-Ref' box, there is a box for 'Attributes' with type 'XML-Ref' and a 'ref' attribute. | | | | | | | | | | |
| Type | XML-Ausgangsadapter-Entry | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:int<ul style="list-style-type: none">• XML-Ref<ul style="list-style-type: none">• XML-Ausgangsadapter-Entry | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded | | |
| content: | complex | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | |
| QName | Type | Use | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | |
| Source | <pre><xs:element name="a" type="XML-Ausgangsadapter-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | |

Element XML-Kontrollmodul-Item / verkehrsmitteltypeeingangsadapter-matrix

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | e* |
| Children | e |
| Instance | <pre><verkehrsmitteltypeingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </verkehrsmitteltypeingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="verkehrsmitteltypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontrollmodul-Item / verkehrsmitteltypausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><verkehrsmitteltypausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </verkehrsmitteltypausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="verkehrsmitteltypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontrollmodul-Item / wegevarianteneingangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><wegevarianteneingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </wegevarianteneingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="wegevarianteneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontrollmodul-Item / wegevariantenausgangsadapter-matrix

| | |
|------------|----------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | a* |
| Children | a |
| Instance | <pre><wegevariantenausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </wegevariantenausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="wegevariantenausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontrollmodul-Item / tarifpunkteingangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><tarifpunkteingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </tarifpunkteingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="tarifpunkteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

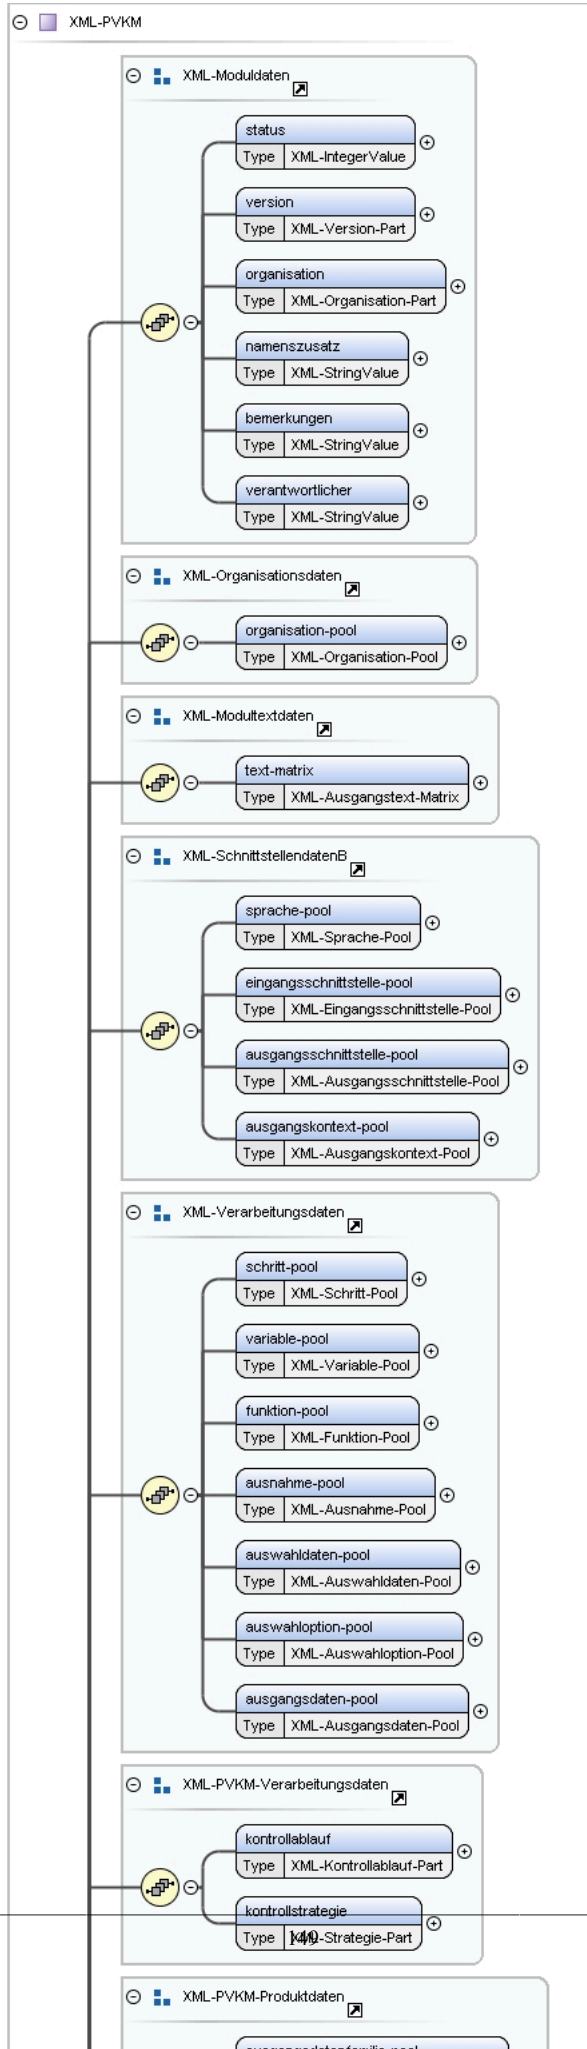
Element XML-Kontrollmodul-Item / tarifpunktausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><tarifpunktausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </tarifpunktausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="tarifpunktausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element pv-km

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



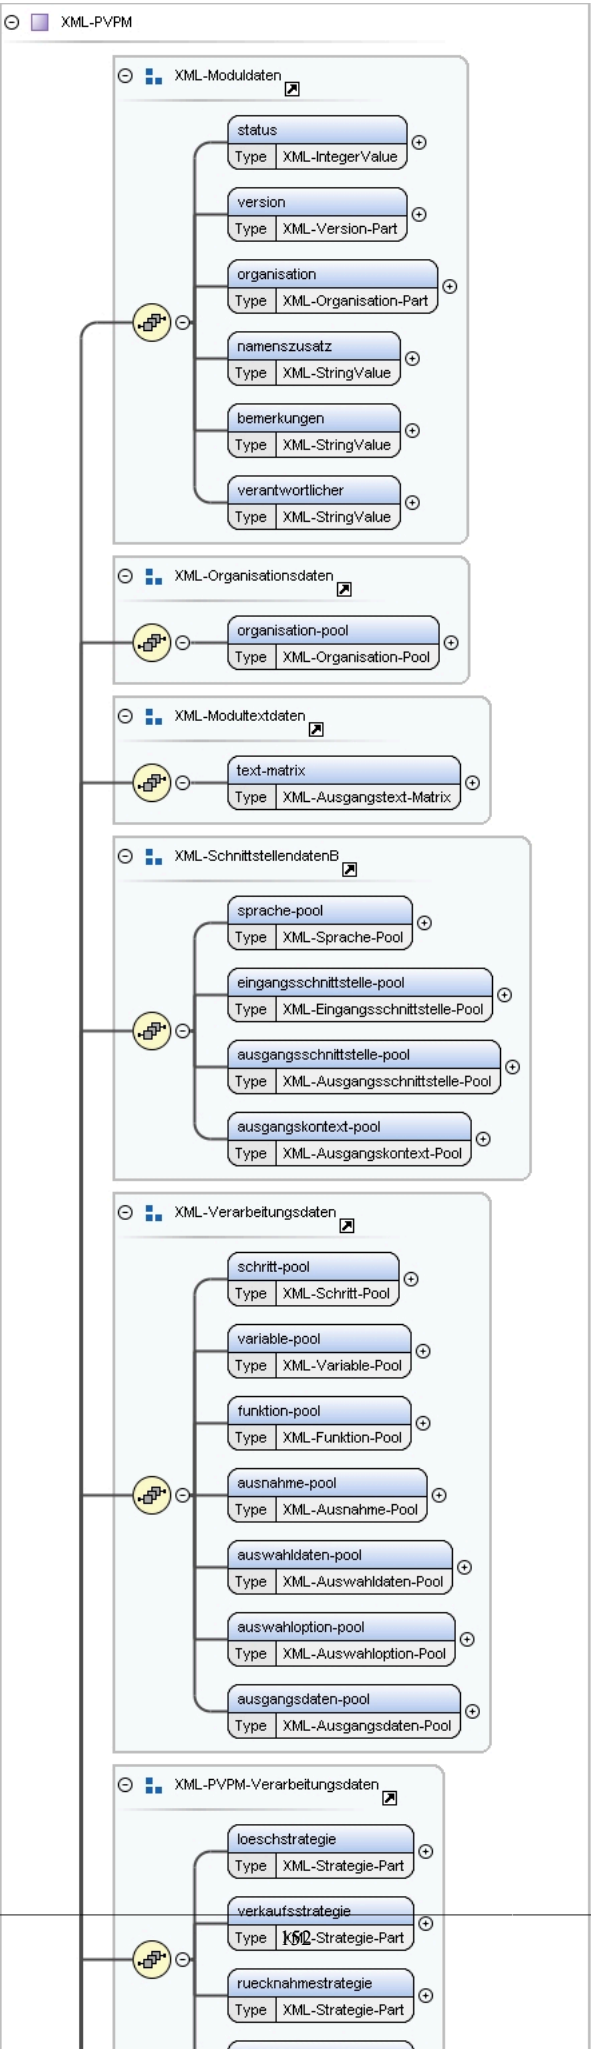
| | |
|------------|--|
| Type | XML-PVKM |
| Properties | content: complex |
| Model | status , version , organisation , namenszusatz , bemerkungen , verantwortlicher , organisation-pool , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , kontrollablauf , kontrollstrategie , ausgangsdatenfamilie-pool , abhaengigkeitskriterium-pool , identifikationsparameter-pool , efmprodukt-pool , tarifprodukt-pool , fremdprodukt-pool , produktgruppe-pool , tarifpunkt-pool , tarifpunktgruppe-pool , linie-pool , verkehrsmitteltyp-pool , verkehrsmittellinienbezug-pool , modulkontext-pool , bezahlart-pool , mitnahmetyp-pool , rabattmedientyp-pool , tagesbedingung-pool , tageszeitbedingung-pool , modulkontextbedingung-pool , verkehrsmittellinienbedingung-pool , zuordnungstyp-pool , zuordnungsdaten-matrix , zuordnungsausnahme-matrix , wegevariante-pool , bewertungstyp-pool , bewertungsdaten-pool , bewertungsdaten-matrix , bewertungsausnahme-matrix , nummerninterpretation-pool , bitleisteninterpretation-pool , raumnummerninterpretation-pool , signatur , annotation |
| Children | abhaengigkeitskriterium-pool , annotation , ausgangsdaten-pool , ausgangsdatenfamilie-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bemerkungen , bewertungsausnahme-matrix , bewertungsdaten-matrix , bewertungsdaten-pool , bewertungstyp-pool , bezahlart-pool , bitleisteninterpretation-pool , efmprodukt-pool , eingangsschnittstelle-pool , fremdprodukt-pool , funktion-pool , identifikationsparameter-pool , kontrollablauf , kontrollstrategie , linie-pool , mitnahmetyp-pool , modulkontext-pool , modulkontextbedingung-pool , namenszusatz , nummerninterpretation-pool , organisation , organisation-pool , produktgruppe-pool , rabattmedientyp-pool , raumnummerninterpretation-pool , schritt-pool , signatur , sprache-pool , status , tagesbedingung-pool , tageszeitbedingung-pool , tarifprodukt-pool , tarifpunkt-pool , tarifpunktgruppe-pool , text-matrix , variable-pool , verantwortlicher , verkehrsmittellinienbedingung-pool , verkehrsmittellinienbezug-pool , verkehrsmitteltyp-pool , version , wegevariante-pool , zuordnungsausnahme-matrix , zuordnungsdaten-matrix , zuordnungstyp-pool |
| Instance | <pre> <pv-km xmlns="http://vdv/ka/pkm/1"> <status>{1,1}</status> <version>{1,1}</version> <organisation>{1,1}</organisation> <namenszusatz>{1,1}</namenszusatz> <bemerkungen>{1,1}</bemerkungen> <verantwortlicher>{1,1}</verantwortlicher> <organisation-pool>{1,1}</organisation-pool> <text-matrix>{1,1}</text-matrix> <sprache-pool key="">{1,1}</sprache-pool> <eingangsschnittstelle-pool key="">{1,1}</eingangsschnittstelle-pool> <ausgangsschnittstelle-pool key="">{1,1}</ausgangsschnittstelle-pool> <ausgangskontext-pool key="">{1,1}</ausgangskontext-pool> <schritt-pool key="">{1,1}</schritt-pool> <variable-pool key="">{1,1}</variable-pool> <funktion-pool key="">{1,1}</funktion-pool> <ausnahme-pool key="">{1,1}</ausnahme-pool> <auswahldaten-pool key="">{1,1}</auswahldaten-pool> <auswahloption-pool key="">{1,1}</auswahloption-pool> <ausgangsdaten-pool key="">{1,1}</ausgangsdaten-pool> <kontrollablauf>{1,1}</kontrollablauf> <kontrollstrategie>{1,1}</kontrollstrategie> <ausgangsdatenfamilie-pool key="">{1,1}</ausgangsdatenfamilie-pool> <abhaengigkeitskriterium-pool key="">{1,1}</abhaengigkeitskriterium-pool> <identifikationsparameter-pool key="">{1,1}</identifikationsparameter-pool> <efmprodukt-pool key="">{1,1}</efmprodukt-pool> <tarifprodukt-pool key="">{1,1}</tarifprodukt-pool> <fremdprodukt-pool key="">{1,1}</fremdprodukt-pool> <produktgruppe-pool key="">{1,1}</produktgruppe-pool> <tarifpunkt-pool key="">{1,1}</tarifpunkt-pool> <tarifpunktgruppe-pool key="">{1,1}</tarifpunktgruppe-pool> <linie-pool key="">{1,1}</linie-pool> <verkehrsmitteltyp-pool key="">{1,1}</verkehrsmitteltyp-pool> <verkehrsmittellinienbezug-pool key="">{1,1}</verkehrsmittellinienbezug-pool> <modulkontext-pool key="">{1,1}</modulkontext-pool> <bezahlart-pool key="">{1,1}</bezahlart-pool> <mitnahmetyp-pool key="">{1,1}</mitnahmetyp-pool> <rabattmedientyp-pool key="">{1,1}</rabattmedientyp-pool> <tagesbedingung-pool key="">{1,1}</tagesbedingung-pool> <tageszeitbedingung-pool key="">{1,1}</tageszeitbedingung-pool> <modulkontextbedingung-pool key="">{1,1}</modulkontextbedingung-pool> <verkehrsmittellinienbedingung-pool key="">{1,1}</verkehrsmittellinienbedingung-pool> <zuordnungstyp-pool key="">{1,1}</zuordnungstyp-pool> <zuordnungsdaten-matrix>{1,1}</zuordnungsdaten-matrix> <zuordnungsausnahme-matrix>{1,1}</zuordnungsausnahme-matrix> <wegevariante-pool key="">{1,1}</wegevariante-pool> <bewertungstyp-pool key="">{1,1}</bewertungstyp-pool> <bewertungsdaten-pool key="">{1,1}</bewertungsdaten-pool> <bewertungsdaten-matrix>{1,1}</bewertungsdaten-matrix> <bewertungsausnahme-matrix>{1,1}</bewertungsausnahme-matrix> <nummerninterpretation-pool key="">{1,1}</nummerninterpretation-pool> <bitleisteninterpretation-pool key="">{1,1}</bitleisteninterpretation-pool> <raumnummerninterpretation-pool key="">{1,1}</raumnummerninterpretation-pool> <signatur>{1,1}</signatur> <annotation>{1,1}</annotation> </pre> |

| | |
|-----------------|---|
| | </pv-km> |
| Source | <xs:element name="pv-km" type="XML-PVKM" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element pv-km

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | |
|------------|--|
| Type | XML-PVPM |
| Properties | content: complex |
| Model | status , version , organisation , namenszusatz , bemerkungen , verantwortlicher , organisation-pool , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , loeschstrategie , verkaufsstrategie , ruecknahmestrategie , darstellungsstrategie , ausgangsdatenfamilie-pool , nachfolgekriterium-pool , abhaengigkeitskriterium-pool , schlues-sel-pool , kontingentierung-pool , identifikationsparameter-pool , efmprodukt-pool , tarifprodukt-pool , fremdprodukt-pool , produk-tgruppe-pool , tarifpunkt-pool , tarifpunktgruppe-pool , tarifpunktreferenz-pool , linie-pool , verkehrsmitteltyp-pool , verkehrsmittelinienbezug-pool , modulkontext-pool , bezahlart-pool , waehrung-pool , zahlungsintervall-pool , mitnahmetyp-pool , rabattmedientyp-pool , spezialbedingung-pool , bezahlartbedingung-pool , zahlungsintervallbedingung-pool , tagesbedingung-pool , tageszeitbedingung-pool , zeitraumbedingung-pool , tarifpunktbedingung-pool , bewertungsbedingung-pool , mitnahmebedingung-pool , rabattmedienbedingung-pool , modulkontextbedingung-pool , verkehrsmittelinienbedingung-pool , zuordnungstyp-pool , zuordnungsdaten-matrix , zuordnungsausnahme-matrix , wegevariante-pool , bewertungstyp-pool , bewertungsdaten-pool , bewertungsdaten-matrix , bewertungsausnahme-matrix , nummerninterpretation-pool , bitleisteninterpretation-pool , raumnummerninterpretation-pool , signatur , annotation |
| Children | abhaengigkeitskriterium-pool , annotation , ausgangsdaten-pool , ausgangsdatenfamilie-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bemerkungen , bewertungsausnahme-matrix , bewertungsbedingung-pool , bewertungsdaten-matrix , bewertungsdaten-pool , bewertungstyp-pool , bezahlart-pool , bezahlartbedingung-pool , bitleisteninterpretation-pool , darstellungsstrategie , efmprodukt-pool , eingangsschnittstelle-pool , fremdprodukt-pool , funktion-pool , identifikationsparameter-pool , kontingentierung-pool , linie-pool , loeschstrategie , mitnahmebedingung-pool , mitnahmetyp-pool , modulkontext-pool , modulkontextbedingung-pool , nachfolgekriterium-pool , namenszusatz , nummerninterpretation-pool , organisation , organisation-pool , produktgruppe-pool , rabattmedienbedingung-pool , rabattmedientyp-pool , raumnummerninterpretation-pool , ruecknahmestrategie , schlues-sel-pool , schritt-pool , signatur , spezialbedingung-pool , sprache-pool , status , tagesbedingung-pool , tageszeitbedingung-pool , tarifprodukt-pool , tarifpunkt-pool , tarifpunktbedingung-pool , tarifpunktgruppe-pool , tarifpunktreferenz-pool , text-matrix , variable-pool , verantwortlicher , verkaufsstrategie , verkehrsmittelinienbedingung-pool , verkehrsmittelinienbezug-pool , verkehrsmitteltyp-pool , version , waehrung-pool , wegevariante-pool , zahlungsintervall-pool , zahlungsintervallbedingung-pool , zeitraumbedingung-pool , zuordnungsausnahme-matrix , zuordnungsdaten-matrix , zuordnungstyp-pool |
| Instance | <pre> <pv-pm xmlns="http://vdv/ka/pkm/1"> <status>{1,1}</status> <version>{1,1}</version> <organisation>{1,1}</organisation> <namenszusatz>{1,1}</namenszusatz> <bemerkungen>{1,1}</bemerkungen> <verantwortlicher>{1,1}</verantwortlicher> <organisation-pool>{1,1}</organisation-pool> <text-matrix>{1,1}</text-matrix> <sprache-pool key="">{1,1}</sprache-pool> <eingangsschnittstelle-pool key="">{1,1}</eingangsschnittstelle-pool> <ausgangsschnittstelle-pool key="">{1,1}</ausgangsschnittstelle-pool> <ausgangskontext-pool key="">{1,1}</ausgangskontext-pool> <schritt-pool key="">{1,1}</schritt-pool> <variable-pool key="">{1,1}</variable-pool> <funktion-pool key="">{1,1}</funktion-pool> <ausnahme-pool key="">{1,1}</ausnahme-pool> <auswahldaten-pool key="">{1,1}</auswahldaten-pool> <auswahloption-pool key="">{1,1}</auswahloption-pool> <ausgangsdaten-pool key="">{1,1}</ausgangsdaten-pool> <loeschstrategie>{1,1}</loeschstrategie> <verkaufsstrategie>{1,1}</verkaufsstrategie> <ruecknahmestrategie>{1,1}</ruecknahmestrategie> <darstellungsstrategie>{1,1}</darstellungsstrategie> <ausgangsdatenfamilie-pool key="">{1,1}</ausgangsdatenfamilie-pool> <nachfolgekriterium-pool key="">{1,1}</nachfolgekriterium-pool> <abhaengigkeitskriterium-pool key="">{1,1}</abhaengigkeitskriterium-pool> <schlues-sel-pool key="">{1,1}</schlues-sel-pool> <kontingentierung-pool key="">{1,1}</kontingentierung-pool> <identifikationsparameter-pool key="">{1,1}</identifikationsparameter-pool> <efmprodukt-pool key="">{1,1}</efmprodukt-pool> <tarifprodukt-pool key="">{1,1}</tarifprodukt-pool> <fremdprodukt-pool key="">{1,1}</fremdprodukt-pool> <produktgruppe-pool key="">{1,1}</produktgruppe-pool> <tarifpunkt-pool key="">{1,1}</tarifpunkt-pool> <tarifpunktgruppe-pool key="">{1,1}</tarifpunktgruppe-pool> <tarifpunktreferenz-pool key="">{1,1}</tarifpunktreferenz-pool> <linie-pool key="">{1,1}</linie-pool> <verkehrsmitteltyp-pool key="">{1,1}</verkehrsmitteltyp-pool> <verkehrsmittelinienbezug-pool key="">{1,1}</verkehrsmittelinienbezug-pool> <modulkontext-pool key="">{1,1}</modulkontext-pool> <bezahlart-pool key="">{1,1}</bezahlart-pool> <waehrung-pool key="">{1,1}</waehrung-pool> <zahlungsintervall-pool key="">{1,1}</zahlungsintervall-pool> <mitnahmetyp-pool key="">{1,1}</mitnahmetyp-pool> <rabattmedientyp-pool key="">{1,1}</rabattmedientyp-pool> <spezialbedingung-pool key="">{1,1}</spezialbedingung-pool> <bezahlartbedingung-pool key="">{1,1}</bezahlartbedingung-pool> <zahlungsintervallbedingung-pool key="">{1,1}</zahlungsintervallbedingung-pool> </pre> |

| | |
|-----------------|---|
| | <pre> <tagesbedingung-pool key="">{1,1}</tagesbedingung-pool> <tageszeitbedingung-pool key="">{1,1}</tageszeitbedingung-pool> <zeitraumbedingung-pool key="">{1,1}</zeitraumbedingung-pool> <tarifpunktbedingung-pool key="">{1,1}</tarifpunktbedingung-pool> <bewertungsbedingung-pool key="">{1,1}</bewertungsbedingung-pool> <mitnahmebedingung-pool key="">{1,1}</mitnahmebedingung-pool> <rabattmedienbedingung-pool key="">{1,1}</rabattmedienbedingung-pool> <modulkontextbedingung-pool key="">{1,1}</modulkontextbedingung-pool> <verkehrsmittellinienbedingung-pool key="">{1,1}</verkehrsmittellinienbedingung-pool> <zuordnungstyp-pool key="">{1,1}</zuordnungstyp-pool> <zuordnungsdaten-matrix>{1,1}</zuordnungsdaten-matrix> <zuordnungsausnahme-matrix>{1,1}</zuordnungsausnahme-matrix> <wegevariante-pool key="">{1,1}</wegevariante-pool> <bewertungstyp-pool key="">{1,1}</bewertungstyp-pool> <bewertungsdaten-pool key="">{1,1}</bewertungsdaten-pool> <bewertungsdaten-matrix>{1,1}</bewertungsdaten-matrix> <bewertungsausnahme-matrix>{1,1}</bewertungsausnahme-matrix> <nummerninterpretation-pool key="">{1,1}</nummerninterpretation-pool> <bitleisteninterpretation-pool key="">{1,1}</bitleisteninterpretation-pool> <raumnummerninterpretation-pool key="">{1,1}</raumnummerninterpretation-pool> <signatur>{1,1}</signatur> <annotation>{1,1}</annotation> </pv-pm> </pre> |
| Source | <code><xs:element name="pv-pm" type="XML-PVPM"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Verarbeitungsdaten / loeschstrategie

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Strategie-Part |
| Properties | content: complex |
| Model | start |
| Children | start |
| Instance | <pre> <loeschstrategie xmlns="http://vdv/ka/pkm/1"> <start>{1,1}</start> </loeschstrategie> </pre> |
| Source | <code><xs:element name="loeschstrategie" type="XML-Strategie-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Verarbeitungsdaten / verkaufsstrategie

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Strategie-Part |
| Properties | content: complex |
| Model | start |
| Children | start |
| Instance | <pre> <verkaufsstrategie xmlns="http://vdv/ka/pkm/1"> <start>{1,1}</start> </verkaufsstrategie> </pre> |
| Source | <code><xs:element name="verkaufsstrategie" type="XML-Strategie-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Verarbeitungsdaten / rucknahmestrategie

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Strategie-Part |
| Properties | content: complex |
| Model | start |
| Children | start |
| Instance | <pre><rucknahmestrategie xmlns="http://vdv/ka/pkm/1"> <start>{1,1}</start> </rucknahmestrategie></pre> |
| Source | <pre><xs:element name="rucknahmestrategie" type="XML-Strategie-Part" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Verarbeitungsdaten / darstellungsstrategie

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Strategie-Part |
| Properties | content: complex |
| Model | start |
| Children | start |
| Instance | <pre><darstellungsstrategie xmlns="http://vdv/ka/pkm/1"> <start>{1,1}</start> </darstellungsstrategie></pre> |
| Source | <pre><xs:element name="darstellungsstrategie" type="XML-Strategie-Part" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Produktdaten / ausgangsdatenfamilie-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsdatenfamilie-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangsdatenfamilie-Pool |
| Properties | content: complex |
| Model | item* |

| | | | | |
|-----------------|--|---------|----------|--|
| Children | item | | | |
| Instance | <pre><ausgangsdatenfamilie-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </ausgangsdatenfamilie-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausgangsdatenfamilie-pool" type="XML-Ausgangsdatenfamilie-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Produktdaten / nachfolgekriterium-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Abhaengigkeitskriterium-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Abhaengigkeitskriterium-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><nachfolgekriterium-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </nachfolgekriterium-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="nachfolgekriterium-pool" type="XML-Abhaengigkeitskriterium-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Produktdaten / abhaengigkeitskriterium-pool

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Abhaengigkeitskriterium-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| | <ul style="list-style-type: none">XML-Abhaengigkeitskriterium-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><abhaengigkeitskriterium-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </abhaengigkeitskriterium-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="abhaengigkeitskriterium-pool" type="XML-Abhaengigkeitskriterium-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Produktdaten / schluessel-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Schluessel-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Schluessel-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><schluessel-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </schluessel-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="schluessel-pool" type="XML-Schluessel-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Schluessel-Pool / item

| | | | | |
|-------------|------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram | | | | |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Type | XML-Schluessel-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Schluessel-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | id , name | | | | | | |
| Children | id, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <id>{1,1}</id> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Schluessel-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Schluessel-Item / id

| | | | |
|-----------------|---|----------|--------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Source | <pre><xs:element name="id" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Schluessel-Item / name

| | | | |
|-----------------|---|----------|--------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-PVPM-Produktdaten / kontingentierung-pool

| | |
|-----------|---------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Kontingentierung-Pool |

| | | | | |
|-----------------|---|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Kontingentierung-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><kontingentierung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </kontingentierung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="kontingentierung-pool" type="XML-Kontingentierung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Kontingentierung-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Kontingentierung-Item type. It is a complex type with a base type XML-Name-Item. The diagram shows a sequence of elements: 'name' (XML-StringValue), 'kontingentdaten-table' (XML-Kontingentdaten-Table), and 'kontingentausnahme-table' (XML-Kontingentausnahme-Table). The 'item' element is shown as a container for these elements.</p> | | | | | | |
| Type | XML-Kontingentierung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-ItemXML-Name-ItemXML-Kontingentierung-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , kontingentdaten-table , kontingentausnahme-table | | | | | | |
| Children | kontingentausnahme-table, kontingentdaten-table, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <kontingentdaten-table>{1,1}</kontingentdaten-table> <kontingentausnahme-table>{1,1}</kontingentausnahme-table> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Kontingentierung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Kontingentierung-Item / kontingentdaten-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Kontingentdaten-Table |
| Properties | content: complex |
| Model | tagesbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung , spezialbedingung , daten-pool |
| Children | daten-pool, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Instance | <pre><kontingentdaten-table xmlns="http://vdv/ka/pkm/1"> <tagesbedingung>{1,1}</tagesbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </kontingentdaten-table></pre> |
| Source | <code><xs:element name="kontingentdaten-table" type="XML-Kontingentdaten-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontingentdaten-Table / tagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-ON |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <code><xs:element name="tagesbedingung" type="XML-Ref-List-ON" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontingentdaten-Table / tarifpunktbedingung

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-ON |
| Properties | content: complex |
| Model | ref* |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontingentsdaten-Table / verkehrsmittellinienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontingentsdaten-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontingentsdaten-Table / daten-pool

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Kontingentsdaten-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </daten-pool></pre> |

| | |
|-----------------|---|
| | <code></daten-pool></code> |
| Source | <code><xs:element name="daten-pool" type="XML-Kontingentdaten-Pool" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontingentdaten-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Kontingentdaten-Item | | | | | | |
| Properties | <table> <tr><td>content:</td><td>complex</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | url | | | | | | |
| Children | url | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <url>{1,1}</url> </item></pre> | | | | | | |
| Source | <code><xs:element name="item" type="XML-Kontingentdaten-Item" minOccurs="0" maxOccurs="unbounded" /></code> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Kontingentdaten-Item / url

| | | | |
|-----------------|---|----------|--------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Source | <code><xs:element name="url" type="XML-StringValue" /></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-Kontingentierung-Item / kontingentausnahme-table

| | | | |
|------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Kontingentausnahme-Table | | |
| Properties | <table> <tr><td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | tagesbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung , spezialbedingung , ausnahme | | |
| Children | ausnahme, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung | | |

| | |
|-----------------|--|
| Instance | <pre><kontingentausnahme-table xmlns="http://vdv/ka/pkm/1"> <tagesbedingung>{1,1}</tagesbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </kontingentausnahme-table></pre> |
| Source | <code><xs:element name="kontingentausnahme-table" type="XML-Kontingentausnahme-Table"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontingentausnahme-Table / tagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <code><xs:element name="tagesbedingung" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontingentausnahme-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <code><xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontingentausnahme-Table / verkehrsmittellinienbedingung

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |

| | |
|-----------------|--|
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontingentausnahme-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Kontingentausnahme-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Produktdaten / identifikationsparameter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Identifikationsparameter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Identifikationsparameter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><identifikationsparameter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </identifikationsparameter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="identifikationsparameter-pool" type="XML-Identifikationsparameter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Produktdaten / efmprodukt-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-PVPM-EFMProdukt-Pool type. It is a complex type that extends the XML-Pool type. The diagram shows the following components:</p> <ul style="list-style-type: none">XML-PVPM-EFMProdukt-Pool: The main type, which is a complex type extending XML-Pool.XML-Pool (extension base): The base type, which is a simple type.Attributes: A container for attributes, including a key attribute of type XML-Ref.item: A sequence of items of type XML-PVPM-EFMProdukt-Item, with a cardinality of 0..∞. | | | |
| Type | XML-PVPM-EFMProdukt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-PVPM-EFMProdukt-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><efmprodukt-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </efmprodukt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="efmprodukt-pool" type="XML-PVPM-EFMProdukt-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-EFMProdukt-Pool / item

| | |
|-------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-PVPM-EFMProdukt-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-PVPM-EFMProdukt-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , schluessel , loeschdaten{0,1} , darstellungsdaten{0,1} , ruecknahmedaten{0,1} | | | | | | |
| Children | darstellungsdaten, loeschdaten, name, nr, ruecknahmedaten, schluessel, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <schluessel>{1,1}</schluessel> <loeschdaten>{0,1}</loeschdaten> <darstellungsdaten>{0,1}</darstellungsdaten> <ruecknahmedaten>{0,1}</ruecknahmedaten> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-PVPM-EFMProdukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-PVPM-EFMProdukt-Item / schluessel

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-PVPM-Schluessel-Part |
| Properties | content: complex |
| Model | mkpv , mktr , mkauth |
| Children | mkauth, mkpv, mktr |
| Instance | <pre><schluessel xmlns="http://vdv/ka/pkm/1"> <mkpv>{1,1}</mkpv> <mktr>{1,1}</mktr> <mkauth>{1,1}</mkauth> </schluessel></pre> |
| Source | <code><xs:element name="schluessel" type="XML-PVPM-Schluessel-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Schluessel-Part / mkpv

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><mkpv xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </mkpv></pre> |
| Source | <code><xs:element name="mkpv" type="XML-Ref-01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Schluessel-Part / mktr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><mktr xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </mktr></pre> |
| Source | <code><xs:element name="mktr" type="XML-Ref-01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Schluessel-Part / mkauth

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><mkauth xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </mkauth></pre> |
| Source | <pre><xs:element name="mkauth" type="XML-Ref-01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-EFMPProdukt-Item / loeschdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Loeschdaten-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktdaten-Part XML-Loeschdaten-Part |
| Properties | content: complex minOccurs: 0 |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , unterstuetztztab |
| Children | abhaengigkeitsausnahme-table , abhaengigkeitsdaten-table , ausgangsdaten-matrix , funktion , modulkontext , unterstuetztztab |
| Instance | <pre><loeschdaten xmlns="http://vdv/ka/pkm/1"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> <unterstuetztztab>{1,1}</unterstuetztztab> </loeschdaten></pre> |
| Source | <pre><xs:element name="loeschdaten" type="XML-Loeschdaten-Part" minOccurs="0" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Loeschdaten-Part / unterstuetztztab

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-DateValue |
| Properties | content: simple |
| Facets | pattern \-?\d+-\d+-\d+ |
| Source | <code><xs:element name="unterstuetztztab" type="XML-DateValue" /></code> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-EFMPprodukt-Item / darstellungsdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Darstellungsdaten-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktdaten-Part XML-Darstellungsdaten-Part |
| Properties | content: complex minOccurs: 0 |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , unterstuetztztab |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><darstellungsdaten xmlns="http://vdv/ka/pkm/1"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> <unterstuetztztab>{1,1}</unterstuetztztab> </darstellungsdaten></pre> |
| Source | <code><xs:element name="darstellungsdaten" type="XML-Darstellungsdaten-Part" minOccurs="0" /></code> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Darstellungsdaten-Part / unterstuetztztab

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-DateValue |
| Properties | content: simple |
| Facets | pattern \-?\d+-\d+-\d+ |
| Source | <code><xs:element name="unterstuetzt" type="XML-DateValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-EFMPProdukt-Item / ruecknahmedaten

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ruecknahmedaten-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktdaten-Part XML-Ruecknahmedaten-Part |
| Properties | content: complex minOccurs: 0 |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , uzpdaten-table , uzpausnahme-table , rueckzahlungsdaten-table , rueckzahlungsausnahme-table , unterstuetzt |
| Children | abhaengigkeitsausnahme-table , abhaengigkeitsdaten-table , ausgangsdaten-matrix , funktion , modulkontext , rueckzahlungsausnahme-table , rueckzahlungsdaten-table , unterstuetzt , uzpausnahme-table , uzpdaten-table |
| Instance | <pre> <ruecknahmedaten xmlns="http://vdv/ka/pkm/1"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> <uzpdaten-table>{1,1}</uzpdaten-table> <uzpausnahme-table>{1,1}</uzpausnahme-table> <rueckzahlungsdaten-table>{1,1}</rueckzahlungsdaten-table> </pre> |

| | |
|-----------------|---|
| | <pre><rueckzahlungsausnahme-table>{1,1}</rueckzahlungsausnahme-table> <unterstuetzt-tab>{1,1}</unterstuetzt-tab> </ruecknahmedaten></pre> |
| Source | <code><xs:element name="ruecknahmedaten" type="XML-Ruecknahmedaten-Part" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ruecknahmedaten-Part / uzpdaten-table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-UZPDaten-Table |
| Properties | content: complex |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | daten-pool, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Instance | <pre><uzpdaten-table xmlns="http://vdv/ka/pkm/1"> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </uzpdaten-table></pre> |
| Source | <code><xs:element name="uzpdaten-table" type="XML-UZPDaten-Table"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-UZPDaten-Table / tagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-ON |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0, unbounded}</ref> </tagesbedingung></pre> |
| Source | <code><xs:element name="tagesbedingung" type="XML-Ref-List-ON"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-UZPDaten-Table / zeitraumbedingung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-UZPDaten-Table / modulkontextbedingung

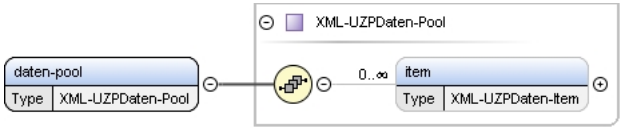
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-UZPDaten-Table / spezialbedingung

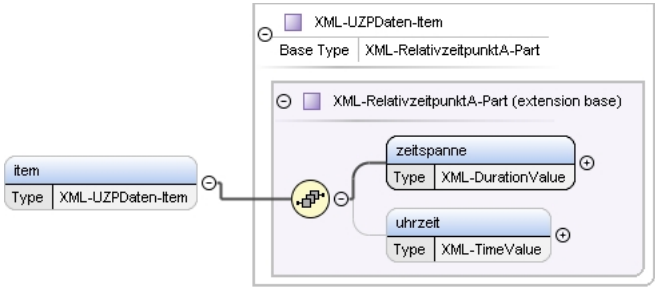
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-UZPDaten-Table / daten-pool


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-UZPDaten-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <pre><xs:element name="daten-pool" type="XML-UZPDaten-Pool" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-UZPDaten-Pool / item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-UZPDaten-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-RelativzeitpunktA-Part <ul style="list-style-type: none"> XML-UZPDaten-Item |
| Properties | content: complex minOccurs: 0 maxOccurs: unbounded |
| Model | zeitspanne , uhrzeit{0,1} |
| Children | uhrzeit, zeitspanne |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <zeitspanne>{1,1}</zeitspanne> <uhrzeit>{0,1}</uhrzeit> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-UZPDaten-Item" minOccurs="0" maxOccurs="unbounded" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-RelativzeitpunktA-Part / zeitspanne

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-DurationValue |
| Properties | content: simple |
| Facets | pattern: <code>[\+ \-] P (\d + Y) ? (\d + M) ? (\d + D) ? (T (\d + H) ? (\d + M) ? (\d + S) ?) ?</code> |
| Source | <pre><xs:element name="zeitspanne" type="XML-DurationValue" /></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-RelativzeitpunktA-Part / uhrzeit

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-TimeValue |
| Properties | content: simple minOccurs: 0 |
| Facets | pattern \d+:\d+:\d+(\[\+ \- \] \d+:\d+)? |
| Source | <xs:element name="uhrzeit" type="XML-TimeValue" minOccurs="0" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ruecknahmedaten-Part / uzpausnahme-table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-UZPAusnahme-Table |
| Properties | content: complex |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Instance | <pre><uzpausnahme-table xmlns="http://vdv/ka/pkm/1"> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </uzpausnahme-table></pre> |
| Source | <xs:element name="uzpausnahme-table" type="XML-UZPAusnahme-Table" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-UZPAusnahme-Table / tagesbedingung

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-ON |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-UZPAusnahme-Table / zeitraumbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-UZPAusnahme-Table / modulkontextbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-UZPAusnahme-Table / spezialbedingung

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |

| | |
|-----------------|---|
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-UZPAusnahme-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ruecknahmedaten-Part / rueckzahlungsdaten-table

| | |
|------------|------------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Rueckzahlungsdaten-Table |
| Properties | content: complex |

| | |
|-----------------|--|
| Model | waehrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zeitraumbedingung |
| Instance | <pre><rueckzahlungsdaten-table xmlns="http://vdv/ka/pkm/1"> <waehrung>{1,1}</waehrung> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </rueckzahlungsdaten-table></pre> |
| Source | <code><xs:element name="rueckzahlungsdaten-table" type="XML-Rueckzahlungsdaten-Table"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / waehrung

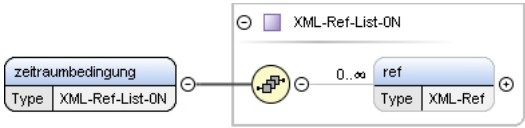
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><waehrung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </waehrung></pre> |
| Source | <code><xs:element name="waehrung" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / tagesbedingung

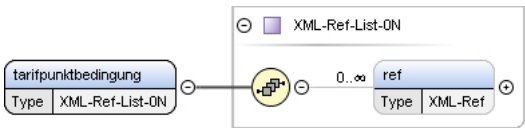
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <code><xs:element name="tagesbedingung" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / zeitraumbedingung

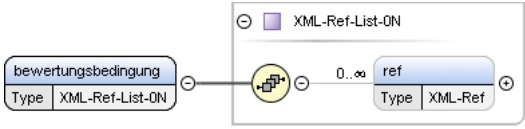
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / bewertungsbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <pre><xs:element name="bewertungsbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / verkehrsmittellinienbedingung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmitellinienbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </verkehrsmitellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmitellinienbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / mitnahmebedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><mitnahmebedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </mitnahmebedingung></pre> |
| Source | <pre><xs:element name="mitnahmebedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / rabattmedienbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><rabattmedienbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </rabattmedienbedingung></pre> |
| Source | <pre><xs:element name="rabattmedienbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / modulkontextbedingung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / daten-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Rueckzahlungsdaten-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <pre><xs:element name="daten-pool" type="XML-Rueckzahlungsdaten-Pool"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Pool / item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-Rueckzahlungsdaten-Item |
| Properties | content: complex minOccurs: 0 maxOccurs: unbounded |
| Model | betrag , gebuehr |
| Children | betrag, gebuehr |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <betrag>{1,1}</betrag> <gebuehr>{1,1}</gebuehr> </item></pre> |
| Source | <code><xs:element name="item" type="XML-Rueckzahlungsdaten-Item" minOccurs="0" maxOccurs="unbounded" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Item / betrag


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Waehrungsbetrag-Part |
| Properties | content: complex |
| Model | wert , mwstsatz {0,1} |
| Children | mwstsatz, wert |
| Instance | <pre><betrag xmlns="http://vdv/ka/pkm/1"> <wert>{1,1}</wert> <mwstsatz>{0,1}</mwstsatz> </betrag></pre> |
| Source | <code><xs:element name="betrag" type="XML-Waehrungsbetrag-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Waehrungsbetrag-Part / wert

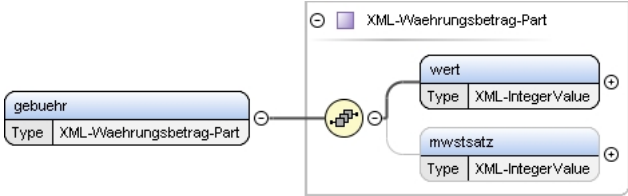
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-IntegerValue |
| Properties | content: simple |
| Source | <code><xs:element name="wert" type="XML-IntegerValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Waehrungsbetrag-Part / mwstsatz

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-IntegerValue |
| Properties | content: simple minOccurs: 0 |
| Source | <code><xs:element name="mwstsatz" type="XML-IntegerValue" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Item / gebuehr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Waehrungsbetrag-Part |
| Properties | content: complex |
| Model | wert , mwstsatz{0,1} |
| Children | mwstsatz, wert |
| Instance | <pre><gebuehr xmlns="http://vdv/ka/pkm/1"> <wert>{1,1}</wert> <mwstsatz>{0,1}</mwstsatz> </gebuehr></pre> |
| Source | <code><xs:element name="gebuehr" type="XML-Waehrungsbetrag-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ruecknahmedaten-Part / rueckzahlungsausnahme-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Rueckzahlungsausnahme-Table |
| Properties | content: complex |
| Model | waehrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zeitraumbedingung |
| Instance | <pre><rueckzahlungsausnahme-table xmlns="http://vdv/ka/pkm/1"> <waehrung>{1,1}</waehrung> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </rueckzahlungsausnahme-table></pre> |
| Source | <xs:element name="rueckzahlungsausnahme-table" type="XML-Rueckzahlungsausnahme-Table" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / waehrung

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-ON |
| Properties | content: complex |
| Model | ref* |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><waehrung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </waehrung></pre> |
| Source | <pre><xs:element name="waehrung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / tagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / zeitraumbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / tarifpunktbedingung

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |

| | |
|-----------------|---|
| Instance | <code><tarifpunktbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></code> |
| Source | <code><xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / bewertungsbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><bewertungsbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </bewertungsbedingung></code> |
| Source | <code><xs:element name="bewertungsbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / verkehrsmittellinienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></code> |
| Source | <code><xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / mitnahmebedingung

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><mitnahmebedingung xmlns="http://vdv/ka/pkm/1"></code> |

| | |
|-----------------|---|
| | <code><ref>{0,unbounded}</ref></code> <code></mitnahmebedingung></code> |
| Source | <code><xs:element name="mitnahmebedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / rabattmedienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><rabattmedienbedingung xmlns="http://vdv/ka/pkm/1"></code> <code><ref>{0,unbounded}</ref></code> <code></rabattmedienbedingung></code> |
| Source | <code><xs:element name="rabattmedienbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / modulkontextbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><modulkontextbedingung xmlns="http://vdv/ka/pkm/1"></code> <code><ref>{0,unbounded}</ref></code> <code></modulkontextbedingung></code> |
| Source | <code><xs:element name="modulkontextbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / spezialbedingung

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><spezialbedingung xmlns="http://vdv/ka/pkm/1"></code> <code><ref>{0,unbounded}</ref></code> |

| | |
|-----------------|---|
| | <code></spezialbedingung></code> |
| Source | <code><xs:element name="spezialbedingung" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <code><xs:element name="ausnahme" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Ruecknahmedaten-Part / unterstuetztztab

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-DateValue |
| Properties | content: simple |
| Facets | pattern \-?\d+-\d+-\d+ |
| Source | <code><xs:element name="unterstuetztztab" type="XML-DateValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Produktdaten / tarifprodukt-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-PVPM-Tarifprodukt-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-PVPM-Tarifprodukt-Pool |
| Properties | content: complex |
| Model | item* |

| | | | | |
|-----------------|---|---------|----------|--|
| Children | item | | | |
| Instance | <pre><tarifprodukt-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tarifprodukt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="tarifprodukt-pool" type="XML-PVPM-Tarifprodukt-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Tarifprodukt-Pool / item

| | | | | |
|----------------|--|-----------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-PVPM-Tarifprodukt-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-PVPM-Tarifprodukt-Item | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| | maxOccurs: | unbounded | | |

| | |
|-----------------|---|
| Model | nr , name , text-matrix , extNr , efmprodukt , identifikation , loeschdaten{0,1} , verkaufsdaten{0,1} , darstellungsdaten{0,1} , ruecknahmedaten{0,1} |
| Children | darstellungsdaten, efmprodukt, extNr, identifikation, loeschdaten, name, nr, ruecknahmedaten, text-matrix, verkaufsdaten |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <extNr>{1,1}</extNr> <efmprodukt>{1,1}</efmprodukt> <identifikation>{1,1}</identifikation> <loeschdaten>{0,1}</loeschdaten> <verkaufsdaten>{0,1}</verkaufsdaten> <darstellungsdaten>{0,1}</darstellungsdaten> <ruecknahmedaten>{0,1}</ruecknahmedaten> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-PVPM-Tarifprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Tarifprodukt-Item / extNr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <pre><xs:element name="extNr" type="XML-StringValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Tarifprodukt-Item / efmprodukt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><efmprodukt xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </efmprodukt></pre> |
| Source | <pre><xs:element name="efmprodukt" type="XML-Ref-01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Tarifprodukt-Item / identifikation

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Ref-Set-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><identifikation xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </identifikation></pre> |
| Source | <code><xs:element name="identifikation" type="XML-Ref-Set-1N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

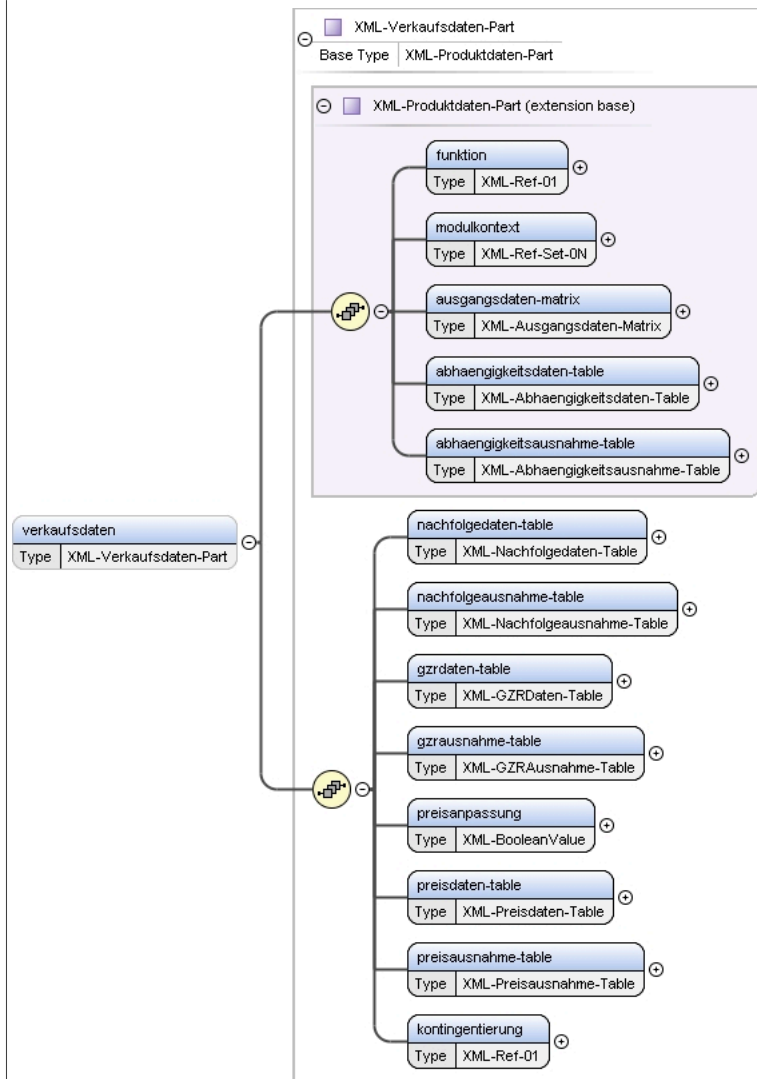
Element XML-PVPM-Tarifprodukt-Item / loeschdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Loeschdaten-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produkttypen-Part <ul style="list-style-type: none"> XML-Loeschdaten-Part |
| Properties | content: complex minOccurs: 0 |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , unterstuetztztab |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><loeschdaten xmlns="http://vdv/ka/pkm/1"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> <unterstuetztztab>{1,1}</unterstuetztztab> </loeschdaten></pre> |
| Source | <code><xs:element name="loeschdaten" type="XML-Loeschdaten-Part" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Tarifprodukt-Item / verkaufsdaten

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | | | | | |
|----------------|--|----------|---------|------------|---|
| Type | XML-Verkaufsdaten-Part | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktdaten-Part XML-Verkaufsdaten-Part | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , nachfolgedaten-table , nachfolgeausnahme-table , gzrdaten-table , gzrausnahme-table , preisanpassung , preisdaten-table , preisausnahme-table , kontingentierung | | | | |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, gzrausnahme-table, gzrdaten-table, kontingentierung, modulkontext, nachfolgeausnahme-table, nachfolgedaten-table, preisanpassung, preisausnahme-table, preisdaten-table | | | | |
| Instance | <pre> <verkaufsdaten xmlns="http://vdv/ka/pkm/1"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> <nachfolgedaten-table>{1,1}</nachfolgedaten-table> <nachfolgeausnahme-table>{1,1}</nachfolgeausnahme-table> <gzrdaten-table>{1,1}</gzrdaten-table> <gzrausnahme-table>{1,1}</gzrausnahme-table> <preisanpassung>{1,1}</preisanpassung> <preisdaten-table>{1,1}</preisdaten-table> <preisausnahme-table>{1,1}</preisausnahme-table> <kontingentierung>{1,1}</kontingentierung> </verkaufsdaten> </pre> | | | | |

| | |
|-----------------|---|
| Source | <code><xs:element name="verkaufsdaten" type="XML-Verkaufsdaten-Part" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkaufsdaten-Part / nachfolgedaten-table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Nachfolgedaten-Table |
| Properties | content: complex |
| Model | kriterium , vorgaenger , nachfolger |
| Children | kriterium, nachfolger, vorgaenger |
| Instance | <pre><nachfolgedaten-table xmlns="http://vdv/ka/pkm/1"> <kriterium>{1,1}</kriterium> <vorgaenger>{1,1}</vorgaenger> <nachfolger>{1,1}</nachfolger> </nachfolgedaten-table></pre> |
| Source | <code><xs:element name="nachfolgedaten-table" type="XML-Nachfolgedaten-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Nachfolgedaten-Table / kriterium

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><kriterium xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </kriterium></pre> |
| Source | <code><xs:element name="kriterium" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Nachfolgedaten-Table / vorgaenger

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorgaenger xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </vorgaenger></pre> |
| Source | <pre><xs:element name="vorgaenger" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Nachfolgedaten-Table / nachfolger

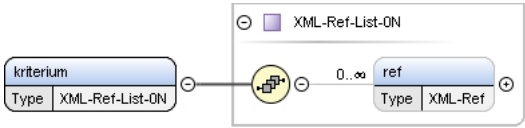
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachfolger xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </nachfolger></pre> |
| Source | <pre><xs:element name="nachfolger" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkaufsdaten-Part / nachfolgeausnahme-table

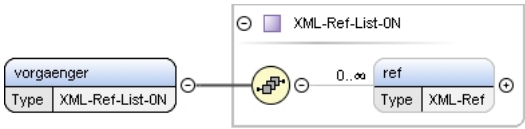
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Nachfolgeausnahme-Table |
| Properties | content: complex |
| Model | kriterium , vorgaenger , ausnahme |
| Children | ausnahme, kriterium, vorgaenger |
| Instance | <pre><nachfolgeausnahme-table xmlns="http://vdv/ka/pkm/1"> <kriterium>{1,1}</kriterium> <vorgaenger>{1,1}</vorgaenger> <ausnahme>{1,1}</ausnahme> </nachfolgeausnahme-table></pre> |
| Source | <pre><xs:element name="nachfolgeausnahme-table" type="XML-Nachfolgeausnahme-Table" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Nachfolgeausnahme-Table / kriterium

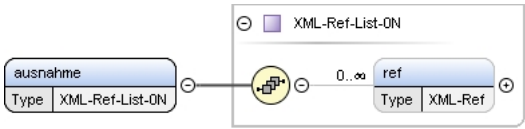
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><kriterium xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </kriterium></pre> |
| Source | <pre><xs:element name="kriterium" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Nachfolgeausnahme-Table / vorgaenger

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorgaenger xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </vorgaenger></pre> |
| Source | <pre><xs:element name="vorgaenger" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Nachfolgeausnahme-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkaufsdaten-Part / gzrdaten-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

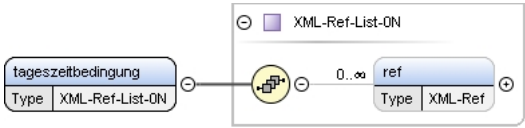
| | |
|-----------------|--|
| Diagram | |
| Type | XML-GZRDaten-Table |
| Properties | content: complex |
| Model | tagesbedingung , tageszeitbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, daten-pool, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Instance | <pre><gZRdaten-table xmlns="http://vdv/ka/pkm/1"> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </gZRdaten-table></pre> |
| Source | <code><xs:element name="gZRdaten-table" type="XML-GZRDaten-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRDaten-Table / tagesbedingung

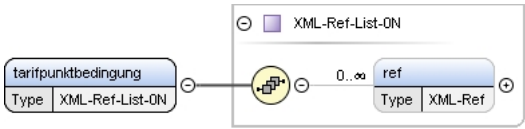
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <code><xs:element name="tagesbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRDaten-Table / tageszeitbedingung

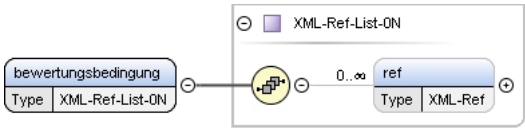
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  The diagram shows a box for the 'tageszeitbedingung' element with 'Type XML-Ref-List-0N'. It is connected to a yellow circle with a plus sign, which is then connected to a box for the 'ref' element with 'Type XML-Ref'. A line with '0..∞' connects the yellow circle to the 'ref' box. A legend at the top right shows a purple square for 'XML-Ref-List-0N'. |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tageszeitbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </tageszeitbedingung></pre> |
| Source | <pre><xs:element name="tageszeitbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRDaten-Table / tarifpunktbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  The diagram shows a box for the 'tarifpunktbedingung' element with 'Type XML-Ref-List-0N'. It is connected to a yellow circle with a plus sign, which is then connected to a box for the 'ref' element with 'Type XML-Ref'. A line with '0..∞' connects the yellow circle to the 'ref' box. A legend at the top right shows a purple square for 'XML-Ref-List-0N'. |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRDaten-Table / bewertungsbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  The diagram shows a box for the 'bewertungsbedingung' element with 'Type XML-Ref-List-0N'. It is connected to a yellow circle with a plus sign, which is then connected to a box for the 'ref' element with 'Type XML-Ref'. A line with '0..∞' connects the yellow circle to the 'ref' box. A legend at the top right shows a purple square for 'XML-Ref-List-0N'. |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <pre><xs:element name="bewertungsbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRDaten-Table / verkehrsmittellinienbedingung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRDaten-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRDaten-Table / daten-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-GZRDaten-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <pre><xs:element name="daten-pool" type="XML-GZRDaten-Pool"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRDaten-Pool / item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-GZRDaten-Item |
| Properties | content: complex minOccurs: 0 maxOccurs: unbounded |
| Model | beginn , ende |
| Children | beginn, ende |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <beginn>{1,1}</beginn> <ende>{1,1}</ende> </item></pre> |
| Source | <code><xs:element name="item" type="XML-GZRDaten-Item" minOccurs="0" maxOccurs="unbounded" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRDaten-Item / beginn

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-RelativzeitpunktB-Part |
| Properties | content: complex |
| Model | zeitspanne , (uhrzeit unbestimmt) |
| Children | uhrzeit, unbestimmt, zeitspanne |
| Instance | <pre><beginn xmlns="http://vdv/ka/pkm/1"> <zeitspanne>{1,1}</zeitspanne> <uhrzeit>{1,1}</uhrzeit> <unbestimmt>{1,1}</unbestimmt> </beginn></pre> |
| Source | <code><xs:element name="beginn" type="XML-RelativzeitpunktB-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-RelativzeitpunktB-Part / zeitspanne

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-DurationValue |
| Properties | content: simple |
| Facets | pattern: <code>[\+ \-] P (\d + Y) ? (\d + M) ? (\d + D) ? (T (\d + H) ? (\d + M) ? (\d + S) ?) ?</code> |
| Source | <code><xs:element name="zeitspanne" type="XML-DurationValue" /></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-RelativzeitpunktB-Part / uhrzeit

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-TimeValue |
| Properties | content: simple |
| Facets | pattern \d+:\d+:\d+([\+ -]\d+:\d+)? |
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-RelativzeitpunktB-Part / unbestimmt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-VoidValue |
| Properties | content: complex |
| Model | |
| Source | <code><xs:element name="unbestimmt" type="XML-VoidValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRDaten-Item / ende

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-RelativzeitpunktB-Part |
| Properties | content: complex |
| Model | zeitspanne , (uhrzeit unbestimmt) |
| Children | uhrzeit, unbestimmt, zeitspanne |
| Instance | <pre><ende xmlns="http://vdv/ka/pkm/1"> <zeitspanne>{1,1}</zeitspanne> <uhrzeit>{1,1}</uhrzeit> <unbestimmt>{1,1}</unbestimmt> </ende></pre> |
| Source | <code><xs:element name="ende" type="XML-RelativzeitpunktB-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkaufsdaten-Part / gzrausnahme-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

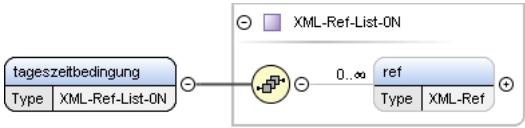
| | |
|-----------------|--|
| Diagram | |
| Type | XML-GZRAusnahme-Table |
| Properties | content: complex |
| Model | tagesbedingung , tageszeitbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Instance | <pre><gзраusnahme-table xmlns="http://vdv/ka/pkm/1"> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </gзраusnahme-table></pre> |
| Source | <code><xs:element name="gзраusnahme-table" type="XML-GZRAusnahme-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRAusnahme-Table / tagesbedingung

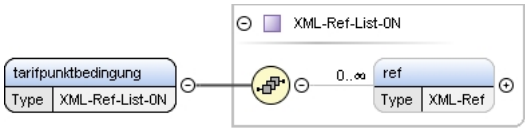
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-ON |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <code><xs:element name="tagesbedingung" type="XML-Ref-List-ON" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRAusnahme-Table / tageszeitbedingung

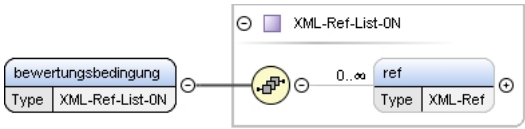
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tageszeitbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </tageszeitbedingung></pre> |
| Source | <pre><xs:element name="tageszeitbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRAusnahme-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRAusnahme-Table / bewertungsbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{ 0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <pre><xs:element name="bewertungsbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRAusnahme-Table / verkehrsmittellinienbedingung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmitellinienbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </verkehrsmitellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmitellinienbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRAusnahme-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-GZRAusnahme-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkaufsdaten-Part / preisanpassung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-BooleanValue |
| Properties | content: simple |
| Source | <code><xs:element name="preisanpassung" type="XML-BooleanValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkaufsdaten-Part / preisdaten-table

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <p>The diagram illustrates the structure of the XML-Preisdaten-Table element. It is a complex element containing a sequence of child elements. Each child element is represented by a box with its name and type. The types are: XML-Ref-List-ON for most conditions and XML-Preisdaten-Pool for the data pool. The elements are connected by a vertical line, indicating a sequence.</p> |
| Type | XML-Preisdaten-Table |
| Properties | content: complex |
| Model | wachrung , bezahlartbedingung , zahlungsintervallbedingung , tagesbedingung , tageszeitbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung , bezahlartbedingung , daten-pool , mitnahmebedingung , modulkontextbedingung , rabattmedienbedingung , spezialbedingung , tagesbedingung , tageszeitbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung , wachrung , zahlungsintervallbedingung , zeitraumbedingung |
| Instance | <pre> <preisdaten-table xmlns="http://vdv/ka/pkm/1"> <waehrung>{1,1}</waehrung> <bezahlartbedingung>{1,1}</bezahlartbedingung> <zahlungsintervallbedingung>{1,1}</zahlungsintervallbedingung> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> </pre> |

| | |
|-----------------|--|
| | <pre> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </preisdaten-table> </pre> |
| Source | <code><xs:element name="preisdaten-table" type="XML-Preisdaten-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / waehrung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <waehrung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </waehrung> </pre> |
| Source | <code><xs:element name="waehrung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / bezahlartbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <bezahlartbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </bezahlartbedingung> </pre> |
| Source | <code><xs:element name="bezahlartbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / zahlungsintervallbedingung

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><zahlungsintervallbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </zahlungsintervallbedingung></pre> |
| Source | <pre><xs:element name="zahlungsintervallbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / tagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / tageszeitbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tageszeitbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tageszeitbedingung></pre> |
| Source | <pre><xs:element name="tageszeitbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / zeitraumbedingung

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |

| | |
|-----------------|---|
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / bewertungsbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <pre><xs:element name="bewertungsbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / verkehrsmittellinienbedingung

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |

| | |
|-----------------|---|
| | <code></verkehrsmittellinienbedingung></code> |
| Source | <code><xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / mitnahmebedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><mitnahmebedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </mitnahmebedingung></pre> |
| Source | <code><xs:element name="mitnahmebedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / rabattmedienbedingung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><rabattmedienbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </rabattmedienbedingung></pre> |
| Source | <code><xs:element name="rabattmedienbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / modulkontextbedingung


| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <code><xs:element name="modulkontextbedingung" type="XML-Ref-List-0N" /></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

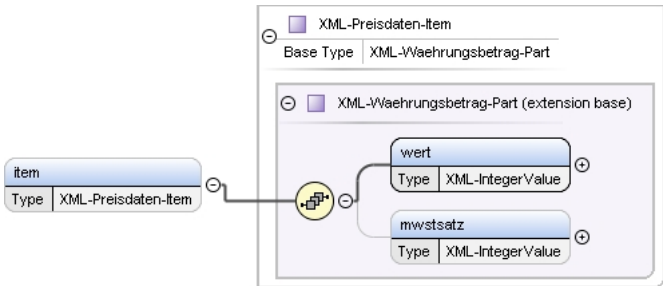
Element XML-Preisdaten-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / daten-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Preisdaten-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <pre><xs:element name="daten-pool" type="XML-Preisdaten-Pool"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Pool / item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Preisdaten-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Waehrungsbetrag-Part XML-Preisdaten-Item |
| Properties | content: complex |

| | |
|-----------------|---|
| | minOccurs: 0 |
| | maxOccurs: unbounded |
| Model | wert , mwstsatz{0,1} |
| Children | mwstsatz, wert |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <wert>{1,1}</wert> <mwstsatz>{0,1}</mwstsatz> </item></pre> |
| Source | <xs:element name="item" type="XML-Preisdaten-Item" minOccurs="0" maxOccurs="unbounded"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkaufsdaten-Part / preisausnahme-table

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-PreisAusnahme-Table |
| Properties | content: complex |
| Model | waehrung , bezahlarbedingung , zahlungsintervallbedingung , tagesbedingung , tageszeitbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, bezahlarbedingung, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zahlungsintervallbedingung, zeitraumbedingung |
| Instance | <pre><preisausnahme-table xmlns="http://vdv/ka/pkm/1"> <waehrung>{1,1}</waehrung></pre> |

| | |
|-----------------|--|
| | <pre> <bezahllartbedingung>{1,1}</bezahllartbedingung> <zahlungsintervallbedingung>{1,1}</zahlungsintervallbedingung> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </preisausnahme-table> </pre> |
| Source | <code><xs:element name="preisausnahme-table" type="XML-Preisausnahme-Table"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / waehrung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <waehrung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </waehrung> </pre> |
| Source | <code><xs:element name="waehrung" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / bezahllartbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <bezahllartbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </bezahllartbedingung> </pre> |
| Source | <code><xs:element name="bezahllartbedingung" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / zahlungsintervallbedingung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zahlungsintervallbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </zahlungsintervallbedingung></pre> |
| Source | <code><xs:element name="zahlungsintervallbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / tagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <code><xs:element name="tagesbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / tageszeitbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tageszeitbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tageszeitbedingung></pre> |
| Source | <code><xs:element name="tageszeitbedingung" type="XML-Ref-List-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / zeitraumbedingung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / bewertungsbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <pre><xs:element name="bewertungsbedingung" type="XML-Ref-List-0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / verkehrsmittellinienbedingung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|--|
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <code><xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / mitnahmebedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><mitnahmebedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </mitnahmebedingung></pre> |
| Source | <code><xs:element name="mitnahmebedingung" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / rabattmedienbedingung

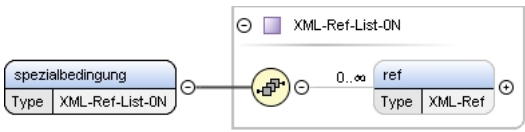
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><rabattmedienbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </rabattmedienbedingung></pre> |
| Source | <code><xs:element name="rabattmedienbedingung" type="XML-Ref-List-0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / modulkontextbedingung

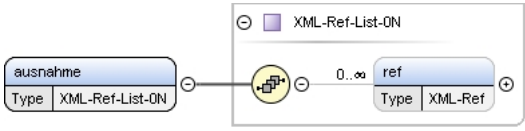
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PreisAusnahme-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PreisAusnahme-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-List-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-Ref-List-0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Verkaufsdaten-Part / kontingentierung

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |

| | |
|-----------------|---|
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><kontingentierung xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </kontingentierung></pre> |
| Source | <code><xs:element name="kontingentierung" type="XML-Ref-01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Tarifprodukt-Item / darstellungsdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Darstellungsdaten-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktdaten-Part <ul style="list-style-type: none"> XML-Darstellungsdaten-Part |
| Properties | content: complex minOccurs: 0 |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , unterstuetztztab |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><darstellungsdaten xmlns="http://vdv/ka/pkm/1"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> <unterstuetztztab>{1,1}</unterstuetztztab> </darstellungsdaten></pre> |
| Source | <code><xs:element name="darstellungsdaten" type="XML-Darstellungsdaten-Part" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Tarifprodukt-Item / ruecknahmedaten

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | | |
|-----------------|---|----------|---------|------------|---|
| Diagram | | | | | |
| Type | XML-Ruecknahmedaten-Part | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produkttypen-Part XML-Ruecknahmedaten-Part | | | | |
| Properties | <table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , uzpdaten-table , uzpausnahme-table , rueckzahlungsdaten-table , rueckzahlungsausnahme-table , unterstuetzt | | | | |
| Children | abhaengigkeitsausnahme-table , abhaengigkeitsdaten-table , ausgangsdaten-matrix , funktion , modulkontext , rueckzahlungsausnahme-table , rueckzahlungsdaten-table , unterstuetzt , uzpausnahme-table , uzpdaten-table | | | | |
| Instance | <pre><ruecknahmedaten xmlns="http://vdv/ka/pkm/1"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> <uzpdaten-table>{1,1}</uzpdaten-table> <uzpausnahme-table>{1,1}</uzpausnahme-table> <rueckzahlungsdaten-table>{1,1}</rueckzahlungsdaten-table> <rueckzahlungsausnahme-table>{1,1}</rueckzahlungsausnahme-table> <unterstuetzt>{1,1}</unterstuetzt> </ruecknahmedaten></pre> | | | | |
| Source | <xs:element name="ruecknahmedaten" type="XML-Ruecknahmedaten-Part" minOccurs="0"/> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | |

Element XML-PVPM-Produktdaten / fremdprodukt-pool

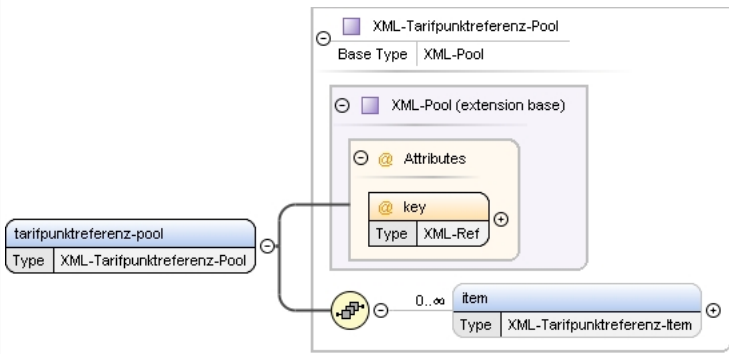
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-Fremdprodukt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Fremdprodukt-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><fremdprodukt-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </fremdprodukt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="fremdprodukt-pool" type="XML-Fremdprodukt-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Produktdaten / produktgruppe-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Produktgruppe-Pool type. It is a complex type that extends the XML-Pool type. The extension XML-Produktgruppe-Pool includes a key attribute of type XML-Ref and a sequence of item elements of type XML-Produktgruppe-Item, with a cardinality of 0..∞.</p> | | | |
| Type | XML-Produktgruppe-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Produktgruppe-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><produktgruppe-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </produktgruppe-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="produktgruppe-pool" type="XML-Produktgruppe-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Tarifpunktreferenzdaten / tarifpunktreferenz-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |
| Type | XML-Tarifpunktreferenz-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Tarifpunktreferenz-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktreferenz-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tarifpunktreferenz-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunktreferenz-pool" type="XML-Tarifpunktreferenz-Pool" /></pre> | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

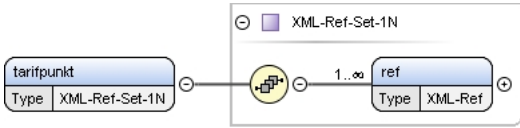
Element XML-Tarifpunktreferenz-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} |

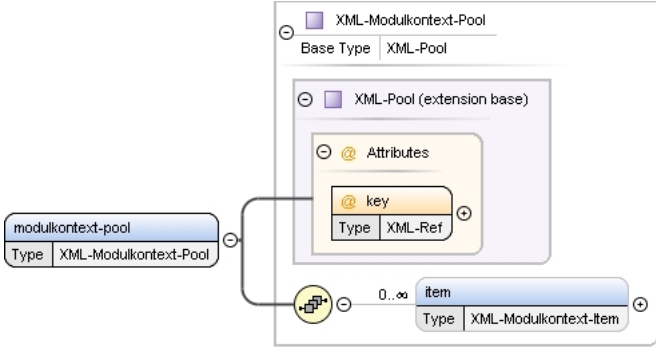
| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Tarifpunktreferenz-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Tarifpunkt-Item <ul style="list-style-type: none"> XML-Tarifpunktreferenz-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , typ , ortsbezug , tarifpunkt | | | | | | |
| Children | name, nr, ortsbezug, tarifpunkt, text-matrix, typ | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <typ>{1,1}</typ> <ortsbezug>{1,1}</ortsbezug> <tarifpunkt>{1,1}</tarifpunkt> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tarifpunktreferenz-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktreferenz-Item / tarifpunkt

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Ref-Set-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><tarifpunkt xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </tarifpunkt></pre> |
| Source | <pre><xs:element name="tarifpunkt" type="XML-Ref-Set-1N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Bedingungsdaten / modulkontext-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |
| Type | XML-Modulkontext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Modulkontext-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><modulkontext-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </modulkontext-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="modulkontext-pool" type="XML-Modulkontext-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Bedingungsdaten / bezahlart-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| Diagram | <p>The diagram illustrates the structure of the XML-Bezahlt-Pool. It is a complex type that extends the XML-Pool. The XML-Bezahlt-Pool has a key attribute of type XML-Ref and a sequence of XML-Bezahlt-Item elements. The cardinality for the sequence is 0..∞.</p> | | | | | | | | |
|-----------------|---|----------|------|-----|--|-----|---------|----------|--|
| Type | XML-Bezahlt-Pool | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Bezahlt-Pool | | | | | | | | |
| Properties | content: complex | | | | | | | | |
| Model | item* | | | | | | | | |
| Children | item | | | | | | | | |
| Instance | <pre><bezahlt-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </bezahlt-pool></pre> | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| key | XML-Ref | required | | | | | | | |
| Source | <pre><xs:element name="bezahlt-pool" type="XML-Bezahlt-Pool" /></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | |

Element XML-PVPM-Bedingungsdaten / waehrung-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Waehrung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Waehrung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><waehrung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </waehrung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="waehrung-pool" type="XML-Waehrung-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema PKM.xsd | | | |

Element XML-Waehrung-Pool / item

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Waehrung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Waehrung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name, text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Waehrung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-PVPM-Bedingungsdaten / zahlungsintervall-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Zahlungsintervall-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Zahlungsintervall-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><zahlungsintervall-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </zahlungsintervall-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="zahlungsintervall-pool" type="XML-Zahlungsintervall-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Zahlungsintervall-Pool / item

| | | | | | | | |
|----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Zahlungsintervall-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Text-Item<ul style="list-style-type: none">XML-Zahlungsintervall-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name, text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Zahlungsintervall-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-PVPM-Bedingungsdaten / mitnahmetyp-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <pre>graph TD XML_Mitnahmetyp_Pool[XML-Mitnahmetyp-Pool] -- Base Type --> XML_Pool[XML-Pool] XML_Pool -- extension base --> XML_Mitnahmetyp_Pool XML_Pool --> key[key] key --> XML_Ref[XML-Ref] XML_Mitnahmetyp_Pool -- 0..∞ --> item[item] item --> XML_Mitnahmetyp_Item[XML-Mitnahmetyp-Item]</pre> | | | |
| Type | XML-Mitnahmetyp-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Mitnahmetyp-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><mitnahmetyp-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </mitnahmetyp-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="mitnahmetyp-pool" type="XML-Mitnahmetyp-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Bedingungsdaten / rabattmedientyp-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <p>The diagram illustrates the structure of the XML-Rabattmedientyp-Pool. It is a base type XML-Pool with an extension XML-Rabattmedientyp-Pool. The extension has an attribute key of type XML-Ref. The element is composed of a sequence of item elements of type XML-Rabattmedientyp-Item, with a cardinality of 0..∞.</p> |
| Type | XML-Rabattmedientyp-Pool |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Rabattmedientyp-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><rabattmedientyp-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0..unbounded}</item> </rabattmedientyp-pool></pre> |

| | | | | |
|-----------------|---|---------|----------|--|
| | </rabattmedientyp-pool> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="rabattmedientyp-pool" type="XML-Rabattmedientyp-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Bedingungsdaten / spezialbedingung-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Spezialbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Spezialbedingung-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><spezialbedingung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </spezialbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="spezialbedingung-pool" type="XML-Spezialbedingung-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Spezialbedingung-Pool / item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implicit key Attribut} | | | |
| Diagram | | | | |
| Type | XML-Spezialbedingung-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item | | | |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| | <ul style="list-style-type: none"> XML-Name-Item XML-Spezialbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , funktion | | | | | | |
| Children | funktion, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <funktion>{1,1}</funktion> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Spezialbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Spezialbedingung-Item / funktion

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/1"> <ref>{1,1}</ref> </funktion></pre> |
| Source | <pre><xs:element name="funktion" type="XML-Ref-11"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Bedingungsdaten / bezahlartbedingung-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Bezahlartbedingung-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Bezahlartbedingung-Pool |
| Properties | content: complex |

| Model | item* | | | |
|-----------------|---|---------|----------|--|
| Children | item | | | |
| Instance | <pre><bezahlartbedingung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </bezahlartbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bezahlartbedingung-pool" type="XML-Bezahlartbedingung-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Bezahlartbedingung-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Bezahlartbedingung-Item type. It is a complex type with a base type of XML-Name-Item. It contains two child elements: 'name' (type XML-StringValue) and 'bezahlart' (type XML-Ref-Set-1N). The 'name' element is optional (indicated by a circle with a dot) and the 'bezahlart' element is optional (indicated by a circle with a dot). The 'bezahlart' element has a cardinality of 1..1.</p> | | | | | | |
| Type | XML-Bezahlartbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Bezahlartbedingung-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , bezahlart | | | | | | |
| Children | bezahlart, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <bezahlart>{1,1}</bezahlart> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bezahlartbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Bezahlartbedingung-Item / bezahlart

| | | | |
|-----------|---------------------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Ref-Set-1N | | |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><bezahlart xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </bezahlart></pre> |
| Source | <pre><xs:element name="bezahlart" type="XML-Ref-Set-1N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Bedingungsdaten / zahlungsintervallbedingung-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Zahlungsintervallbedingung-Pool. It is a base type XML-Pool with an extension XML-Zahlungsintervallbedingung-Pool. The extension has an attribute key of type XML-Ref. The main element is a pool of items of type XML-Zahlungsintervallbedingung-Item, with a cardinality of 0..∞.</p> | | | |
| Type | XML-Zahlungsintervallbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Zahlungsintervallbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><zahlungsintervallbedingung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </zahlungsintervallbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="zahlungsintervallbedingung-pool" type="XML-Zahlungsintervallbedingung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Zahlungsintervallbedingung-Pool / item

| | | | | |
|-------------|-------------------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram | | | | |
| Type | XML-Zahlungsintervallbedingung-Item | | | |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Zahlungsintervallbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , zahlungsintervall | | | | | | |
| Children | name, zahlungsintervall | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <zahlungsintervall>{1,1}</zahlungsintervall> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Zahlungsintervallbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Zahlungsintervallbedingung-Item / zahlungsintervall

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><zahlungsintervall xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </zahlungsintervall></pre> |
| Source | <pre><xs:element name="zahlungsintervall" type="XML-Ref-Set-1N"/></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Bedingungsdaten / tagesbedingung-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Tagesbedingung-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Tagesbedingung-Pool |

| | | | | |
|-----------------|---|---------|----------|--|
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tagesbedingung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tagesbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tagesbedingung-pool" type="XML-Tagesbedingung-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Bedingungsdaten / tageszeitbedingung-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Tageszeitbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tageszeitbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tageszeitbedingung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tageszeitbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="tageszeitbedingung-pool" type="XML-Tageszeitbedingung-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Bedingungsdaten / zeitraumbedingung-pool

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |

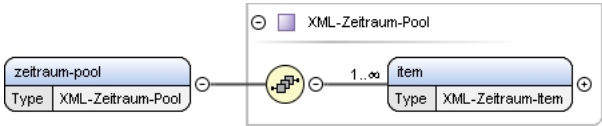
| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Zeitraumbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Zeitraumbedingung-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><zeitraumbedingung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </zeitraumbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="zeitraumbedingung-pool" type="XML-Zeitraumbedingung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Zeitraumbedingung-Pool / item

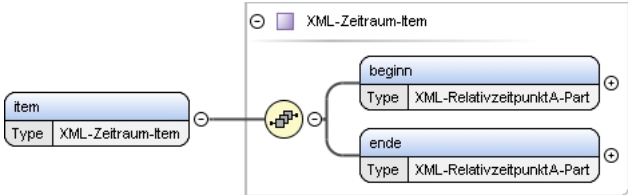
| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Zeitraumbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Zeitraumbedingung-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , zeitraum-pool | | | | | | |
| Children | name, zeitraum-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <zeitraum-pool>{1,1}</zeitraum-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Zeitraumbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Zeitraumbedingung-Item / zeitraum-pool

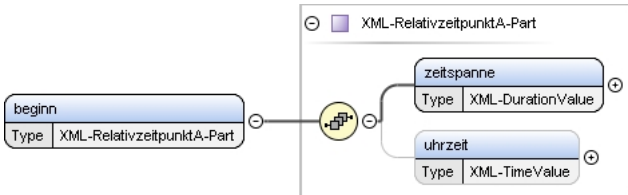
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Zeitraum-Pool |
| Properties | content: complex |
| Model | item+ |
| Children | item |
| Instance | <pre><zeitraum-pool xmlns="http://vdv/ka/pkm/1"> <item>{1,unbounded}</item> </zeitraum-pool></pre> |
| Source | <pre><xs:element name="zeitraum-pool" type="XML-Zeitraum-Pool" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Zeitraum-Pool / item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Zeitraum-Item |
| Properties | content: complex maxOccurs: unbounded |
| Model | beginn , ende |
| Children | beginn, ende |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <beginn>{1,1}</beginn> <ende>{1,1}</ende> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Zeitraum-Item" maxOccurs="unbounded" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Zeitraum-Item / beginn

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-RelativzeitpunktA-Part |
| Properties | content: complex |
| Model | zeitspanne , uhrzeit{0,1} |
| Children | uhrzeit, zeitspanne |
| Instance | <pre><beginn xmlns="http://vdv/ka/pkm/1"> <zeitspanne>{1,1}</zeitspanne> <uhrzeit>{0,1}</uhrzeit> </beginn></pre> |
| Source | <pre><xs:element name="beginn" type="XML-RelativzeitpunktA-Part" /></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Zeitraum-Item / ende

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-RelativzeitpunktA-Part |
| Properties | content: complex |
| Model | zeitspanne , uhrzeit{0,1} |
| Children | uhrzeit, zeitspanne |
| Instance | <pre><ende xmlns="http://vdv/ka/pkm/1"> <zeitspanne>{1,1}</zeitspanne> <uhrzeit>{0,1}</uhrzeit> </ende></pre> |
| Source | <code><xs:element name="ende" type="XML-RelativzeitpunktA-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Bedingungsdaten / tarifpunktbedingung-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Tarifpunktbedingung-Pool. It shows a base type XML-Pool, which is extended by XML-Pool (extension base). The extension base contains an attribute key of type XML-Ref. The main type XML-Tarifpunktbedingung-Pool contains a sequence of items of type XML-Tarifpunktbedingung-Item, with a cardinality of 0..∞.</p> | | | |
| Type | XML-Tarifpunktbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Tarifpunktbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktbedingung-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tarifpunktbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="tarifpunktbedingung-pool" type="XML-Tarifpunktbedingung-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Tarifpunktbedingung-Pool / item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Tarifpunktbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Tarifpunktbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , von , nach , ueber | | | | | | |
| Children | nach, name, ueber, von | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <von>{1,1}</von> <nach>{1,1}</nach> <ueber>{1,1}</ueber> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tarifpunktbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktbedingung-Item / von

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><von xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </von></pre> |
| Source | <pre><xs:element name="von" type="XML-Ref-01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Tarifpunktbedingung-Item / nach

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><nach xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </nach></pre> |
| Source | <pre><xs:element name="nach" type="XML-Ref-01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Tarifpunktbedingung-Item / ueber

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ueber xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </ueber></pre> |
| Source | <pre><xs:element name="ueber" type="XML-Ref-01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Bedingungsdaten / bewertungsbedingung-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Bewertungsbedingung-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Bewertungsbedingung-Pool |
| Properties | content: complex |
| Model | item* |

| | | | | |
|-----------------|--|---------|----------|--|
| Children | item | | | |
| Instance | <pre><bewertungsbedingung-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </bewertungsbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bewertungsbedingung-pool" type="XML-Bewertungsbedingung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsbedingung-Pool / item

| | | | | | | | | | |
|-----------------|---|--|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | | | |
| Annotations | {Implizites key Attribut} | | | | | | | | |
| Diagram | | | | | | | | | |
| Type | XML-Bewertungsbedingung-Item | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Bewertungsbedingung-Item | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | | | |
| minOccurs: | 0 | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | |
| Model | name , bewertungstyp , werte | | | | | | | | |
| Children | bewertungstyp, name, werte | | | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <bewertungstyp>{1,1}</bewertungstyp> <werte>{1,1}</werte> </item></pre> | | | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bewertungsbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | |

Element XML-Bewertungsbedingung-Item / bewertungstyp

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |

| | |
|-----------------|---|
| Type | XML-Ref-11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><bewertungstyp xmlns="http://vdv/ka/pkm/1"> <ref>{1,1}</ref> </bewertungstyp></pre> |
| Source | <code><xs:element name="bewertungstyp" type="XML-Ref-11" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Bewertungsbedingung-Item / werte

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre> classDiagram class XMLArrayValue { +XMLValue[] werte } class XMLValue { +bits +text +zahl +liste +datum +uhrzeit +zeitpunkt +zeitspanne +wahrheitswert +objekt +funktion +undefiniert } XMLArrayValue "0..∞" --> "1" XMLValue XMLValue -- > bits XMLValue -- > text XMLValue -- > zahl XMLValue -- > liste XMLValue -- > datum XMLValue -- > uhrzeit XMLValue -- > zeitpunkt XMLValue -- > zeitspanne XMLValue -- > wahrheitswert XMLValue -- > objekt XMLValue -- > funktion XMLValue -- > undefiniert </pre> |
| Type | XML-ArrayValue |
| Properties | content: complex |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne wahrheitswert objekt funktion undefiniert |
| Children | bits, datum, funktion, liste, objekt, text, uhrzeit, undefiniert, wahrheitswert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><werte xmlns="http://vdv/ka/pkm/1"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <wahrheitswert>{1,1}</wahrheitswert> </werte></pre> |

| | |
|-----------------|--|
| | <pre><objekt ref="">{1,1}</objekt> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </werte></pre> |
| Source | <code><xs:element name="werte" type="XML-ArrayValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Bedingungsdaten / mitnahmebedingung-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Mitnahmebedingung-Pool. It is a base type XML-Pool with an extension XML-Mitnahmebedingung-Pool. The extension has a key attribute of type XML-Ref and a sequence of item elements of type XML-Mitnahmebedingung-Item with cardinality 0..∞.</p> | | | |
| Type | XML-Mitnahmebedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Mitnahmebedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><mitnahmebedingung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </mitnahmebedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="mitnahmebedingung-pool" type="XML-Mitnahmebedingung-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Mitnahmebedingung-Pool / item

| | | | |
|----------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Implicit key Attribut} | | |
| Diagram | | | |
| Type | XML-Mitnahmebedingung-Item | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Mitnahmebedingung-Item | | |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| | <ul style="list-style-type: none"> XML-Name-Item XML-Mitnahmebedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , anzahl-matrix | | | | | | |
| Children | anzahl-matrix, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <anzahl-matrix>{1,1}</anzahl-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Mitnahmebedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Mitnahmebedingung-Item / anzahl-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Mitnahmeanzahl-Matrix |
| Properties | content: complex |
| Model | anzahl+ |
| Children | anzahl |
| Instance | <pre><anzahl-matrix xmlns="http://vdv/ka/pkm/1"> <anzahl ref="#">{1,unbounded}</anzahl> </anzahl-matrix></pre> |
| Source | <pre><xs:element name="anzahl-matrix" type="XML-Mitnahmeanzahl-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Mitnahmeanzahl-Matrix / anzahl

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Sortiert nach erstem Attribut} |
| Diagram | |
| Type | XML-Mitnahmeanzahl-Entry |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerValue XML-Mitnahmeanzahl-Entry |
| Properties | content: complex |

| | maxOccurs: | unbounded | | |
|-----------------|---|-----------|----------|--|
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="anzahl" type="XML-Mitnahmeanzahl-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-PVPM-Bedingungsdaten / rabattmedienbedingung-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Rabattmedienbedingung-Pool element. It is an XML-Pool with a base type XML-Pool. It has an attribute 'key' of type XML-Ref. It contains a sequence of 'item' elements of type XML-Rabattmedienbedingung-Item, with a cardinality of 0..∞.</p> | | | |
| Type | XML-Rabattmedienbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Rabattmedienbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><rabattmedienbedingung-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0, unbounded}</item> </rabattmedienbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="rabattmedienbedingung-pool" type="XML-Rabattmedienbedingung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Rabattmedienbedingung-Pool / item

| | | | | |
|-------------|------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram | | | | |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Type | XML-Rabattmedienbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Rabattmedienbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , rabattmedientyp | | | | | | |
| Children | name, rabattmedientyp | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <rabattmedientyp>{1,1}</rabattmedientyp> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Rabattmedienbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Rabattmedienbedingung-Item / rabattmedientyp

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><rabattmedientyp xmlns="http://vdv/ka/pkm/1"> <ref>{1,unbounded}</ref> </rabattmedientyp></pre> |
| Source | <pre><xs:element name="rabattmedientyp" type="XML-Ref-Set-1N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-PVPM-Bedingungsdaten / modulkontextbedingung-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Modulkontextbedingung-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool |

| | | | | |
|-----------------|--|---------|----------|--|
| | <ul style="list-style-type: none">XML-Modulkontextbedingung-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><modulkontextbedingung-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </modulkontextbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="modulkontextbedingung-pool" type="XML-Modulkontextbedingung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

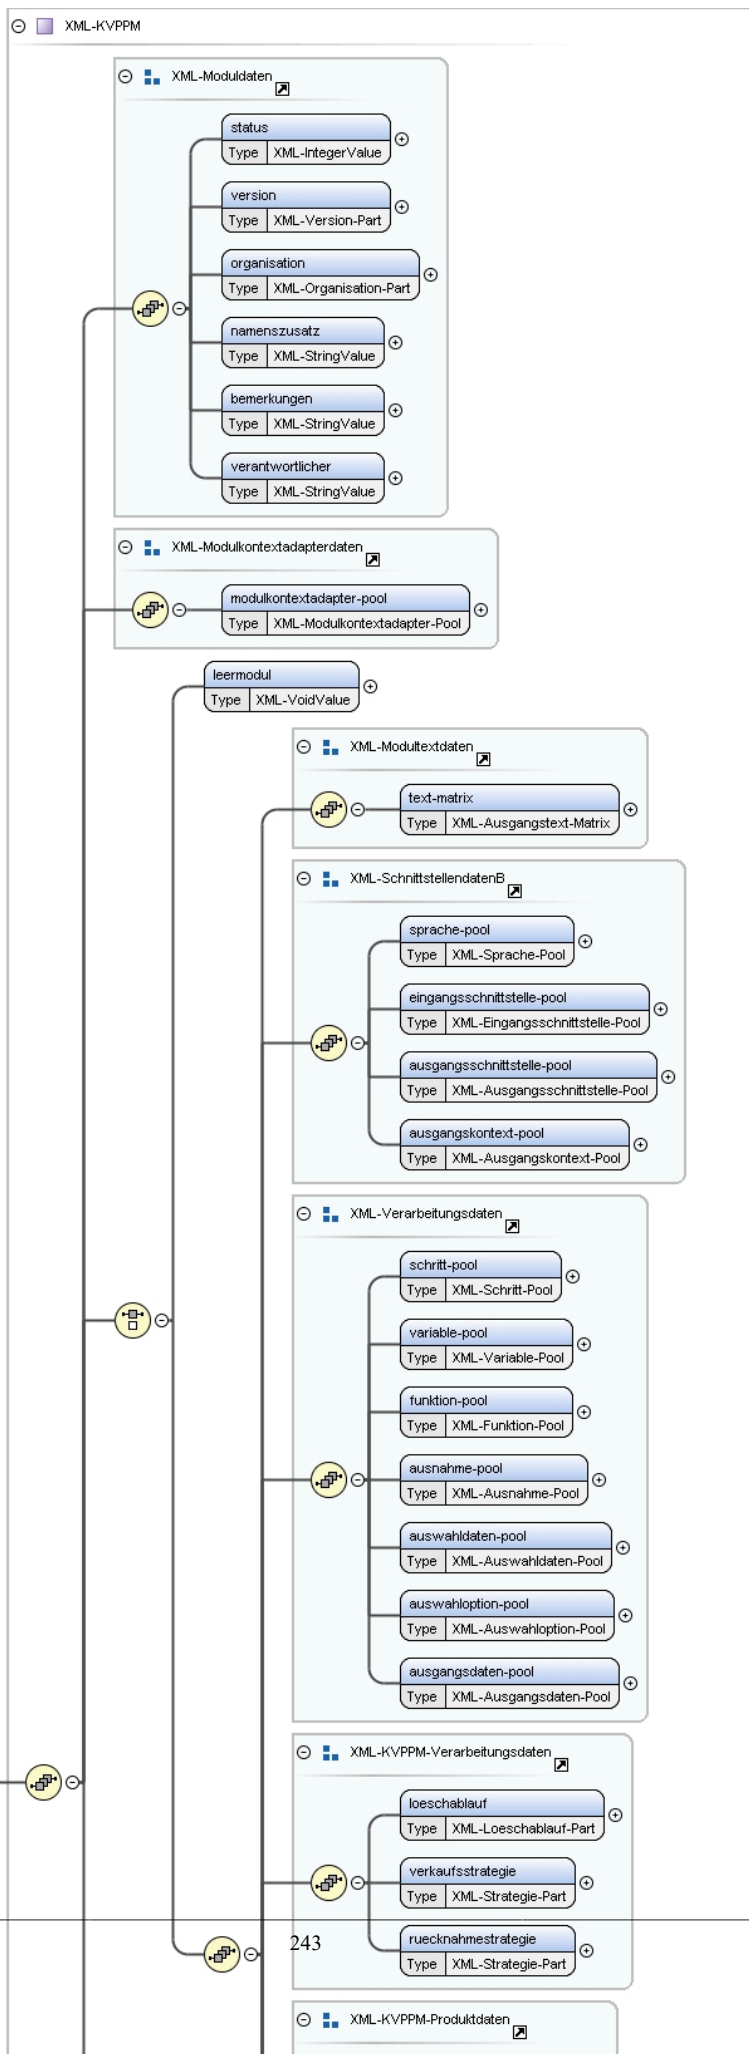
Element XML-PVPM-Bedingungsdaten / verkehrsmittellinienbedingung-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Verkehrsmittellinienbedingung-Pool. It is a base type for XML-Pool (extension base). It has an attribute 'key' of type XML-Ref. It contains a sequence of 'item' elements (0..∞) of type XML-Verkehrsmittellinienbedingung-Item. The diagram also shows a box for 'verkehrsmittellinienbedingung-pool' with type XML-Verkehrsmittellinienbedingung-Pool.</p> | | | |
| Type | XML-Verkehrsmittellinienbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Verkehrsmittellinienbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><verkehrsmittellinienbedingung-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </verkehrsmittellinienbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung-pool" type="XML-Verkehrsmittellinienbedingung-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element kvp-pm

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | |
|-----------------|--|
| Type | XML-KVPPM |
| Properties | content: complex |
| Model | status , version , organisation , namenszusatz , bemerkungen , verantwortlicher , modulkontextadapter-pool , (leermodul (text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , loeschablauf , verkaufsstrategie , ruecknahmestategie , schluessel-pool , linienadapter-pool , verkehrsmitteltypadapter-pool , wegevariantenadapter-pool , tarifpunktadapter-pool , tarifpunktreferenzadapter-pool , bezahlartadapter-pool , waehrungsadapter-pool , zahlungsintervalladapter-pool , mitnahmetypadapter-pool , rabattmedientypadapter-pool , identifikationsparameteradapter-pool , nummerninterpretation-pool , produktmodul-pool)) , signatur , annotation |
| Children | annotation , ausgangsdaten-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bemerkungen , bezahlartadapter-pool , eingangsschnittstelle-pool , funktion-pool , identifikationsparameteradapter-pool , leermodul , linienadapter-pool , loeschablauf , mitnahmetypadapter-pool , modulkontextadapter-pool , namenszusatz , nummerninterpretation-pool , organisation , produktmodul-pool , rabattmedientypadapter-pool , ruecknahmestategie , schluessel-pool , schritt-pool , signatur , sprache-pool , status , tarifpunktadapter-pool , tarifpunktreferenzadapter-pool , text-matrix , variable-pool , verantwortlicher , verkaufsstrategie , verkehrsmitteltypadapter-pool , version , waehrungsadapter-pool , wegevariantenadapter-pool , zahlungsintervalladapter-pool |
| Instance | <pre> <kvp-pm xmlns="http://vdv/ka/pkm/1"> <status>{1,1}</status> <version>{1,1}</version> <organisation>{1,1}</organisation> <namenszusatz>{1,1}</namenszusatz> <bemerkungen>{1,1}</bemerkungen> <verantwortlicher>{1,1}</verantwortlicher> <modulkontextadapter-pool key="">{1,1}</modulkontextadapter-pool> <leermodul>{1,1}</leermodul> <text-matrix>{1,1}</text-matrix> <sprache-pool key="">{1,1}</sprache-pool> <eingangsschnittstelle-pool key="">{1,1}</eingangsschnittstelle-pool> <ausgangsschnittstelle-pool key="">{1,1}</ausgangsschnittstelle-pool> <ausgangskontext-pool key="">{1,1}</ausgangskontext-pool> <schritt-pool key="">{1,1}</schritt-pool> <variable-pool key="">{1,1}</variable-pool> <funktion-pool key="">{1,1}</funktion-pool> <ausnahme-pool key="">{1,1}</ausnahme-pool> <auswahldaten-pool key="">{1,1}</auswahldaten-pool> <auswahloption-pool key="">{1,1}</auswahloption-pool> <ausgangsdaten-pool key="">{1,1}</ausgangsdaten-pool> <loeschablauf>{1,1}</loeschablauf> <verkaufsstrategie>{1,1}</verkaufsstrategie> <ruecknahmestategie>{1,1}</ruecknahmestategie> <schluessel-pool key="">{1,1}</schluessel-pool> <linienadapter-pool key="">{1,1}</linienadapter-pool> <verkehrsmitteltypadapter-pool key="">{1,1}</verkehrsmitteltypadapter-pool> <wegevariantenadapter-pool key="">{1,1}</wegevariantenadapter-pool> <tarifpunktadapter-pool key="">{1,1}</tarifpunktadapter-pool> <tarifpunktreferenzadapter-pool key="">{1,1}</tarifpunktreferenzadapter-pool> <bezahlartadapter-pool key="">{1,1}</bezahlartadapter-pool> <waehrungsadapter-pool key="">{1,1}</waehrungsadapter-pool> <zahlungsintervalladapter-pool key="">{1,1}</zahlungsintervalladapter-pool> <mitnahmetypadapter-pool key="">{1,1}</mitnahmetypadapter-pool> <rabattmedientypadapter-pool key="">{1,1}</rabattmedientypadapter-pool> <identifikationsparameteradapter-pool key="">{1,1}</identifikationsparameteradapter-pool> <nummerninterpretation-pool key="">{1,1}</nummerninterpretation-pool> <produktmodul-pool key="">{1,1}</produktmodul-pool> <signatur>{1,1}</signatur> <annotation>{1,1}</annotation> </kvp-pm> </pre> |
| Source | <xs:element name="kvp-pm" type="XML-KVPPM" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-KVPPM / leermodul

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-VoidValue |
| Properties | content: complex |
| Model | |

| | |
|-----------------|---|
| Source | <code><xs:element name="leermodul" type="XML-VoidValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-KVPPM-Verarbeitungsdaten / loeschablauf

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Loeschablauf-Part |
| Properties | content: complex |
| Model | loeschwartzeit |
| Children | loeschwartzeit |
| Instance | <pre><loeschablauf xmlns="http://vdv/ka/pkm/1"> <loeschwartzeit>{1,1}</loeschwartzeit> </loeschablauf></pre> |
| Source | <code><xs:element name="loeschablauf" type="XML-Loeschablauf-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

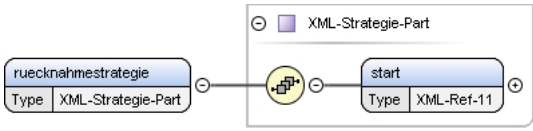
Element XML-Loeschablauf-Part / loeschwartzeit

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-DurationValue |
| Properties | content: simple |
| Facets | pattern <code>[\+\-]P(\d+Y)?(\d+M)?(\d+D)?(T(\d+H)?(\d+M)?(\d+S)?)?</code> |
| Source | <code><xs:element name="loeschwartzeit" type="XML-DurationValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-KVPPM-Verarbeitungsdaten / verkaufsstrategie

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Strategie-Part |
| Properties | content: complex |
| Model | start |
| Children | start |
| Instance | <pre><verkaufsstrategie xmlns="http://vdv/ka/pkm/1"> <start>{1,1}</start> </verkaufsstrategie></pre> |
| Source | <code><xs:element name="verkaufsstrategie" type="XML-Strategie-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-KVPPM-Verarbeitungsdaten / ruecknahmestrategie

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Strategie-Part |
| Properties | content: complex |
| Model | start |
| Children | start |
| Instance | <pre><ruecknahmestrategie xmlns="http://vdv/ka/pkm/1"> <start>{1,1}</start> </ruecknahmestrategie></pre> |
| Source | <pre><xs:element name="ruecknahmestrategie" type="XML-Strategie-Part"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-KVPPM-Produktdaten / schluessel-pool

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | |
|-----------------|---|----------|------|-----|-----|---------|----------|--|--|--|
| Diagram | | | | | | | | | | |
| Type | XML-Schluessel-Pool | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Schluessel-Pool | | | | | | | | | |
| Properties | content: | complex | | | | | | | | |
| Model | item* | | | | | | | | | |
| Children | item | | | | | | | | | |
| Instance | <pre><schluessel-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </schluessel-pool></pre> | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td></tr></tbody></table> | QName | Type | Use | key | XML-Ref | required | | | |
| QName | Type | Use | | | | | | | | |
| key | XML-Ref | required | | | | | | | | |
| Source | <pre><xs:element name="schluessel-pool" type="XML-Schluessel-Pool"/></pre> | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | |

Element XML-KVPPM-Adapterdaten / linienadapter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-Linienadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Linienadapter-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><linienadapter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </linienadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="linienadapter-pool" type="XML-Linienadapter-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-KVPPM-Adapterdaten / verkehrsmitteltypadapter-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Verkehrsmitteltypadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Verkehrsmitteltypadapter-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><verkehrsmitteltypadapter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </verkehrsmitteltypadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="verkehrsmitteltypadapter-pool" type="XML-Verkehrsmitteltypadapter-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-KVPPM-Adapterdaten / wegevariantenadapter-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the UML model for the XML-Wegevariantenadapter-Pool. It shows a base type XML-Pool with an extension XML-Wegevariantenadapter-Pool. The extension has an attribute key of type XML-Ref. The main element wegevariantenadapter-pool is of type XML-Wegevariantenadapter-Pool and contains a sequence of items (0..∞) of type XML-Wegevariantenadapter-Item.</p> | | | |
| Type | XML-Wegevariantenadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Wegevariantenadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><wegevariantenadapter-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </wegevariantenadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="wegevariantenadapter-pool" type="XML-Wegevariantenadapter-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-KVPPM-Adapterdaten / tarifpunktadapter-pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the XML structure for 'tarifpunktadapter-pool'. It is a complex type that extends 'XML-Pool'. It features an attribute 'key' of type 'XML-Ref'. The main content is a sequence of 'item' elements, each of type 'XML-Tarifpunktadapter-Item', with a cardinality of 0 to infinity.</p> | | | |
| Type | XML-Tarifpunktadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tarifpunktadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktadapter-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tarifpunktadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |

| | |
|-----------------|---|
| Source | <code><xs:element name="tarifpunktadapter-pool" type="XML-Tarifpunktadapter-Pool" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-KVPPM-Adapterdaten / tarifpunktreferenzadapter-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Tarifpunktreferenzadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Tarifpunktreferenzadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktreferenzadapter-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </tarifpunktreferenzadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunktreferenzadapter-pool" type="XML-Tarifpunktreferenzadapter-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Tarifpunktreferenzadapter-Pool / item

| | | | |
|-------------|---|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | |
| Diagram | | | |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Type | XML-Tarifpunktreferenzadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Tarifpunktreferenzadapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , typ | | | | | | |
| Children | name, nr, text-matrix, typ | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <typ>{1,1}</typ> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tarifpunktreferenzadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Implizites key Attribut, Sortiert nach erstem Element</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktreferenzadapter-Item / typ

| | | | |
|-----------------|---|----------|--------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Source | <pre><xs:element name="typ" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Element XML-KVPPM-Adapterdaten / bezahlartadapter-pool

| | | | |
|----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Bezahlartadapter-Pool | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Bezahlartadapter-Pool | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | item* | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Children | item | | | |
| Instance | <pre><bezahlartadapter-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </bezahlartadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bezahlartadapter-pool" type="XML-Bezahlartadapter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Bezahlartadapter-Pool / item

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Bezahlartadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Bezahlartadapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name, text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bezahlartadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicit key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-KVPPM-Adapterdaten / waehrungsadapter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | <p>The diagram illustrates the structure of the XML-Waehrungsadapter-Pool. It is a base type XML-Pool with an extension XML-Waehrungsadapter-Pool. The extension has a key attribute of type XML-Ref and a sequence of 0..∞ items of type XML-Waehrungsadapter-Item.</p> | | | |
| Type | XML-Waehrungsadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Waehrungsadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><waehrungsadapter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </waehrungsadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="waehrungsadapter-pool" type="XML-Waehrungsadapter-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Waehrungsadapter-Pool / item

| | | | | |
|----------------|---|---------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Waehrungsadapter-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item XML-Text-Item XML-Waehrungsadapter-Item | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |

| | |
|-----------------|--|
| | maxOccurs: unbounded |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Waehrungsadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-KVPPM-Adapterdaten / zahlungsintervalladapter-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the <code>XML-Zahlungsintervalladapter-Pool</code> type. It is a complex type that extends the <code>XML-Pool</code> base type. The <code>XML-Pool</code> base type has an <code>Attributes</code> container, which includes a <code>key</code> attribute of type <code>XML-Ref</code>. The <code>XML-Zahlungsintervalladapter-Pool</code> type has a <code>zahlungsintervalladapter-pool</code> element of type <code>XML-Zahlungsintervalladapter-Pool</code>. This element contains a sequence of <code>item</code> elements, each of type <code>XML-Zahlungsintervalladapter-Item</code>, with a cardinality of <code>0..∞</code>.</p> | | | |
| Type | XML-Zahlungsintervalladapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Zahlungsintervalladapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><zahlungsintervalladapter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </zahlungsintervalladapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="zahlungsintervalladapter-pool" type="XML-Zahlungsintervalladapter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Zahlungsintervalladapter-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Zahlungsintervalladapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> • XML-Item • XML-Nr-Item • XML-Text-Item • XML-Zahlungsintervalladapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Zahlungsintervalladapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-KVPPM-Adapterdaten / mitnahmetyppadapter-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Mitnahmetyppadapter-Pool |
| Type hierarchy | <ul style="list-style-type: none"> • XML-Pool |

| | | | | |
|-----------------|---|---------|----------|--|
| | <ul style="list-style-type: none">XML-Mitnahmetypadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><mitnahmetypadapter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </mitnahmetypadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="mitnahmetypadapter-pool" type="XML-Mitnahmetypadapter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Mitnahmetypadapter-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | <pre>classDiagram class XML_Mitnahmetypadapter_Item { Base Type XML-Text-Item } class XML_Text_Item { Base Type XML-Nr-Item } class XML_Nr_Item { Base Type XML-Item } class XML_Item { Base Type XML-IntegerValue Base Type XML-StringValue } class XML_Ausgangstext_Matrix { Base Type XML-Item } class item { Type XML-Mitnahmetypadapter-Item } XML_Mitnahmetypadapter_Item -- > XML_Text_Item XML_Mitnahmetypadapter_Item -- > XML_Item XML_Text_Item -- > XML_Nr_Item XML_Text_Item -- > XML_Item XML_Nr_Item -- > XML_IntegerValue XML_Nr_Item -- > XML_StringValue XML_Item -- > XML_Ausgangstext_Matrix</pre> | | | | | | |
| Type | XML-Mitnahmetypadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Text-Item<ul style="list-style-type: none">XML-Mitnahmetypadapter-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Mitnahmetypadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-KVPPM-Adapterdaten / rabattmedientypadapter-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | XML-Rabattmedientypadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Rabattmedientypadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><rabattmedientypadapter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </rabattmedientypadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="rabattmedientypadapter-pool" type="XML-Rabattmedientypadapter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Rabattmedientypadapter-Pool / item

| | | | |
|----------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | |
| Diagram | | | |
| Type | XML-Rabattmedientypadapter-Item | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item | | |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| | <ul style="list-style-type: none"> XML-Rabattmedientypadapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Rabattmedientypadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-KVPPM-Adapterdaten / identifikationsparameteradapter-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the XML-Identifikationsparameteradapter-Pool type. It is a base type for XML-Pool (extension base). XML-Pool has an attribute 'key' of type XML-Ref. XML-Identifikationsparameteradapter-Pool has a complex content model consisting of an 'item' element (0..∞ occurrences) of type XML-Identifikationsparameteradapter-Item.</p> | | | |
| Type | XML-Identifikationsparameteradapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Identifikationsparameteradapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><identifikationsparameteradapter-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </identifikationsparameteradapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="identifikationsparameteradapter-pool" type="XML-Identifikationsparameteradapter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Identifikationsparameteradapter-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Identifikationsparameteradapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Identifikationsparameteradapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name, wert-pool | | | | | | |
| Children | name, nr, wert-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <wert-pool key=" ">{1,1}</wert-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Identifikationsparameteradapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Implizites key Attribut, Sortiert nach erstem Element</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Identifikationsparameteradapter-Item / wert-pool

| | | | |
|----------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | XML-Identifikationsparameterwertadapter-Pool | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Identifikationsparameterwertadapter-Pool | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | item* | | |

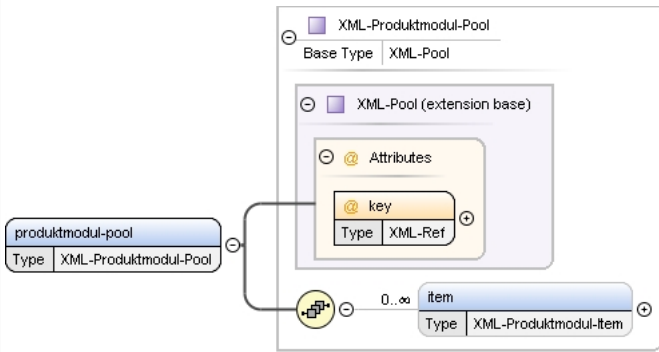
| | | | | |
|-----------------|---|---------|----------|--|
| Children | item | | | |
| Instance | <pre><wert-pool key="" xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </wert-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="wert-pool" type="XML-Identifikationsparameterwertadapter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Identifikationsparameterwertadapter-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/1 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Identifikationsparameterwertadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Text-Item<ul style="list-style-type: none">XML-Identifikationsparameterwertadapter-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Identifikationsparameterwertadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-KVPPM / produktmodul-pool

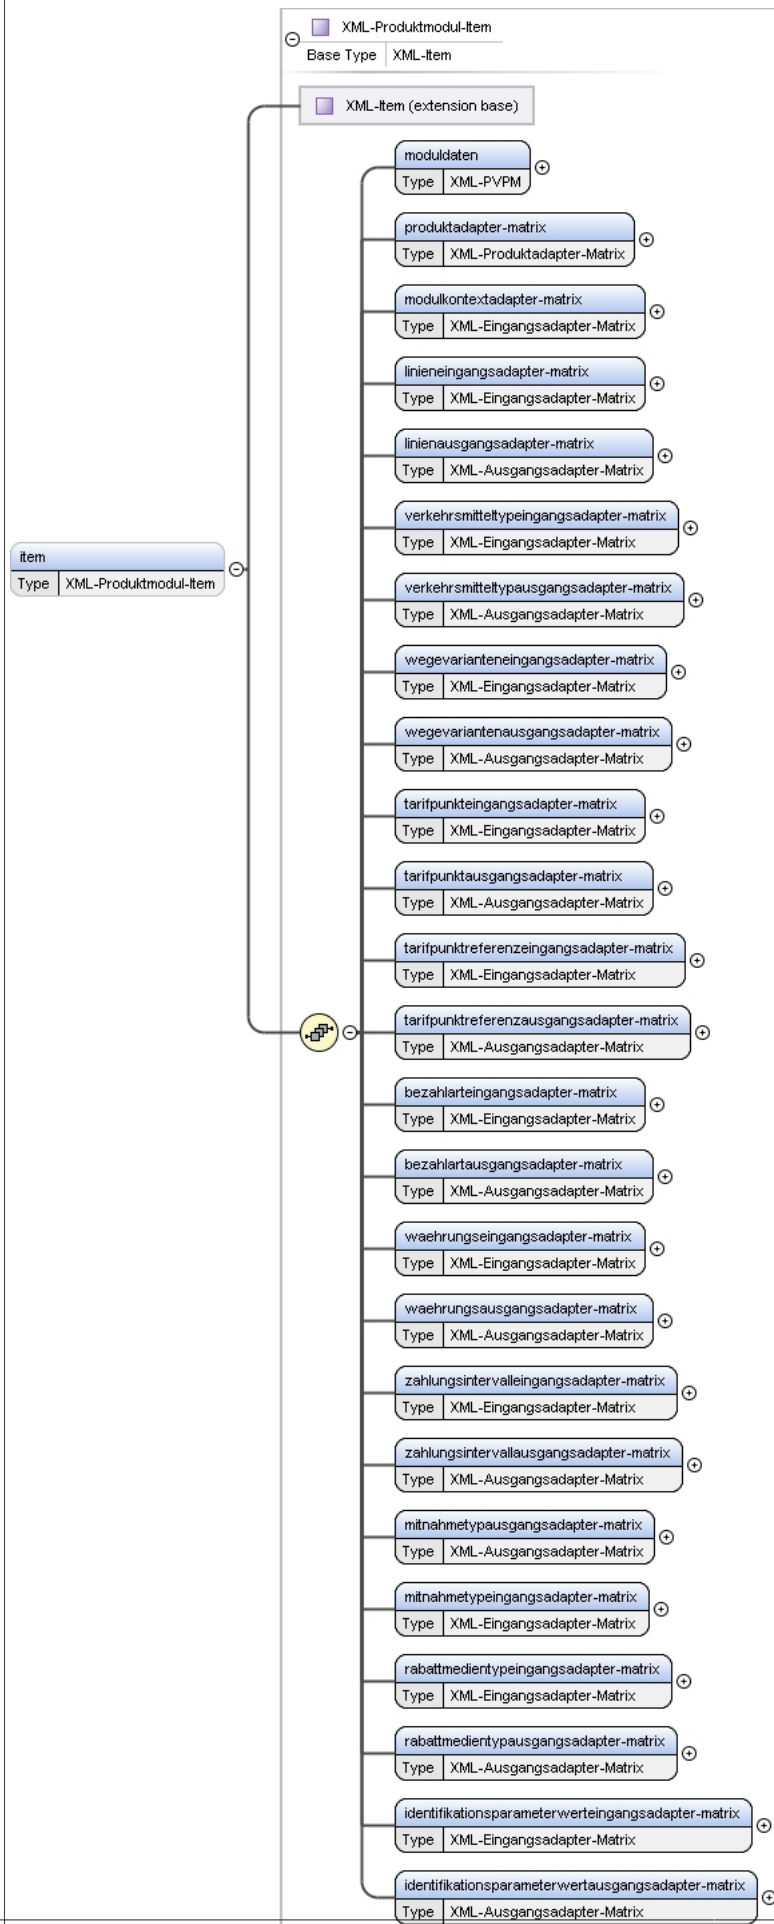
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram |  | | | |
| Type | XML-Produktmodul-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Produktmodul-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><produktmodul-pool key=" " xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </produktmodul-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="produktmodul-pool" type="XML-Produktmodul-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Element XML-Produktmodul-Pool / item

| | |
|-------------|-------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implies key Attribute} |

Diagram

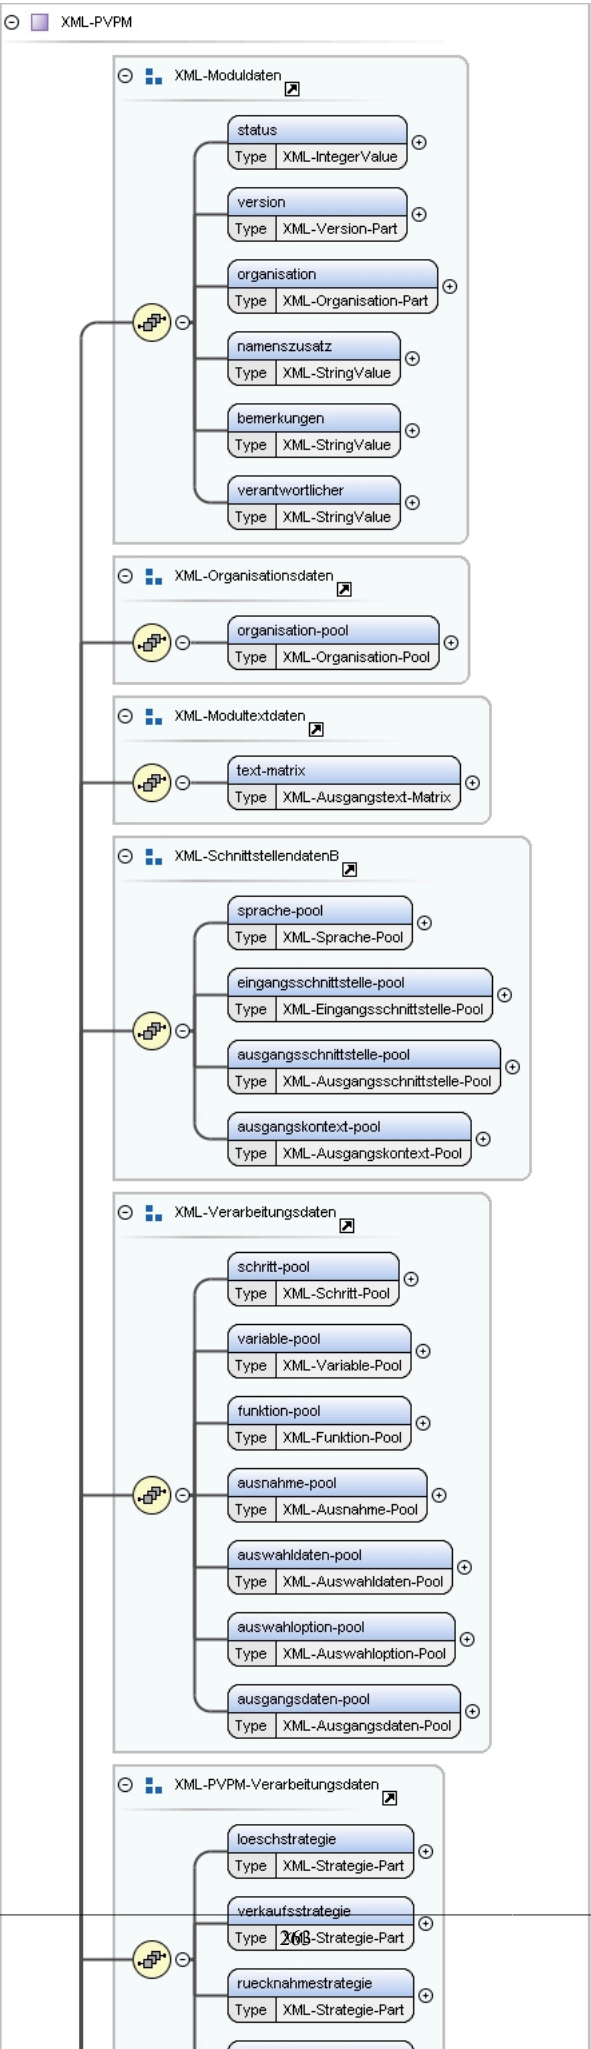


| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Type | XML-Produktmodul-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Produktmodul-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | moduldaten , produktadapter-matrix , modulkontextadapter-matrix , linieneingangsadapter-matrix , linienausgangsadapter-matrix , verkehrsmitteltypeingangsadapter-matrix , verkehrsmitteltypausgangsadapter-matrix , wegevarianteneingangsadapter-matrix , wegevariantenausgangsadapter-matrix , tarifpunkteingangsadapter-matrix , tarifpunktausgangsadapter-matrix , tarifpunktreferenzeingangsadapter-matrix , tarifpunktreferenzausgangsadapter-matrix , bezahlarteingangsadapter-matrix , bezahlartausgangsadapter-matrix , waehrungseingangsadapter-matrix , waehrungsausgangsadapter-matrix , zahlungsintervalleingangsadapter-matrix , zahlungsintervallausgangsadapter-matrix , mitnahmetyppausgangsadapter-matrix , mitnahmetypeingangsadapter-matrix , rabattmedientypeingangsadapter-matrix , rabattmedientypausgangsadapter-matrix , identifikationsparameterwerteingangsadapter-matrix , identifikationsparameterwertausgangsadapter-matrix | | | | | | |
| Children | bezahlartausgangsadapter-matrix, bezahlarteingangsadapter-matrix, identifikationsparameterwertausgangsadapter-matrix, identifikationsparameterwerteingangsadapter-matrix, linienausgangsadapter-matrix, linieneingangsadapter-matrix, mitnahmetyppausgangsadapter-matrix, mitnahmetypeingangsadapter-matrix, moduldaten, modulkontextadapter-matrix, produktadapter-matrix, rabattmedientypausgangsadapter-matrix, rabattmedientypeingangsadapter-matrix, tarifpunktausgangsadapter-matrix, tarifpunkteingangsadapter-matrix, tarifpunktreferenzausgangsadapter-matrix, tarifpunktreferenzeingangsadapter-matrix, verkehrsmitteltypausgangsadapter-matrix, verkehrsmitteltypeingangsadapter-matrix, waehrungsausgangsadapter-matrix, waehrungseingangsadapter-matrix, wegevarianteneingangsadapter-matrix, wegevariantenausgangsadapter-matrix, zahlungsintervallausgangsadapter-matrix, zahlungsintervalleingangsadapter-matrix | | | | | | |
| Instance | <pre> <item xmlns="http://vdv/ka/pkm/1"> <moduldaten>{1,1}</moduldaten> <produktadapter-matrix>{1,1}</produktadapter-matrix> <modulkontextadapter-matrix>{1,1}</modulkontextadapter-matrix> <linieneingangsadapter-matrix>{1,1}</linieneingangsadapter-matrix> <linienausgangsadapter-matrix>{1,1}</linienausgangsadapter-matrix> <verkehrsmitteltypeingangsadapter-matrix>{1,1}</verkehrsmitteltypeingangsadapter-matrix> <verkehrsmitteltypausgangsadapter-matrix>{1,1}</verkehrsmitteltypausgangsadapter-matrix> <wegevarianteneingangsadapter-matrix>{1,1}</wegevarianteneingangsadapter-matrix> <wegevariantenausgangsadapter-matrix>{1,1}</wegevariantenausgangsadapter-matrix> <tarifpunkteingangsadapter-matrix>{1,1}</tarifpunkteingangsadapter-matrix> <tarifpunktausgangsadapter-matrix>{1,1}</tarifpunktausgangsadapter-matrix> <tarifpunktreferenzeingangsadapter-matrix>{1,1}</tarifpunktreferenzeingangsadapter-matrix> <tarifpunktreferenzausgangsadapter-matrix>{1,1}</tarifpunktreferenzausgangsadapter-matrix> <bezahlarteingangsadapter-matrix>{1,1}</bezahlarteingangsadapter-matrix> <bezahlartausgangsadapter-matrix>{1,1}</bezahlartausgangsadapter-matrix> <waehrungseingangsadapter-matrix>{1,1}</waehrungseingangsadapter-matrix> <waehrungsausgangsadapter-matrix>{1,1}</waehrungsausgangsadapter-matrix> <zahlungsintervalleingangsadapter-matrix>{1,1}</zahlungsintervalleingangsadapter-matrix> <zahlungsintervallausgangsadapter-matrix>{1,1}</zahlungsintervallausgangsadapter-matrix> <mitnahmetyppausgangsadapter-matrix>{1,1}</mitnahmetyppausgangsadapter-matrix> <mitnahmetypeingangsadapter-matrix>{1,1}</mitnahmetypeingangsadapter-matrix> <rabattmedientypeingangsadapter-matrix>{1,1}</rabattmedientypeingangsadapter-matrix> <rabattmedientypausgangsadapter-matrix>{1,1}</rabattmedientypausgangsadapter-matrix> <identifikationsparameterwerteingangsadapter-matrix>{1,1}</identifikationsparameterwerteingangsadapter-matrix> <identifikationsparameterwertausgangsadapter-matrix>{1,1}</identifikationsparameterwertausgangsadapter-matrix> </item> </pre> | | | | | | |
| Source | <pre> <xs:element name="item" type="XML-Produktmodul-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Produktmodul-Item / moduldaten

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | |
|------------|---|
| Type | XML-PVPM |
| Properties | content: complex |
| Model | status , version , organisation , namenszusatz , bemerkungen , verantwortlicher , organisation-pool , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , loeschstrategie , verkaufsstrategie , ruecknahmestategie , darstellungsstrategie , ausgangsdatenfamilie-pool , nachfolgekriterium-pool , abhaengigkeitskriterium-pool , schlues-sel-pool , kontingentierung-pool , identifikationsparameter-pool , efmprodukt-pool , tarifprodukt-pool , fremdprodukt-pool , produk-tgruppe-pool , tarifpunkt-pool , tarifpunktgruppe-pool , tarifpunktreferenz-pool , linie-pool , verkehrsmitteltyp-pool , verkehrsmittelinienbezug-pool , modulkontext-pool , bezahlart-pool , waehrung-pool , zahlungsintervall-pool , mitnahmetyp-pool , rabattmedientyp-pool , spezialbedingung-pool , bezahlartbedingung-pool , zahlungsintervallbedingung-pool , tagesbedingung-pool , tageszeitbedingung-pool , zeitraumbedingung-pool , tarifpunktbedingung-pool , bewertungsbedingung-pool , mitnahmebedingung-pool , rabattmedienbedingung-pool , modulkontextbedingung-pool , verkehrsmittelinienbedingung-pool , zuordnungstyp-pool , zuordnungsdaten-matrix , zuordnungsausnahme-matrix , wegevariante-pool , bewertungstyp-pool , bewertungsdaten-pool , bewertungsdaten-matrix , bewertungsausnahme-matrix , nummerninterpretation-pool , bitleisteninterpretation-pool , raumnummerninterpretation-pool , signatur , annotation |
| Children | abhaengigkeitskriterium-pool , annotation , ausgangsdaten-pool , ausgangsdatenfamilie-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bemerkungen , bewertungsausnahme-matrix , bewertungsbedingung-pool , bewertungsdaten-matrix , bewertungsdaten-pool , bewertungstyp-pool , bezahlart-pool , bezahlartbedingung-pool , bitleisteninterpretation-pool , darstellungsstrategie , efmprodukt-pool , eingangsschnittstelle-pool , fremdprodukt-pool , funktion-pool , identifikationsparameter-pool , kontingentierung-pool , linie-pool , loeschstrategie , mitnahmebedingung-pool , mitnahmetyp-pool , modulkontext-pool , modulkontextbedingung-pool , nachfolgekriterium-pool , namenszusatz , nummerninterpretation-pool , organisation , organisation-pool , produktgruppe-pool , rabattmedienbedingung-pool , rabattmedientyp-pool , raumnummerninterpretation-pool , ruecknahmestategie , schlues-sel-pool , schritt-pool , signatur , spezialbedingung-pool , sprache-pool , status , tagesbedingung-pool , tageszeitbedingung-pool , tarifprodukt-pool , tarifpunkt-pool , tarifpunktbedingung-pool , tarifpunktgruppe-pool , tarifpunktreferenz-pool , text-matrix , variable-pool , verantwortlicher , verkaufsstrategie , verkehrsmittelinienbedingung-pool , verkehrsmittelinienbezug-pool , verkehrsmitteltyp-pool , version , waehrung-pool , wegevariante-pool , zahlungsintervall-pool , zahlungsintervallbedingung-pool , zeitraumbedingung-pool , zuordnungsdaten-matrix , zuordnungstyp-pool |
| Instance | <pre> <moduldaten xmlns="http://vdv/ka/pkm/1"> <status>{1,1}</status> <version>{1,1}</version> <organisation>{1,1}</organisation> <namenszusatz>{1,1}</namenszusatz> <bemerkungen>{1,1}</bemerkungen> <verantwortlicher>{1,1}</verantwortlicher> <organisation-pool>{1,1}</organisation-pool> <text-matrix>{1,1}</text-matrix> <sprache-pool key="">{1,1}</sprache-pool> <eingangsschnittstelle-pool key="">{1,1}</eingangsschnittstelle-pool> <ausgangsschnittstelle-pool key="">{1,1}</ausgangsschnittstelle-pool> <ausgangskontext-pool key="">{1,1}</ausgangskontext-pool> <schritt-pool key="">{1,1}</schritt-pool> <variable-pool key="">{1,1}</variable-pool> <funktion-pool key="">{1,1}</funktion-pool> <ausnahme-pool key="">{1,1}</ausnahme-pool> <auswahldaten-pool key="">{1,1}</auswahldaten-pool> <auswahloption-pool key="">{1,1}</auswahloption-pool> <ausgangsdaten-pool key="">{1,1}</ausgangsdaten-pool> <loeschstrategie>{1,1}</loeschstrategie> <verkaufsstrategie>{1,1}</verkaufsstrategie> <ruecknahmestategie>{1,1}</ruecknahmestategie> <darstellungsstrategie>{1,1}</darstellungsstrategie> <ausgangsdatenfamilie-pool key="">{1,1}</ausgangsdatenfamilie-pool> <nachfolgekriterium-pool key="">{1,1}</nachfolgekriterium-pool> <abhaengigkeitskriterium-pool key="">{1,1}</abhaengigkeitskriterium-pool> <schlues-sel-pool key="">{1,1}</schlues-sel-pool> <kontingentierung-pool key="">{1,1}</kontingentierung-pool> <identifikationsparameter-pool key="">{1,1}</identifikationsparameter-pool> <efmprodukt-pool key="">{1,1}</efmprodukt-pool> <tarifprodukt-pool key="">{1,1}</tarifprodukt-pool> <fremdprodukt-pool key="">{1,1}</fremdprodukt-pool> <produktgruppe-pool key="">{1,1}</produktgruppe-pool> <tarifpunkt-pool key="">{1,1}</tarifpunkt-pool> <tarifpunktgruppe-pool key="">{1,1}</tarifpunktgruppe-pool> <tarifpunktreferenz-pool key="">{1,1}</tarifpunktreferenz-pool> <linie-pool key="">{1,1}</linie-pool> <verkehrsmitteltyp-pool key="">{1,1}</verkehrsmitteltyp-pool> <verkehrsmittelinienbezug-pool key="">{1,1}</verkehrsmittelinienbezug-pool> <modulkontext-pool key="">{1,1}</modulkontext-pool> <bezahlart-pool key="">{1,1}</bezahlart-pool> <waehrung-pool key="">{1,1}</waehrung-pool> <zahlungsintervall-pool key="">{1,1}</zahlungsintervall-pool> <mitnahmetyp-pool key="">{1,1}</mitnahmetyp-pool> <rabattmedientyp-pool key="">{1,1}</rabattmedientyp-pool> <spezialbedingung-pool key="">{1,1}</spezialbedingung-pool> <bezahlartbedingung-pool key="">{1,1}</bezahlartbedingung-pool> <zahlungsintervallbedingung-pool key="">{1,1}</zahlungsintervallbedingung-pool> </pre> |

| | |
|-----------------|--|
| | <pre> <tagesbedingung-pool key="">{1,1}</tagesbedingung-pool> <tageszeitbedingung-pool key="">{1,1}</tageszeitbedingung-pool> <zeitraumbedingung-pool key="">{1,1}</zeitraumbedingung-pool> <tarifpunktbedingung-pool key="">{1,1}</tarifpunktbedingung-pool> <bewertungsbedingung-pool key="">{1,1}</bewertungsbedingung-pool> <mitnahmebedingung-pool key="">{1,1}</mitnahmebedingung-pool> <rabattmedienbedingung-pool key="">{1,1}</rabattmedienbedingung-pool> <modulkontextbedingung-pool key="">{1,1}</modulkontextbedingung-pool> <verkehrsmittellinienbedingung-pool key="">{1,1}</verkehrsmittellinienbedingung-pool> <zuordnungstyp-pool key="">{1,1}</zuordnungstyp-pool> <zuordnungsdaten-matrix>{1,1}</zuordnungsdaten-matrix> <zuordnungsausnahme-matrix>{1,1}</zuordnungsausnahme-matrix> <wegevariante-pool key="">{1,1}</wegevariante-pool> <bewertungstyp-pool key="">{1,1}</bewertungstyp-pool> <bewertungsdaten-pool key="">{1,1}</bewertungsdaten-pool> <bewertungsdaten-matrix>{1,1}</bewertungsdaten-matrix> <bewertungsausnahme-matrix>{1,1}</bewertungsausnahme-matrix> <nummerninterpretation-pool key="">{1,1}</nummerninterpretation-pool> <bitleisteninterpretation-pool key="">{1,1}</bitleisteninterpretation-pool> <raumnummerninterpretation-pool key="">{1,1}</raumnummerninterpretation-pool> <signatur>{1,1}</signatur> <annotation>{1,1}</annotation> </moduldaten> </pre> |
| Source | <xs:element name="moduldaten" type="XML-PVPM" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Matrix / produktadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Produktadapter-Matrix |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre> <produktadapter-matrix xmlns="http://vdv/ka/pkm/1"> <item ref="">{0,unbounded}</item> </produktadapter-matrix> </pre> |
| Source | <xs:element name="produktadapter-matrix" type="XML-Produktadapter-Matrix" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Matrix / item

| | |
|-------------|---------------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Sortiert nach erstem Attribut} |

| Diagram | | | | | | | |
|-----------------|--|----------|---------|------------|-----|------------|-----------|
| Type | XML-Produktadapter-Entry | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-ItemXML-Produktadapter-Entry | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , schluessel , loeschmodulkontext , verkaufsmodulkontext , darstellungsmodulkontext , ruecknahmepool , preisanpassung-pool | | | | | | |
| Children | darstellungsmodulkontext, loeschmodulkontext, nr, preisanpassung-pool, ruecknahmepool, schluessel, verkaufsmodulkontext | | | | | | |
| Instance | <pre><item ref=" " xmlns="http://vdv/ka/pkm/1"> <nr>{1,1}</nr> <schluessel>{1,1}</schluessel> <loeschmodulkontext>{1,1}</loeschmodulkontext> <verkaufsmodulkontext>{1,1}</verkaufsmodulkontext> <darstellungsmodulkontext>{1,1}</darstellungsmodulkontext> <ruecknahmepool>{1,1}</ruecknahmepool> <preisanpassung-pool>{1,1}</preisanpassung-pool> </item></pre> | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td></tr></table> | QName | Type | Use | ref | XML-Ref | required |
| QName | Type | Use | | | | | |
| ref | XML-Ref | required | | | | | |
| Source | <pre><xs:element name="item" type="XML-Produktadapter-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Element XML-Produktadapter-Entry / nr

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-StringValue |
| Properties | content: simple |
| Source | <code><xs:element name="nr" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Entry / schluessel

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-KVPPM-Schluessel-Part |
| Properties | content: complex |
| Model | mkkvp |
| Children | mkkvp |
| Instance | <pre><schluessel xmlns="http://vdv/ka/pkm/1"> <mkkvp>{1,1}</mkkvp> </schluessel></pre> |
| Source | <code><xs:element name="schluessel" type="XML-KVPPM-Schluessel-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-KVPPM-Schluessel-Part / mkkvp

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><mkkvp xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </mkkvp></pre> |
| Source | <code><xs:element name="mkkvp" type="XML-Ref-01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Entry / loeschmodulkontext

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><loeschmodulkontext xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </loeschmodulkontext></pre> |

| | |
|-----------------|---|
| Source | <code><xs:element name="loeschmodulkontext" type="XML-Ref-Set-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Entry / verkaufsmodulkontext

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkaufsmoedulkontext xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </verkaufsmoedulkontext></pre> |
| Source | <code><xs:element name="verkaufsmoedulkontext" type="XML-Ref-Set-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

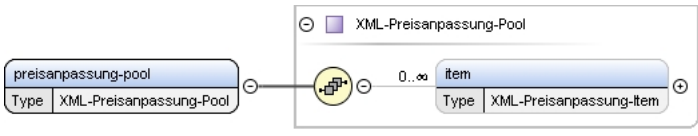
Element XML-Produktadapter-Entry / darstellungsmodulkontext

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><darstellungsmodulkontext xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </darstellungsmodulkontext></pre> |
| Source | <code><xs:element name="darstellungsmodulkontext" type="XML-Ref-Set-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

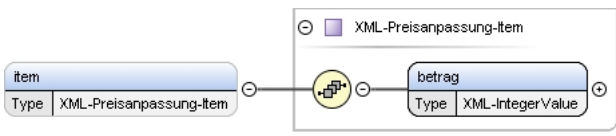
Element XML-Produktadapter-Entry / ruecknahmemodulkontext

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ref-Set-0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ruecknahmemodulkontext xmlns="http://vdv/ka/pkm/1"> <ref>{0,unbounded}</ref> </ruecknahmemodulkontext></pre> |
| Source | <code><xs:element name="ruecknahmemodulkontext" type="XML-Ref-Set-0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |


Element XML-Produktadapter-Entry / preisanpassung-pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  The diagram shows a container box labeled 'XML-Preisanpassung-Pool'. Inside, there is an element box labeled 'preisanpassung-pool' with 'Type XML-Preisanpassung-Pool'. This box is connected to a multiplicity circle containing '0..∞'. This circle is then connected to an element box labeled 'item' with 'Type XML-Preisanpassung-Item'. |
| Type | XML-Preisanpassung-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><preisanpassung-pool xmlns="http://vdv/ka/pkm/1"> <item>{0,unbounded}</item> </preisanpassung-pool></pre> |
| Source | <pre><xs:element name="preisanpassung-pool" type="XML-Preisanpassung-Pool" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

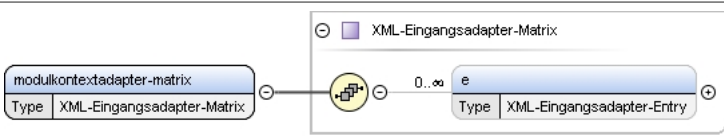
Element XML-Preisanpassung-Pool / item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  The diagram shows a container box labeled 'XML-Preisanpassung-Item'. Inside, there is an element box labeled 'item' with 'Type XML-Preisanpassung-Item'. This box is connected to a multiplicity circle containing '0'. This circle is then connected to an element box labeled 'betrag' with 'Type XML-IntegerValue'. |
| Type | XML-Preisanpassung-Item |
| Properties | content: complex minOccurs: 0 maxOccurs: unbounded |
| Model | betrag |
| Children | betrag |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <betrag>{1,1}</betrag> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Preisanpassung-Item" minOccurs="0" maxOccurs="unbounded" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Preisanpassung-Item / betrag

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  The diagram shows a container box labeled 'XML-IntegerValue'. Inside, there is an element box labeled 'betrag' with 'Type XML-IntegerValue'. This box is connected to a multiplicity circle containing '1'. |
| Type | XML-IntegerValue |
| Properties | content: simple |
| Source | <pre><xs:element name="betrag" type="XML-IntegerValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / modulkontextadapter-matrix

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  The diagram shows a container box labeled 'XML-Eingangsadapter-Matrix'. Inside, there is an element box labeled 'modulkontextadapter-matrix' with 'Type XML-Eingangsadapter-Matrix'. This box is connected to a multiplicity circle containing '0..∞'. This circle is then connected to an element box labeled 'e' with 'Type XML-Eingangsadapter-Entry'. |

| | |
|-----------------|---|
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><modulkontextadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </modulkontextadapter-matrix></pre> |
| Source | <pre><xs:element name="modulkontextadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / linieneingangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><linieneingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </linieneingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="linieneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / linienausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><linienausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </linienausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="linienausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / verkehrsmitteltypeingangsadapter-matrix

| | |
|-----------|----------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><verkehrsmitteltypeingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </verkehrsmitteltypeingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="verkehrsmitteltypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / verkehrsmitteltypausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><verkehrsmitteltypausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </verkehrsmitteltypausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="verkehrsmitteltypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / wegevarianteneingangsadapter-matrix

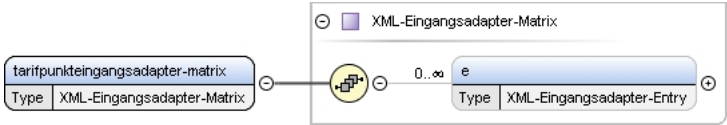
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><wegevarianteneingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </wegevarianteneingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="wegevarianteneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / wegevariantenausgangsadapter-matrix

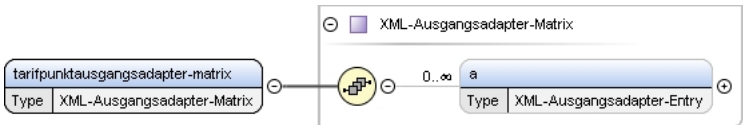
| | |
|-----------|----------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><wegevariantenausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </wegevariantenausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="wegevariantenausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

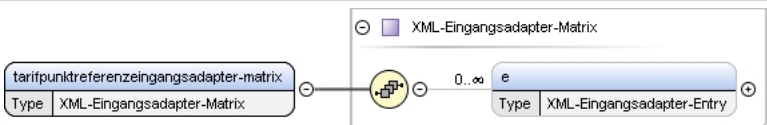
Element XML-Produktmodul-Item / tarifpunkteingangsadapter-matrix

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  The diagram shows a container box labeled 'XML-Eingangsadapter-Matrix'. Inside, there is a box for 'tarifpunkteingangsadapter-matrix' (Type: XML-Eingangsadapter-Matrix) connected to a box for 'e' (Type: XML-Eingangsadapter-Entry). The connection is labeled with '0..∞'. |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><tarifpunkteingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </tarifpunkteingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="tarifpunkteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / tarifpunktausgangsadapter-matrix

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  The diagram shows a container box labeled 'XML-Ausgangsadapter-Matrix'. Inside, there is a box for 'tarifpunktausgangsadapter-matrix' (Type: XML-Ausgangsadapter-Matrix) connected to a box for 'a' (Type: XML-Ausgangsadapter-Entry). The connection is labeled with '0..∞'. |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><tarifpunktausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </tarifpunktausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="tarifpunktausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / tarifpunktreferenzeingangsadapter-matrix

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  The diagram shows a container box labeled 'XML-Eingangsadapter-Matrix'. Inside, there is a box for 'tarifpunktreferenzeingangsadapter-matrix' (Type: XML-Eingangsadapter-Matrix) connected to a box for 'e' (Type: XML-Eingangsadapter-Entry). The connection is labeled with '0..∞'. |
| Type | XML-Eingangsadapter-Matrix |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><tarifpunktreferenzeingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </tarifpunktreferenzeingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="tarifpunktreferenzeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / tarifpunktreferenzausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><tarifpunktreferenzausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </tarifpunktreferenzausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="tarifpunktreferenzausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / bezahlarteingangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><bezahlarteingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </bezahlarteingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="bezahlarteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / bezahlartausgangsadapter-matrix

| | |
|------------|----------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | a* |
| Children | a |
| Instance | <pre><bezahlartausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </bezahlartausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="bezahlartausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / waehrungseingangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><waehrungseingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </waehrungseingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="waehrungseingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / waehrungsausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><waehrungsausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </waehrungsausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="waehrungsausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / zahlungsintervalleingangsadapter-matrix

| | |
|------------|----------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | e* |
| Children | e |
| Instance | <pre><zahlungsintervalleingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </zahlungsintervalleingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="zahlungsintervalleingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / zahlungsintervallausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><zahlungsintervallausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </zahlungsintervallausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="zahlungsintervallausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / mitnahmetypausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><mitnahmetypausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </mitnahmetypausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="mitnahmetypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / mitnahmetypeingangsadapter-matrix

| | |
|------------|----------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |

| | |
|-----------------|---|
| Children | e |
| Instance | <pre><mitnahmetypeingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </mitnahmetypeingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="mitnahmetypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / rabattmedientypeingangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><rabattmedientypeingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </rabattmedientypeingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="rabattmedientypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / rabattmedientypausgangsadapter-matrix


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><rabattmedientypausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </rabattmedientypausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="rabattmedientypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Produktmodul-Item / identifikationsparameterwerteingangsadapter-matrix


| | |
|------------|----------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |

| | |
|-----------------|---|
| Children | e |
| Instance | <pre><identifikationsparameterwerteingangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> <e ref="">{0,unbounded}</e> </identifikationsparameterwerteingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="identifikationsparameterwerteingangsadapter-matrix" type="XML-Eingangsadapter- Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/1/XML-Schema_PKM.xsd |

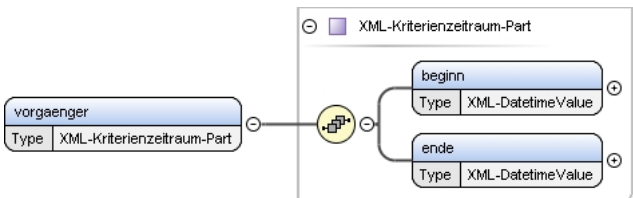
Element XML-Produktmodul-Item / identifikationsparameterwertausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><identifikationsparameterwertausgangsadapter-matrix xmlns="http://vdv/ka/pkm/1"> {0,unbounded} </identifikationsparameterwertausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="identifikationsparameterwertausgangsadapter-matrix" type="XML-Ausgangsadapter- Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/1/XML-Schema_PKM.xsd |

Element XML-Nachfolgekriterium-Item / funktion

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | XML-Ref-01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/1"> <ref>{0,1}</ref> </funktion></pre> |
| Source | <pre><xs:element name="funktion" type="XML-Ref-01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/1/XML-Schema_PKM.xsd |

Element XML-Nachfolgekriterium-Item / vorgaenger

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |

| | |
|-----------------|---|
| Type | XML-Kriterienzeitraum-Part |
| Properties | content: complex |
| Model | beginn , ende |
| Children | beginn, ende |
| Instance | <pre><vorgaenger xmlns="http://vdv/ka/pkm/1"> <beginn>{1,1}</beginn> <ende>{1,1}</ende> </vorgaenger></pre> |
| Source | <code><xs:element name="vorgaenger" type="XML-Kriterienzeitraum-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Nachfolgekriterium-Item / wirksamkeit

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | XML-Kriterienzeitraum-Part |
| Properties | content: complex |
| Model | beginn , ende |
| Children | beginn, ende |
| Instance | <pre><wirksamkeit xmlns="http://vdv/ka/pkm/1"> <beginn>{1,1}</beginn> <ende>{1,1}</ende> </wirksamkeit></pre> |
| Source | <code><xs:element name="wirksamkeit" type="XML-Kriterienzeitraum-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element XML-Nachfolgekriterium-Pool / item

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Annotations | {Implies key Attribut} |
| Diagram | |
| Type | XML-Nachfolgekriterium-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item |

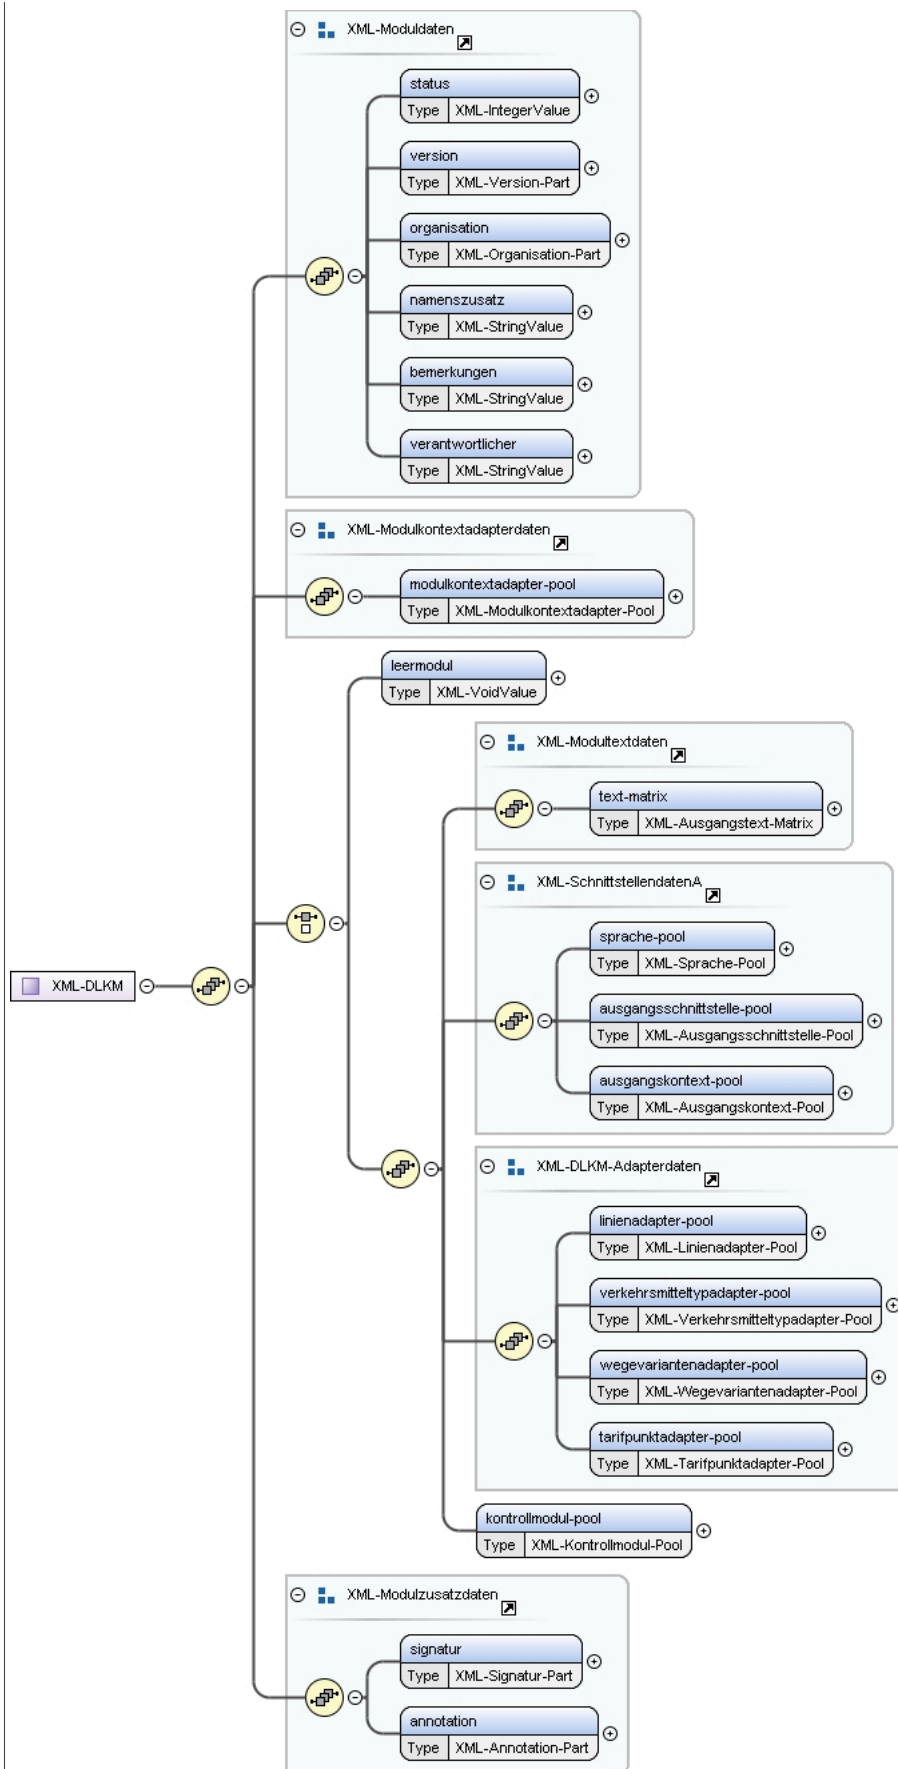
| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| | <ul style="list-style-type: none"> • XML-Name-Item • XML-Nachfolgekriterium-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , funktion , vorgaenger , wirksamkeit | | | | | | |
| Children | funktion, name, vorgaenger, wirksamkeit | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/1"> <name>{1,1}</name> <funktion>{1,1}</funktion> <vorgaenger>{1,1}</vorgaenger> <wirksamkeit>{1,1}</wirksamkeit> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Nachfolgekriterium-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | |

Complex Type(s)

Complex Type XML-DLKM

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



Used by

Element

dl-km

| | |
|-----------------|---|
| Model | status , version , organisation , namenszusatz , bemerkungen , verantwortlicher , modulkontextadapter-pool , (leermodul (text-matrix , sprache-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , linienadapter-pool , verkehrsmitteltypadapter-pool , wegevariantenadapter-pool , tarifpunktadapter-pool , kontrollmodul-pool)) , signatur , annotation |
| Children | annotation, ausgangskontext-pool, ausgangsschnittstelle-pool, bemerkungen, kontrollmodul-pool, leermodul, linienadapter-pool, modulkontextadapter-pool, namenszusatz, organisation, signatur, sprache-pool, status, tarifpunktadapter-pool, text-matrix, verantwortlicher, verkehrsmitteltypadapter-pool, version, wegevariantenadapter-pool |
| Source | <pre><xs:complexType name="XML-DLKM"> <xs:sequence> <xs:group ref="XML-Moduldaten" /> <xs:group ref="XML-Modulkontextadapterdaten" /> <xs:choice> <xs:element name="leermodul" type="XML-VoidValue" /> <xs:sequence> <xs:group ref="XML-Modultextdaten" /> <xs:group ref="XML-SchnittstellendatenA" /> <xs:group ref="XML-DLKM-Adapterdaten" /> <xs:element name="kontrollmodul-pool" type="XML-Kontrollmodul-Pool" /> </xs:sequence> </xs:choice> <xs:group ref="XML-Modulzusatzdaten" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Version-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Elements XML-Moduldaten/version, XML-Version-Part/vorgaengerversion |
| Model | gueltigkeitsbeginn , nr , internNr , spezifikation , bearbeiter , bemerkungen , speicherzeitpunkt , vorgaengerversion{0,1} |
| Children | bearbeiter, bemerkungen, gueltigkeitsbeginn, internNr, nr, speicherzeitpunkt, spezifikation, vorgaengerversion |
| Source | <pre><xs:complexType name="XML-Version-Part"> <xs:sequence> <xs:element name="gueltigkeitsbeginn" type="XML-DatetimeValue" /> <xs:element name="nr" type="XML-IntegerValue" /> <xs:element name="internNr" type="XML-IntegerValue" /> <xs:element name="spezifikation" type="XML-IntegerValue" /> <xs:element name="bearbeiter" type="XML-StringValue" /> <xs:element name="bemerkungen" type="XML-StringValue" /> <xs:element name="speicherzeitpunkt" type="XML-DatetimeValue" /> <xs:element name="vorgaengerversion" type="XML-Version-Part" minOccurs="0" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Organisation-Part

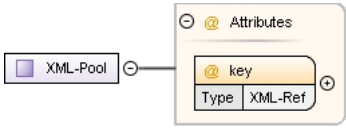
| | | | |
|-----------------|--|---|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Used by | Elements | XML-Fremdprodukt-Item/organisation, XML-Moduldaten/organisation | |
| | Complex Type | XML-Organisation-Item | |
| Model | id , name | | |
| Children | id, name | | |
| Source | <pre><xs:complexType name="XML-Organisation-Part"> <xs:sequence> <xs:element name="id" type="XML-IntegerValue" /> <xs:element name="name" type="XML-StringValue" /> </xs:sequence> </xs:complexType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Complex Type XML-Modulkontextadapter-Pool

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|--|---|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Modulkontextadapter-Pool | | | | | | | | | | | |
| Used by | Element | XML-Modulkontextadapterdaten/modulkontextadapter-pool | | | | | | | | | | |
| Model | item+ | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Modulkontextadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Modulkontextadapter-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|--|----------|--|
| Diagram |  | | | |
| Used by | Complex Types | <p>XML-Abhaengigkeitskriterium-Pool, XML-Ausgangsdaten-Pool, XML-Ausgangsdatenfamilie-Pool, XML-Ausgangskontext-Pool, XML-Ausgangsparameter-Pool, XML-Ausgangsschnittstelle-Pool, XML-Ausnahme-Pool, XML-Auswahldaten-Pool, XML-Auswahloption-Pool, XML-Bewertungsbedingung-Pool, XML-Bewertungsdaten-Pool, XML-Bewertungstyp-Pool, XML-Bezahlart-Pool, XML-Bezahlartadapter-Pool, XML-Bezahlartbedingung-Pool, XML-Bitleisteninterpretation-Pool, XML-Eingangsparameter-Pool, XML-Eingangsschnittstelle-Pool, XML-Fremdprodukt-Pool, XML-Funktion-Pool, XML-Identifikationsparameter-Pool, XML-Identifikationsparameteradapter-Pool, XML-Identifikationsparameterwert-Pool, XML-Identifikationsparameterwertadapter-Pool, XML-Kontingierung-Pool, XML-Kontrollmodul-Pool, XML-Linie-Pool, XML-Linienadapter-Pool, XML-Mitnahmebedingung-Pool, XML-Mitnahmetyp-Pool, XML-Mitnahmetypadapter-Pool, XML-Modulkontext-Pool, XML-Modulkontextadapter-Pool, XML-Modulkontextbedingung-Pool, XML-Nachfolgekriterium-Pool, XML-Nummerninterpretation-Pool, XML-Nummerntext-Pool, XML-PVKM-EFMPProdukt-Pool, XML-PVKM-Tarifprodukt-Pool, XML-PVPM-EFMPProdukt-Pool, XML-PVPM-Tarifprodukt-Pool, XML-Produktgruppe-Pool, XML-Produktmodul-Pool, XML-Rabattmedienbedingung-Pool, XML-Rabattmedientyp-Pool, XML-Rabattmedientypadapter-Pool, XML-Raummodifikation-Pool, XML-Raumnummerninterpretation-Pool, XML-Schluessel-Pool, XML-Schritt-Pool, XML-Spezialbedingung-Pool, XML-Sprache-Pool, XML-Tagesbedingung-Pool, XML-Tageszeitbedingung-Pool, XML-Tarifpunkt-Pool, XML-Tarifpunktadapter-Pool, XML-Tarifpunktbedingung-Pool, XML-Tarifpunktgruppe-Pool, XML-Tarifpunktreferenz-Pool, XML-Tarifpunktreferenzadapter-Pool, XML-Variable-Pool, XML-Verkehrsmittellinienbedingung-Pool, XML-Verkehrsmittellinienbezug-Pool, XML-Verkehrsmitteltyp-Pool, XML-Verkehrsmitteltypadapter-Pool, XML-Wachrung-Pool, XML-Wachrungsadapter-Pool, XML-Wegevariante-Pool, XML-Wegevariantenadapter-Pool, XML-Zahlungsintervall-Pool, XML-Zahlungsintervalladapter-Pool, XML-Zahlungsintervallbedingung-Pool, XML-Zeitraumbedingung-Pool, XML-Zuordnungstyp-Pool</p> | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Pool"> <xs:attribute name="key" type="XML-Ref" use="required" /> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Modulkontextadapter-Item


| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Nr-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Modulkontextadapter-Item |
| Used by | Element XML-Modulkontextadapter-Pool/item |
| Model | nr , name |
| Children | name, nr |
| Source | <pre><xs:complexType name="XML-Modulkontextadapter-Item"> <xs:complexContent> <xs:extension base="XML-Nr-Item" /> </xs:complexContent> </xs:complexType></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|


Complex Type XML-Nr-Item

| | | | |
|-----------------|--|---|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | extension of XML-Item | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item | | |
| Used by | Complex Types | XML-Ausgangsparameter-Item, XML-Ausgangsschnittstelle-Item, XML-Eingangsparameter-Item, XML-Eingangsschnittstelle-Item, XML-Identifikationsparameter-Item, XML-Identifikationsparameteradapter-Item, XML-Modulkontextadapter-Item, XML-Nummerninterpretation-Item, XML-Raummodifikation-Item, XML-Sprache-Item, XML-Text-Item | |
| Model | nr , name | | |
| Children | name, nr | | |
| Source | <pre><xs:complexType name="XML-Nr-Item"> <xs:complexContent> <xs:extension base="XML-Item"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Complex Type XML-Item


| | | | |
|-----------------|---|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram |  | | |
| Used by | Complex Types | XML-Kontrollmodul-Item, XML-Name-Item, XML-Nr-Item, XML-Produktadapter-Entry, XML-Produktmodul-Item, XML-Schluessel-Item | |
| Source | <xs:complexType name="XML-Item" /> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Complex Type XML-VoidValue

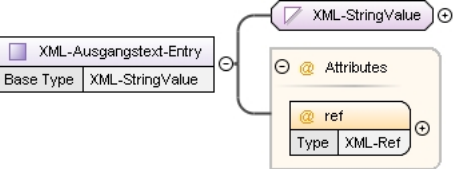
| | | | |
|-----------------|---|---|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram |  | | |
| Used by | Elements | XML-DLKM/leermodul, XML-KVPPM/leermodul, XML-RelativzeitpunktB-Part/unbestimmt, XML-Value/undefiniert | |
| Model | | | |
| Source | <pre><xs:complexType name="XML-VoidValue"> <xs:sequence/> </xs:complexType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Complex Type XML-Ausgangstext-Matrix

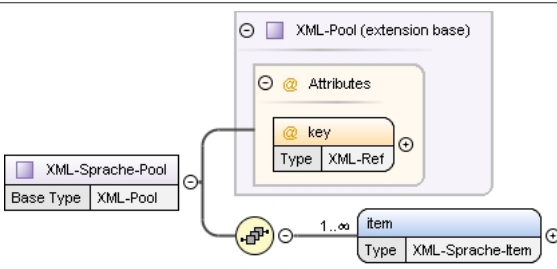
| | | | |
|-----------|---------------------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
|-----------|---------------------|--|--|

| | | | |
|-----------------|--|---|--|
| Diagram |  | | |
| Used by | Elements | XML-Bewertungsdaten-Item/text-matrix, XML-Modultextdaten/text-matrix, XML-Text-Item/text-matrix | |
| Model | text* | | |
| Children | text | | |
| Source | <pre><xs:complexType name="XML-Ausgangstext-Matrix"> <xs:sequence> <xs:element name="text" type="XML-Ausgangstext-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Complex Type XML-Ausgangstext-Entry

| | | | |
|-----------------|--|------------------------------|----------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram |  | | |
| Type | extension of XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringValue XML-Ausgangstext-Entry | | |
| Used by | Element | XML-Ausgangstext-Matrix/text | |
| Attributes | QName | Type | Use |
| | ref | XML-Ref | required |
| Source | <pre><xs:complexType name="XML-Ausgangstext-Entry"> <xs:simpleContent> <xs:extension base="XML-StringValue"> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:extension> </xs:simpleContent> </xs:complexType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Complex Type XML-Sprache-Pool

| | | | |
|----------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram |  | | |
| Type | extension of XML-Pool | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Sprache-Pool | | |

| | | | | |
|-----------------|--|---------|----------|--|
| Used by | ElementsXML-SchnittstellendatenA/sprache-pool, XML-SchnittstellendatenB/sprache-pool | | | |
| Model | item+ | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Sprache-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Sprache-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Sprache-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Nr-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Sprache-Item |
| Used by | Element XML-Sprache-Pool/item |
| Model | nr , name |
| Children | name, nr |
| Source | <pre><xs:complexType name="XML-Sprache-Item"> <xs:complexContent> <xs:extension base="XML-Nr-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangsschnittstelle-Pool

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |

| | | | | |
|-----------------|--|--|----------|--|
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangsschnittstelle-Pool | | | |
| Used by | Elements | XML-SchnittstellendatenA/ausgangsschnittstelle-pool, XML-SchnittstellendatenB/ausgangsschnittstelle-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Ausgangsschnittstelle-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangsschnittstelle-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangsschnittstelle-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Nr-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Ausgangsschnittstelle-Item |
| Used by | Element XML-Ausgangsschnittstelle-Pool/item |
| Model | nr , name , parameter-pool |
| Children | name, nr, parameter-pool |
| Source | <pre><xs:complexType name="XML-Ausgangsschnittstelle-Item"> <xs:complexContent> <xs:extension base="XML-Nr-Item"> <xs:sequence> <xs:element name="parameter-pool" type="XML-Ausgangsparameter-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangspoolparameter-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangspoolparameter-Pool | | | |
| Used by | Element XML-Ausgangsschnittstelle-Item/parameter-pool | | | |
| Model | item+ | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Ausgangspoolparameter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangspoolparameter-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangspoolparameter-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Nr-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Ausgangspoolparameter-Item | | | |
| Used by | Element XML-Ausgangspoolparameter-Pool/item | | | |
| Model | nr , name | | | |
| Children | name, nr | | | |
| Source | <pre> <xs:complexType name="XML-Ausgangspoolparameter-Item"> </pre> | | | |

| | |
|-----------------|---|
| | <pre> <xs:complexContent> <xs:extension base="XML-Nr-Item" /> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangskontext-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangskontext-Pool | | | |
| Used by | Elements XML-SchnittstellendatenA/ausgangskontext-pool, XML-SchnittstellendatenB/ausgangskontext-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Ausgangskontext-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangskontext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicitizes key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangskontext-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Ausgangskontext-Item | | | |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> XML-Name-Item XML-Ausgangskontext-Item |
| Used by | Element XML-Ausgangskontext-Pool/item |
| Model | name , sprache , parameter |
| Children | name, parameter, sprache |
| Source | <pre><xs:complexType name="XML-Ausgangskontext-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="sprache" type="XML-Ref-Set-1N" /> <xs:element name="parameter" type="XML-Ref-Set-1N" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Name-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item |
| Used by | <p>Complex Types</p> <p>XML-Abhaengigkeitskriterium-Item, XML-Ausgangsdatenfamilie-Item, XML-Ausgangskontext-Item, XML-Bewertungsbedingung-Item, XML-Bewertungsdaten-Item, XML-Bewertungstyp-Item, XML-Bezahlartbedingung-Item, XML-Bitleisteninterpretation-Item, XML-Funktion-Item, XML-Kontingentierung-Item, XML-Mitnahmebedingung-Item, XML-Modulkontext-Item, XML-Modulkontextbedingung-Item, XML-Nachfolgekriterium-Item, XML-Produktgruppe-Item, XML-Rabattmedienbedingung-Item, XML-Raumnummerninterpretation-Item, XML-Schritt-Item, XML-Sequenz-Item, XML-Spezialbedingung-Item, XML-Tagesbedingung-Item, XML-Tageszeitbedingung-Item, XML-Tarifpunktbedingung-Item, XML-Tarifpunktgruppe-Item, XML-Variable-Item, XML-Verkehrsmittellinienbedingung-Item, XML-Verkehrsmittellinienbezug-Item, XML-Zahlungsintervallbedingung-Item, XML-Zeitraumbedingung-Item, XML-Zuordnungstyp-Item</p> |
| Model | name |
| Children | name |
| Source | <pre><xs:complexType name="XML-Name-Item"> <xs:complexContent> <xs:extension base="XML-Item"> <xs:sequence> <xs:element name="name" type="XML-StringValue" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ref-Set-1N

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | <p>Elements</p> <p>XML-Ausgangskontext-Item/parameter, XML-Ausgangskontext-Item/sprache, XML-Bezahlartbedingung-Item/bezahlart, XML-Modulkontextbedingung-Item/modulkontext, XML-PVKM-Tarifprodukt-Item/identifikation, XML-PVPM-Tarifprodukt-Item/identifikation, XML-Produktgruppe-Item/pro-</p> |

| | |
|-----------------|--|
| | dukt, XML-Rabattmedienbedingung-Item/rabattmedientyp, XML-Tarifpunktgruppe-Item/tarifpunkt, XML-Tarifpunktreferenz-Item/tarifpunkt, XML-Verkehrsmittellinienbedingung-Item/verkehrsmittellinienbezug, XML-Zahlungsintervallbedingung-Item/zahlungsintervall |
| Model | ref+ |
| Children | ref |
| Source | <pre><xs:complexType name="XML-Ref-Set-1N"> <xs:sequence> <xs:element name="ref" type="XML-Ref" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Linienadapter-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Linienadapter-Pool | | | |
| Used by | Elements XML-DLKM-Adapterdaten/linienadapter-pool, XML-KVPPM-Adapterdaten/linienadapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Linienadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Linienadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Linienadapter-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Linienadapter-Item |
| Used by | Element XML-Linienadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Linienadapter-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Text-Item

| | | |
|----------------|--|--|
| Namespace | http://vdv/ka/pkm/1 | |
| Diagram | | |
| Type | extension of XML-Nr-Item | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item | |
| Used by | Complex Types | XML-Ausnahme-Item, XML-Bezahlart-Item, XML-Bezahlartadapter-Item, XML-Fremdprodukt-Item, XML-Identifikationsparameterwert-Item, XML-Identifikationsparameterwertadapter-Item, XML-Linie-Item, XML-Linienadapter-Item, XML-Mitnahmetyp-Item, XML-Mitnahmetypadapter-Item, XML-Nummerntext-Item, XML-PVKM-EFMPProdukt-Item, XML-PVKM-Tarifprodukt-Item, XML-PVPM-EFMPProdukt-Item, XML-PVPM-Tarifprodukt-Item, XML-Rabattmedientyp-Item, XML-Rabattmedientypadapter-Item, XML-Tarifpunkt-Item, XML-Tarifpunktadapter-Item, XML-Tarifpunktreferenzadapter-Item, XML-Verkehrsmitteltyp-Item, XML-Verkehrsmitteltypadapter-Item, XML-Wachung- |

| | |
|-----------------|--|
| | Item, XML-Wachrungsadapter-Item, XML-Wegevariante-Item, XML-Wegevariantenadapter-Item, XML-Zahlungsintervall-Item, XML-Zahlungsintervalladapter-Item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Text-Item"> <xs:complexContent> <xs:extension base="XML-Nr-Item"> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Verkehrsmitteltypadapter-Pool

| | | | | |
|-----------------|--|---|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Verkehrsmitteltypadapter-Pool. It is an extension of the XML-Pool type. The diagram shows a box for 'XML-Verkehrsmitteltypadapter-Pool' with 'Base Type' as 'XML-Pool'. A line connects it to a larger box representing the 'XML-Pool (extension base)'. Inside this base box, there is an 'Attributes' section with a 'key' attribute of type 'XML-Ref'. Below the attributes, there is a sequence of 'item' elements, each of type 'XML-Verkehrsmitteltypadapter-Item', with a cardinality of '0..∞'. A note indicates that the key attribute is implicit and sorted by the first element.</p> | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Verkehrsmitteltypadapter-Pool | | | |
| Used by | Elements | XML-DLKM-Adapterdaten/verkehrsmitteltypadapter-pool, XML-KVPPM-Adapterdaten/verkehrsmitteltypadapter-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Verkehrsmitteltypadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Verkehrsmitteltypadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicit key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Verkehrsmitteltypadapter-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Verkehrsmitteltypadapter-Item |
| Used by | Element XML-Verkehrsmitteltypadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Verkehrsmitteltypadapter-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Wegevariantenadapter-Pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Wegevariantenadapter-Pool | | | |
| Used by | Elements XML-DLKM-Adapterdaten/wegevariantenadapter-pool, XML-KVPPM-Adapterdaten/wegevariantenadapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Wegevariantenadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Wegevariantenadapter-Item" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |

| | |
|-----------------|---|
| | <pre> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Wegevariantenadapter-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Wegevariantenadapter-Item |
| Used by | Element XML-Wegevariantenadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Wegevariantenadapter-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"/> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunktadapter-Pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Tarifpunktadapter-Pool |

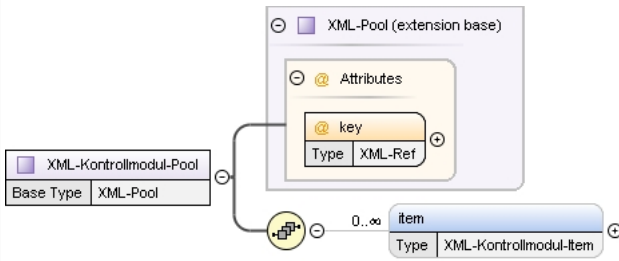
| Used by | Elements | XML-DLKM-Adapterdaten/tarifpunktadapter-pool, XML-KVPPM-Adapterdaten/tarifpunktadapter-pool | | |
|----------------------|--|---|----------|--|
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Tarifpunktadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifpunktadapter-Item

| | |
|---------------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre> classDiagram class XML-Text-Item { <<extension base=XML-Item>> } class XML-Nr-Item { <<extension base=XML-Item>> } class XML-Item { nr XML-IntegerValue name XML-StringValue text-matrix XML-Ausgangstext-Matrix typ XML-StringValue } class XML-Tarifpunktadapter-Item { <<extension base=XML-Text-Item>> } XML-Text-Item -- > XML-Item XML-Nr-Item -- > XML-Item XML-Tarifpunktadapter-Item -- > XML-Text-Item </pre> |
| Type | extension of XML-Text-Item |
| Type hierar- chy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Tarifpunktadapter-Item |
| Used by | Element XML-Tarifpunktadapter-Pool/item |
| Model | nr , name , text-matrix , typ |
| Children | name, nr, text-matrix, typ |
| Source | <pre> <xs:complexType name="XML-Tarifpunktadapter-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"> <xs:sequence> <xs:element name="typ" type="XML-StringValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Kontrollmodul-Pool

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Kontrollmodul-Pool | | | | | | | | | | | |
| Used by | Element XML-DLKM/kontrollmodul-pool | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Kontrollmodul-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Kontrollmodul-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Kontrollmodul-Item

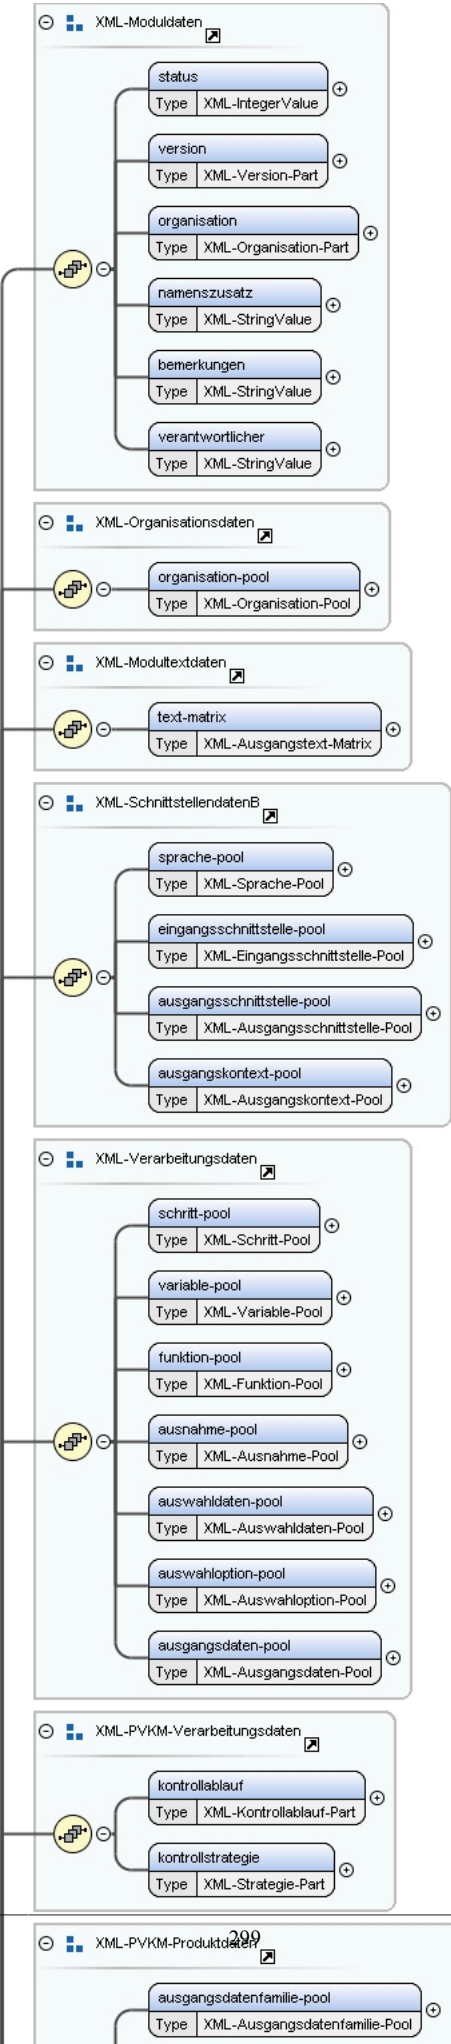
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Kontrollmodul-Item |
| Used by | Element XML-Kontrollmodul-Pool/item |
| Model | moduldaten , modulkontextadapter-matrix , linieneingangsadapter-matrix , linienausgangsadapter-matrix , verkehrsmitteltypeingangsadapter-matrix , verkehrsmitteltypausgangsadapter-matrix , wegevarianteneingangsadapter-matrix , wegevariantenausgangsadapter-matrix , tarifpunkteingangsadapter-matrix , tarifpunktausgangsadapter-matrix |
| Children | linienausgangsadapter-matrix, linieneingangsadapter-matrix, moduldaten, modulkontextadapter-matrix, tarifpunktausgangsadapter-matrix, tarifpunkteingangsadapter-matrix, verkehrsmitteltypausgangsadapter-matrix, verkehrsmitteltypeingangsadapter-matrix, wegevarianteneingangsadapter-matrix, wegevariantenausgangsadapter-matrix |
| Source | <pre> <xs:complexType name="XML-Kontrollmodul-Item"> <xs:complexContent> <xs:extension base="XML-Item"> <xs:sequence> <xs:element name="moduldaten" type="XML-PVKM"/> <xs:element name="modulkontextadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="linieneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="linienausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="verkehrsmitteltypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="verkehrsmitteltypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="wegevarianteneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="wegevariantenausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="tarifpunkteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="tarifpunktausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-PVKM

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | |
|-----------------|--|
| Used by | Elements XML-Kontrollmodul-Item/moduldaten, pv-km |
| Model | status , version , organisation , namenszusatz , bemerkungen , verantwortlicher , organisation-pool , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , kontrollablauf , kontrollstrategie , ausgangsdatenfamilie-pool , abhaengigkeitskriterium-pool , identifikationsparameter-pool , efmprodukt-pool , tarifprodukt-pool , fremdprodukt-pool , produktgruppe-pool , tarifpunkt-pool , tarifpunktgruppe-pool , linie-pool , verkehrsmitteltyp-pool , verkehrsmittellinienbezug-pool , modulkontext-pool , bezahlart-pool , mitnahmetyp-pool , rabattmedientyp-pool , tagesbedingung-pool , tageszeitbedingung-pool , modulkontextbedingung-pool , verkehrsmittellinienbedingung-pool , zuordnungstyp-pool , zuordnungsdaten-matrix , zuordnungsausnahme-matrix , wegevariante-pool , bewertungstyp-pool , bewertungsdaten-pool , bewertungsdaten-matrix , bewertungsausnahme-matrix , nummerninterpretation-pool , bitleisteninterpretation-pool , raumnummerninterpretation-pool , signatur , annotation |
| Children | abhaengigkeitskriterium-pool , annotation , ausgangsdaten-pool , ausgangsdatenfamilie-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bemerkungen , bewertungsausnahme-matrix , bewertungsdaten-matrix , bewertungsdaten-pool , bewertungstyp-pool , bezahlart-pool , bitleisteninterpretation-pool , efmprodukt-pool , eingangsschnittstelle-pool , fremdprodukt-pool , funktion-pool , identifikationsparameter-pool , kontrollablauf , kontrollstrategie , linie-pool , mitnahmetyp-pool , modulkontext-pool , modulkontextbedingung-pool , namenszusatz , nummerninterpretation-pool , organisation , organisation-pool , produktgruppe-pool , rabattmedientyp-pool , raumnummerninterpretation-pool , schritt-pool , signatur , sprache-pool , status , tagesbedingung-pool , tageszeitbedingung-pool , tarifprodukt-pool , tarifpunkt-pool , tarifpunktgruppe-pool , text-matrix , variable-pool , verantwortlicher , verkehrsmittellinienbedingung-pool , verkehrsmittellinienbezug-pool , verkehrsmitteltyp-pool , version , wegevariante-pool , zuordnungsausnahme-matrix , zuordnungsdaten-matrix , zuordnungstyp-pool |
| Source | <pre> <xs:complexType name="XML-PVKM"> <xs:sequence> <xs:group ref="XML-Moduldaten"/> <xs:group ref="XML-Organisationsdaten"/> <xs:group ref="XML-Modultextdaten"/> <xs:group ref="XML-SchnittstellendatenB"/> <xs:group ref="XML-Verarbeitungsdaten"/> <xs:group ref="XML-PVKM-Verarbeitungsdaten"/> <xs:group ref="XML-PVKM-Produktdaten"/> <xs:group ref="XML-Tarifpunktdaten"/> <xs:group ref="XML-Verkehrsmittelliniendaten"/> <xs:group ref="XML-PVKM-Bedingungsdaten"/> <xs:group ref="XML-Tarifpunktzuordnungsdaten"/> <xs:group ref="XML-Tarifpunktbewertungsdaten"/> <xs:group ref="XML-Nummerninterpretationsdaten"/> <xs:group ref="XML-Tarifpunktinterpretationsdaten"/> <xs:group ref="XML-Modulzusatzdaten"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Organisation-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre> classDiagram class XMLOrganisationPool { item XMLOrganisationItem } XMLOrganisationPool "1" -- "1..∞" XMLOrganisationItem : item </pre> |
| Used by | Element XML-Organisationsdaten/organisation-pool |
| Model | item+ |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Organisation-Pool"> <xs:sequence> <xs:element name="item" type="XML-Organisation-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Organisation-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | extension of XML-Organisation-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Organisation-Part XML-Organisation-Item |
| Used by | Element XML-Organisation-Pool/item |
| Model | id , name , anforderung |
| Children | anforderung, id, name |
| Source | <pre> <xs:complexType name="XML-Organisation-Item"> <xs:complexContent> <xs:extension base="XML-Organisation-Part"> <xs:sequence> <xs:element name="anforderung" type="XML-Ergaenzungsanforderung-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ergaenzungsanforderung-Pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Organisation-Item/anforderung |
| Model | nr+ |
| Children | nr |
| Source | <pre> <xs:complexType name="XML-Ergaenzungsanforderung-Pool"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Eingangsschnittstelle-Pool

| | |
|-----------|-----------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Pool |

| | | | | |
|----------------------|--|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Eingangsschnittstelle-Pool | | | |
| Used by | Element XML-SchnittstellendatenB/eingangsschnittstelle-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Eingangsschnittstelle-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Eingangsschnittstelle-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Eingangsschnittstelle-Item

| | | | | |
|----------------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Nr-Item | | | |
| Type hierar- chy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Eingangsschnittstelle-Item | | | |
| Used by | Element XML-Eingangsschnittstelle-Pool/item | | | |
| Model | nr , name , parameter-pool | | | |
| Children | name, nr, parameter-pool | | | |
| Source | <pre> <xs:complexType name="XML-Eingangsschnittstelle-Item"> <xs:complexContent> <xs:extension base="XML-Nr-Item"> <xs:sequence> <xs:element name="parameter-pool" type="XML-Eingangsparameter-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Eingangsparameter-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

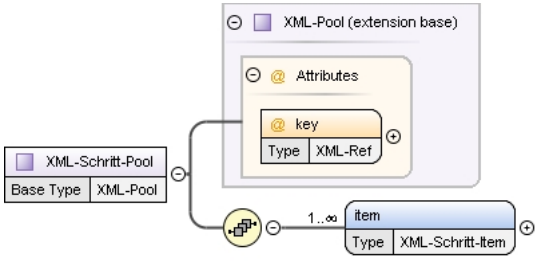
| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Eingangsparameter-Pool | | | |
| Used by | Element XML-Eingangsschnittstelle-Item/parameter-pool | | | |
| Model | item+ | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Eingangsparameter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Eingangsparameter-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Eingangsparameter-Item

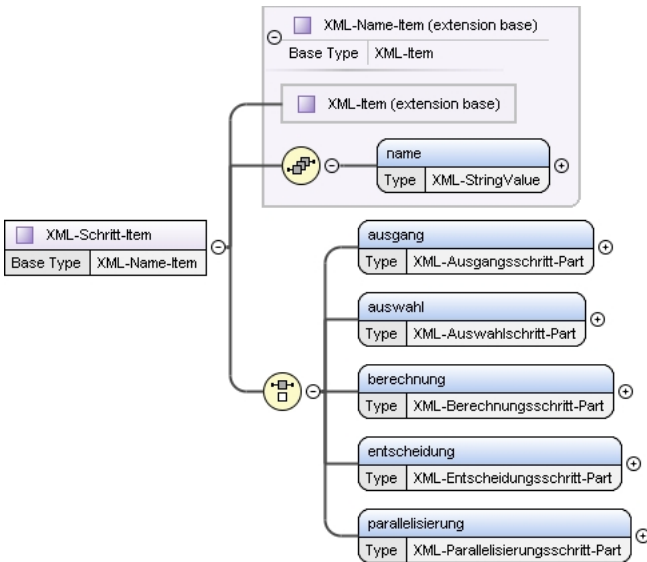
| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Nr-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Eingangsparameter-Item | | | |
| Used by | Element XML-Eingangsparameter-Pool/item | | | |
| Model | nr , name | | | |
| Children | name, nr | | | |
| Source | <pre> <xs:complexType name="XML-Eingangsparameter-Item"> <xs:complexContent> <xs:extension base="XML-Nr-Item" /> </xs:complexContent> </xs:complexType> </pre> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Schritt-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Schritt-Pool | | | |
| Used by | Element XML-Verarbeitungsdaten/schritt-pool | | | |
| Model | item+ | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Schritt-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Schritt-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Schritt-Item

| | | | | |
|-----------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |

| | |
|-----------------|---|
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Schritt-Item |
| Used by | Element XML-Schritt-Pool/item |
| Model | name , (ausgang auswahl berechnung entscheidung parallelisierung) |
| Children | ausgang, auswahl, berechnung, entscheidung, name, parallelisierung |
| Source | <pre> <xs:complexType name="XML-Schritt-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:choice> <xs:element name="ausgang" type="XML-Ausgangsschritt-Part"/> <xs:element name="auswahl" type="XML-Auswahlschritt-Part"/> <xs:element name="berechnung" type="XML-Berechnungsschritt-Part"/> <xs:element name="entscheidung" type="XML-Entscheidungsschritt-Part"/> <xs:element name="parallelisierung" type="XML-Parallelisierungsschritt-Part"/> </xs:choice> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangsschritt-Part

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Schritt-Item/ausgang |
| Model | ausgangsdaten , ausnahme , nachfolger |
| Children | ausgangsdaten, ausnahme, nachfolger |
| Source | <pre> <xs:complexType name="XML-Ausgangsschritt-Part"> <xs:sequence> <xs:element name="ausgangsdaten" type="XML-Ref-11"/> <xs:element name="ausnahme" type="XML-Ref-01"/> <xs:element name="nachfolger" type="XML-Ref-01"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ref-11

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Elements XML-Ausgangsschritt-Part/ausgangsdaten, XML-Auswahlschritt-Part/auswahldaten, XML-Berechnungsschritt-Part/funktion, XML-Bewertungsbedingung-Item/bewertungstyp, XML-Entscheidungsschritt-Part/funktion, XML-Entscheidungsschritt-Part/janachfolger, XML-Entscheidungsschritt-Part/neinnachfolger, XML-Spezialbedingung-Item/funktion, XML-Strategie-Part/start |
| Model | ref |
| Children | ref |
| Source | <pre> <xs:complexType name="XML-Ref-11"> <xs:sequence> <xs:element name="ref" type="XML-Ref"/> </xs:sequence> </pre> |

| | |
|-----------------|---|
| | <code></xs:complexType></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ref-01

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | <p>Elements</p> <p>XML-Abhaengigkeitskriterium-Item/funktion, XML-Ausgangsschritt-Part/ausnahme, XML-Ausgangsschritt-Part/nachfolger, XML-Auswahldaten-Item/defaultoption, XML-Auswahlschritt-Part/ausnahme, XML-Berechnungsschritt-Part/ausnahme, XML-Berechnungsschritt-Part/nachfolger, XML-Entscheidungsschritt-Part/ausnahme, XML-KVPPM-Schluesel-Part/mkkvp, XML-Linie-Item/verkehrsmittellinienbezug, XML-Nachfolgekriterium-Item/funktion, XML-PVKM-Tarifprodukt-Item/efmprodukt, XML-PVPM-Schluesel-Part/mkauth, XML-PVPM-Schluesel-Part/mkpvp, XML-PVPM-Schluesel-Part/mktr, XML-PVPM-Tarifprodukt-Item/efmprodukt, XML-Parallelisierungsschritt-Part/nachfolger, XML-Produktdaten-Part/funktion, XML-Tarifpunktbedingung-Item/nach, XML-Tarifpunktbedingung-Item/ueber, XML-Tarifpunktbedingung-Item/von, XML-Verkaufsdaten-Part/kontingentierung, XML-Verkehrsmitteltyp-Item/verkehrsmittellinienbezug</p> |
| Model | ref{0,1} |
| Children | ref |
| Source | <pre><xs:complexType name="XML-Ref-01"> <xs:sequence> <xs:element name="ref" type="XML-Ref" minOccurs="0" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Auswahlschritt-Part

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Schritt-Item/auswahl |
| Model | auswahldaten , ausnahme , nachfolger |
| Children | ausnahme, auswahldaten, nachfolger |
| Source | <pre><xs:complexType name="XML-Auswahlschritt-Part"> <xs:sequence> <xs:element name="auswahldaten" type="XML-Ref-11" /> <xs:element name="ausnahme" type="XML-Ref-01" /> <xs:element name="nachfolger" type="XML-Ref-List-1N" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ref-List-1N

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | <p>Elements</p> <p>XML-Auswahldaten-Item/auswahloption, XML-Auswahlschritt-Part/nachfolger, XML-Bitleisteninterpretation-Item/tarifpunkt</p> |
| Model | ref+ |

| | |
|-----------------|--|
| Children | ref |
| Source | <pre><xs:complexType name="XML-Ref-List-1N"> <xs:sequence> <xs:element name="ref" type="XML-Ref" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Berechnungsschritt-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Schritt-Item/berechnung |
| Model | funktion , ausnahme , nachfolger |
| Children | ausnahme, funktion, nachfolger |
| Source | <pre><xs:complexType name="XML-Berechnungsschritt-Part"> <xs:sequence> <xs:element name="funktion" type="XML-Ref-11" /> <xs:element name="ausnahme" type="XML-Ref-01" /> <xs:element name="nachfolger" type="XML-Ref-01" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Entscheidungsschritt-Part

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Schritt-Item/entscheidung |
| Model | funktion , ausnahme , janachfolger , neinnachfolger |
| Children | ausnahme, funktion, janachfolger, neinnachfolger |
| Source | <pre><xs:complexType name="XML-Entscheidungsschritt-Part"> <xs:sequence> <xs:element name="funktion" type="XML-Ref-11" /> <xs:element name="ausnahme" type="XML-Ref-01" /> <xs:element name="janachfolger" type="XML-Ref-11" /> <xs:element name="neinnachfolger" type="XML-Ref-11" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Parallelisierungsschritt-Part

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Used by | Element XML-Schritt-Item/parallelisierung |
| Model | parallel , nachfolger |
| Children | nachfolger, parallel |
| Source | <pre><xs:complexType name="XML-Parallelisierungsschritt-Part"> <xs:sequence> <xs:element name="parallel" type="XML-Ref-Set-0N"/> <xs:element name="nachfolger" type="XML-Ref-01"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ref-Set-0N

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Elements XML-Parallelisierungsschritt-Part/parallel, XML-Produktadapter-Entry/darstellungsmodulkontext, XML-Produktadapter-Entry/loeschmodulkontext, XML-Produktadapter-Entry/ruecknahmepoolkontext, XML-Produktadapter-Entry/verkaufsmoedulkontext, XML-Produktadapter-Entry/modulkontext, XML-Raummodifikation-Item/exk, XML-Raummodifikation-Item/ink |
| Model | ref* |
| Children | ref |
| Source | <pre><xs:complexType name="XML-Ref-Set-0N"> <xs:sequence> <xs:element name="ref" type="XML-Ref" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Variable-Pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Variable-Pool | | | |
| Used by | Element XML-Verarbeitungsdaten/variable-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |

| | |
|-----------------|--|
| Source | <pre> <xs:complexType name="XML-Variable-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Variable-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Variable-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Variable-Item |
| Used by | Element XML-Variable-Pool/item |
| Model | name |
| Children | name |
| Source | <pre> <xs:complexType name="XML-Variable-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"/> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Funktion-Pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Funktion-Pool |
| Used by | Element XML-Verarbeitungsdaten/funktion-pool |
| Model | item* |
| Children | item |

| Attributes | QName | Type | Use | |
|-----------------|--|---------|----------|--|
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Funktion-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Funktion-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Funktion-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Funktion-Item |
| Used by | Element XML-Funktion-Pool/item |
| Model | name , (nr wert aufruf) |
| Children | aufruf, name, nr, wert |
| Source | <pre><xs:complexType name="XML-Funktion-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:choice> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="wert"> <xs:complexType> <xs:group ref="XML-Value"/> </xs:complexType> </xs:element> <xs:element name="aufruf" type="XML-FunctionValue"/> </xs:choice> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-ArrayValue

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Used by | Elements XML-Bewertungsbedingung-Item/werte, XML-Value/liste |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne wahrheitswert objekt funktion undefiniert |
| Children | bits, datum, funktion, liste, objekt, text, uhrzeit, undefiniert, wahrheitswert, zahl, zeitpunkt, zeitspanne |
| Source | <pre><xs:complexType name="XML-ArrayValue"> <xs:group ref="XML-Value" minOccurs="0" maxOccurs="unbounded" /> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-ObjectValue

| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Ref | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-ObjectValue | | | |
| Used by | Element XML-Value/objekt | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | optional | |
| Source | <pre><xs:complexType name="XML-ObjectValue"></pre> | | | |

| | |
|-----------------|--|
| | <pre> <xs:simpleContent> <xs:extension base="XML-Ref"> <xs:attribute name="ref" type="XML-Ref" /> </xs:extension> </xs:simpleContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-FunctionValue

| | | | | |
|------------|--|--|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Used by | Elements | XML-FunctionValue/aufruf, XML-Funktion-Item/aufruf, XML-Value/funktion | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne wahrheitswert objekt funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, liste, objekt, param, text, uhrzeit, undefiniert, wahrheitswert, zahl, zeitpunkt, zeitspanne | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-FunctionValue"> <xs:choice minOccurs="0" maxOccurs="unbounded"> <xs:group ref="XML-Value" /> <xs:element name="param" type="XML-IntegerValue" /> <xs:element name="aufruf" type="XML-FunctionValue" /> </xs:choice> </xs:complexType></pre> | | | |

| | |
|-----------------|---|
| | <pre> </xs:choice> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ausnahme-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Ausnahme-Pool | | | |
| Used by | Element XML-Verarbeitungsdaten/ausnahme-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Ausnahme-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausnahme-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausnahme-Item

| | | | | |
|-----------|----------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Text-Item | | | |

| | |
|-----------------|---|
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Ausnahme-Item |
| Used by | Element XML-Ausnahme-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Ausnahme-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Auswahldaten-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Auswahldaten-Pool | | | |
| Used by | Element XML-Verarbeitungsdaten/auswahldaten-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Auswahldaten-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Auswahldaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Auswahldaten-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Sequenz-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Sequenz-Item <ul style="list-style-type: none"> XML-Auswahldaten-Item |
| Used by | Element XML-Auswahldaten-Pool/item |
| Model | name , sequenz-matrix , defaultoption , auswahloption |
| Children | auswahloption, defaultoption, name, sequenz-matrix |
| Source | <pre> <xs:complexType name="XML-Auswahldaten-Item"> <xs:complexContent> <xs:extension base="XML-Sequenz-Item"> <xs:sequence> <xs:element name="defaultoption" type="XML-Ref-01" /> <xs:element name="auswahloption" type="XML-Ref-List-1N" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Sequenz-Item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Sequenz-Item |
| Used by | Complex Types XML-Ausgangsdaten-Item, XML-Auswahldaten-Item, XML-Auswahloption-Item |
| Model | name , sequenz-matrix |
| Children | name, sequenz-matrix |

| | |
|-----------------|--|
| Source | <pre> <xs:complexType name="XML-Sequenz-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="sequenz-matrix" type="XML-Ausgangssequenz-Matrix" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangssequenz-Matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Sequenz-Item/sequenz-matrix |
| Model | sequenz* |
| Children | sequenz |
| Source | <pre> <xs:complexType name="XML-Ausgangssequenz-Matrix"> <xs:sequence> <xs:element name="sequenz" type="XML-Ausgangssequenz-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangssequenz-Entry

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|--|--|
| Diagram | | | | | | | | | | | |
| Used by | Element XML-Ausgangssequenz-Matrix/sequenz | | | | | | | | | | |
| Model | ref text | | | | | | | | | | |
| Children | ref, text | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | |
| QName | Type | Use | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Ausgangssequenz-Entry"> <xs:choice maxOccurs="unbounded"> <xs:element name="ref" type="XML-Ref" /> <xs:element name="text" type="XML-StringValue" /> </xs:choice> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:complexType></pre> | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | |

Complex Type XML-Auswahloption-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| Diagram | <p>The diagram illustrates the structure of the XML-Auswahloption-Pool type. It is an extension of the XML-Pool type. The XML-Auswahloption-Pool type has a base type XML-Pool and contains a sequence of 'item' elements (0..∞). Each 'item' is of type XML-Auswahloption-Item. The 'key' attribute is required and of type XML-Ref.</p> | | | | | | | | | | | |
|-----------------|--|---|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Auswahloption-Pool | | | | | | | | | | | |
| Used by | Element | XML-Verarbeitungsdaten/auswahloption-pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Auswahloption-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Auswahloption-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Auswahloption-Item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre>classDiagram class XMLSequenzItem["XML-Sequenz-Item (extension base)"] { Base Type XML-Name-Item } class XMLNameItem["XML-Name-Item (extension base)"] { Base Type XML-Item } class XMLItem["XML-Item (extension base)"] { name XML-StringValue sequenz-matrix XML-Ausgangssequenz-Matrix } class XMLAuswahloptionItem["XML-Auswahloption-Item"] { Base Type XML-Sequenz-Item } XMLSequenzItem -- XMLNameItem XMLNameItem -- XMLItem XMLItem -- XMLAuswahloptionItem XMLItem -- name XMLItem -- sequenz-matrix</pre> |
| Type | extension of XML-Sequenz-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Sequenz-Item<ul style="list-style-type: none">XML-Auswahloption-Item |
| Used by | Element XML-Auswahloption-Pool/item |
| Model | name , sequenz-matrix |
| Children | name, sequenz-matrix |
| Source | <xs:complexType name="XML-Auswahloption-Item"> |

| | |
|-----------------|---|
| | <pre> <xs:complexContent> <xs:extension base="XML-Sequenz-Item" /> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangsdaten-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Ausgangsdaten-Pool | | | |
| Used by | Element XML-Verarbeitungsdaten/ausgangsdaten-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Ausgangsdaten-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangsdaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangsdaten-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Sequenz-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Ausgangsdaten-Item | | | |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> • XML-Name-Item • XML-Sequenz-Item • XML-Ausgangsdaten-Item |
| Used by | Element XML-Ausgangsdaten-Pool/item |
| Model | name , sequenz-matrix |
| Children | name, sequenz-matrix |
| Source | <pre><xs:complexType name="XML-Ausgangsdaten-Item"> <xs:complexContent> <xs:extension base="XML-Sequenz-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Kontrollablauf-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-PVKM-Verarbeitungsdaten/kontrollablauf |
| Model | pruefungvor , pruefungnach |
| Children | pruefungnach, pruefungvor |
| Source | <pre><xs:complexType name="XML-Kontrollablauf-Part"> <xs:sequence> <xs:element name="pruefungvor" type="XML-DurationValue" /> <xs:element name="pruefungnach" type="XML-DurationValue" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Strategie-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Elements XML-KVPPM-Verarbeitungsdaten/ruecknahmestrategie, XML-KVPPM-Verarbeitungsdaten/verkaufsstrategie, XML-PVKM-Verarbeitungsdaten/kontrollstrategie, XML-PVPM-Verarbeitungsdaten/darstellungsstrategie, XML-PVPM-Verarbeitungsdaten/loeschstrategie, XML-PVPM-Verarbeitungsdaten/ruecknahmestrategie, XML-PVPM-Verarbeitungsdaten/verkaufsstrategie |
| Model | start |
| Children | start |
| Source | <pre><xs:complexType name="XML-Strategie-Part"> <xs:sequence> <xs:element name="start" type="XML-Ref-11" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangsdatenfamilie-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|--|----------|--|
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangsdatenfamilie-Pool | | | |
| Used by | Elements | XML-PVKM-Produktdaten/ausgangsdatenfamilie-pool, XML-PVPM-Produktdaten/ausgangsdatenfamilie-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Ausgangsdatenfamilie-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangsdatenfamilie-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangsdatenfamilie-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre>classDiagram class XML-Name-Item { Base Type } class XML-Item { Base Type } class XML-Ausgangsdatenfamilie-Item { Base Type XML-Name-Item } class XML-StringValue { Type } XML-Name-Item < -- XML-Item XML-Name-Item < -- XML-Ausgangsdatenfamilie-Item XML-Ausgangsdatenfamilie-Item -- XML-StringValue : name</pre> |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Ausgangsdatenfamilie-Item |
| Used by | Element XML-Ausgangsdatenfamilie-Pool/item |
| Model | name |
| Children | name |
| Source | <pre><xs:complexType name="XML-Ausgangsdatenfamilie-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"/> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Abhaengigkeitskriterium-Pool

| | | | | |
|------------------|--|--|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Abhaengigkeitskriterium-Pool | | | |
| Used by | Elements | XML-PVKM-Produktdaten/abhaengigkeitskriterium-pool, XML-PVPM-Produktdaten/abhaengigkeit-skriterium-pool, XML-PVPM-Produktdaten/nachfolgekriterium-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Abhaengigkeitskriterium-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Abhaengigkeitskriterium-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema loca-tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Abhaengigkeitskriterium-Item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <p>The diagram illustrates the structure of the <code>XML-Abhaengigkeitskriterium-Item</code> class. It is an extension of <code>XML-Name-Item</code>, which in turn extends <code>XML-Item</code>. The <code>XML-Abhaengigkeitskriterium-Item</code> class contains three elements: <code>name</code> (Type: <code>XML-StringValue</code>), <code>funktion</code> (Type: <code>XML-Ref-01</code>), and <code>wirksamkeit</code> (Type: <code>XML-Kriterienzeitraum-Part</code>). The <code>XML-Item</code> class is the base type for <code>XML-Name-Item</code> and <code>XML-Abhaengigkeitskriterium-Item</code>. The <code>XML-Name-Item</code> class is the base type for <code>XML-Abhaengigkeitskriterium-Item</code>.</p> |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Abhaengigkeitskriterium-Item |
| Used by | Element XML-Abhaengigkeitskriterium-Pool/item |
| Model | name , funktion , wirksamkeit |

| | |
|-----------------|--|
| Children | funktion, name, wirksamkeit |
| Source | <pre><xs:complexType name="XML-Abhaengigkeitskriterium-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="funktion" type="XML-Ref-01" /> <xs:element name="wirksamkeit" type="XML-Kriterienzeitraum-Part" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Kriterienzeitraum-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Elements XML-Abhaengigkeitskriterium-Item/wirksamkeit, XML-Nachfolgekriterium-Item/vorgaenger, XML-Nachfolgekriterium-Item/wirksamkeit |
| Model | beginn , ende |
| Children | beginn, ende |
| Source | <pre><xs:complexType name="XML-Kriterienzeitraum-Part"> <xs:sequence> <xs:element name="beginn" type="XML-DatetimeValue" /> <xs:element name="ende" type="XML-DatetimeValue" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Identifikationsparameter-Pool

| | | | | |
|----------------|---|---|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <pre>graph TD subgraph XML_Pool [XML-Pool (extension base)] subgraph Attributes key["key Type: XML-Ref"] end item["item Type: XML-Identifikationsparameter-Item"] end XML_Pool -- "0..∞" --> item</pre> | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Identifikationsparameter-Pool | | | |
| Used by | Elements | XML-PVKM-Produktdaten/identifikationsparameter-pool, XML-PVPM-Produktdaten/identifikation-sparameter-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Identifikationsparameter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Identifikationsparameter-Item" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |

| | |
|-----------------|---|
| | <pre> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Identifikationsparameter-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Nr-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Identifikationsparameter-Item |
| Used by | Element XML-Identifikationsparameter-Pool/item |
| Model | nr , name , wert-pool |
| Children | name, nr, wert-pool |
| Source | <pre> <xs:complexType name="XML-Identifikationsparameter-Item"> <xs:complexContent> <xs:extension base="XML-Nr-Item"> <xs:sequence> <xs:element name="wert-pool" type="XML-Identifikationsparameterwert-Pool"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Identifikationsparameterwert-Pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Identifikationsparameterwert-Pool |

| Used by | Element XML-Identifikationsparameter-Item/wert-pool | | | |
|-----------------|--|---------|----------|--|
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Identifikationsparameterwert-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Identifikationsparameterwert-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Identifikationsparameterwert-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Text-Item<ul style="list-style-type: none">XML-Identifikationsparameterwert-Item |
| Used by | Element XML-Identifikationsparameterwert-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Identifikationsparameterwert-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"/> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-PVKM-EFMPProdukt-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-PVKM-EFMProdukt-Pool | | | |
| Used by | Element XML-PVKM-Produktdaten/efmprodukt-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-PVKM-EFMProdukt-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-PVKM-EFMProdukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-PVKM-EFMProdukt-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Text-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-PVKM-EFMProdukt-Item | | | |

| | |
|-----------------|--|
| Used by | Element XML-PVKM-EFMProdukt-Pool/item |
| Model | nr , name , text-matrix , kontrolldaten{0,1} |
| Children | kontrolldaten, name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-PVKM-EFMProdukt-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"> <xs:sequence> <xs:element name="kontrolldaten" type="XML-Kontrolldaten-Part" minOccurs="0"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Kontrolldaten-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Produktdaten-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktdaten-Part XML-Kontrolldaten-Part |
| Used by | Elements XML-PVKM-EFMProdukt-Item/kontrolldaten, XML-PVKM-Tarifprodukt-Item/kontrolldaten |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , unterstuetztztab |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Source | <pre><xs:complexType name="XML-Kontrolldaten-Part"> <xs:complexContent> <xs:extension base="XML-Produktdaten-Part"> <xs:sequence> <xs:element name="unterstuetztztab" type="XML-DateValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Produktdaten-Part

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|----------------------|--|
| Diagram | |
| Used by | Complex Types XML-Darstellungsdaten-Part, XML-Kontrolldaten-Part, XML-Loeschdaten-Part, XML-Ruecknahme- daten-Part, XML-Verkaufsdaten-Part |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext |
| Source | <pre> <xs:complexType name="XML-Produktdaten-Part"> <xs:sequence> <xs:element name="funktion" type="XML-Ref-01" /> <xs:element name="modulkontext" type="XML-Ref-Set-0N" /> <xs:element name="ausgangsdaten-matrix" type="XML-Ausgangsdaten-Matrix" /> <xs:element name="abhaengigkeitsdaten-table" type="XML-Abhaengigkeitsdaten-Table" /> <xs:element name="abhaengigkeitsausnahme-table" type="XML-Abhaengigkeitsausnahme-Table" /> </xs:sequence> </xs:complexType> </pre> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangsdaten-Matrix

| | |
|----------------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Produktdaten-Part/ausgangsdaten-matrix |
| Model | ausgangsdaten* |
| Children | ausgangsdaten |
| Source | <pre> <xs:complexType name="XML-Ausgangsdaten-Matrix"> <xs:sequence> <xs:element name="ausgangsdaten" type="XML-Ausgangsdaten-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangsdaten-Entry

| | |
|---------------------|----------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Ref |
| Type hierar- chy | • xs:int |

```

graph LR
    A[XML-Abhängigkeitsdaten-Table] --> B(( ))
    B --> C[kriterium]
    B --> D[vorausgesetzt]
    C --> E[Type XML-Ref-List-ON]
    D --> F[Type XML-Ref-List-ON]

```

XML-Ref-List-ON

| | |
|-----------------|--|
| | <p>ble/tarifpunktbedingung, XML-Preisausnahme-Table/verkehrsmittellinienbedingung, XML-Preisausnahme-Table/waehrung, XML-Preisausnahme-Table/zahlungsintervallbedingung, XML-Preisausnahme-Table/zeitraumbedingung, XML-Preisdaten-Table/bewertungsbedingung, XML-Preisdaten-Table/bezahlartbedingung, XML-Preisdaten-Table/mitnahmebedingung, XML-Preisdaten-Table/modulkontextbedingung, XML-Preisdaten-Table/rabattmedienbedingung, XML-Preisdaten-Table/spezialbedingung, XML-Preisdaten-Table/tagesbedingung, XML-Preisdaten-Table/tageszeitbedingung, XML-Preisdaten-Table/tarifpunktbedingung, XML-Preisdaten-Table/verkehrsmittellinienbedingung, XML-Preisdaten-Table/waehrung, XML-Preisdaten-Table/zahlungsintervallbedingung, XML-Preisdaten-Table/zeitraumbedingung, XML-Rueckzahlungsausnahme-Table/ausnahme, XML-Rueckzahlungsausnahme-Table/bewertungsbedingung, XML-Rueckzahlungsausnahme-Table/mitnahmebedingung, XML-Rueckzahlungsausnahme-Table/modulkontextbedingung, XML-Rueckzahlungsausnahme-Table/rabattmedienbedingung, XML-Rueckzahlungsausnahme-Table/spezialbedingung, XML-Rueckzahlungsausnahme-Table/tagesbedingung, XML-Rueckzahlungsausnahme-Table/tarifpunktbedingung, XML-Rueckzahlungsausnahme-Table/verkehrsmittellinienbedingung, XML-Rueckzahlungsausnahme-Table/waehrung, XML-Rueckzahlungsausnahme-Table/zeitraumbedingung, XML-Rueckzahlungsdaten-Table/bewertungsbedingung, XML-Rueckzahlungsdaten-Table/mitnahmebedingung, XML-Rueckzahlungsdaten-Table/modulkontextbedingung, XML-Rueckzahlungsdaten-Table/rabattmedienbedingung, XML-Rueckzahlungsdaten-Table/spezialbedingung, XML-Rueckzahlungsdaten-Table/tagesbedingung, XML-Rueckzahlungsdaten-Table/tarifpunktbedingung, XML-Rueckzahlungsdaten-Table/verkehrsmittellinienbedingung, XML-Rueckzahlungsdaten-Table/waehrung, XML-Rueckzahlungsdaten-Table/zeitraumbedingung, XML-UZPAusnahme-Table/ausnahme, XML-UZPAusnahme-Table/modulkontextbedingung, XML-UZPAusnahme-Table/spezialbedingung, XML-UZPAusnahme-Table/tagesbedingung, XML-UZPAusnahme-Table/zeitraumbedingung, XML-UZPDaten-Table/modulkontextbedingung, XML-UZPDaten-Table/spezialbedingung, XML-UZPDaten-Table/tagesbedingung, XML-UZPDaten-Table/zeitraumbedingung</p> |
| Model | ref* |
| Children | ref |
| Source | <pre><xs:complexType name="XML-Ref-List-0N"> <xs:sequence> <xs:element name="ref" type="XML-Ref" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Abhaengigkeitsausnahme-Table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre> graph LR Root[XML-Abhaengigkeitsausnahme-Table] --> Kriterium[kriterium Type XML-Ref-List-0N] Root --> Vorausgesetzt[vorausgesetzt Type XML-Ref-List-0N] Root --> Ausnahme[ausnahme Type XML-Ref-List-0N] </pre> |
| Used by | Element XML-Produktdaten-Part/abhaengigkeitsausnahme-table |
| Model | kriterium , vorausgesetzt , ausnahme |
| Children | ausnahme, kriterium, vorausgesetzt |
| Source | <pre><xs:complexType name="XML-Abhaengigkeitsausnahme-Table"> <xs:sequence> <xs:element name="kriterium" type="XML-Ref-List-0N" /> <xs:element name="vorausgesetzt" type="XML-Ref-List-0N" /> <xs:element name="ausnahme" type="XML-Ref-List-0N" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-PVKM-Tarifprodukt-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|----------------------|--|---------|----------|--|
| Diagram |  | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-PVKM-Tarifprodukt-Pool | | | |
| Used by | Element XML-PVKM-Produktdaten/tarifprodukt-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-PVKM-Tarifprodukt-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-PVKM-Tarifprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-PVKM-Tarifprodukt-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-PVKM-Tarifprodukt-Item |
| Used by | Element XML-PVKM-Tarifprodukt-Pool/item |
| Model | nr , name , text-matrix , extNr , efmprodukt , identifikation , kontrolldaten{0,1} |
| Children | efmprodukt, extNr, identifikation, kontrolldaten, name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-PVKM-Tarifprodukt-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"> <xs:sequence> <xs:element name="extNr" type="XML-StringValue"/> <xs:element name="efmprodukt" type="XML-Ref-01"/> <xs:element name="identifikation" type="XML-Ref-Set-1N"/> <xs:element name="kontrolldaten" type="XML-Kontrolldaten-Part" minOccurs="0"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Fremdprodukt-Pool

| | |
|-----------|-----------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Pool |

| | | | | |
|-----------------|---|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Fremdprodukt-Pool | | | |
| Used by | Elements XML-PVKM-Produktdaten/fremdprodukt-pool, XML-PVPM-Produktdaten/fremdprodukt-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Fremdprodukt-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Fremdprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Fremdprodukt-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Text-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Fremdprodukt-Item | | | |
| Used by | Element XML-Fremdprodukt-Pool/item | | | |
| Model | nr , name , text-matrix , tarifstand , organisation | | | |
| Children | name, nr, organisation, tarifstand, text-matrix | | | |
| Source | <pre> <xs:complexType name="XML-Fremdprodukt-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"> <xs:sequence> <xs:element name="tarifstand" type="XML-StringValue"/> </pre> | | | |

| | |
|-----------------|--|
| | <pre> <xs:element name="organisation" type="XML-Organisation-Part" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Produktgruppe-Pool

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | <pre>graph LR subgraph XML_Pool [XML-Pool (extension base)] subgraph Attributes key["@key"] end item[item] end XML_Pool -- "0..∞" --> item XML_Pool -- "1" --> XML_Pool_Pool[XML-Produktgruppe-Pool] XML_Pool_Pool -- "1" --> XML_Pool_Pool_Pool[XML-Produktgruppe-Pool]</pre> | | | | | | | | | | | |
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Produktgruppe-Pool | | | | | | | | | | | |
| Used by | Elements XML-PVKM-Produktdaten/produktgruppe-pool, XML-PVPM-Produktdaten/produktgruppe-pool | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Produktgruppe-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Produktgruppe-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Produktgruppe-Item

| | | | |
|----------------|---|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | extension of XML-Name-Item | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Produktgruppe-Item | | |

| | |
|-----------------|--|
| Used by | Element XML-Produktgruppe-Pool/item |
| Model | name , produkt |
| Children | name, produkt |
| Source | <pre> <xs:complexType name="XML-Produktgruppe-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="produkt" type="XML-Ref-Set-1N"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunkt-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Tarifpunkt-Pool | | | |
| Used by | Element XML-Tarifpunktdaten/tarifpunkt-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Tarifpunkt-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunkt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifpunkt-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | | |
|-----------------|--|---------|--------------------------|--------------|-----------------------------|
| Diagram | | | | | |
| Type | extension of XML-Text-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Tarifpunkt-Item | | | | |
| Used by | <table border="1"> <tr> <td>Element</td> <td>XML-Tarifpunkt-Pool/item</td> </tr> <tr> <td>Complex Type</td> <td>XML-Tarifpunktreferenz-Item</td> </tr> </table> | Element | XML-Tarifpunkt-Pool/item | Complex Type | XML-Tarifpunktreferenz-Item |
| Element | XML-Tarifpunkt-Pool/item | | | | |
| Complex Type | XML-Tarifpunktreferenz-Item | | | | |
| Model | nr , name , text-matrix , typ , ortsbezug | | | | |
| Children | name, nr, ortsbezug, text-matrix, typ | | | | |
| Source | <pre> <xs:complexType name="XML-Tarifpunkt-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"> <xs:sequence> <xs:element name="typ" type="XML-StringValue"/> <xs:element name="ortsbezug" type="XML-StringValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Tarifpunktgruppe-Pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Tarifpunktgruppe-Pool |
| Used by | Element XML-Tarifpunktdaten/tarifpunktgruppe-pool |

| | | | | |
|-----------------|---|---------|----------|--|
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Tarifpunktgruppe-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktgruppe-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifpunktgruppe-Item

| | | | | |
|-----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Tarifpunktgruppe-Item | | | |
| Used by | Element XML-Tarifpunktgruppe-Pool/item | | | |
| Model | name , tarifpunkt | | | |
| Children | name, tarifpunkt | | | |
| Source | <pre><xs:complexType name="XML-Tarifpunktgruppe-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="tarifpunkt" type="XML-Ref-Set-1N"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Linie-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Linie-Pool | | | |
| Used by | Element XML-Verkehrsmittelliniendaten/linie-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Linie-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Linie-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Linie-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Text-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Linie-Item | | | |

| | |
|-----------------|---|
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Verkehrsmitteltyp-Item |
| Used by | Element XML-Verkehrsmitteltyp-Pool/item |
| Model | nr , name , text-matrix , verkehrsmittellinienbezug |
| Children | name, nr, text-matrix, verkehrsmittellinienbezug |
| Source | <pre> <xs:complexType name="XML-Verkehrsmitteltyp-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"> <xs:sequence> <xs:element name="verkehrsmittellinienbezug" type="XML-Ref-01" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Verkehrsmittellinienbezug-Pool

| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Verkehrsmittellinienbezug-Pool | | | |
| Used by | Element XML-Verkehrsmittelliniendaten/verkehrsmittellinienbezug-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |

| | |
|-----------------|---|
| Source | <pre> <xs:complexType name="XML-Verkehrsmittellinienbezug-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Verkehrsmittellinienbezug-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Verkehrsmittellinienbezug-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Verkehrsmittellinienbezug-Item |
| Used by | Element XML-Verkehrsmittellinienbezug-Pool/item |
| Model | name |
| Children | name |
| Source | <pre> <xs:complexType name="XML-Verkehrsmittellinienbezug-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item" /> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Modulkontext-Pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Modulkontext-Pool |
| Used by | Elements XML-PVKM-Bedingungsdaten/modulkontext-pool, XML-PVPM-Bedingungsdaten/modulkontext-pool |
| Model | item* |
| Children | item |

| Attributes | QName | Type | Use | |
|-----------------|--|---------|----------|--|
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Modulkontext-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Modulkontext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Modulkontext-Item

| | | | | |
|-----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Modulkontext-Item | | | |
| Used by | Element XML-Modulkontext-Pool/item | | | |
| Model | name | | | |
| Children | name | | | |
| Source | <pre><xs:complexType name="XML-Modulkontext-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"/> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bezahlart-Pool

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Bezahlart-Pool | | | |
| Used by | Elements XML-PVKM-Bedingungsdaten/bezahlart-pool, XML-PVPM-Bedingungsdaten/bezahlart-pool | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bezahlart-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bezahlart-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bezahlart-Item

| | | | | |
|-----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Text-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Bezahlart-Item | | | |
| Used by | Element XML-Bezahlart-Pool/item | | | |
| Model | nr , name , text-matrix | | | |
| Children | name, nr, text-matrix | | | |
| Source | <pre><xs:complexType name="XML-Bezahlart-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Mitnahmetyp-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Mitnahmetyp-Pool | | | |
| Used by | Elements XML-PVKM-Bedingungsdaten/mitnahmetyp-pool, XML-PVPM-Bedingungsdaten/mitnahmetyp-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Mitnahmetyp-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Mitnahmetyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Mitnahmetyp-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Text-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Mitnahmetyp-Item | | | |
| Used by | Element XML-Mitnahmetyp-Pool/item | | | |

| | |
|-----------------|--|
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Mitnahmetyp-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Rabattmedientyp-Pool

| | | | | |
|-----------------|---|--|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Rabattmedientyp-Pool | | | |
| Used by | Elements | XML-PVKM-Bedingungsdaten/rabattmedientyp-pool, XML-PVPM-Bedingungsdaten/rabattmedientyp-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Rabattmedientyp-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Rabattmedientyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Rabattmedientyp-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Rabattmedientyp-Item |
| Used by | Element XML-Rabattmedientyp-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Rabattmedientyp-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Tagesbedingung-Pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Tagesbedingung-Pool | | | |
| Used by | Elements XML-PVKM-Bedingungsdaten/tagesbedingung-pool, XML-PVPM-Bedingungsdaten/tagesbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Tagesbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tagesbedingung-Item" minOccurs="0" maxOccurs="unbounded"></pre> | | | |

| | |
|-----------------|--|
| | <pre> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Tagesbedingung-Item


| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Tagesbedingung-Item |
| Used by | Element XML-Tagesbedingung-Pool/item |
| Model | name , wochentag-pool , kalendertag-pool |
| Children | kalendertag-pool, name, wochentag-pool |
| Source | <pre> <xs:complexType name="XML-Tagesbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="wochentag-pool" type="XML-Wochentag-Pool"/> <xs:element name="kalendertag-pool" type="XML-Kalendertag-Pool"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Wochentag-Pool

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Tagesbedingung-Item/wochentag-pool |
| Model | nr* |
| Children | nr |
| Source | <pre> <xs:complexType name="XML-Wochentag-Pool"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </pre> |

| | |
|-----------------|---|
| | <code></xs:complexType></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Kalendertag-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Used by | Element XML-Tagesbedingung-Item/kalendertag-pool |
| Model | datum* |
| Children | datum |
| Source | <pre> <xs:complexType name="XML-Kalendertag-Pool"> <xs:sequence> <xs:element name="datum" type="XML-DateValue" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Tageszeitbedingung-Pool

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|---|--|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tageszeitbedingung-Pool | | | | | | | | | | | |
| Used by | Elements | XML-PVKM-Bedingungsdaten/tageszeitbedingung-pool, XML-PVPM-Bedingungsdaten/tageszeitbedingung-pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Tageszeitbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tageszeitbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Tageszeitbedingung-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Tageszeitbedingung-Item |
| Used by | Element XML-Tageszeitbedingung-Pool/item |
| Model | name , zeitabschnitt-pool |
| Children | name, zeitabschnitt-pool |
| Source | <pre> <xs:complexType name="XML-Tageszeitbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="zeitabschnitt-pool" type="XML-Zeitabschnitt-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zeitabschnitt-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Tageszeitbedingung-Item/zeitabschnitt-pool |
| Model | item+ |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Zeitabschnitt-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zeitabschnitt-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zeitabschnitt-Item

| | |
|-----------|-------------------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Zeitabschnitt-Pool/item |

| | |
|-----------------|--|
| Model | von , bis |
| Children | bis, von |
| Source | <pre><xs:complexType name="XML-Zeitabschnitt-Item"> <xs:sequence> <xs:element name="von" type="XML-TimeValue"/> <xs:element name="bis" type="XML-TimeValue"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Modulkontextbedingung-Pool

| | | | | |
|-----------------|--|--|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Modulkontextbedingung-Pool. It is an extension of the XML-Pool (extension base). The extension has a key attribute of type XML-Ref. The content is a sequence of 'item' elements of type XML-Modulkontextbedingung-Item, with a cardinality of 0..∞.</p> | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Modulkontextbedingung-Pool | | | |
| Used by | Elements | XML-PVKM-Bedingungsdaten/modulkontextbedingung-pool, XML-PVPM-Bedingungsdaten/modulkontextbedingung-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Modulkontextbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Modulkontextbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Modulkontextbedingung-Item

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |

| | |
|-----------------|--|
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Modulkontextbedingung-Item |
| Used by | Element XML-Modulkontextbedingung-Pool/item |
| Model | name , modulkontext |
| Children | modulkontext, name |
| Source | <pre><xs:complexType name="XML-Modulkontextbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="modulkontext" type="XML-Ref-Set-1N" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Verkehrsmittellinienbedingung-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Verkehrsmittellinienbedingung-Pool | | | |
| Used by | Elements XML-PVKM-Bedingungsdaten/verkehrsmittellinienbedingung-pool, XML-PVPM-Bedingungsdaten/verkehrsmittellinienbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Verkehrsmittellinienbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Verkehrsmittellinienbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Verkehrsmittellinienbedingung-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Verkehrsmittellinienbedingung-Item |
| Used by | Element XML-Verkehrsmittellinienbedingung-Pool/item |
| Model | name , verkehrsmittellinienbezug |
| Children | name, verkehrsmittellinienbezug |
| Source | <pre> <xs:complexType name="XML-Verkehrsmittellinienbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="verkehrsmittellinienbezug" type="XML-Ref-Set-1N"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungstyp-Pool

| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Zuordnungstyp-Pool | | | |
| Used by | Element XML-Tarifpunktzuordnungsdaten/zuordnungstyp-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Zuordnungstyp-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zuordnungstyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </pre> | | | |

| | |
|-----------------|---|
| | <code></xs:complexType></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungstyp-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Zuordnungstyp-Item |
| Used by | Element XML-Zuordnungstyp-Pool/item |
| Model | name |
| Children | name |
| Source | <pre><xs:complexType name="XML-Zuordnungstyp-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungsdaten-Matrix

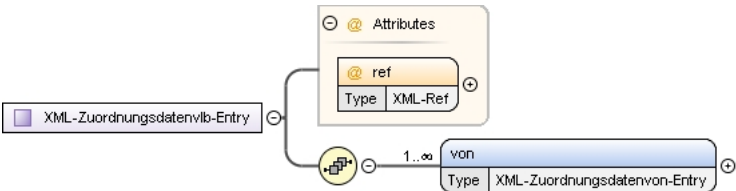
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Tarifpunktzuordnungsdaten/zuordnungsdaten-matrix |
| Model | typ* |
| Children | typ |
| Source | <pre><xs:complexType name="XML-Zuordnungsdaten-Matrix"> <xs:sequence> <xs:element name="typ" type="XML-Zuordnungsdatentyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungsdatentyp-Entry

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Zuordnungsdaten-Matrix/typ |

| | | | | |
|-----------------|--|---------|----------|--|
| Model | vlb+ | | | |
| Children | vlb | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Zuordnungsdatentyp-Entry"> <xs:sequence> <xs:element name="vlb" type="XML-Zuordnungsdatenvlb-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zuordnungsdatenvlb-Entry

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | |
|-----------------|--|----------------------------------|------|-----|--|-----|---------|----------|--|
| Diagram |  | | | | | | | | |
| Used by | Element | XML-Zuordnungsdatentyp-Entry/vlb | | | | | | | |
| Model | von+ | | | | | | | | |
| Children | von | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| ref | XML-Ref | required | | | | | | | |
| Source | <pre><xs:complexType name="XML-Zuordnungsdatenvlb-Entry"> <xs:sequence> <xs:element name="von" type="XML-Zuordnungsdatenvon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:complexType></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | |

Complex Type XML-Zuordnungsdatenvon-Entry

| | | | | |
|------------|--|----------------------------------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Zuordnungsdatenvon-Entry complex type. It features an 'Attributes' section with a 'ref' attribute of type 'XML-Ref'. A line connects this box to a multiplicity '1..∞' and then to a box labeled 'zu' of type 'XML-Ref'.</p> | | | |
| Used by | Element | XML-Zuordnungsdatenvlb-Entry/von | | |
| Model | zu+ | | | |
| Children | zu | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <xs:complexType name="XML-Zuordnungsdatenvon-Entry"> | | | |

| | |
|-----------------|--|
| | <pre> <xs:sequence> <xs:element name="zu" type="XML-Ref" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungsausnahme-Matrix

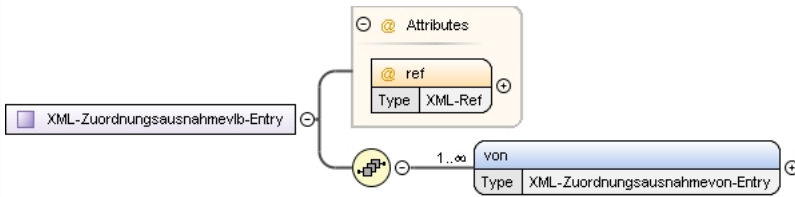
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Tarifpunktzuordnungsdaten/zuordnungsausnahme-matrix |
| Model | typ* |
| Children | typ |
| Source | <pre> <xs:complexType name="XML-Zuordnungsausnahme-Matrix"> <xs:sequence> <xs:element name="typ" type="XML-Zuordnungsausnahmetyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungsausnahmetyp-Entry

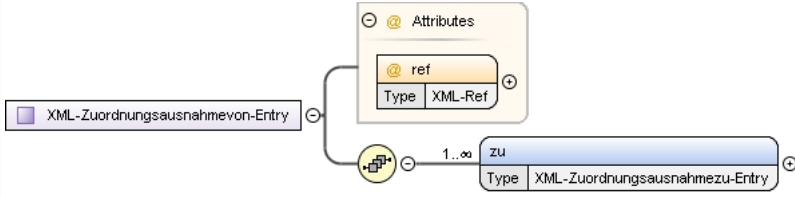
| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|--|-----------------------------------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | <p>The diagram illustrates the structure of the <code>XML-Zuordnungsausnahmetyp-Entry</code> complex type. It consists of a sequence of <code>vlb</code> elements, each of type <code>XML-Zuordnungsausnahmevlb-Entry</code>. The <code>vlb</code> elements are connected by a sequence line with a multiplicity of <code>1..∞</code>. The <code>XML-Zuordnungsausnahmevlb-Entry</code> type is shown as a box with a <code>ref</code> attribute, which is of type <code>XML-Ref</code> and is required. The <code>XML-Zuordnungsausnahmetyp-Entry</code> type is shown as a box with a <code>ref</code> attribute, which is of type <code>XML-Ref</code> and is required.</p> | | | | | | | | | | | |
| Used by | Element | XML-Zuordnungsausnahme-Matrix/typ | | | | | | | | | | |
| Model | vlb+ | | | | | | | | | | | |
| Children | vlb | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Zuordnungsausnahmetyp-Entry"> <xs:sequence> <xs:element name="vlb" type="XML-Zuordnungsausnahmevlb-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema PKM.xsd | | | | | | | | | | | |

Complex Type XML-Zuordnungsausnahmevlb-Entry

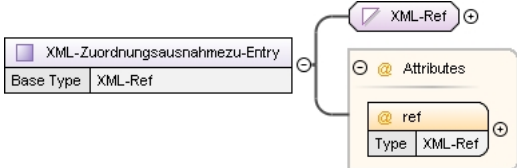
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|-------------------------------------|------------|--|
| Diagram |  | | | |
| Used by | Element | XML-Zuordnungsausnahmetyp-Entry/vlb | | |
| Model | von+ | | | |
| Children | von | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Zuordnungsausnahmevbl-Entry"> <xs:sequence> <xs:element name="von" type="XML-Zuordnungsausnahmevon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zuordnungsausnahmevbl-Entry

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|--|-------------------------------------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Used by | Element | XML-Zuordnungsausnahmevbl-Entry/von | | | | | | | | | | |
| Model | zu+ | | | | | | | | | | | |
| Children | zu | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Zuordnungsausnahmevbl-Entry"> <xs:sequence> <xs:element name="zu" type="XML-Zuordnungsausnahmevbl-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Zuordnungsausnahmezu-Entry

| | | | | |
|-----------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |

| Type | extension of XML-Ref | | | |
|-----------------|--|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-ZuordnungsAusnahmezu-Entry | | | |
| Used by | Element XML-ZuordnungsAusnahmevon-Entry/zu | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-ZuordnungsAusnahmezu-Entry"> <xs:simpleContent> <xs:extension base="XML-Ref"> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:extension> </xs:simpleContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Wegevariante-Pool

| Namespace | http://vdv/ka/pkm/1 | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Wegevariante-Pool | | | |
| Used by | Element XML-Tarifpunktbewertungsdaten/wegevariante-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Wegevariante-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Wegevariante-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicitizes key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Wegevariante-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Wegevariante-Item |
| Used by | Element XML-Wegevariante-Pool/item |
| Model | nr , name , text-matrix , tarifpunktfolge-pool |
| Children | name, nr, tarifpunktfolge-pool, text-matrix |
| Source | <pre><xs:complexType name="XML-Wegevariante-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"> <xs:sequence> <xs:element name="tarifpunktfolge-pool" type="XML-Tarifpunktfolge-Pool"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunktfolge-Pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Wegevariante-Item/tarifpunktfolge-pool |
| Model | item* |
| Children | item |
| Source | <pre><xs:complexType name="XML-Tarifpunktfolge-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktfolge-Item" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunktfolge-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Used by | Element XML-Tarifpunktfolge-Pool/item |
| Model | ink exk |
| Children | exk, ink |
| Source | <pre><xs:complexType name="XML-Tarifpunktfolge-Item"> <xs:choice maxOccurs="unbounded"> <xs:element name="ink" type="XML-Ref" /> <xs:element name="exk" type="XML-Ref" /> </xs:choice> </xs:complexType></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungstyp-Pool

| | | | | |
|-----------------|--|--|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Bewertungstyp-Pool | | | |
| Used by | Element | XML-Tarifpunktbewertungsdaten/bewertungstyp-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungstyp-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bewertungstyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungstyp-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Bewertungstyp-Item |
| Used by | Element XML-Bewertungstyp-Pool/item |
| Model | name |
| Children | name |
| Source | <pre><xs:complexType name="XML-Bewertungstyp-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"/> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungsdaten-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Bewertungsdaten-Pool | | | |
| Used by | Element XML-Tarifpunktbewertungendaten/bewertungsdaten-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsdaten-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bewertungsdaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsdaten-Item

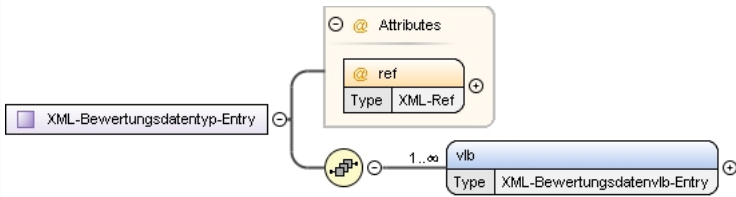
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Bewertungsdaten-Item |
| Used by | Element XML-Bewertungsdaten-Pool/item |
| Model | name , wert , text-matrix |
| Children | name, text-matrix, wert |
| Source | <pre> <xs:complexType name="XML-Bewertungsdaten-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="wert"> <xs:complexType> <xs:group ref="XML-Value" /> </xs:complexType> </xs:element> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungsdaten-Matrix

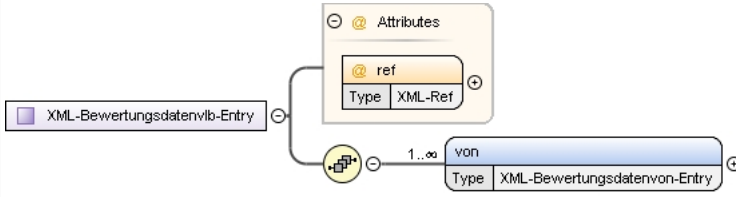
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Tarifpunktbewertungsdaten/bewertungsdaten-matrix |
| Model | typ* |
| Children | typ |
| Source | <pre> <xs:complexType name="XML-Bewertungsdaten-Matrix"> <xs:sequence> <xs:element name="typ" type="XML-Bewertungsdatentyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungsdatentyp-Entry

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

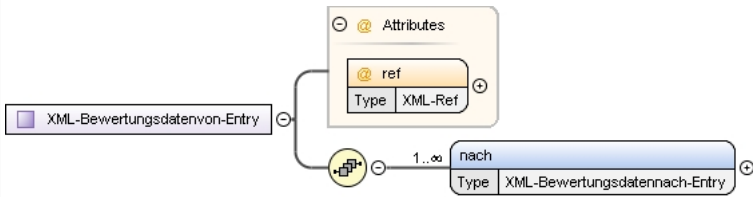
| | | | | |
|-----------------|---|--------------------------------|------------|--|
| Diagram |  | | | |
| Used by | Element | XML-Bewertungsdaten-Matrix/typ | | |
| Model | v1b+ | | | |
| Children | v1b | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsdatentyp-Entry"> <xs:sequence> <xs:element name="v1b" type="XML-Bewertungsdatenv1b-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsdatenv1b-Entry

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|---|----------------------------------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Used by | Element | XML-Bewertungsdatentyp-Entry/vlb | | | | | | | | | | |
| Model | von+ | | | | | | | | | | | |
| Children | von | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Bewertungsdatenvlb-Entry"> <xs:sequence> <xs:element name="von" type="XML-Bewertungsdatenvon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Bewertungsdatenvon-Entry

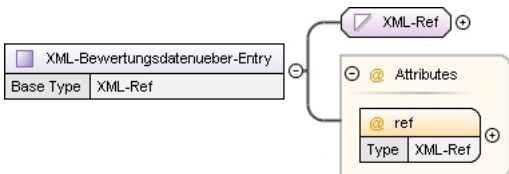
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|--|----------------------------------|------------|--|
| Diagram |  | | | |
| Used by | Element | XML-Bewertungsdatenvlb-Entry/von | | |
| Model | nach+ | | | |
| Children | nach | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsdaten-von-Entry"> <xs:sequence> <xs:element name="nach" type="XML-Bewertungsdatennach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsdatennach-Entry

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|--|-----------------------------------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Used by | Element | XML-Bewertungsdatenvon-Entry/nach | | | | | | | | | | |
| Model | ueber+ | | | | | | | | | | | |
| Children | ueber | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Bewertungsdatennach-Entry"> <xs:sequence> <xs:element name="ueber" type="XML-Bewertungsdatenueber-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Bewertungsdatenueber-Entry

| | | | | |
|-----------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |

| Type | extension of XML-Ref | | | |
|-----------------|--|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Bewertungsdatenueber-Entry | | | |
| Used by | Element XML-Bewertungsdatennach-Entry/ueber | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsdatenueber-Entry"> <xs:simpleContent> <xs:extension base="XML-Ref"> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:extension> </xs:simpleContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsausnahme-Matrix

| | | | | |
|-----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Used by | Element XML-Tarifpunktbewertungsdaten/bewertungsausnahme-matrix | | | |
| Model | typ* | | | |
| Children | typ | | | |
| Source | <pre><xs:complexType name="XML-Bewertungsausnahme-Matrix"> <xs:sequence> <xs:element name="typ" type="XML-Bewertungsausnahmetyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsausnahmetyp-Entry

| Namespace | http://vdv/ka/pkm/1 | | | |
|------------|--|---------|----------|--|
| Diagram | | | | |
| Used by | Element XML-Bewertungsausnahme-Matrix/typ | | | |
| Model | v1b+ | | | |
| Children | v1b | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsausnahmetyp-Entry"> <xs:sequence> <xs:element name="v1b" type="XML-Bewertungsausnahmev1b-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:complexType></pre> | | | |

| | |
|-----------------|---|
| | <pre> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungsausnahmevlb-Entry

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | |
|-----------------|---|-------------------------------------|------|-----|--|-----|---------|----------|--|
| Diagram | | | | | | | | | |
| Used by | Element | XML-Bewertungsausnahmetyp-Entry/vlb | | | | | | | |
| Model | von+ | | | | | | | | |
| Children | von | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| ref | XML-Ref | required | | | | | | | |
| Source | <pre><xs:complexType name="XML-Bewertungsausnahmevlb-Entry"> <xs:sequence> <xs:element name="von" type="XML-Bewertungsausnahmevon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | |

Complex Type XML-Bewertungsausnahmevon-Entry

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | |
|-----------------|---|-------------------------------------|------|-----|--|-----|---------|----------|--|
| Diagram | | | | | | | | | |
| Used by | Element | XML-Bewertungsausnahmevlb-Entry/von | | | | | | | |
| Model | nach+ | | | | | | | | |
| Children | nach | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| ref | XML-Ref | required | | | | | | | |
| Source | <pre><xs:complexType name="XML-Bewertungsausnahmevon-Entry"> <xs:sequence> <xs:element name="nach" type="XML-Bewertungsausnahmenach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | |

Complex Type XML-Bewertungsausnahmenach-Entry

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | <p>The diagram illustrates the structure of the <code>XML-Bewertungsausnahmenach-Entry</code> complex type. It consists of a sequence of elements: a required attribute <code>ref</code> of type <code>XML-Ref</code>, and an element <code>ueber</code> of type <code>XML-Bewertungsausnahmeueber-Entry</code> that occurs 1 to infinity times.</p> | | | | | | | | | | | |
| Used by | Element XML-Bewertungsausnahmevon-Entry/nach | | | | | | | | | | | |
| Model | ueber+ | | | | | | | | | | | |
| Children | ueber | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Bewertungsausnahmenach-Entry"> <xs:sequence> <xs:element name="ueber" type="XML-Bewertungsausnahmeueber-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Bewertungsausnahmeueber-Entry

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | extension of XML-Ref | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:int<ul style="list-style-type: none">• XML-Ref<ul style="list-style-type: none">• XML-Bewertungsausnahmeueber-Entry | | | | | | | | | | | |
| Used by | Element XML-Bewertungsausnahmenach-Entry/ueber | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Bewertungsausnahmeueber-Entry"> <xs:simpleContent> <xs:extension base="XML-Ref"> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:extension> </xs:simpleContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Nummerninterpretation-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Nummerninterpretation-Pool | | | |
| Used by | Element XML-Nummerninterpretationsdaten/nummerninterpretation-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Nummerninterpretation-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Nummerninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Nummerninterpretation-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Nr-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Nummerninterpretation-Item | | | |
| Used by | Element XML-Nummerninterpretation-Pool/item | | | |
| Model | nr , name , nummertext-pool | | | |
| Children | name, nr, nummertext-pool | | | |
| Source | <pre> <xs:complexType name="XML-Nummerninterpretation-Item"> <xs:complexContent> <xs:extension base="XML-Nr-Item"> </pre> | | | |

| | |
|-----------------|---|
| | <pre> <xs:sequence> <xs:element name="nummerntext-pool" type="XML-Nummerntext-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Nummerntext-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Nummerntext-Pool | | | |
| Used by | Element XML-Nummerninterpretation-Item/nummerntext-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Nummerntext-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Nummerntext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Nummerntext-Item

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |

| | |
|-----------------|--|
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Nummerntext-Item |
| Used by | Element XML-Nummerntext-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Nummerntext-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Bitleisteninterpretation-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Bitleisteninterpretation-Pool | | | |
| Used by | Element XML-Tarifpunktinterpretationsdaten/bitleisteninterpretation-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bitleisteninterpretation-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bitleisteninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bitleisteninterpretation-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Bitleisteninterpretation-Item |
| Used by | Element XML-Bitleisteninterpretation-Pool/item |
| Model | name , tarifpunkt |
| Children | name, tarifpunkt |
| Source | <pre><xs:complexType name="XML-Bitleisteninterpretation-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="tarifpunkt" type="XML-Ref-List-1N"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Raumnummerninterpretation-Pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Raumnummerninterpretation-Pool | | | |
| Used by | Element XML-Tarifpunktinterpretationsdaten/raumnummerninterpretation-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Raumnummerninterpretation-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Raumnummerninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |

| | |
|-----------------|---|
| | <pre> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Raumnummerninterpretation-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Raumnummerninterpretation-Item |
| Used by | Element XML-Raumnummerninterpretation-Pool/item |
| Model | name , raummodifikation-pool |
| Children | name, raummodifikation-pool |
| Source | <pre> <xs:complexType name="XML-Raumnummerninterpretation-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="raummodifikation-pool" type="XML-Raummodifikation-Pool"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Raummodifikation-Pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Raummodifikation-Pool | | | |
| Used by | Element XML-Raumnummerninterpretation-Item/raummodifikation-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |

| | |
|-----------------|--|
| Source | <pre> <xs:complexType name="XML-Raummodifikation-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Raummodifikation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Raummodifikation-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Nr-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Raummodifikation-Item |
| Used by | Element XML-Raummodifikation-Pool/item |
| Model | nr , name , ink , exk |
| Children | exk, ink, name, nr |
| Source | <pre> <xs:complexType name="XML-Raummodifikation-Item"> <xs:complexContent> <xs:extension base="XML-Nr-Item"> <xs:sequence> <xs:element name="ink" type="XML-Ref-Set-0N"/> <xs:element name="exk" type="XML-Ref-Set-0N"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Signatur-Part

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|---|
| Used by | Element XML-Modulzusatzdaten/signatur |
| Model | type , data |
| Children | data, type |
| Source | <pre><xs:complexType name="XML-Signatur-Part"> <xs:sequence minOccurs="0"> <xs:element name="type" type="XML-StringValue"/> <xs:element name="data" type="XML-BitsValue"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Annotation-Part

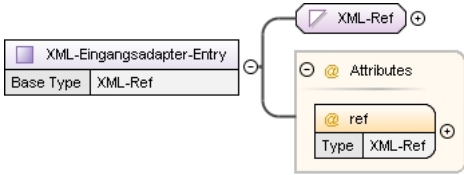
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Modulzusatzdaten/annotation |
| Model | data* |
| Children | data |
| Source | <pre><xs:complexType name="XML-Annotation-Part"> <xs:sequence> <xs:element name="data" type="XML-BitsValue" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Eingangsadapter-Matrix


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | <p>Elements</p> <p>XML-Kontrollmodul-Item/linieneingangsadapter-matrix, XML-Kontrollmodul-Item/modulkontextadapter-matrix, XML-Kontrollmodul-Item/tarifpunkteingangsadapter-matrix, XML-Kontrollmodul-Item/verkehrsmitteltypeingangsadapter-matrix, XML-Kontrollmodul-Item/wegevarianteneingangsadapter-matrix, XML-Produktmodul-Item/bezahlarteingangsadapter-matrix, XML-Produktmodul-Item/identifikationsparameterwerteingangsadapter-matrix, XML-Produktmodul-Item/linieneingangsadapter-matrix, XML-Produktmodul-Item/mitnahmetypeingangsadapter-matrix, XML-Produktmodul-Item/modulkontextadapter-matrix, XML-Produktmodul-Item/rabattmedientypeingangsadapter-matrix, XML-Produktmodul-Item/tarifpunkteingangsadapter-matrix, XML-Produktmodul-Item/tarifpunktreferenzeingangsadapter-matrix, XML-Produktmodul-Item/verkehrsmitteltypeingangsadapter-matrix, XML-Produktmodul-Item/waehrungseingangsadapter-matrix, XML-Produktmodul-Item/wegevarianteneingangsadapter-matrix, XML-Produktmodul-Item/zahlungsintervalleingangsadapter-matrix</p> |
| Model | e* |
| Children | e |
| Source | <pre><xs:complexType name="XML-Eingangsadapter-Matrix"> <xs:sequence> <xs:element name="e" type="XML-Eingangsadapter-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Eingangsadapter-Entry

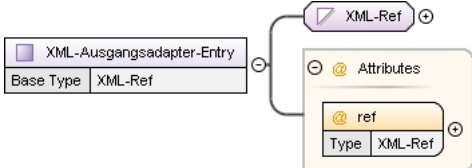
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|---|-------------|------------|--|
| Diagram |  <p>The diagram shows a box for 'XML-Eingangsadapter-Entry' with 'Base Type' set to 'XML-Ref'. An arrow points from this box to a larger box representing the 'XML-Ref' type. This larger box contains an 'Attributes' section with a 'ref' attribute. The 'ref' attribute has a 'Type' of 'XML-Ref' and a cardinality of '1'.</p> | | | |
| Type | extension of XML-Ref | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Eingangsadapter-Entry | | | |
| Used by | Element XML-Eingangsadapter-Matrix/c | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Eingangsadapter-Entry"> <xs:simpleContent> <xs:extension base="XML-Ref"> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:extension> </xs:simpleContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangsadapter-Matrix

| | | | |
|----------------------|---|---|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram |  | | |
| Used by | Elements | XML-Kontrollmodul-Item/linienausgangsadapter-matrix, XML-Kontrollmodul-Item/tarifpunktausgangsadapter-matrix, XML-Kontrollmodul-Item/verkehrsmitteltypausgangsadapter-matrix, XML-Kontrollmodul-Item/wegevariantenausgangsadapter-matrix, XML-Produktmodul-Item/bezahlartausgangsadapter-matrix, XML-Produktmodul-Item/identifikationsparameterwertausgangsadapter-matrix, XML-Produktmodul-Item/linienausgangsadapter-matrix, XML-Produktmodul-Item/mitnahmety-pausgangsadapter-matrix, XML-Produktmodul-Item/rabattmedientypausgangsadapter-matrix, XML-Produktmodul-Item/tarifpunktausgangsadapter-matrix, XML-Produktmodul-Item/tarifpunktreferen-zausgangsadapter-matrix, XML-Produktmodul-Item/verkehrsmitteltypausgangsadapter-matrix, XML-Produktmodul-Item/waehrungsausgangsadapter-matrix, XML-Produktmodul-Item/wegevariantenausgangsadapter-matrix, XML-Produktmodul-Item/zahlungsintervallausgangsadapter-matrix | |
| Model | a* | | |
| Children | a | | |
| Source | <pre><xs:complexType name="XML-Ausgangsadapter-Matrix"> <xs:sequence> <xs:element name="a" type="XML-Ausgangsadapter-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> | | |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Complex Type XML-Ausgangsadapter-Entry

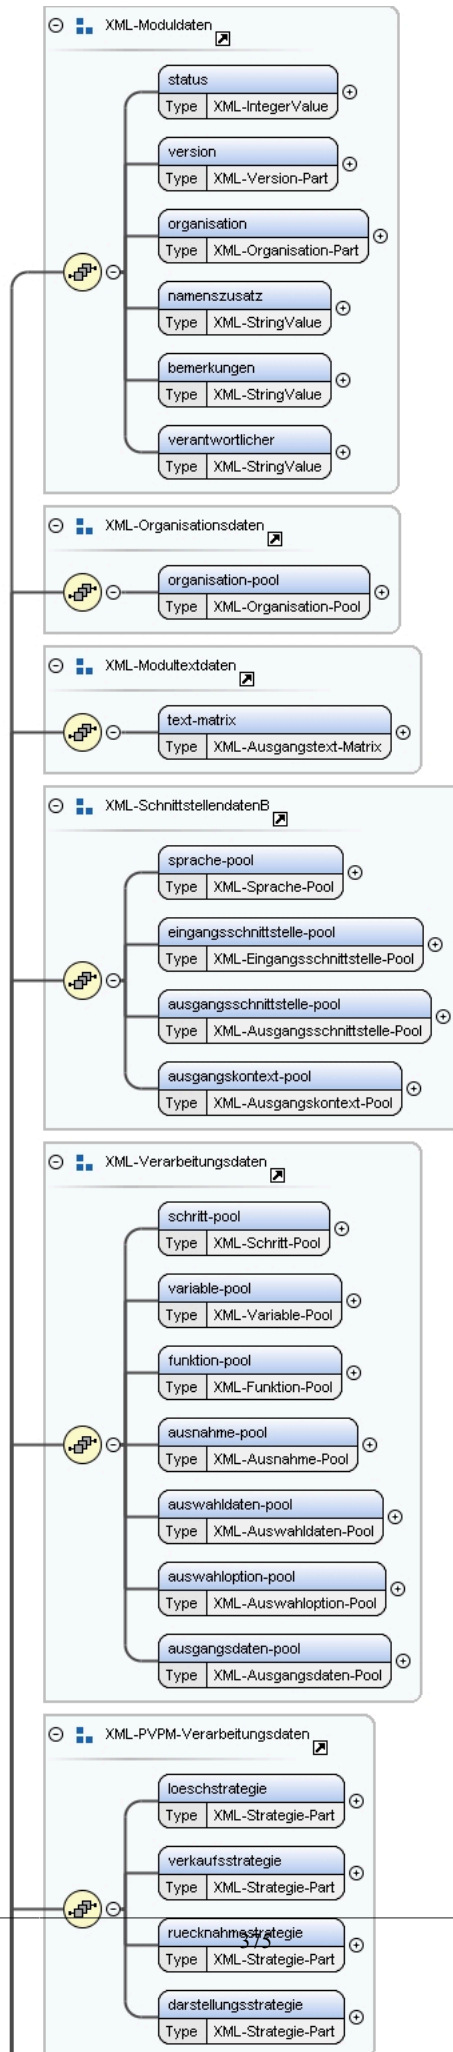
| | | | | |
|-----------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  <p>The diagram shows a box for 'XML-Ausgangsadapter-Entry' with 'Base Type' set to 'XML-Ref'. An arrow points from this box to a larger box representing the 'XML-Ref' type. This larger box contains an 'Attributes' section with a 'ref' attribute. The 'ref' attribute has a 'Type' of 'XML-Ref' and a cardinality of '1'.</p> | | | |

| | | | | |
|-----------------|--|-------------|------------|--|
| Type | extension of XML-Ref | | | |
| Type hierarchy | <ul style="list-style-type: none"> • xs:int • XML-Ref • XML-Ausgangsadapter-Entry | | | |
| Used by | Element XML-Ausgangsadapter-Matrix/a | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Ausgangsadapter-Entry"> <xs:simpleContent> <xs:extension base="XML-Ref"> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:extension> </xs:simpleContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-PVPM

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | |
|------------------|--|
| Used by | Elements XML-Produktmodul-Item/moduldaten, pv-pm |
| Model | status , version , organisation , namenszusatz , bemerkungen , verantwortlicher , organisation-pool , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , loeschstrategie , verkaufsstrategie , ruecknahmesstrategie , darstellungsstrategie , ausgangsdatenfamilie-pool , nachfolgekriterium-pool , abhaengigkeitskriterium-pool , schlues-sel-pool , kontingentierung-pool , identifikationsparameter-pool , efmprodukt-pool , tarifprodukt-pool , fremdprodukt-pool , produk-tgruppe-pool , tarifpunkt-pool , tarifpunktgruppe-pool , tarifpunktreferenz-pool , linie-pool , verkehrsmitteltyp-pool , verkehrsmittellinienbezug-pool , modulkontext-pool , bezahlart-pool , waehrung-pool , zahlungsintervall-pool , mitnahmetyp-pool , rabattmedientyp-pool , spezialbedingung-pool , bezahlartbedingung-pool , zahlungsintervallbedingung-pool , tagesbedingung-pool , tageszeitbedingung-pool , zeitraumbedingung-pool , tarifpunktbedingung-pool , bewertungsbedingung-pool , mitnahmebedin-gung-pool , rabattmedienbedingung-pool , modulkontextbedingung-pool , verkehrsmittellinienbedingung-pool , zuordnungstyp-pool , zuordnungsdaten-matrix , zuordnungsausnahme-matrix , wegevariante-pool , bewertungstyp-pool , bewertungsdaten-pool , bewertungsdaten-matrix , bewertungsausnahme-matrix , nummerninterpretation-pool , bitleisteninterpretation-pool , raumnummerninter-pretation-pool , signatur , annotation |
| Children | abhaengigkeitskriterium-pool , annotation , ausgangsdaten-pool , ausgangsdatenfamilie-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bemerkungen , bewertungsausnahme-matrix , bewertungsbedingung-pool , bewertungsdaten-matrix , bewertungsdaten-pool , bewertungstyp-pool , bezahlart-pool , bezahlartbedingung-pool , bitleisteninterpretation-pool , darstellungsstrategie , efmprodukt-pool , eingangsschnittstelle-pool , fremdprodukt-pool , funktion-pool , identifikationsparameter-pool , kontingentierung-pool , linie-pool , loeschstrategie , mitnahmebedingung-pool , mitnahmetyp-pool , modulkontext-pool , modulkontextbedingung-pool , nachfolgekriterium-pool , namenszusatz , nummerninterpretation-pool , organ-isation , organisation-pool , produktgruppe-pool , rabattmedienbedingung-pool , rabattmedientyp-pool , raumnummerninterpreta-tion-pool , ruecknahmestategie , schlues-sel-pool , schritt-pool , signatur , spezialbedingung-pool , sprache-pool , status , tagesbedin-gung-pool , tageszeitbedingung-pool , tarifprodukt-pool , tarifpunkt-pool , tarifpunktbedingung-pool , tarifpunktgruppe-pool , tarifpunk-treferenz-pool , text-matrix , variable-pool , verantwortlicher , verkaufsstrategie , verkehrsmittellinienbedingung-pool , verkehrsmittellinienbezug-pool , verkehrsmitteltyp-pool , version , waehrung-pool , wegevariante-pool , zahlungsintervall-pool , zahlungsinter-vallbedingung-pool , zeitraumbedingung-pool , zuordnungsausnahme-matrix , zuordnungsdaten-matrix , zuordnungstyp-pool |
| Source | <pre> <xs:complexType name="XML-PVPM"> <xs:sequence> <xs:group ref="XML-Moduldaten" /> <xs:group ref="XML-Organisationsdaten" /> <xs:group ref="XML-Modultextdaten" /> <xs:group ref="XML-SchnittstellendatenB" /> <xs:group ref="XML-Verarbeitungsdaten" /> <xs:group ref="XML-PVPM-Verarbeitungsdaten" /> <xs:group ref="XML-PVPM-Produktdaten" /> <xs:group ref="XML-Tarifpunktdaten" /> <xs:group ref="XML-Tarifpunktreferenzdaten" /> <xs:group ref="XML-Verkehrsmittelliniendaten" /> <xs:group ref="XML-PVPM-Bedingungsdaten" /> <xs:group ref="XML-Tarifpunktzuordnungsdaten" /> <xs:group ref="XML-Tarifpunktbewertungsdaten" /> <xs:group ref="XML-Nummerninterpretationsdaten" /> <xs:group ref="XML-Tarifpunktinterpretationsdaten" /> <xs:group ref="XML-Modulzusatzdaten" /> </xs:sequence> </xs:complexType> </pre> |
| Schema loca-tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Schlues-sel-Pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre> classDiagram class XML_Pool { @Attributes } class XML_Schlues-sel_Pool { key XML-Ref } XML_Pool < -- XML_Schlues-sel_Pool XML_Schlues-sel_Pool "0..∞" --> XML_Schlues-sel_Item : item class XML_Schlues-sel_Item { Type XML-Schlues-sel-Item } </pre> |
| Type | extension of XML-Pool |
| Type hierar-chy | <ul style="list-style-type: none"> XML-Pool XML-Schlues-sel-Pool |
| Used by | Elements XML-KVPPM-Produktdaten/schlues-sel-pool, XML-PVPM-Produktdaten/schlues-sel-pool |
| Model | item* |

| | | | | |
|-----------------|--|-------------|------------|--|
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Schluessel-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Schluessel-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Schluessel-Item

| | | | | |
|-----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Schluessel-Item | | | |
| Used by | Element XML-Schluessel-Pool/item | | | |
| Model | id , name | | | |
| Children | id, name | | | |
| Source | <pre> <xs:complexType name="XML-Schluessel-Item"> <xs:complexContent> <xs:extension base="XML-Item"> <xs:sequence> <xs:element name="id" type="XML-IntegerValue" /> <xs:element name="name" type="XML-StringValue" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Kontingentierung-Pool

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool | | | |

| | | | | |
|-----------------|--|---|----------|--|
| | <ul style="list-style-type: none">XML-Kontingentierung-Pool | | | |
| Used by | Element | XML-PVPM-Produktdaten/kontingentierung-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Kontingentierung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Kontingentierung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Kontingentierung-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre>graph TD XML-Name-Item[XML-Name-Item (extension base)] --> XML-Item[XML-Item (extension base)] XML-Item --> name[name] XML-Item --> kontingentdaten-table[kontingentdaten-table] XML-Item --> kontingentausnahme-table[kontingentausnahme-table] name --> XML-String-Value[XML-StringValue] kontingentdaten-table --> XML-Kontingentdaten-Table[XML-Kontingentdaten-Table] kontingentausnahme-table --> XML-Kontingentausnahme-Table[XML-Kontingentausnahme-Table]</pre> |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Kontingentierung-Item |
| Used by | Element XML-Kontingentierung-Pool/item |
| Model | name , kontingentdaten-table , kontingentausnahme-table |
| Children | kontingentausnahme-table, kontingentdaten-table, name |
| Source | <pre><xs:complexType name="XML-Kontingentierung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="kontingentdaten-table" type="XML-Kontingentdaten-Table"/> <xs:element name="kontingentausnahme-table" type="XML-Kontingentausnahme-Table"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Kontingentdaten-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Used by | Element XML-Kontingentierung-Item/kontingentdaten-table |
| Model | tagesbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung , spezialbedingung , daten-pool |
| Children | daten-pool, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Source | <pre> <xs:complexType name="XML-Kontingentdaten-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-Ref-List-0N"/> <xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N"/> <xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N"/> <xs:element name="spezialbedingung" type="XML-Ref-List-0N"/> <xs:element name="daten-pool" type="XML-Kontingentdaten-Pool"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Kontingentdaten-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Kontingentdaten-Table/daten-pool |
| Model | item* |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Kontingentdaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-Kontingentdaten-Item" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Kontingentdaten-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Kontingentdaten-Pool/item |
| Model | url |
| Children | url |
| Source | <pre> <xs:complexType name="XML-Kontingentdaten-Item"> <xs:sequence> <xs:element name="url" type="XML-StringValue"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Kontingentausnahme-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Used by | Element XML-Kontingentierung-Item/kontingentausnahme-table |
| Model | tagesbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Source | <pre> <xs:complexType name="XML-Kontingentausnahme-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-Ref-List-0N"/> <xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N"/> <xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N"/> <xs:element name="spezialbedingung" type="XML-Ref-List-0N"/> <xs:element name="ausnahme" type="XML-Ref-List-0N"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-PVPM-EFMPProdukt-Pool

| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-PVPM-EFMPProdukt-Pool | | | |
| Used by | Element XML-PVPM-Produktdaten/efmprodukt-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-PVPM-EFMPProdukt-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-PVPM-EFMPProdukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-PVPM-EFMProdukt-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-PVPM-EFMProdukt-Item |
| Used by | Element XML-PVPM-EFMProdukt-Pool/item |
| Model | nr , name , text-matrix , schluessel , loeschdaten{0,1} , darstellungsdaten{0,1} , ruecknahmedaten{0,1} |
| Children | darstellungsdaten, loeschdaten, name, nr, ruecknahmedaten, schluessel, text-matrix |
| Source | <pre> <xs:complexType name="XML-PVPM-EFMProdukt-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"> <xs:sequence> <xs:element name="schluessel" type="XML-PVPM-Schluessel-Part"/> <xs:element name="loeschdaten" type="XML-Loeschdaten-Part" minOccurs="0"/> <xs:element name="darstellungsdaten" type="XML-Darstellungsdaten-Part" minOccurs="0"/> <xs:element name="ruecknahmedaten" type="XML-Ruecknahmedaten-Part" minOccurs="0"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-PVPM-Schluessel-Part

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Used by | Element XML-PVPM-EFMProdukt-Item/schluesel |
| Model | mkpv , mktr , mkauth |
| Children | mkauth, mkpv, mktr |
| Source | <pre> <xs:complexType name="XML-PVPM-Schluesel-Part"> <xs:sequence> <xs:element name="mkpv" type="XML-Ref-01"/> <xs:element name="mktr" type="XML-Ref-01"/> <xs:element name="mkauth" type="XML-Ref-01"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Loeschdaten-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Produktdaten-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktdaten-Part XML-Loeschdaten-Part |
| Used by | Elements XML-PVPM-EFMProdukt-Item/loeschdaten, XML-PVPM-Tarifprodukt-Item/loeschdaten |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , unterstuetzt-tab |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetzt-tab |
| Source | <pre> <xs:complexType name="XML-Loeschdaten-Part"> <xs:complexContent> <xs:extension base="XML-Produktdaten-Part"> <xs:sequence> <xs:element name="unterstuetzt-tab" type="XML-DateValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Darstellungsdaten-Part

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Produktdaten-Part |
| Type hierarchy | <ul style="list-style-type: none">XML-Produktdaten-PartXML-Darstellungsdaten-Part |
| Used by | Elements XML-PVPM-EFMPProdukt-Item/darstellungsdaten, XML-PVPM-Tarifprodukt-Item/darstellungsdaten |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , unterstuetzt-tab |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetzt-tab |
| Source | <pre><xs:complexType name="XML-Darstellungsdaten-Part"> <xs:complexContent> <xs:extension base="XML-Produktdaten-Part"> <xs:sequence> <xs:element name="unterstuetzt-tab" type="XML-DateValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

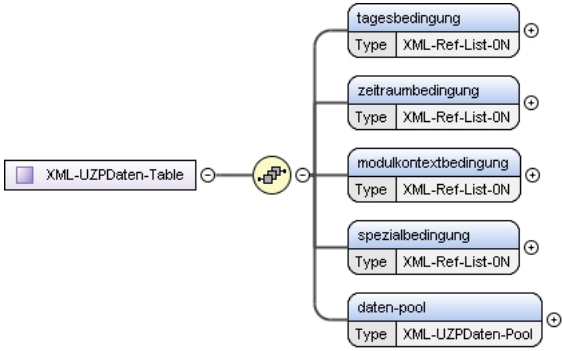
Complex Type XML-Ruecknahmedaten-Part

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|


| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Produktdaten-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktdaten-Part XML-Ruecknahmedaten-Part |
| Used by | Elements XML-PVPM-EFMPProdukt-Item/ruecknahmedaten, XML-PVPM-Tarifprodukt-Item/ruecknahmedaten |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , uzpdaten-table , uzpausnahme-table , rueckzahlungsdaten-table , rueckzahlungsausnahme-table , unterstuetzt |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, rueckzahlungsausnahme-table, rueckzahlungsdaten-table, unterstuetzt, uzpausnahme-table, uzpdaten-table |
| Source | <pre> <xs:complexType name="XML-Ruecknahmedaten-Part"> <xs:complexContent> <xs:extension base="XML-Produktdaten-Part"> <xs:sequence> <xs:element name="uzpdaten-table" type="XML-UZPDaten-Table"/> <xs:element name="uzpausnahme-table" type="XML-UZPAusnahme-Table"/> <xs:element name="rueckzahlungsdaten-table" type="XML-Rueckzahlungsdaten-Table"/> <xs:element name="rueckzahlungsausnahme-table" type="XML-Rueckzahlungsausnahme-Table"/> <xs:element name="unterstuetzt" type="XML-DateValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-UZPDaten-Table

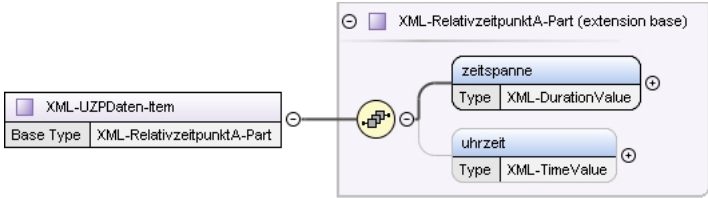
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram |  <p>The diagram shows a sequence container (yellow circle with a plus sign) connected to five child elements. From top to bottom, these are: tagesbedingung (Type: XML-Ref-List-0N), zeitraumbedingung (Type: XML-Ref-List-0N), modulkontextbedingung (Type: XML-Ref-List-0N), spezialbedingung (Type: XML-Ref-List-0N), and daten-pool (Type: XML-UZPDaten-Pool). The XML-UZPDaten-Table element is shown as a purple box connected to the sequence container.</p> |
| Used by | Element XML-Ruecknahmedaten-Part/uzpdaten-table |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | daten-pool, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Source | <pre> <xs:complexType name="XML-UZPDaten-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-Ref-List-0N"/> <xs:element name="zeitraumbedingung" type="XML-Ref-List-0N"/> <xs:element name="modulkontextbedingung" type="XML-Ref-List-0N"/> <xs:element name="spezialbedingung" type="XML-Ref-List-0N"/> <xs:element name="daten-pool" type="XML-UZPDaten-Pool"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-UZPDaten-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  <p>The diagram shows a sequence container (yellow circle with a plus sign) connected to a single child element item (Type: XML-UZPDaten-Item). The XML-UZPDaten-Pool element is shown as a purple box connected to the sequence container. The cardinality is indicated as 0..∞.</p> |
| Used by | Element XML-UZPDaten-Table/daten-pool |
| Model | item* |
| Children | item |
| Source | <pre> <xs:complexType name="XML-UZPDaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-UZPDaten-Item" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-UZPDaten-Item

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  <p>The diagram shows a sequence container (yellow circle with a plus sign) connected to two child elements: zeitspanne (Type: XML-DurationValue) and uhrzeit (Type: XML-TimeValue). The XML-UZPDaten-Item element is shown as a purple box connected to the sequence container. It is noted as an extension of XML-RelativzeitpunktA-Part (extension base).</p> |
| Type | extension of XML-RelativzeitpunktA-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-RelativzeitpunktA-Part XML-UZPDaten-Item |
| Used by | Element XML-UZPDaten-Pool/item |
| Model | zeitspanne , uhrzeit{0,1} |
| Children | uhrzeit, zeitspanne |

| | |
|-----------------|--|
| Source | <pre><xs:complexType name="XML-UZPDaten-Item"> <xs:complexContent> <xs:extension base="XML-RelativzeitpunktA-Part" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-RelativzeitpunktA-Part

| | | | |
|-----------------|---|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Used by | Complex Type | XML-UZPDaten-Item | |
| | Elements | XML-Zeitraum-Item/beginn, XML-Zeitraum-Item/ende | |
| Model | zeitspanne , uhrzeit{0,1} | | |
| Children | uhrzeit, zeitspanne | | |
| Source | <pre><xs:complexType name="XML-RelativzeitpunktA-Part"> <xs:sequence> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:element name="uhrzeit" type="XML-TimeValue" minOccurs="0"/> </xs:sequence> </xs:complexType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Complex Type XML-UZPAusnahme-Table

| | | | |
|-----------------|---|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Used by | Element | XML-Ruecknahmedaten-Part/uzpausnahme-table | |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , ausnahme | | |
| Children | ausnahme, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung | | |
| Source | <pre><xs:complexType name="XML-UZPAusnahme-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-Ref-List-0N" /> <xs:element name="zeitraumbedingung" type="XML-Ref-List-0N" /> <xs:element name="modulkontextbedingung" type="XML-Ref-List-0N" /> <xs:element name="spezialbedingung" type="XML-Ref-List-0N" /> <xs:element name="ausnahme" type="XML-Ref-List-0N" /> </xs:sequence> </xs:complexType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Complex Type XML-Rueckzahlungsdaten-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Used by | Element XML-Ruecknahmedaten-Part/rueckzahlungsdaten-table |
| Model | waehrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zeitraumbedingung |
| Source | <pre> <xs:complexType name="XML-Rueckzahlungsdaten-Table"> <xs:sequence> <xs:element name="waehrung" type="XML-Ref-List-0N" /> <xs:element name="tagesbedingung" type="XML-Ref-List-0N" /> <xs:element name="zeitraumbedingung" type="XML-Ref-List-0N" /> <xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N" /> <xs:element name="bewertungsbedingung" type="XML-Ref-List-0N" /> <xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N" /> <xs:element name="mitnahmebedingung" type="XML-Ref-List-0N" /> <xs:element name="rabattmedienbedingung" type="XML-Ref-List-0N" /> <xs:element name="modulkontextbedingung" type="XML-Ref-List-0N" /> <xs:element name="spezialbedingung" type="XML-Ref-List-0N" /> <xs:element name="daten-pool" type="XML-Rueckzahlungsdaten-Pool" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Rueckzahlungsdaten-Pool

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Rueckzahlungsdaten-Table/daten-pool |
| Model | item* |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Rueckzahlungsdaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-Rueckzahlungsdaten-Item" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType> </pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Rueckzahlungsdaten-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Rueckzahlungsdaten-Pool/item |
| Model | betrag , gebuehr |
| Children | betrag, gebuehr |
| Source | <pre><xs:complexType name="XML-Rueckzahlungsdaten-Item"> <xs:sequence> <xs:element name="betrag" type="XML-Waehrungsbetrag-Part" /> <xs:element name="gebuehr" type="XML-Waehrungsbetrag-Part" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Waehrungsbetrag-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Elements XML-Rueckzahlungsdaten-Item/betrag, XML-Rueckzahlungsdaten-Item/gebuehr Complex Type XML-Preisdaten-Item |
| Model | wert , mwstsatz{0,1} |
| Children | mwstsatz, wert |
| Source | <pre><xs:complexType name="XML-Waehrungsbetrag-Part"> <xs:sequence> <xs:element name="wert" type="XML-IntegerValue" /> <xs:element name="mwstsatz" type="XML-IntegerValue" minOccurs="0" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Rueckzahlungsausnahme-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Used by | Element XML-Ruecknahmedaten-Part/rueckzahlungsausnahme-table |
| Model | waehrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zeitraumbedingung |
| Source | <pre> <xs:complexType name="XML-Rueckzahlungsausnahme-Table"> <xs:sequence> <xs:element name="waehrung" type="XML-Ref-List-0N" /> <xs:element name="tagesbedingung" type="XML-Ref-List-0N" /> <xs:element name="zeitraumbedingung" type="XML-Ref-List-0N" /> <xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N" /> <xs:element name="bewertungsbedingung" type="XML-Ref-List-0N" /> <xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N" /> <xs:element name="mitnahmebedingung" type="XML-Ref-List-0N" /> <xs:element name="rabattmedienbedingung" type="XML-Ref-List-0N" /> <xs:element name="modulkontextbedingung" type="XML-Ref-List-0N" /> <xs:element name="spezialbedingung" type="XML-Ref-List-0N" /> <xs:element name="ausnahme" type="XML-Ref-List-0N" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-PVPM-Tarifprodukt-Pool

| | |
|-----------|-----------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Pool |

| | | | | |
|-----------------|--|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-PVPM-Tarifprodukt-Pool | | | |
| Used by | Element XML-PVPM-Produktdaten/tarifprodukt-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-PVPM-Tarifprodukt-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-PVPM-Tarifprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-PVPM-Tarifprodukt-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Text-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item | | | |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> • XML-Nr-Item • XML-Text-Item • XML-PVPM-Tarifprodukt-Item |
| Used by | Element XML-PVPM-Tarifprodukt-Pool/item |
| Model | nr, name, text-matrix, extNr, efmprodukt, identifikation, loeschdaten{0,1}, verkaufsdaten{0,1}, darstellungsdaten{0,1}, ruecknahmedaten{0,1} |
| Children | darstellungsdaten, efmprodukt, extNr, identifikation, loeschdaten, name, nr, ruecknahmedaten, text-matrix, verkaufsdaten |
| Source | <pre> <xs:complexType name="XML-PVPM-Tarifprodukt-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"> <xs:sequence> <xs:element name="extNr" type="XML-StringValue"/> <xs:element name="efmprodukt" type="XML-Ref-01"/> <xs:element name="identifikation" type="XML-Ref-Set-1N"/> <xs:element name="loeschdaten" type="XML-Loeschdaten-Part" minOccurs="0"/> <xs:element name="verkaufsdaten" type="XML-Verkaufsdaten-Part" minOccurs="0"/> <xs:element name="darstellungsdaten" type="XML-Darstellungsdaten-Part" minOccurs="0"/> <xs:element name="ruecknahmedaten" type="XML-Ruecknahmedaten-Part" minOccurs="0"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Verkaufsdaten-Part

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre> classDiagram class XMLProduktDatenPart["XML-Produktdaten-Part (extension base)"] { funktion XML-Ref-01 modulkontext XML-Ref-Set-0N ausgangsdaten-matrix XML-Ausgangsdaten-Matrix abhaengigkeitsdaten-table XML-Abhaengigkeitsdaten-Table abhaengigkeitsausnahme-table XML-Abhaengigkeitsausnahme-Table } class XMLVerkaufsDatenPart["XML-Verkaufsdaten-Part"] { nachfolgedaten-table XML-Nachfolgedaten-Table nachfolgeausnahme-table XML-Nachfolgeausnahme-Table gzrdaten-table XML-GZRDaten-Table gzrausnahme-table XML-GZRAusnahme-Table preisanpassung XML-BooleanValue preisdaten-table XML-Preisdaten-Table preisausnahme-table XML-Preisausnahme-Table kontingentierung XML-Ref-01 } XMLProduktDatenPart --> XMLVerkaufsDatenPart : Base Type </pre> |
| Type | extension of XML-Produktdaten-Part |

| | |
|-----------------|---|
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktdaten-Part XML-Verkaufsdaten-Part |
| Used by | Element XML-PVPM-Tarifprodukt-Item/verkaufsdaten |
| Model | funktion , modulkontext , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table , nachfolgedaten-table , nachfolgeausnahme-table , gzrdaten-table , gzrausnahme-table , preisanpassung , preisdaten-table , preisausnahme-table , kontingentierung |
| Children | abhaengigkeitsausnahme-table , abhaengigkeitsdaten-table , ausgangsdaten-matrix , funktion , gzrausnahme-table , gzrdaten-table , kontingentierung , modulkontext , nachfolgeausnahme-table , nachfolgedaten-table , preisanpassung , preisausnahme-table , preisdaten-table |
| Source | <pre> <xs:complexType name="XML-Verkaufsdaten-Part"> <xs:complexContent> <xs:extension base="XML-Produktdaten-Part"> <xs:sequence> <xs:element name="nachfolgedaten-table" type="XML-Nachfolgedaten-Table"/> <xs:element name="nachfolgeausnahme-table" type="XML-Nachfolgeausnahme-Table"/> <xs:element name="gzrdaten-table" type="XML-GZRDaten-Table"/> <xs:element name="gzrausnahme-table" type="XML-GZRAusnahme-Table"/> <xs:element name="preisanpassung" type="XML-BooleanValue"/> <xs:element name="preisdaten-table" type="XML-Preisdaten-Table"/> <xs:element name="preisausnahme-table" type="XML-Preisausnahme-Table"/> <xs:element name="kontingentierung" type="XML-Ref-01"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Nachfolgedaten-Table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Verkaufsdaten-Part/nachfolgedaten-table |
| Model | kriterium , vorgaenger , nachfolger |
| Children | kriterium , nachfolger , vorgaenger |
| Source | <pre> <xs:complexType name="XML-Nachfolgedaten-Table"> <xs:sequence> <xs:element name="kriterium" type="XML-Ref-List-ON"/> <xs:element name="vorgaenger" type="XML-Ref-List-ON"/> <xs:element name="nachfolger" type="XML-Ref-List-ON"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Nachfolgeausnahme-Table

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Verkaufsdaten-Part/nachfolgeausnahme-table |
| Model | kriterium , vorgaenger , ausnahme |

| | |
|-----------------|--|
| Children | ausnahme, kriterium, vorgaenger |
| Source | <pre><xs:complexType name="XML-Nachfolgeausnahme-Table"> <xs:sequence> <xs:element name="kriterium" type="XML-Ref-List-0N" /> <xs:element name="vorgaenger" type="XML-Ref-List-0N" /> <xs:element name="ausnahme" type="XML-Ref-List-0N" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-GZRDaten-Table

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Verkaufsdaten-Part/gzrdaten-table |
| Model | tagesbedingung , tageszeitbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, daten-pool, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Source | <pre><xs:complexType name="XML-GZRDaten-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-Ref-List-0N" /> <xs:element name="tageszeitbedingung" type="XML-Ref-List-0N" /> <xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N" /> <xs:element name="bewertungsbedingung" type="XML-Ref-List-0N" /> <xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N" /> <xs:element name="spezialbedingung" type="XML-Ref-List-0N" /> <xs:element name="daten-pool" type="XML-GZRDaten-Pool" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-GZRDaten-Pool

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-GZRDaten-Table/daten-pool |
| Model | item* |
| Children | item |
| Source | <pre><xs:complexType name="XML-GZRDaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-GZRDaten-Item" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-GZRDaten-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-GZRDaten-Pool/item |
| Model | beginn , ende |
| Children | beginn, ende |
| Source | <pre><xs:complexType name="XML-GZRDaten-Item"> <xs:sequence> <xs:element name="beginn" type="XML-RelativzeitpunktB-Part" /> <xs:element name="ende" type="XML-RelativzeitpunktB-Part" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-RelativzeitpunktB-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Elements XML-GZRDaten-Item/beginn, XML-GZRDaten-Item/ende |
| Model | zeitspanne , (uhrzeit unbestimmt) |
| Children | uhrzeit, unbestimmt, zeitspanne |
| Source | <pre><xs:complexType name="XML-RelativzeitpunktB-Part"> <xs:sequence> <xs:element name="zeitspanne" type="XML-DurationValue" /> <xs:choice minOccurs="0"> <xs:element name="uhrzeit" type="XML-TimeValue" /> <xs:element name="unbestimmt" type="XML-VoidValue" /> </xs:choice> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-GZRAusnahme-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Used by | Element XML-Verkaufsdaten-Part/gzrausnahme-table |
| Model | tagesbedingung , tageszeitbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Source | <pre> <xs:complexType name="XML-GZRAusnahme-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-Ref-List-0N" /> <xs:element name="tageszeitbedingung" type="XML-Ref-List-0N" /> <xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N" /> <xs:element name="bewertungsbedingung" type="XML-Ref-List-0N" /> <xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N" /> <xs:element name="spezialbedingung" type="XML-Ref-List-0N" /> <xs:element name="ausnahme" type="XML-Ref-List-0N" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |


Complex Type XML-Preisdaten-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

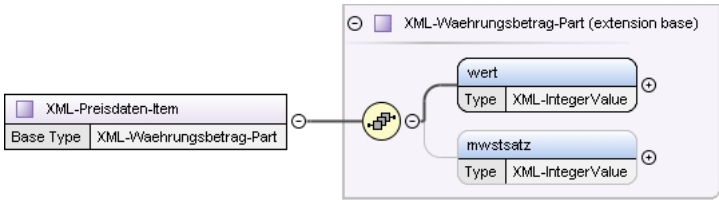
| | |
|-----------------|---|
| Diagram | |
| Used by | Element XML-Verkaufsdaten-Part/preisdaten-table |
| Model | waehrung , bezahlartbedingung , zahlungsintervallbedingung , tagesbedingung , tageszeitbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, bezahlartbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zahlungsintervallbedingung, zeitraumbedingung |
| Source | <pre> <xs:complexType name="XML-Preisdaten-Table"> <xs:sequence> <xs:element name="waehrung" type="XML-Ref-List-0N" /> <xs:element name="bezahlartbedingung" type="XML-Ref-List-0N" /> <xs:element name="zahlungsintervallbedingung" type="XML-Ref-List-0N" /> <xs:element name="tagesbedingung" type="XML-Ref-List-0N" /> <xs:element name="tageszeitbedingung" type="XML-Ref-List-0N" /> <xs:element name="zeitraumbedingung" type="XML-Ref-List-0N" /> <xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N" /> <xs:element name="bewertungsbedingung" type="XML-Ref-List-0N" /> <xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N" /> <xs:element name="mitnahmebedingung" type="XML-Ref-List-0N" /> <xs:element name="rabattmedienbedingung" type="XML-Ref-List-0N" /> <xs:element name="modulkontextbedingung" type="XML-Ref-List-0N" /> <xs:element name="spezialbedingung" type="XML-Ref-List-0N" /> <xs:element name="daten-pool" type="XML-Preisdaten-Pool" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Preisdaten-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Used by | Element XML-Preisdaten-Table/daten-pool |
| Model | item* |
| Children | item |
| Source | <pre><xs:complexType name="XML-Preisdaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-Preisdaten-Item" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Preisdaten-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | extension of XML-Waehrungsbetrag-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Waehrungsbetrag-Part <ul style="list-style-type: none"> XML-Preisdaten-Item |
| Used by | Element XML-Preisdaten-Pool/item |
| Model | wert , mwstsatz {0,1} |
| Children | mwstsatz, wert |
| Source | <pre><xs:complexType name="XML-Preisdaten-Item"> <xs:complexContent> <xs:extension base="XML-Waehrungsbetrag-Part" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

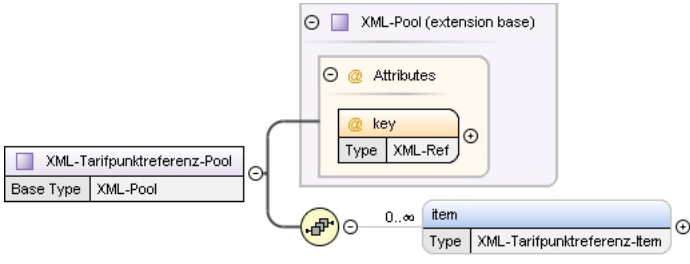
Complex Type XML-Preisausnahme-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Used by | Element XML-Verkaufsdaten-Part/preisAusnahme-table |
| Model | waehrung , bezahlarbbedingung , zahlungsintervallbedingung , tagesbedingung , tageszeitbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, bezahlarbbedingung, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zahlungsintervallbedingung, zeitraumbedingung |
| Source | <pre> <xs:complexType name="XML-PreisAusnahme-Table"> <xs:sequence> <xs:element name="waehrung" type="XML-Ref-List-0N" /> <xs:element name="bezahlarbbedingung" type="XML-Ref-List-0N" /> <xs:element name="zahlungsintervallbedingung" type="XML-Ref-List-0N" /> <xs:element name="tagesbedingung" type="XML-Ref-List-0N" /> <xs:element name="tageszeitbedingung" type="XML-Ref-List-0N" /> <xs:element name="zeitraumbedingung" type="XML-Ref-List-0N" /> <xs:element name="tarifpunktbedingung" type="XML-Ref-List-0N" /> <xs:element name="bewertungsbedingung" type="XML-Ref-List-0N" /> <xs:element name="verkehrsmittellinienbedingung" type="XML-Ref-List-0N" /> <xs:element name="mitnahmebedingung" type="XML-Ref-List-0N" /> <xs:element name="rabattmedienbedingung" type="XML-Ref-List-0N" /> <xs:element name="modulkontextbedingung" type="XML-Ref-List-0N" /> <xs:element name="spezialbedingung" type="XML-Ref-List-0N" /> <xs:element name="ausnahme" type="XML-Ref-List-0N" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunktreferenz-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|----------------------|--|---------|----------|--|
| Diagram |  | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-PoolXML-Tarifpunktreferenz-Pool | | | |
| Used by | Element XML-Tarifpunktreferenzdaten/tarifpunktreferenz-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Tarifpunktreferenz-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktreferenz-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifpunktreferenz-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Tarifpunkt-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Tarifpunkt-Item XML-Tarifpunktreferenz-Item |
| Used by | Element XML-Tarifpunktreferenz-Pool/item |
| Model | nr , name , text-matrix , typ , ortsbezug , tarifpunkt |
| Children | name, nr, ortsbezug, tarifpunkt, text-matrix, typ |
| Source | <pre> <xs:complexType name="XML-Tarifpunktreferenz-Item"> <xs:complexContent> <xs:extension base="XML-Tarifpunkt-Item"> <xs:sequence> <xs:element name="tarifpunkt" type="XML-Ref-Set-1N"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Waehrung-Pool

| | |
|-----------|-----------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Pool |

| | | | | |
|-----------------|---|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Waehrung-Pool | | | |
| Used by | Element XML-PVPM-Bedingungsdaten/waehrung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Waehrung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Waehrung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Waehrung-Item

| | | | | |
|-----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Text-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Waehrung-Item | | | |
| Used by | Element XML-Waehrung-Pool/item | | | |
| Model | nr , name , text-matrix | | | |
| Children | name, nr, text-matrix | | | |
| Source | <pre> <xs:complexType name="XML-Waehrung-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zahlungsintervall-Pool

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | | | | |
|----------------------|--|---|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | <p>The diagram illustrates the structure of the XML-Zahlungsintervall-Pool complex type. It is an extension of the XML-Pool (extension base). The diagram shows an 'Attributes' section with a 'key' attribute of type XML-Ref. A sequence container holds an 'item' element of type XML-Zahlungsintervall-Item, with a cardinality of 0..∞.</p> | | | | | | | | | | | |
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Zahlungsintervall-Pool | | | | | | | | | | | |
| Used by | Element | XML-PVPM-Bedingungsdaten/zahlungsintervall-pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Zahlungsintervall-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zahlungsintervall-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Zahlungsintervall-Item

| | | | |
|----------------|---|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | extension of XML-Text-Item | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Zahlungsintervall-Item | | |

| | |
|-----------------|--|
| | <ul style="list-style-type: none"> XML-Zahlungsintervall-Item |
| Used by | Element XML-Zahlungsintervall-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Zahlungsintervall-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Spezialbedingung-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Spezialbedingung-Pool | | | |
| Used by | Element XML-PVPM-Bedingungsdaten/spezialbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Spezialbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Spezialbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Spezialbedingung-Item

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |

| | |
|-----------------|--|
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Spezialbedingung-Item |
| Used by | Element XML-Spezialbedingung-Pool/item |
| Model | name , funktion |
| Children | funktion, name |
| Source | <pre><xs:complexType name="XML-Spezialbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="funktion" type="XML-Ref-11"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Bezahlartbedingung-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Bezahlartbedingung-Pool | | | |
| Used by | Element XML-PVPM-Bedingungsdaten/bezahlartbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bezahlartbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bezahlartbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bezahlartbedingung-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Bezahlartbedingung-Item |
| Used by | Element XML-Bezahlartbedingung-Pool/item |
| Model | name , bezahlart |
| Children | bezahlart, name |
| Source | <pre><xs:complexType name="XML-Bezahlartbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="bezahlart" type="XML-Ref-Set-1N" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zahlungsintervallbedingung-Pool

| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Zahlungsintervallbedingung-Pool | | | |
| Used by | Element XML-PVPM-Bedingungsdaten/zahlungsintervallbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Zahlungsintervallbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zahlungsintervallbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicit key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |

| | |
|-----------------|---|
| | <pre></xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zahlungsintervallbedingung-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Zahlungsintervallbedingung-Item |
| Used by | Element XML-Zahlungsintervallbedingung-Pool/item |
| Model | name , zahlungsintervall |
| Children | name, zahlungsintervall |
| Source | <pre><xs:complexType name="XML-Zahlungsintervallbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="zahlungsintervall" type="XML-Ref-Set-1N"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zeitraumbedingung-Pool

| | | | | |
|----------------|--|---|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Zeitraumbedingung-Pool | | | |
| Used by | Element | XML-PVPM-Bedingungsdaten/zeitraumbedingung-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:complexType name="XML-Zeitraumbedingung-Pool"> | | | |

| | |
|-----------------|---|
| | <pre> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zeitraumbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zeitraumbedingung-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Zeitraumbedingung-Item |
| Used by | Element XML-Zeitraumbedingung-Pool/item |
| Model | name , zeitraum-pool |
| Children | name, zeitraum-pool |
| Source | <pre> <xs:complexType name="XML-Zeitraumbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="zeitraum-pool" type="XML-Zeitraum-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zeitraum-Pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Zeitraumbedingung-Item/zeitraum-pool |
| Model | item+ |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Zeitraum-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zeitraum-Item" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zeitraum-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Zeitraum-Pool/item |
| Model | beginn , ende |
| Children | beginn, ende |
| Source | <pre> <xs:complexType name="XML-Zeitraum-Item"> <xs:sequence> <xs:element name="beginn" type="XML-RelativzeitpunktA-Part" /> <xs:element name="ende" type="XML-RelativzeitpunktA-Part" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunktbedingung-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tarifpunktbedingung-Pool | | | |
| Used by | Element XML-PVPM-Bedingungsdaten/tarifpunktbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Tarifpunktbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifpunktbedingung-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Tarifpunktbedingung-Item |
| Used by | Element XML-Tarifpunktbedingung-Pool/item |
| Model | name , von , nach , ueber |
| Children | nach, name, ueber, von |
| Source | <pre> <xs:complexType name="XML-Tarifpunktbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="von" type="XML-Ref-01" /> <xs:element name="nach" type="XML-Ref-01" /> <xs:element name="ueber" type="XML-Ref-01" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungsbedingung-Pool

| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Bewertungsbedingung-Pool | | | |
| Used by | Element XML-PVPM-Bedingungsdaten/bewertungsbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Bewertungsbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> </pre> | | | |

| | |
|-----------------|--|
| | <pre> <xs:sequence> <xs:element name="item" type="XML-Bewertungsbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungsbedingung-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Bewertungsbedingung-Item |
| Used by | Element XML-Bewertungsbedingung-Pool/item |
| Model | name , bewertungstyp , werte |
| Children | bewertungstyp, name, werte |
| Source | <pre> <xs:complexType name="XML-Bewertungsbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="bewertungstyp" type="XML-Ref-11"/> <xs:element name="werte" type="XML-ArrayValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Mitnahmebedingung-Pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool |

| | | | | |
|-----------------|--|---|----------|--|
| | <ul style="list-style-type: none">XML-Mitnahmebedingung-Pool | | | |
| Used by | Element | XML-PVPM-Bedingungsdaten/mitnahmebedingung-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Mitnahmebedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Mitnahmebedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Mitnahmebedingung-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Mitnahmebedingung-Item |
| Used by | Element XML-Mitnahmebedingung-Pool/item |
| Model | name , anzahl-matrix |
| Children | anzahl-matrix, name |
| Source | <pre><xs:complexType name="XML-Mitnahmebedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="anzahl-matrix" type="XML-Mitnahmeanzahl-Matrix"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Mitnahmeanzahl-Matrix

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Used by | Element | XML-Mitnahmebedingung-Item/anzahl-matrix | | |

| | |
|-----------------|--|
| Model | anzahl+ |
| Children | anzahl |
| Source | <pre> <xs:complexType name="XML-Mitnahmeanzahl-Matrix"> <xs:sequence> <xs:element name="anzahl" type="XML-Mitnahmeanzahl-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Mitnahmeanzahl-Entry

| | | | | |
|-----------------|---|----------------------------------|------------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-IntegerValue | | | |
| Type hierarchy | <ul style="list-style-type: none"> • xs:long • XML-IntegerValue • XML-Mitnahmeanzahl-Entry | | | |
| Used by | Element | XML-Mitnahmeanzahl-Matrix/anzahl | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Mitnahmeanzahl-Entry"> <xs:simpleContent> <xs:extension base="XML-IntegerValue"> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:extension> </xs:simpleContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Rabattmedienbedingung-Pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <p>The diagram illustrates the relationship between XML-Rabattmedienbedingung-Pool and XML-Pool. XML-Rabattmedienbedingung-Pool is an extension of XML-Pool. The XML-Pool (extension base) contains an Attributes section with a key of type XML-Ref. XML-Rabattmedienbedingung-Pool has a Base Type of XML-Pool. A line connects XML-Rabattmedienbedingung-Pool to a box for item (Type XML-Rabattmedienbedingung-Item) with a cardinality of 0..∞.</p> |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none">• XML-Pool• XML-Rabattmedienbedingung-Pool |
| Used by | Element XML-PVPM-Bedingungsdaten/rabattmedienbedingung-pool |
| Model | item* |
| Children | item |

| Attributes | QName | Type | Use | |
|-----------------|--|---------|----------|--|
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Rabattmedienbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Rabattmedienbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

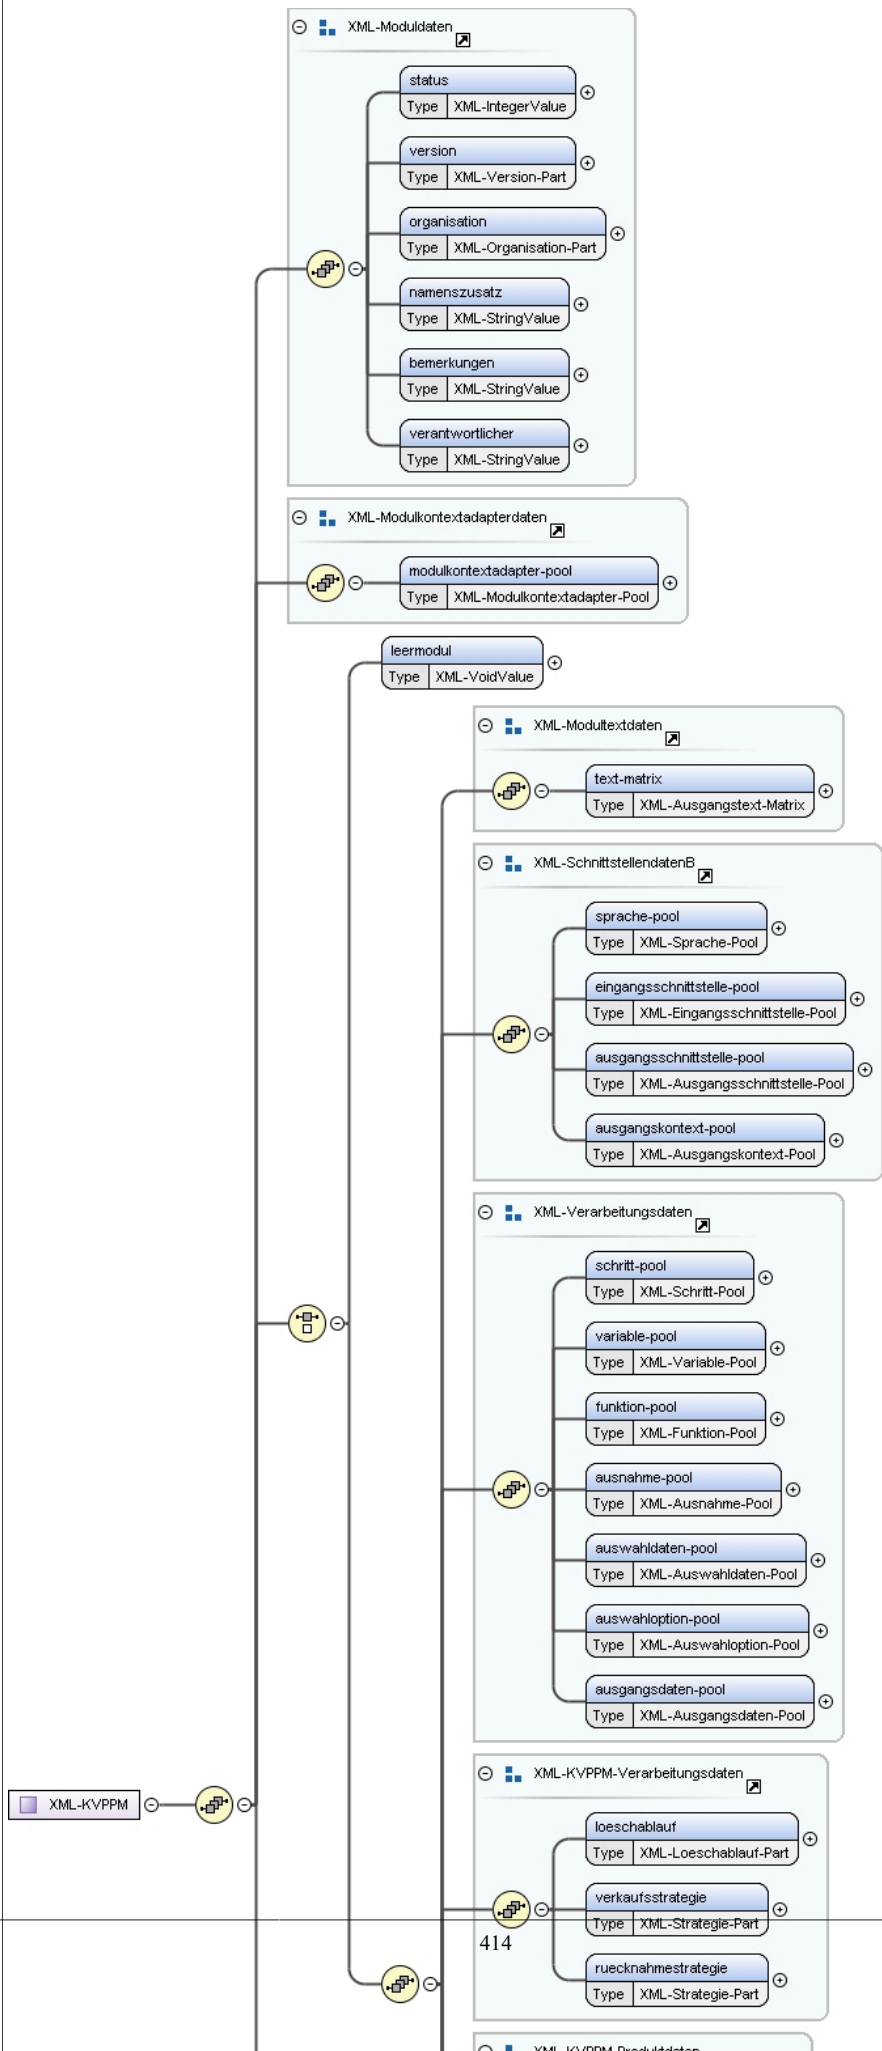
Complex Type XML-Rabattmedienbedingung-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Rabattmedienbedingung-Item |
| Used by | Element XML-Rabattmedienbedingung-Pool/item |
| Model | name , rabattmedientyp |
| Children | name, rabattmedientyp |
| Source | <pre><xs:complexType name="XML-Rabattmedienbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="rabattmedientyp" type="XML-Ref-Set-1N"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-KVPPM

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | |
|-----------------|--|
| Used by | Element kvp-pm |
| Model | status , version , organisation , namenszusatz , bemerkungen , verantwortlicher , modulkontextadapter-pool , (leermodul (text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , loeschablauf , verkaufsstrategie , ruecknahmestategie , schluessel-pool , linienadapter-pool , verkehrsmitteltypadapter-pool , wegevariantenadapter-pool , tarifpunktadapter-pool , tarifpunktreferenzadapter-pool , bezahlartadapter-pool , waehrungsadapter-pool , zahlungsintervalladapter-pool , mitnahmetypadapter-pool , rabattmedientypadapter-pool , identifikationsparameteradapter-pool , nummerninterpretation-pool , produktmodul-pool)), signatur , annotation |
| Children | annotation , ausgangsdaten-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bemerkungen , bezahlartadapter-pool , eingangsschnittstelle-pool , funktion-pool , identifikationsparameteradapter-pool , leermodul , linienadapter-pool , loeschablauf , mitnahmetypadapter-pool , modulkontextadapter-pool , namenszusatz , nummerninterpretation-pool , organisation , produktmodul-pool , rabattmedientypadapter-pool , ruecknahmestategie , schluessel-pool , schritt-pool , signatur , sprache-pool , status , tarifpunktadapter-pool , tarifpunktreferenzadapter-pool , text-matrix , variable-pool , verantwortlicher , verkaufsstrategie , verkehrsmitteltypadapter-pool , version , waehrungsadapter-pool , wegevariantenadapter-pool , zahlungsintervalladapter-pool |
| Source | <pre> <xs:complexType name="XML-KVPPM"> <xs:sequence> <xs:group ref="XML-Moduldaten" /> <xs:group ref="XML-Modulkontextadapterdaten" /> <xs:choice> <xs:element name="leermodul" type="XML-VoidValue" /> <xs:sequence> <xs:group ref="XML-Modultextdaten" /> <xs:group ref="XML-SchnittstellendatenB" /> <xs:group ref="XML-Verarbeitungsdaten" /> <xs:group ref="XML-KVPPM-Verarbeitungsdaten" /> <xs:group ref="XML-KVPPM-Produktdaten" /> <xs:group ref="XML-KVPPM-Adapterdaten" /> <xs:group ref="XML-Nummerninterpretationsdaten" /> <xs:element name="produktmodul-pool" type="XML-Produktmodul-Pool" /> </xs:sequence> </xs:choice> <xs:group ref="XML-Modulzusatzdaten" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Loeschablauf-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-KVPPM-Verarbeitungsdaten/loeschablauf |
| Model | loeschwartezeit |
| Children | loeschwartezeit |
| Source | <pre> <xs:complexType name="XML-Loeschablauf-Part"> <xs:sequence> <xs:element name="loeschwartezeit" type="XML-DurationValue" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunktreferenzadapter-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | | | | |
|-----------------|--|---------|----------|--|
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Tarifpunktreferenzadapter-Pool | | | |
| Used by | Element XML-KVPPM-Adapterdaten/tarifpunktreferenzadapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Tarifpunktreferenzadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktreferenzadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifpunktreferenzadapter-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Text-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Tarifpunktreferenzadapter-Item | | | |
| Used by | Element XML-Tarifpunktreferenzadapter-Pool/item | | | |
| Model | nr , name , text-matrix , typ | | | |
| Children | name, nr, text-matrix, typ | | | |
| Source | <pre> <xs:complexType name="XML-Tarifpunktreferenzadapter-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"> <xs:sequence> <xs:element name="typ" type="XML-StringValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |

| | |
|-----------------|--|
| | <pre> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Bezahlartadapter-Pool

| | | | |
|-----------------|--|---------|----------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |
| Type | extension of XML-Pool | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Bezahlartadapter-Pool | | |
| Used by | Element XML-KVPPM-Adapterdaten/bezahlartadapter-pool | | |
| Model | item* | | |
| Children | item | | |
| Attributes | QName | Type | Use |
| | key | XML-Ref | required |
| Source | <pre> <xs:complexType name="XML-Bezahlartadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bezahlartadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Complex Type XML-Bezahlartadapter-Item

| | | | |
|-----------|---------------------|--|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram | | | |

| | |
|-----------------|---|
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Bezahlartadapter-Item |
| Used by | Element XML-Bezahlartadapter-Pool/item |
| Model | nr, name, text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Bezahlartadapter-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Waehrungsadapter-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Waehrungsadapter-Pool | | | |
| Used by | Element XML-KVPPM-Adapterdaten/waehrungsadapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Waehrungsadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Waehrungsadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicitizes key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Waehrungsadapter-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Waehrungsadapter-Item |
| Used by | Element XML-Waehrungsadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Waehrungsadapter-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zahlungsintervalladapter-Pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Zahlungsintervalladapter-Pool | | | |
| Used by | Element XML-KVPPM-Adapterdaten/zahlungsintervalladapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Zahlungsintervalladapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zahlungsintervalladapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation></pre> | | | |

| | |
|-----------------|---|
| | <pre> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Zahlungsintervalladapter-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Zahlungsintervalladapter-Item |
| Used by | Element XML-Zahlungsintervalladapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Zahlungsintervalladapter-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item"/> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Mitnahmetypadapter-Pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Mitnahmetypadapter-Pool |

| Used by | Element XML-KVPPM-Adapterdaten/mitnahmetyppadapter-pool | | | |
|-----------------|--|---------|----------|--|
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Mitnahmetyppadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Mitnahmetyppadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Mitnahmetyppadapter-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <p>The diagram illustrates the class hierarchy and structure of XML-Mitnahmetyppadapter-Item. It is a complex type that extends XML-Text-Item. XML-Text-Item extends XML-Nr-Item, which in turn extends XML-Item. XML-Item has two optional elements: 'nr' (type XML-IntegerValue) and 'name' (type XML-StringValue). XML-Mitnahmetyppadapter-Item has one optional element: 'text-matrix' (type XML-Ausgangstext-Matrix).</p> |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Item<ul style="list-style-type: none">XML-Nr-Item<ul style="list-style-type: none">XML-Text-Item<ul style="list-style-type: none">XML-Mitnahmetyppadapter-Item |
| Used by | Element XML-Mitnahmetyppadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Mitnahmetyppadapter-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Rabattmedientypadapter-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Rabattmedientypadapter-Pool | | | |
| Used by | Element XML-KVPPM-Adapterdaten/rabattmedientypadapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Rabattmedientypadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Rabattmedientypadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Rabattmedientypadapter-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Text-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Text-Item XML-Rabattmedientypadapter-Item | | | |
| Used by | Element XML-Rabattmedientypadapter-Pool/item | | | |

| | |
|-----------------|---|
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Rabattmedientypadapter-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Identifikationsparameteradapter-Pool

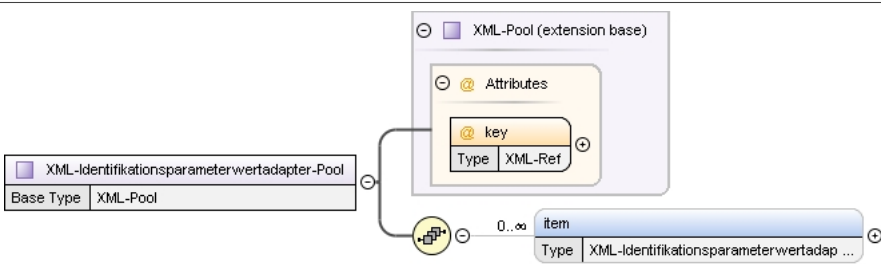
| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Identifikationsparameteradapter-Pool | | | |
| Used by | Element XML-KVPPM-Adapterdaten/identifikationsparameteradapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Identifikationsparameteradapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Identifikationsparameteradapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Identifikationsparameteradapter-Item

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |

| | |
|-----------------|---|
| Type | extension of XML-Nr-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Nr-Item XML-Identifikationsparameteradapter-Item |
| Used by | Element XML-Identifikationsparameteradapter-Pool/item |
| Model | nr , name , wert-pool |
| Children | name, nr, wert-pool |
| Source | <pre><xs:complexType name="XML-Identifikationsparameteradapter-Item"> <xs:complexContent> <xs:extension base="XML-Nr-Item"> <xs:sequence> <xs:element name="wert-pool" type="XML-Identifikationsparameterwertadapter-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Identifikationsparameterwertadapter-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram |  | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Identifikationsparameterwertadapter-Pool | | | |
| Used by | Element XML-Identifikationsparameteradapter-Item/wert-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Identifikationsparameterwertadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Identifikationsparameterwertadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | | |

Complex Type XML-Identifikationsparameterwertadapter-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | extension of XML-Text-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item <ul style="list-style-type: none"> XML-Nr-Item <ul style="list-style-type: none"> XML-Text-Item <ul style="list-style-type: none"> XML-Identifikationsparameterwertadapter-Item |
| Used by | Element XML-Identifikationsparameterwertadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Identifikationsparameterwertadapter-Item"> <xs:complexContent> <xs:extension base="XML-Text-Item" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Produktmodul-Pool

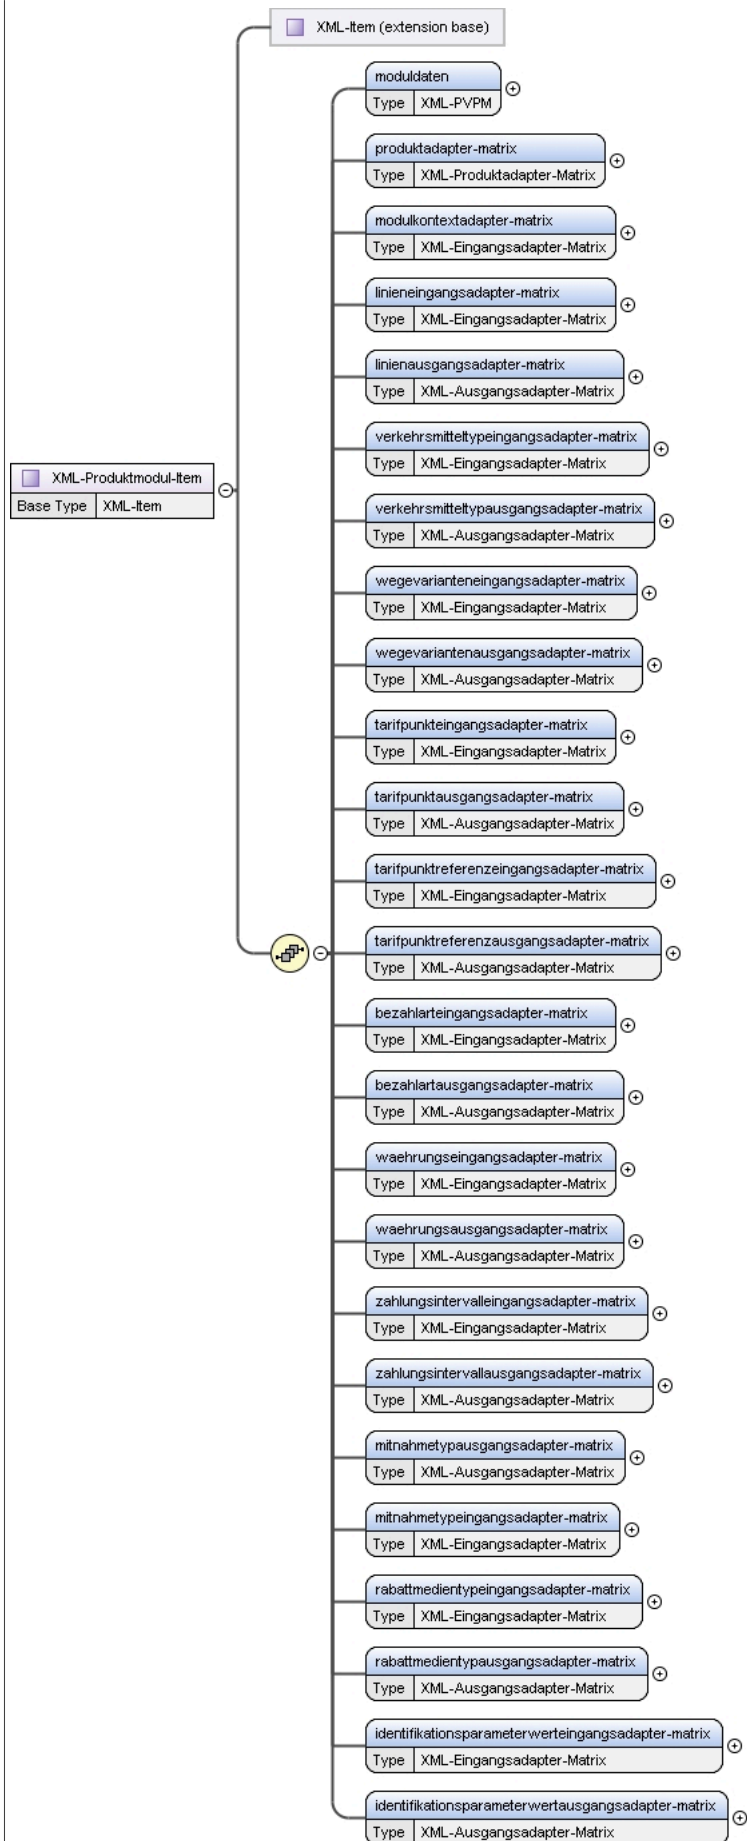
| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Produktmodul-Pool | | | |
| Used by | Element XML-KVPPM/produktmodul-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Produktmodul-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Produktmodul-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> </pre> | | | |

| | |
|-----------------|--|
| | <pre> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Produktmodul-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

Diagram



| | |
|-----------------|---|
| Type | extension of XML-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Produktmodul-Item |
| Used by | Element XML-Produktmodul-Pool/item |
| Model | moduldaten , produktadapter-matrix , modulkontextadapter-matrix , linieneingangsadapter-matrix , linienausgangsadapter-matrix , verkehrsmitteltypeingangsadapter-matrix , verkehrsmitteltypausgangsadapter-matrix , wegevarianteneingangsadapter-matrix , wegevariantenausgangsadapter-matrix , tarifpunkteingangsadapter-matrix , tarifpunktausgangsadapter-matrix , tarifpunktreferenzeingangsadapter-matrix , tarifpunktreferenzausgangsadapter-matrix , bezahlarteingangsadapter-matrix , bezahlartausgangsadapter-matrix , wachrungseingangsadapter-matrix , wachrungsausgangsadapter-matrix , zahlungsintervalleingangsadapter-matrix , zahlungsintervallausgangsadapter-matrix , mitnahmetypausgangsadapter-matrix , mitnahmetypeingangsadapter-matrix , rabattmedientypeingangsadapter-matrix , rabattmedientypausgangsadapter-matrix , identifikationsparameterwerteingangsadapter-matrix , identifikationsparameterwertausgangsadapter-matrix |
| Children | bezahlartausgangsadapter-matrix, bezahlarteingangsadapter-matrix, identifikationsparameterwertausgangsadapter-matrix, identifikationsparameterwerteingangsadapter-matrix, linienausgangsadapter-matrix, linieneingangsadapter-matrix, mitnahmetypausgangsadapter-matrix, mitnahmetypeingangsadapter-matrix, moduldaten, modulkontextadapter-matrix, produktadapter-matrix, rabattmedientypausgangsadapter-matrix, rabattmedientypeingangsadapter-matrix, tarifpunktausgangsadapter-matrix, tarifpunkteingangsadapter-matrix, tarifpunktreferenzausgangsadapter-matrix, tarifpunktreferenzeingangsadapter-matrix, verkehrsmitteltypausgangsadapter-matrix, verkehrsmitteltypeingangsadapter-matrix, wachrungsausgangsadapter-matrix, wachrungseingangsadapter-matrix, wegevariantenausgangsadapter-matrix, wegevarianteneingangsadapter-matrix, zahlungsintervallausgangsadapter-matrix, zahlungsintervalleingangsadapter-matrix |
| Source | <pre> <xs:complexType name="XML-Produktmodul-Item"> <xs:complexContent> <xs:extension base="XML-Item"> <xs:sequence> <xs:element name="moduldaten" type="XML-PVPM"/> <xs:element name="produktadapter-matrix" type="XML-Produktadapter-Matrix"/> <xs:element name="modulkontextadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="linieneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="linienausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="verkehrsmitteltypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="verkehrsmitteltypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="wegevarianteneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="wegevariantenausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="tarifpunkteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="tarifpunktausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="tarifpunktreferenzeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="tarifpunktreferenzausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="bezahlarteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="bezahlartausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="wachrungseingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="wachrungsausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="zahlungsintervalleingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="zahlungsintervallausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="mitnahmetypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="mitnahmetypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="rabattmedientypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="rabattmedientypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> <xs:element name="identifikationsparameterwerteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/> <xs:element name="identifikationsparameterwertausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Produktadapter-Matrix

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre> classDiagram class XMLProduktadapterMatrix["XML-Produktadapter-Matrix"] class item["item"] class XMLProduktadapterEntry["XML-Produktadapter-Entry"] XMLProduktadapterMatrix "0..∞" --> "1" item item -- XMLProduktadapterEntry </pre> |
| Used by | Element XML-Produktmodul-Item/produktadapter-matrix |

| | |
|-----------------|--|
| Model | item* |
| Children | item |
| Source | <pre><xs:complexType name="XML-Produktadapter-Matrix"> <xs:sequence> <xs:element name="item" type="XML-Produktadapter-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Produktadapter-Entry

| Namespace | http://vdv/ka/pkm/1 | | | | | | | | |
|----------------|---|----------|------|-----|-----|---------|----------|--|--|
| Diagram | <p>The diagram shows a complex type XML-Produktadapter-Entry which is an extension of the base type XML-Item. It contains a sequence of seven elements: nr (XML-StringValue), schluessel (XML-KVPPM-Schluessel-Part), loeschmodulkontext (XML-Ref-Set-0N), verkaufsmodulkontext (XML-Ref-Set-0N), darstellungsmodulkontext (XML-Ref-Set-0N), ruecknahmемodulkontext (XML-Ref-Set-0N), and preisanpassung-pool (XML-Preisanpassung-Pool). Additionally, it has a required attribute ref of type XML-Ref.</p> | | | | | | | | |
| Type | extension of XML-Item | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-ItemXML-Produktadapter-Entry | | | | | | | | |
| Used by | Element XML-Produktadapter-Matrix/item | | | | | | | | |
| Model | nr , schluessel , loeschmodulkontext , verkaufsmodulkontext , darstellungsmodulkontext , ruecknahmемodulkontext , preisanpassung-pool | | | | | | | | |
| Children | darstellungsmodulkontext, loeschmodulkontext, nr, preisanpassung-pool, ruecknahmемodulkontext, schluessel, verkaufsmodulkontext | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td></tr></tbody></table> | QName | Type | Use | ref | XML-Ref | required | | |
| QName | Type | Use | | | | | | | |
| ref | XML-Ref | required | | | | | | | |
| Source | <pre><xs:complexType name="XML-Produktadapter-Entry"> <xs:complexContent> <xs:extension base="XML-Item"> <xs:sequence> <xs:element name="nr" type="XML-StringValue"/> <xs:element name="schluessel" type="XML-KVPPM-Schluessel-Part" /> <xs:element name="loeschmodulkontext" type="XML-Ref-Set-0N" /> <xs:element name="verkaufsmodulkontext" type="XML-Ref-Set-0N" /> <xs:element name="darstellungsmodulkontext" type="XML-Ref-Set-0N" /> <xs:element name="ruecknahmемodulkontext" type="XML-Ref-Set-0N" /> <xs:element name="preisanpassung-pool" type="XML-Preisanpassung-Pool" /> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | |

| | |
|-----------------|---|
| | <pre> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-KVPPM-Schluessel-Part

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Produktadapter-Entry/schluessel |
| Model | mkkvp |
| Children | mkkvp |
| Source | <pre> <xs:complexType name="XML-KVPPM-Schluessel-Part"> <xs:sequence> <xs:element name="mkkvp" type="XML-Ref-01" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Preisanpassung-Pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Produktadapter-Entry/preisanpassung-pool |
| Model | item* |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Preisanpassung-Pool"> <xs:sequence> <xs:element name="item" type="XML-Preisanpassung-Item" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Preisanpassung-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Element XML-Preisanpassung-Pool/item |
| Model | betrag |
| Children | betrag |
| Source | <pre> <xs:complexType name="XML-Preisanpassung-Item"> <xs:sequence> <xs:element name="betrag" type="XML-IntegerValue" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Nachfolgekriterium-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Name-Item XML-Nachfolgekriterium-Item |
| Used by | Element XML-Nachfolgekriterium-Pool/item |
| Model | name , funktion , vorgaenger , wirksamkeit |
| Children | funktion, name, vorgaenger, wirksamkeit |
| Source | <pre> <xs:complexType name="XML-Nachfolgekriterium-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="funktion" type="XML-Ref-01"/> <xs:element name="vorgaenger" type="XML-Kriterienzeitraum-Part"/> <xs:element name="wirksamkeit" type="XML-Kriterienzeitraum-Part"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Complex Type XML-Nachfolgekriterium-Pool

| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/1 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Nachfolgekriterium-Pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Nachfolgekriterium-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Nachfolgekriterium-Item" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |

| | |
|-----------------|--|
| | <pre> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Simple Type(s)

Simple Type XML-IntegerValue

| | | |
|-----------------|---|--|
| Namespace | http://vdv/ka/pkm/1 | |
| Diagram | | |
| Type | xs:long | |
| Used by | Elements | XML-Ergaenzungsanforderung-Pool/nr, XML-FunktionValue/param, XML-Funktion-Item/nr, XML-Moduldaten/status, XML-Nr-Item/nr, XML-Organisation-Part/id, XML-Preisanpassung-Item/betrag, XML-Schlüssel-Item/id, XML-Value/zahl, XML-Version-Part/internNr, XML-Version-Part/nr, XML-Version-Part/spezifikation, XML-Währungsbetrag-Part/mwstsatz, XML-Währungsbetrag-Part/wert, XML-Wochentag-Pool/nr |
| | Complex Type | XML-Mitnahmeanzahl-Entry |
| Source | <pre> <xs:simpleType name="XML-IntegerValue"> <xs:restriction base="xs:long"/> </xs:simpleType> </pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Simple Type XML-DatetimeValue


| | | |
|-----------------|--|--|
| Namespace | http://vdv/ka/pkm/1 | |
| Diagram | | |
| Type | restriction of xs:dateTime | |
| Facets | pattern | \-?\d+-\d+-\d+T\d+:\d+:\d+([\/\-\]\d+:\d+)? |
| Used by | Elements | XML-Kriterienzeitraum-Part/beginn, XML-Kriterienzeitraum-Part/ende, XML-Value/zeitpunkt, XML-Version-Part/gueltigkeitsbeginn, XML-Version-Part/speicherzeitpunkt |
| | Complex Type | |
| Source | <pre> <xs:simpleType name="XML-DatetimeValue"> <xs:restriction base="xs:dateTime"> <xs:pattern value="\-?\d+-\d+-\d+T\d+:\d+:\d+([\/\-\]\d+:\d+)?"/> </xs:restriction> </xs:simpleType> </pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Simple Type XML-StringValue


| | | |
|-----------|---------------------|--|
| Namespace | http://vdv/ka/pkm/1 | |
| Diagram | | |
| Type | xs:string | |
| Used by | Elements | XML-Ausgangssequenz-Entry/text, XML-Fremdprodukt-Item/tarifstand, XML-Kontingentsdaten-Item/url, XML-Moduldaten/bemerkungen, XML-Moduldaten/namenszusatz, XML-Moduldaten/verantwortlicher, XML-Name-Item/name, XML-Nr-Item/name, XML-Organisation-Part/name, XML-PVKM-Tarifprodukt-Item/extNr, XML-PVPM-Tarifprodukt-Item/extNr, XML-Produktadapter-Entry/nr, XML-Schlüssel-Item/name, XML-Signatur-Part/type, XML-Tarifpunkt-Item/ortsbezug, XML-Tarifpunkt-Item/typ, XML-Tarifpunktadapter-Item/typ, XML-Tarifpunktreferenzadapter-Item/typ, XML-Value/text, XML-Version-Part/bearbeiter, XML-Version-Part/bemerkungen |
| | Complex Type | XML-Ausgangstext-Entry |

| | |
|-----------------|---|
| Source | <pre><xs:simpleType name="XML-StringValue"> <xs:restriction base="xs:string"/> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |


Simple Type XML-Ref

| | | |
|-----------------|--|---|
| Namespace | http://vdv/ka/pkm/1 | |
| Diagram |  | |
| Type | restriction of xs:int | |
| Facets | minInclusive | 1 |
| Used by | Attributes | XML-Ausgangsadapter-Entry/@ref, XML-Ausgangsdaten-Entry/@ref, XML-Ausgangssequenz-Entry/@ref, XML-Ausgangstext-Entry/@ref, XML-Bewertungsausnahmenach-Entry/@ref, XML-Bewertungsausnahmetyp-Entry/@ref, XML-Bewertungsausnahmeueber-Entry/@ref, XML-Bewertungsausnahmevlb-Entry/@ref, XML-Bewertungsausnahmevon-Entry/@ref, XML-Bewertungsdatennach-Entry/@ref, XML-Bewertungsdatentyp-Entry/@ref, XML-Bewertungsdatenueber-Entry/@ref, XML-Bewertungsdatenvlb-Entry/@ref, XML-Bewertungsdatenvon-Entry/@ref, XML-Eingangsadapter-Entry/@ref, XML-FunctionValue/@ref, XML-Mitnahmeanzahl-Entry/@ref, XML-ObjectValue/@ref, XML-Pool/@key, XML-Produktadapter-Entry/@ref, XML-Zuordnungsausnahmetyp-Entry/@ref, XML-Zuordnungsausnahmevlb-Entry/@ref, XML-Zuordnungsausnahmevon-Entry/@ref, XML-Zuordnungsausnahmezu-Entry/@ref, XML-Zuordnungsdatentyp-Entry/@ref, XML-Zuordnungsdatenvlb-Entry/@ref, XML-Zuordnungsdatenvon-Entry/@ref |
| | Elements | XML-Ausgangssequenz-Entry/ref, XML-Ref-01/ref, XML-Ref-11/ref, XML-Ref-List-0N/ref, XML-Ref-List-1N/ref, XML-Ref-Set-0N/ref, XML-Ref-Set-1N/ref, XML-Tarifpunktfolge-Item/exk, XML-Tarifpunktfolge-Item/ink, XML-Zuordnungsdatenvon-Entry/zu |
| | Complex Types | XML-Ausgangsadapter-Entry, XML-Ausgangsdaten-Entry, XML-Bewertungsausnahmeueber-Entry, XML-Bewertungsdatenueber-Entry, XML-Eingangsadapter-Entry, XML-ObjectValue, XML-Zuordnungsausnahmezu-Entry |
| Source | <pre><xs:simpleType name="XML-Ref"> <xs:restriction base="xs:int"> <xs:minInclusive value="1"/> </xs:restriction> </xs:simpleType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Simple Type XML-BitsValue


| | | |
|-----------------|---|--|
| Namespace | http://vdv/ka/pkm/1 | |
| Diagram |  | |
| Type | xs:hexBinary | |
| Used by | Elements | XML-Annotation-Part/data, XML-Signatur-Part/data, XML-Value/bits |
| Source | <pre><xs:simpleType name="XML-BitsValue"> <xs:restriction base="xs:hexBinary"/> </xs:simpleType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Simple Type XML-DateValue


| | | |
|-----------|---|---|
| Namespace | http://vdv/ka/pkm/1 | |
| Diagram |  | |
| Type | restriction of xs:date | |
| Facets | pattern | \-?\d+-\d+-\d+ |
| Used by | Elements | XML-Darstellungsdaten-Part/unterstuetztb, XML-Kalendertag-Pool/datum, XML-Kontrolldaten-Part/unterstuetztb, XML-Loeschdaten-Part/unterstuetztb, XML-Ruecknahmedaten-Part/unterstuetztb, XML-Value/datum |
| Source | <pre><xs:simpleType name="XML-DateValue"></pre> | |

| | |
|-----------------|---|
| | <pre><xs:restriction base="xs:date"> <xs:pattern value="\-?\d+-\d+-\d+" /> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |


Simple Type XML-TimeValue

| | | | |
|-----------------|---|---------|-----------------------------|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram |  | | |
| Type | restriction of xs:time | | |
| Facets | <table border="1"> <tr> <td>pattern</td> <td>\d+:\d+:\d+([\+ -]\d+:\d+)?</td> </tr> </table> | pattern | \d+:\d+:\d+([\+ -]\d+:\d+)? |
| pattern | \d+:\d+:\d+([\+ -]\d+:\d+)? | | |
| Used by | Elements XML-RelativzeitpunktA-Part/uhrzeit, XML-RelativzeitpunktB-Part/uhrzeit, XML-Value/uhrzeit, XML-Zeitabschnitt-Item/bis, XML-Zeitabschnitt-Item/von | | |
| Source | <pre><xs:simpleType name="XML-TimeValue"> <xs:restriction base="xs:time"> <xs:pattern value="\d+:\d+:\d+([\+ -]\d+:\d+)?" /> </xs:restriction> </xs:simpleType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Simple Type XML-DurationValue

| | | | |
|-----------------|--|---------|--|
| Namespace | http://vdv/ka/pkm/1 | | |
| Diagram |  | | |
| Type | restriction of xs:string | | |
| Facets | <table border="1"> <tr> <td>pattern</td> <td>[\+ -] P (\d+Y) ? (\d+M) ? (\d+D) ? (T (\d+H) ? (\d+M) ? (\d+S) ?) ?</td> </tr> </table> | pattern | [\+ -] P (\d+Y) ? (\d+M) ? (\d+D) ? (T (\d+H) ? (\d+M) ? (\d+S) ?) ? |
| pattern | [\+ -] P (\d+Y) ? (\d+M) ? (\d+D) ? (T (\d+H) ? (\d+M) ? (\d+S) ?) ? | | |
| Used by | Elements XML-Kontrollablauf-Part/pruefungnach, XML-Kontrollablauf-Part/pruefungvor, XML-Loeschablauf-Part/loeschwarzeit, XML-RelativzeitpunktA-Part/zeitspanne, XML-RelativzeitpunktB-Part/zeitspanne, XML-Value/zeitspanne | | |
| Source | <pre><xs:simpleType name="XML-DurationValue"> <xs:restriction base="xs:string"> <xs:pattern value="[\+ -] P (\d+Y) ? (\d+M) ? (\d+D) ? (T (\d+H) ? (\d+M) ? (\d+S) ?) ?" /> </xs:restriction> </xs:simpleType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | | |

Simple Type XML-BooleanValue

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram |  |
| Type | xs:boolean |
| Used by | Elements XML-Value/wahrheitswert, XML-Verkaufsdaten-Part/preisanpassung |
| Source | <pre><xs:simpleType name="XML-BooleanValue"> <xs:restriction base="xs:boolean"/> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group(s)

Element Group XML-Moduldaten

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Used by | Complex Types XML-DLKM, XML-KVPPM, XML-PVKM, XML-PVPM |
| Model | status , version , organisation , namenszusatz , bemerkungen , verantwortlicher |
| Children | bemerkungen, namenszusatz, organisation, status, verantwortlicher, version |
| Source | <pre> <xs:group name="XML-Moduldaten"> <xs:sequence> <xs:element name="status" type="XML-IntegerValue" /> <xs:element name="version" type="XML-Version-Part" /> <xs:element name="organisation" type="XML-Organisation-Part" /> <xs:element name="namenszusatz" type="XML-StringValue" /> <xs:element name="bemerkungen" type="XML-StringValue" /> <xs:element name="verantwortlicher" type="XML-StringValue" /> </xs:sequence> </xs:group> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Modulkontextadapterdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Types XML-DLKM, XML-KVPPM |
| Model | modulkontextadapter-pool |
| Children | modulkontextadapter-pool |
| Source | <pre> <xs:group name="XML-Modulkontextadapterdaten"> <xs:sequence> <xs:element name="modulkontextadapter-pool" type="XML-Modulkontextadapter-Pool" /> </xs:sequence> </xs:group> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Modultextdaten

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Types XML-DLKM, XML-KVPPM, XML-PVKM, XML-PVPM |
| Model | text-matrix |
| Children | text-matrix |
| Source | <pre> <xs:group name="XML-Modultextdaten"> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /> </xs:sequence> </xs:group> </pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |
|-----------------|---|

Element Group XML-SchnittstellendatenA

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Type XML-DLKM |
| Model | sprache-pool , ausgangsschnittstelle-pool , ausgangskontext-pool |
| Children | ausgangskontext-pool, ausgangsschnittstelle-pool, sprache-pool |
| Source | <pre><xs:group name="XML-SchnittstellendatenA"> <xs:sequence> <xs:element name="sprache-pool" type="XML-Sprache-Pool" /> <xs:element name="ausgangsschnittstelle-pool" type="XML-Ausgangsschnittstelle-Pool" /> <xs:element name="ausgangskontext-pool" type="XML-Ausgangskontext-Pool" /> </xs:sequence> </xs:group></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-DLKM-Adapterdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Type XML-DLKM |
| Model | linienadapter-pool , verkehrsmitteltypadapter-pool , wegevariantenadapter-pool , tarifpunktadapter-pool |
| Children | linienadapter-pool, tarifpunktadapter-pool, verkehrsmitteltypadapter-pool, wegevariantenadapter-pool |
| Source | <pre><xs:group name="XML-DLKM-Adapterdaten"> <xs:sequence> <xs:element name="linienadapter-pool" type="XML-Linienadapter-Pool" /> <xs:element name="verkehrsmitteltypadapter-pool" type="XML-Verkehrsmitteltypadapter-Pool" /> <xs:element name="wegevariantenadapter-pool" type="XML-Wegevariantenadapter-Pool" /> <xs:element name="tarifpunktadapter-pool" type="XML-Tarifpunktadapter-Pool" /> </xs:sequence> </xs:group></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Organisationsdaten

| | |
|-----------|----------------------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Types XML-PVKM, XML-PVPM |
| Model | organisation-pool |

| | |
|-----------------|--|
| Children | organisation-pool |
| Source | <pre><xs:group name="XML-Organisationsdaten"> <xs:sequence> <xs:element name="organisation-pool" type="XML-Organisation-Pool"/> </xs:sequence> </xs:group></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-SchnittstellendatenB

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Types XML-KVPPM, XML-PVKM, XML-PVPM |
| Model | sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool |
| Children | ausgangskontext-pool, ausgangsschnittstelle-pool, eingangsschnittstelle-pool, sprache-pool |
| Source | <pre><xs:group name="XML-SchnittstellendatenB"> <xs:sequence> <xs:element name="sprache-pool" type="XML-Sprache-Pool"/> <xs:element name="eingangsschnittstelle-pool" type="XML-Eingangsschnittstelle-Pool"/> <xs:element name="ausgangsschnittstelle-pool" type="XML-Ausgangsschnittstelle-Pool"/> <xs:element name="ausgangskontext-pool" type="XML-Ausgangskontext-Pool"/> </xs:sequence> </xs:group></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Verarbeitungsdaten

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Types XML-KVPPM, XML-PVKM, XML-PVPM |
| Model | schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool |
| Children | ausgangsdaten-pool, ausnahme-pool, auswahldaten-pool, auswahloption-pool, funktion-pool, schritt-pool, variable-pool |
| Source | <pre><xs:group name="XML-Verarbeitungsdaten"> <xs:sequence></pre> |

| | |
|-----------------|---|
| | <pre> <xs:element name="schritt-pool" type="XML-Schritt-Pool"/> <xs:element name="variable-pool" type="XML-Variable-Pool"/> <xs:element name="funktion-pool" type="XML-Funktion-Pool"/> <xs:element name="ausnahme-pool" type="XML-Ausnahme-Pool"/> <xs:element name="auswahldaten-pool" type="XML-Auswahldaten-Pool"/> <xs:element name="auswahloption-pool" type="XML-Auswahloption-Pool"/> <xs:element name="ausgangsdaten-pool" type="XML-Ausgangsdaten-Pool"/> </xs:sequence> </xs:group> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Value

| | | |
|-----------------|--|---|
| Namespace | http://vdv/ka/pkm/1 | |
| Diagram | | |
| Used by | Elements | XML-Bewertungsdaten-Item/wert, XML-Funktion-Item/wert |
| | Complex Types | XML-ArrayValue, XML-FunctionValue |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne wahrheitswert objekt funktion undefiniert | |
| Children | bits, datum, funktion, liste, objekt, text, uhrzeit, undefiniert, wahrheitswert, zahl, zeitpunkt, zeitspanne | |
| Source | <pre> <xs:group name="XML-Value"> <xs:choice> <xs:element name="bits" type="XML-BitsValue"/> <xs:element name="text" type="XML-StringValue"/> <xs:element name="zahl" type="XML-IntegerValue"/> <xs:element name="liste" type="XML-ArrayValue"/> <xs:element name="datum" type="XML-DateValue"/> <xs:element name="uhrzeit" type="XML-TimeValue"/> <xs:element name="zeitpunkt" type="XML-DatetimeValue"/> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:element name="wahrheitswert" type="XML-BooleanValue"/> <xs:element name="objekt" type="XML-ObjectValue"/> <xs:element name="funktion" type="XML-FunctionValue"/> <xs:element name="undefiniert" type="XML-VoidValue"/> </xs:choice> </xs:group> </pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Element Group XML-PVKM-Verarbeitungsdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Type XML-PVKM |
| Model | kontrollablauf , kontrollstrategie |
| Children | kontrollablauf, kontrollstrategie |
| Source | <pre><xs:group name="XML-PVKM-Verarbeitungsdaten"> <xs:sequence> <xs:element name="kontrollablauf" type="XML-Kontrollablauf-Part" /> <xs:element name="kontrollstrategie" type="XML-Strategie-Part" /> </xs:sequence> </xs:group></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-PVKM-Produktdaten

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Type XML-PVKM |
| Model | ausgangsdatenfamilie-pool , abhaengigkeitskriterium-pool , identifikationsparameter-pool , efmprodukt-pool , tarifprodukt-pool , fremdprodukt-pool , produktgruppe-pool |
| Children | abhaengigkeitskriterium-pool, ausgangsdatenfamilie-pool, efmprodukt-pool, fremdprodukt-pool, identifikationsparameter-pool, produktgruppe-pool, tarifprodukt-pool |
| Source | <pre><xs:group name="XML-PVKM-Produktdaten"> <xs:sequence> <xs:element name="ausgangsdatenfamilie-pool" type="XML-Ausgangsdatenfamilie-Pool" /> <xs:element name="abhaengigkeitskriterium-pool" type="XML-Abhaengigkeitskriterium-Pool" /> <xs:element name="identifikationsparameter-pool" type="XML-Identifikationsparameter-Pool" /> <xs:element name="efmprodukt-pool" type="XML-PVKM-EFMProdukt-Pool" /> <xs:element name="tarifprodukt-pool" type="XML-PVKM-Tarifprodukt-Pool" /> <xs:element name="fremdprodukt-pool" type="XML-Fremdprodukt-Pool" /> <xs:element name="produktgruppe-pool" type="XML-Produktgruppe-Pool" /> </xs:sequence> </xs:group></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Tarifpunktdaten

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Used by | Complex Types XML-PVKM, XML-PVPM |
| Model | tarifpunkt-pool , tarifpunktgruppe-pool |
| Children | tarifpunkt-pool, tarifpunktgruppe-pool |
| Source | <pre><xs:group name="XML-Tarifpunktdaten"> <xs:sequence> <xs:element name="tarifpunkt-pool" type="XML-Tarifpunkt-Pool" /> <xs:element name="tarifpunktgruppe-pool" type="XML-Tarifpunktgruppe-Pool" /> </xs:sequence> </xs:group></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Verkehrsmittelliniendaten

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Types XML-PVKM, XML-PVPM |
| Model | linie-pool , verkehrsmitteltyp-pool , verkehrsmittellinienbezug-pool |
| Children | linie-pool, verkehrsmittellinienbezug-pool, verkehrsmitteltyp-pool |
| Source | <pre><xs:group name="XML-Verkehrsmittelliniendaten"> <xs:sequence> <xs:element name="linie-pool" type="XML-Linie-Pool" /> <xs:element name="verkehrsmitteltyp-pool" type="XML-Verkehrsmitteltyp-Pool" /> <xs:element name="verkehrsmittellinienbezug-pool" type="XML-Verkehrsmittellinienbezug-Pool" /> </xs:sequence> </xs:group></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-PVKM-Bedingungsdaten

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |

| | |
|-----------------|--|
| Used by | Complex Type XML-PVKM |
| Model | modulkontext-pool , bezahlart-pool , mitnahmetyp-pool , rabattmedientyp-pool , tagesbedingung-pool , tageszeitbedingung-pool , modulkontextbedingung-pool , verkehrsmittellinienbedingung-pool |
| Children | bezahlart-pool, mitnahmetyp-pool, modulkontext-pool, modulkontextbedingung-pool, rabattmedientyp-pool, tagesbedingung-pool, tageszeitbedingung-pool, verkehrsmittellinienbedingung-pool |
| Source | <pre> <xs:group name="XML-PVKM-Bedingungsdaten"> <xs:sequence> <xs:element name="modulkontext-pool" type="XML-Modulkontext-Pool"/> <xs:element name="bezahlart-pool" type="XML-Bezahlart-Pool"/> <xs:element name="mitnahmetyp-pool" type="XML-Mitnahmetyp-Pool"/> <xs:element name="rabattmedientyp-pool" type="XML-Rabattmedientyp-Pool"/> <xs:element name="tagesbedingung-pool" type="XML-Tagesbedingung-Pool"/> <xs:element name="tageszeitbedingung-pool" type="XML-Tageszeitbedingung-Pool"/> <xs:element name="modulkontextbedingung-pool" type="XML-Modulkontextbedingung-Pool"/> <xs:element name="verkehrsmittellinienbedingung-pool" type="XML-Verkehrsmittellinienbedingung-Pool"/> </xs:sequence> </xs:group> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Tarifpunktzuordnungsdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Types XML-PVKM, XML-PVPM |
| Model | zuordnungstyp-pool , zuordnungsdaten-matrix , zuordnungsausnahme-matrix |
| Children | zuordnungsausnahme-matrix, zuordnungsdaten-matrix, zuordnungstyp-pool |
| Source | <pre> <xs:group name="XML-Tarifpunktzuordnungsdaten"> <xs:sequence> <xs:element name="zuordnungstyp-pool" type="XML-Zuordnungstyp-Pool"/> <xs:element name="zuordnungsdaten-matrix" type="XML-Zuordnungsdaten-Matrix"/> <xs:element name="zuordnungsausnahme-matrix" type="XML-Zuordnungsausnahme-Matrix"/> </xs:sequence> </xs:group> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Tarifpunktbewertungsdaten

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Types XML-PVKM, XML-PVPM |
| Model | wegevariante-pool , bewertungstyp-pool , bewertungsdaten-pool , bewertungsdaten-matrix , bewertungsausnahme-matrix |
| Children | bewertungsausnahme-matrix, bewertungsdaten-matrix, bewertungsdaten-pool, bewertungstyp-pool, wegevariante-pool |

| | |
|-----------------|---|
| Source | <pre><xs:group name="XML-Tarifpunktbewertungsdaten"> <xs:sequence> <xs:element name="wegevariante-pool" type="XML-Wegevariante-Pool"/> <xs:element name="bewertungstyp-pool" type="XML-Bewertungstyp-Pool"/> <xs:element name="bewertungsdaten-pool" type="XML-Bewertungsdaten-Pool"/> <xs:element name="bewertungsdaten-matrix" type="XML-Bewertungsdaten-Matrix"/> <xs:element name="bewertungsausnahme-matrix" type="XML-Bewertungsausnahme-Matrix"/> </xs:sequence> </xs:group></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Nummerninterpretationsdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Types XML-KVPPM, XML-PVKM, XML-PVPM |
| Model | nummerninterpretation-pool |
| Children | nummerninterpretation-pool |
| Source | <pre><xs:group name="XML-Nummerninterpretationsdaten"> <xs:sequence> <xs:element name="nummerninterpretation-pool" type="XML-Nummerninterpretation-Pool"/> </xs:sequence> </xs:group></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Tarifpunktinterpretationsdaten

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Types XML-PVKM, XML-PVPM |
| Model | bitleisteninterpretation-pool , raumnummerninterpretation-pool |
| Children | bitleisteninterpretation-pool, raumnummerninterpretation-pool |
| Source | <pre><xs:group name="XML-Tarifpunktinterpretationsdaten"> <xs:sequence> <xs:element name="bitleisteninterpretation-pool" type="XML-Bitleisteninterpretation-Pool"/> <xs:element name="raumnummerninterpretation-pool" type="XML-Raumnummerninterpretation-Pool"/> </xs:sequence> </xs:group></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Modulzusatzdaten

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Types XML-DLKM, XML-KVPPM, XML-PVKM, XML-PVPM |
| Model | signatur , annotation |
| Children | annotation, signatur |
| Source | <pre><xs:group name="XML-Modulzusatzdaten"></pre> |

| | |
|-----------------|---|
| | <pre> <xs:sequence> <xs:element name="signatur" type="XML-Signatur-Part" /> <xs:element name="annotation" type="XML-Annotation-Part" /> </xs:sequence> </xs:group> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-PVPM-Verarbeitungsdaten

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre> graph LR Root((XML-PVPM-Verarbeitungsdaten)) --- L1(()) L1 --- L2(()) L2 --- L3(()) L3 --- L4(()) L4 --- L5[loeschstrategie] L5 --- L5Type[Type XML-Strategie-Part] L4 --- L6[verkaufsstrategie] L6 --- L6Type[Type XML-Strategie-Part] L4 --- L7[ruecknahmestrategie] L7 --- L7Type[Type XML-Strategie-Part] L4 --- L8[darstellungsstrategie] L8 --- L8Type[Type XML-Strategie-Part] </pre> |
| Used by | Complex Type XML-PVPM |
| Model | loeschstrategie , verkaufsstrategie , ruecknahmestrategie , darstellungsstrategie |
| Children | darstellungsstrategie, loeschstrategie, ruecknahmestrategie, verkaufsstrategie |
| Source | <pre> <xs:group name="XML-PVPM-Verarbeitungsdaten"> <xs:sequence> <xs:element name="loeschstrategie" type="XML-Strategie-Part" /> <xs:element name="verkaufsstrategie" type="XML-Strategie-Part" /> <xs:element name="ruecknahmestrategie" type="XML-Strategie-Part" /> <xs:element name="darstellungsstrategie" type="XML-Strategie-Part" /> </xs:sequence> </xs:group> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-PVPM-Produktdaten

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre> graph LR Root((XML-PVPM-Produktdaten)) --- L1(()) L1 --- L2(()) L2 --- L3(()) L3 --- L4(()) L4 --- L5(()) L5 --- L6(()) L6 --- L7(()) L7 --- L8(()) L8 --- L9(()) L9 --- L10(()) L10 --- L11[ausgangsdatenfamilie-pool] L11 --- L11Type[Type XML-Ausgangsdatenfamilie-Pool] L10 --- L12[nachfolgekriterium-pool] L12 --- L12Type[Type XML-Abhaengigkeitskriterium-Pool] L10 --- L13[abhaengigkeitskriterium-pool] L13 --- L13Type[Type XML-Abhaengigkeitskriterium-Pool] L10 --- L14[schlüssel-pool] L14 --- L14Type[Type XML-Schlüssel-Pool] L10 --- L15[kontingentierung-pool] L15 --- L15Type[Type XML-Kontingentierung-Pool] L10 --- L16[identifikationsparameter-pool] L16 --- L16Type[Type XML-Identifikationsparameter-Pool] L10 --- L17[efmprodukt-pool] L17 --- L17Type[Type XML-PVPM-EFMProdukt-Pool] L10 --- L18[tarifprodukt-pool] L18 --- L18Type[Type XML-PVPM-Tarifprodukt-Pool] L10 --- L19[fremdprodukt-pool] L19 --- L19Type[Type XML-Fremdprodukt-Pool] L10 --- L20[produktgruppe-pool] L20 --- L20Type[Type XML-Produktgruppe-Pool] </pre> |

| | |
|-----------------|--|
| Used by | Complex Type XML-PVPM |
| Model | ausgangsdatenfamilie-pool , nachfolgekriterium-pool , abhaengigkeitskriterium-pool , schluessel-pool , kontingentierung-pool , identifikationsparameter-pool , efmprodukt-pool , tarifprodukt-pool , fremdprodukt-pool , produktgruppe-pool |
| Children | abhaengigkeitskriterium-pool, ausgangsdatenfamilie-pool, efmprodukt-pool, fremdprodukt-pool, identifikationsparameter-pool, kontingentierung-pool, nachfolgekriterium-pool, produktgruppe-pool, schluessel-pool, tarifprodukt-pool |
| Source | <pre> <xs:group name="XML-PVPM-Produktdaten"> <xs:sequence> <xs:element name="ausgangsdatenfamilie-pool" type="XML-Ausgangsdatenfamilie-Pool"/> <xs:element name="nachfolgekriterium-pool" type="XML-Abhaengigkeitskriterium-Pool"/> <xs:element name="abhaengigkeitskriterium-pool" type="XML-Abhaengigkeitskriterium-Pool"/> <xs:element name="schluessel-pool" type="XML-Schluessel-Pool"/> <xs:element name="kontingentierung-pool" type="XML-Kontingentierung-Pool"/> <xs:element name="identifikationsparameter-pool" type="XML-Identifikationsparameter-Pool"/> <xs:element name="efmprodukt-pool" type="XML-PVPM-EFMProdukt-Pool"/> <xs:element name="tarifprodukt-pool" type="XML-PVPM-Tarifprodukt-Pool"/> <xs:element name="fremdprodukt-pool" type="XML-Fremdprodukt-Pool"/> <xs:element name="produktgruppe-pool" type="XML-Produktgruppe-Pool"/> </xs:sequence> </xs:group> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-Tarifpunktreferenzdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | <pre> graph LR A[XML-Tarifpunktreferenzdaten] --- B(()) B --- C[tarifpunktreferenz-pool] C --- D[Type XML-Tarifpunktreferenz-Pool] </pre> |
| Used by | Complex Type XML-PVPM |
| Model | tarifpunktreferenz-pool |
| Children | tarifpunktreferenz-pool |
| Source | <pre> <xs:group name="XML-Tarifpunktreferenzdaten"> <xs:sequence> <xs:element name="tarifpunktreferenz-pool" type="XML-Tarifpunktreferenz-Pool"/> </xs:sequence> </xs:group> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Element Group XML-PVPM-Bedingungsdaten

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|----------|---|
| Diagram | <p>The diagram illustrates the structure of the XML-PVPM-Bedingungsdaten complex type. It consists of a sequence of 18 elements, each representing a different type of condition or pool. The elements are:</p> <ul style="list-style-type: none"> modulkontext-pool (Type: XML-Modulkontext-Pool) bezahlart-pool (Type: XML-Bezahlart-Pool) waehrung-pool (Type: XML-Waehrung-Pool) zahlungsintervall-pool (Type: XML-Zahlungsintervall-Pool) mitnahmetyp-pool (Type: XML-Mitnahmetyp-Pool) rabattmedientyp-pool (Type: XML-Rabattmedientyp-Pool) spezialbedingung-pool (Type: XML-Spezialbedingung-Pool) bezahlartbedingung-pool (Type: XML-Bezahlartbedingung-Pool) zahlungsintervallbedingung-pool (Type: XML-Zahlungsintervallbedingung-Pool) tagesbedingung-pool (Type: XML-Tagesbedingung-Pool) tageszeitbedingung-pool (Type: XML-Tageszeitbedingung-Pool) zeitraumbedingung-pool (Type: XML-Zeitraumbedingung-Pool) tarifpunktbedingung-pool (Type: XML-Tarifpunktbedingung-Pool) bewertungsbedingung-pool (Type: XML-Bewertungsbedingung-Pool) mitnahmebedingung-pool (Type: XML-Mitnahmebedingung-Pool) rabattmedienbedingung-pool (Type: XML-Rabattmedienbedingung-Pool) modulkontextbedingung-pool (Type: XML-Modulkontextbedingung-Pool) verkehrsmittellinienbedingung-pool (Type: XML-Verkehrsmittellinienbedingung-Pool) |
| Used by | Complex Type XML-PVPM |
| Model | modulkontext-pool , bezahlart-pool , waehrung-pool , zahlungsintervall-pool , mitnahmetyp-pool , rabattmedientyp-pool , spezialbedingung-pool , bezahlartbedingung-pool , zahlungsintervallbedingung-pool , tagesbedingung-pool , tageszeitbedingung-pool , zeitraumbedingung-pool , tarifpunktbedingung-pool , bewertungsbedingung-pool , mitnahmebedingung-pool , rabattmedienbedingung-pool , modulkontextbedingung-pool , verkehrsmittellinienbedingung-pool |
| Children | bewertungsbedingung-pool, bezahlart-pool, bezahlartbedingung-pool, mitnahmebedingung-pool, mitnahmetyp-pool, modulkontext-pool, modulkontextbedingung-pool, rabattmedienbedingung-pool, rabattmedientyp-pool, spezialbedingung-pool, tagesbedingung-pool, tageszeitbedingung-pool, tarifpunktbedingung-pool, verkehrsmittellinienbedingung-pool, waehrung-pool, zahlungsintervall-pool, zahlungsintervallbedingung-pool, zeitraumbedingung-pool |
| Source | <pre> <xs:group name="XML-PVPM-Bedingungsdaten"> <xs:sequence> <xs:element name="modulkontext-pool" type="XML-Modulkontext-Pool"/> <xs:element name="bezahlart-pool" type="XML-Bezahlart-Pool"/> <xs:element name="waehrung-pool" type="XML-Waehrung-Pool"/> <xs:element name="zahlungsintervall-pool" type="XML-Zahlungsintervall-Pool"/> <xs:element name="mitnahmetyp-pool" type="XML-Mitnahmetyp-Pool"/> <xs:element name="rabattmedientyp-pool" type="XML-Rabattmedientyp-Pool"/> <xs:element name="spezialbedingung-pool" type="XML-Spezialbedingung-Pool"/> <xs:element name="bezahlartbedingung-pool" type="XML-Bezahlartbedingung-Pool"/> <xs:element name="zahlungsintervallbedingung-pool" type="XML-Zahlungsintervallbedingung-Pool"/> <xs:element name="tagesbedingung-pool" type="XML-Tagesbedingung-Pool"/> </pre> |

| | |
|----------------------|--|
| | <pre> <xs:element name="tageszeitbedingung-pool" type="XML-Tageszeitbedingung-Pool" /> <xs:element name="zeitraumbedingung-pool" type="XML-Zeitraumbedingung-Pool" /> <xs:element name="tarifpunktbedingung-pool" type="XML-Tarifpunktbedingung-Pool" /> <xs:element name="bewertungsbedingung-pool" type="XML-Bewertungsbedingung-Pool" /> <xs:element name="mitnahmebedingung-pool" type="XML-Mitnahmebedingung-Pool" /> <xs:element name="rabattmedienbedingung-pool" type="XML-Rabattmedienbedingung-Pool" /> <xs:element name="modulkontextbedingung-pool" type="XML-Modulkontextbedingung-Pool" /> <xs:element name="verkehrsmittellinienbedingung-pool" type="XML-Verkehrsmittellinienbedingung- Pool" /> </xs:sequence> </xs:group> </pre> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/1/XML-Schema_PKM.xsd |

Element Group XML-KVPPM-Verarbeitungsdaten

| | |
|----------------------|--|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Type XML-KVPPM |
| Model | loeschablauf , verkaufsstrategie , ruecknahmestrategie |
| Children | loeschablauf, ruecknahmestrategie, verkaufsstrategie |
| Source | <pre> <xs:group name="XML-KVPPM-Verarbeitungsdaten"> <xs:sequence> <xs:element name="loeschablauf" type="XML-Loeschablauf-Part" /> <xs:element name="verkaufsstrategie" type="XML-Strategie-Part" /> <xs:element name="ruecknahmestrategie" type="XML-Strategie-Part" /> </xs:sequence> </xs:group> </pre> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/1/XML-Schema_PKM.xsd |

Element Group XML-KVPPM-Produktdaten

| | |
|----------------------|---|
| Namespace | http://vdv/ka/pkm/1 |
| Diagram | |
| Used by | Complex Type XML-KVPPM |
| Model | schluessel-pool |
| Children | schluessel-pool |
| Source | <pre> <xs:group name="XML-KVPPM-Produktdaten"> <xs:sequence> <xs:element name="schluessel-pool" type="XML-Schluessel-Pool" /> </xs:sequence> </xs:group> </pre> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/1/XML-Schema_PKM.xsd |

Element Group XML-KVPPM-Adapterdaten

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/1 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Used by | Complex Type XML-KVPPM |
| Model | linienadapter-pool , verkehrsmitteltypadapter-pool , wegevariantenadapter-pool , tarifpunktadapter-pool , tarifpunktreferenzadapter-pool , bezahlartadapter-pool , waehrungsadapter-pool , zahlungsintervalladapter-pool , mitnahmetypadapter-pool , rabattmedientypadapter-pool , identifikationsparameteradapter-pool |
| Children | bezahlartadapter-pool, identifikationsparameteradapter-pool, linienadapter-pool, mitnahmetypadapter-pool, rabattmedientypadapter-pool, tarifpunktadapter-pool, tarifpunktreferenzadapter-pool, verkehrsmitteltypadapter-pool, waehrungsadapter-pool, wegevariantenadapter-pool, zahlungsintervalladapter-pool |
| Source | <pre> <xs:group name="XML-KVPPM-Adapterdaten"> <xs:sequence> <xs:element name="linienadapter-pool" type="XML-Linienadapter-Pool" /> <xs:element name="verkehrsmitteltypadapter-pool" type="XML-Verkehrsmitteltypadapter-Pool" /> <xs:element name="wegevariantenadapter-pool" type="XML-Wegevariantenadapter-Pool" /> <xs:element name="tarifpunktadapter-pool" type="XML-Tarifpunktadapter-Pool" /> <xs:element name="tarifpunktreferenzadapter-pool" type="XML-Tarifpunktreferenzadapter-Pool" /> <xs:element name="bezahlartadapter-pool" type="XML-Bezahlartadapter-Pool" /> <xs:element name="waehrungsadapter-pool" type="XML-Waehrungsadapter-Pool" /> <xs:element name="zahlungsintervalladapter-pool" type="XML-Zahlungsintervalladapter-Pool" /> <xs:element name="mitnahmetypadapter-pool" type="XML-Mitnahmetypadapter-Pool" /> <xs:element name="rabattmedientypadapter-pool" type="XML-Rabattmedientypadapter-Pool" /> <xs:element name="identifikationsparameteradapter-pool" type="XML-Identifikationsparameteradapter-Pool" /> </xs:sequence> </xs:group> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Namespace: ""

Attribute(s)

Attribute XML-Pool / @key

| | |
|------------|----------------|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |

| | |
|-----------------|---|
| Used by | Complex Type XML-Pool |
| Source | <code><xs:attribute name="key" type="XML-Ref" use="required" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Ausgangstext-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Ausgangstext-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-ObjectValue / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | content: simple |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-ObjectValue |
| Source | <code><xs:attribute name="ref" type="XML-Ref" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-FunctionValue / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-FunctionValue |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Ausgangssequenz-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Ausgangssequenz-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Ausgangsdaten-Entry / @ref

| | |
|-----------|--------------|
| Namespace | No namespace |
|-----------|--------------|

| | |
|-----------------|---|
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Ausgangsdaten-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungsdatenvon-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungsdatenvon-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungsdatenvlb-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungsdatenvlb-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungsdatentyp-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungsdatentyp-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungsausnahmezu-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungsausnahmezu-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungsausnahmevon-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungsausnahmevon-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungsausnahmevlb-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungsausnahmevlb-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungsausnahmetyp-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungsausnahmetyp-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Bewertungsdatenueber-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Bewertungsdatenueber-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Bewertungsdatennach-Entry / @ref

| | |
|------------|--|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Bewertungsdatennach-Entry |

| | |
|-----------------|---|
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Bewertungsdatenvon-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Bewertungsdatenvon-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Bewertungsdatenvlb-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Bewertungsdatenvlb-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Bewertungsdatentyp-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Bewertungsdatentyp-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Bewertungsausnahmeueber-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Bewertungsausnahmeueber-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Bewertungsausnahmenach-Entry / @ref

| | |
|-----------|--------------|
| Namespace | No namespace |
| Type | XML-Ref |

| | | |
|-----------------|---|----------------------------------|
| Properties | use: | required |
| Facets | minInclusive | 1 |
| Used by | Complex Type | XML-Bewertungsausnahmenach-Entry |
| Source | <xs:attribute name="ref" type="XML-Ref" use="required"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Attribute XML-Bewertungsausnahmevon-Entry / @ref

| | | |
|-----------------|---|---------------------------------|
| Namespace | No namespace | |
| Type | XML-Ref | |
| Properties | use: | required |
| Facets | minInclusive | 1 |
| Used by | Complex Type | XML-Bewertungsausnahmevon-Entry |
| Source | <xs:attribute name="ref" type="XML-Ref" use="required"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Attribute XML-Bewertungsausnahmevlb-Entry / @ref

| | | |
|-----------------|---|---------------------------------|
| Namespace | No namespace | |
| Type | XML-Ref | |
| Properties | use: | required |
| Facets | minInclusive | 1 |
| Used by | Complex Type | XML-Bewertungsausnahmevlb-Entry |
| Source | <xs:attribute name="ref" type="XML-Ref" use="required"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Attribute XML-Bewertungsausnahmetyp-Entry / @ref

| | | |
|-----------------|---|---------------------------------|
| Namespace | No namespace | |
| Type | XML-Ref | |
| Properties | use: | required |
| Facets | minInclusive | 1 |
| Used by | Complex Type | XML-Bewertungsausnahmetyp-Entry |
| Source | <xs:attribute name="ref" type="XML-Ref" use="required"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Attribute XML-Eingangsadapter-Entry / @ref

| | | |
|-----------------|---|---------------------------|
| Namespace | No namespace | |
| Type | XML-Ref | |
| Properties | use: | required |
| Facets | minInclusive | 1 |
| Used by | Complex Type | XML-Eingangsadapter-Entry |
| Source | <xs:attribute name="ref" type="XML-Ref" use="required"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd | |

Attribute XML-Ausgangsadapter-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Ausgangsadapter-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Mitnahmeanzahl-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Mitnahmeanzahl-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |

Attribute XML-Produktadapter-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Produktadapter-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/1/XML-Schema_PKM.xsd |