

Schema documentation for XML- Schema_PKM_TX.xsd

march 9, 2023

Table of Contents

| | |
|--|----|
| Resource hierarchy: | 23 |
| Namespace: "http://vdv/ka/pkm/2" | 23 |
| Schema(s) | 23 |
| Main schema XML-Schema_PKM_TX.xsd | 23 |
| Included schema XML-Schema_PKM.xsd | 24 |
| Element(s) | 24 |
| Element pkm:TXVPVTM | 24 |
| Element rntm | 25 |
| Element XML-Tarifmodul / version | 27 |
| Element XML-Version-Part / gueltigkeitsbeginn | 28 |
| Element XML-Version-Part / externNr | 28 |
| Element XML-Version-Part / internNr | 29 |
| Element XML-Version-Part / modulstatus | 29 |
| Element XML-Version-Part / modulspezifikation | 29 |
| Element XML-Version-Part / modulnamenszusatz | 30 |
| Element XML-Version-Part / speicherzeitpunkt | 30 |
| Element XML-Version-Part / bearbeiter | 30 |
| Element XML-Version-Part / freiggeber | 31 |
| Element XML-Version-Part / bemerkung | 31 |
| Element XML-Version-Part / vorgaengerversion | 31 |
| Element XML-Tarifmodul / herausgeber | 32 |
| Element XML-NrName-Item / nr | 32 |
| Element XML-NrName-Item / name | 33 |
| Element XML-Organisation-Part / nr | 33 |
| Element XML-Organisation-Part / name | 33 |
| Element XML-Tarifmodul / fachablauf | 34 |
| Element XML-Fachablauf-Part / kontrollstart | 34 |
| Element XML-Ref01 / ref | 35 |
| Element XML-Ref11 / ref | 35 |
| Element XML-Fachablauf-Part / erfassungsstart | 35 |
| Element XML-Fachablauf-Part / anpassungsstart | 36 |
| Element XML-Fachablauf-Part / darstellungsstart | 36 |
| Element XML-Fachablauf-Part / produktermittlungsstart | 36 |
| Element XML-Fachablauf-Part / transaktionsauswertungsstart | 37 |
| Element XML-Fachablauf-Part / pruefungin | 37 |
| Element XML-Fachablauf-Part / pruefungvor | 38 |
| Element XML-Fachablauf-Part / pruefungnach | 38 |
| Element XML-Tarifmodul / text-matrix | 38 |
| Element XML-Ausgangstext-Matrix / text | 39 |
| Element XML-Tarifmodul / sprache-pool | 39 |
| Element XML-NrName-Pool / item | 40 |
| Element XML-Sprache-Pool / item | 40 |
| Element XML-Sprache-Item / nr | 41 |
| Element XML-Sprache-Item / name | 41 |
| Element XML-Tarifmodul / eingangsschnittstelle-pool | 41 |
| Element XML-Eingangsschnittstelle-Pool / item | 42 |
| Element XML-Eingangsschnittstelle-Item / parameter-pool | 43 |
| Element XML-Eingangsparameter-Pool / item | 43 |
| Element XML-Eingangsparameter-Item / nr | 44 |
| Element XML-Eingangsparameter-Item / name | 44 |
| Element XML-Tarifmodul / ausgangsschnittstelle-pool | 44 |
| Element XML-Ausgangsschnittstelle-Pool / item | 45 |
| Element XML-Ausgangsschnittstelle-Item / nr | 46 |
| Element XML-Ausgangsschnittstelle-Item / name | 46 |
| Element XML-Ausgangsschnittstelle-Item / parameter-pool | 46 |
| Element XML-Ausgangsparameter-Pool / item | 47 |
| Element XML-Ausgangsparameter-Item / nr | 48 |
| Element XML-Ausgangsparameter-Item / name | 48 |
| Element XML-Tarifmodul / ausgangskontext-pool | 48 |
| Element XML-Ausgangskontext-Pool / item | 49 |

| | |
|--|----|
| Element XML-Name-Item / name | 50 |
| Element XML-Ausgangskontext-Item / sprache | 50 |
| Element XML-RefList0N / ref | 50 |
| Element XML-RefSet0N / ref | 51 |
| Element XML-RefSet1N / ref | 51 |
| Element XML-Ausgangskontext-Item / parameter | 51 |
| Element XML-Tarifmodul / datentabelle-pool | 52 |
| Element XML-Datentabelle-Pool / item | 52 |
| Element XML-Datentabelle-Item / datensatzkey | 53 |
| Element XML-CommonFunction / bits | 55 |
| Element XML-CommonFunction / text | 55 |
| Element XML-CommonFunction / zahl | 55 |
| Element XML-CommonFunction / liste | 56 |
| Element XML-ArrayValue / bits | 58 |
| Element XML-ArrayValue / text | 58 |
| Element XML-ArrayValue / zahl | 58 |
| Element XML-ArrayValue / liste | 59 |
| Element XML-ArrayValue / datum | 61 |
| Element XML-ArrayValue / uhrzeit | 61 |
| Element XML-ArrayValue / zeitpunkt | 61 |
| Element XML-ArrayValue / zeitspanne | 62 |
| Element XML-ArrayValue / ja | 62 |
| Element XML-ArrayValue / nein | 62 |
| Element XML-ArrayValue / ref | 62 |
| Element XML-ArrayValue / funktion | 63 |
| Element XML-CommonFunction / datum | 65 |
| Element XML-CommonFunction / uhrzeit | 65 |
| Element XML-CommonFunction / zeitpunkt | 66 |
| Element XML-CommonFunction / zeitspanne | 66 |
| Element XML-CommonFunction / ja | 66 |
| Element XML-CommonFunction / nein | 66 |
| Element XML-CommonFunction / ref | 67 |
| Element XML-CommonFunction / funktion | 67 |
| Element XML-FunctionValue / bits | 69 |
| Element XML-FunctionValue / text | 69 |
| Element XML-FunctionValue / zahl | 70 |
| Element XML-FunctionValue / liste | 70 |
| Element XML-ArrayValue / undefiniert | 72 |
| Element XML-FunctionValue / datum | 72 |
| Element XML-FunctionValue / uhrzeit | 72 |
| Element XML-FunctionValue / zeitpunkt | 73 |
| Element XML-FunctionValue / zeitspanne | 73 |
| Element XML-FunctionValue / ja | 73 |
| Element XML-FunctionValue / nein | 73 |
| Element XML-FunctionValue / ref | 74 |
| Element XML-FunctionValue / funktion | 74 |
| Element XML-FunctionValue / undefiniert | 76 |
| Element XML-FunctionValue / param | 76 |
| Element XML-FunctionValue / aufruf | 76 |
| Element XML-CompositeFunction / bits | 78 |
| Element XML-CompositeFunction / text | 78 |
| Element XML-CompositeFunction / zahl | 79 |
| Element XML-CompositeFunction / liste | 79 |
| Element XML-CompositeFunction / datum | 81 |
| Element XML-CompositeFunction / uhrzeit | 81 |
| Element XML-CompositeFunction / zeitpunkt | 81 |
| Element XML-CompositeFunction / zeitspanne | 82 |
| Element XML-CompositeFunction / ja | 82 |
| Element XML-CompositeFunction / nein | 82 |
| Element XML-CompositeFunction / ref | 82 |
| Element XML-CompositeFunction / funktion | 83 |
| Element XML-CompositeFunction / undefiniert | 85 |
| Element XML-CompositeFunction / param | 85 |
| Element XML-CompositeFunction / aufruf | 85 |
| Element XML-CommonFunction / undefiniert | 87 |
| Element XML-CommonFunction / param | 87 |
| Element XML-CommonFunction / aufruf | 87 |
| Element XML-Datentabelle-Item / datensatzvalue | 89 |
| Element XML-Tarifmodul / schritt-pool | 91 |
| Element XML-Schritt-Pool / item | 91 |
| Element XML-Schritt-Item / ausgang | 92 |
| Element XML-Ausgangsschritt-Part / ausgangsdaten | 93 |

| | |
|--|-----|
| Element XML-Ausgangsschritt-Part / ausnahme | 93 |
| Element XML-Ausgangsschritt-Part / nachfolger | 93 |
| Element XML-Schritt-Item / auswahl | 94 |
| Element XML-Auswahlschritt-Part / auswahldaten | 94 |
| Element XML-Auswahlschritt-Part / ausnahme | 94 |
| Element XML-Auswahlschritt-Part / nachfolger | 95 |
| Element XML-RefList1N / ref | 95 |
| Element XML-Schritt-Item / berechnung | 95 |
| Element XML-Berechnungsschritt-Part / funktion | 96 |
| Element XML-Berechnungsschritt-Part / ausnahme | 96 |
| Element XML-Berechnungsschritt-Part / nachfolger | 96 |
| Element XML-Schritt-Item / entscheidung | 97 |
| Element XML-Entscheidungsschritt-Part / funktion | 97 |
| Element XML-Entscheidungsschritt-Part / ausnahme | 98 |
| Element XML-Entscheidungsschritt-Part / janachfolger | 98 |
| Element XML-Entscheidungsschritt-Part / neinnachfolger | 98 |
| Element XML-Schritt-Item / parallelisierung | 99 |
| Element XML-Parallelisierungsschritt-Part / parallel | 99 |
| Element XML-Parallelisierungsschritt-Part / nachfolger | 100 |
| Element XML-Tarifmodul / variable-pool | 100 |
| Element XML-Name-Pool / item | 100 |
| Element XML-Variable-Pool / item | 101 |
| Element XML-Variable-Item / name | 101 |
| Element XML-Tarifmodul / funktion-pool | 102 |
| Element XML-Funktion-Pool / item | 102 |
| Element XML-Funktion-Item / nr | 103 |
| Element XML-Funktion-Item / wert | 103 |
| Element XML-ValueFunction / bits | 105 |
| Element XML-ValueFunction / text | 105 |
| Element XML-ValueFunction / zahl | 106 |
| Element XML-ValueFunction / liste | 106 |
| Element XML-ValueFunction / datum | 108 |
| Element XML-ValueFunction / uhrzeit | 108 |
| Element XML-ValueFunction / zeitpunkt | 108 |
| Element XML-ValueFunction / zeitspanne | 109 |
| Element XML-ValueFunction / ja | 109 |
| Element XML-ValueFunction / nein | 109 |
| Element XML-ValueFunction / ref | 109 |
| Element XML-ValueFunction / funktion | 110 |
| Element XML-ValueFunction / undefiniert | 112 |
| Element XML-Funktion-Item / aufruf | 112 |
| Element XML-Tarifmodul / ausnahme-pool | 114 |
| Element XML-Ausgangstext-Pool / item | 115 |
| Element XML-Ausgangstext-Item / text-matrix | 115 |
| Element XML-Ausnahme-Pool / item | 115 |
| Element XML-Ausnahme-Item / nr | 116 |
| Element XML-Ausnahme-Item / name | 116 |
| Element XML-Ausnahme-Item / text-matrix | 117 |
| Element XML-Tarifmodul / auswahldaten-pool | 117 |
| Element XML-Ausgangssequenz-Pool / item | 118 |
| Element XML-Ausgangssequenz-Item / sequenz-matrix | 118 |
| Element XML-Ausgangssequenz-Matrix / sequenz | 119 |
| Element XML-Ausgangssequenz-Entry / ref | 119 |
| Element XML-Ausgangssequenz-Entry / text | 119 |
| Element XML-Ausgangssequenz-Item / defaultoption | 120 |
| Element XML-Ausgangssequenz-Item / auswahloption | 120 |
| Element XML-Auswahldaten-Pool / item | 120 |
| Element XML-Auswahldaten-Item / name | 121 |
| Element XML-Auswahldaten-Item / sequenz-matrix | 122 |
| Element XML-Auswahldaten-Item / defaultoption | 122 |
| Element XML-Auswahldaten-Item / auswahloption | 122 |
| Element XML-Tarifmodul / auswahloption-pool | 123 |
| Element XML-Ausgangsdaten-Pool / item | 123 |
| Element XML-Ausgangsdaten-Item / name | 124 |
| Element XML-Ausgangsdaten-Item / sequenz-matrix | 124 |
| Element XML-Auswahloption-Pool / item | 125 |
| Element XML-Auswahloption-Item / name | 126 |
| Element XML-Auswahloption-Item / sequenz-matrix | 126 |
| Element XML-Tarifmodul / ausgangsdaten-pool | 126 |
| Element XML-Tarifmodul / ausgangsdatenfamilie-pool | 127 |
| Element XML-Ausgangsdatenfamilie-Pool / item | 127 |
| Element XML-Ausgangsdatenfamilie-Item / name | 128 |

| | |
|--|-----|
| Element XML-Tarifmodul / organisation-pool | 128 |
| Element XML-Organisation-Pool / item | 129 |
| Element XML-Organisation-Item / anforderung | 129 |
| Element XML-Wochentag-Pool / nr | 130 |
| Element XML-Ergaenzungsanforderung-Pool / nr | 130 |
| Element XML-Tarifmodul / efmprodukt-pool | 131 |
| Element XML-Eigenprodukt-Pool / item | 131 |
| Element XML-Eigenprodukt-Item / ruckzahlungsdaten-table | 133 |
| Element XML-Rueckzahlung-Table / waehrung | 135 |
| Element XML-Rueckzahlung-Table / tagesbedingung | 135 |
| Element XML-Rueckzahlung-Table / zeitraumbedingung | 135 |
| Element XML-Rueckzahlung-Table / tarifpunktbedingung | 136 |
| Element XML-Rueckzahlung-Table / bewertungsbedingung | 136 |
| Element XML-Rueckzahlung-Table / verkehrsmittellinienbedingung | 136 |
| Element XML-Rueckzahlung-Table / mitnahmebedingung | 136 |
| Element XML-Rueckzahlung-Table / rabattmedienbedingung | 137 |
| Element XML-Rueckzahlung-Table / modulkontextbedingung | 137 |
| Element XML-Rueckzahlung-Table / spezialbedingung | 137 |
| Element XML-Rueckzahlung-Table / daten-pool | 138 |
| Element XML-Rueckzahlungsdaten-Pool / item | 138 |
| Element XML-Rueckzahlungsdaten-Item / betrag | 138 |
| Element XML-Preisdaten-Item / wert | 139 |
| Element XML-Preisdaten-Item / mwstsatz | 139 |
| Element XML-Rueckzahlungsdaten-Item / gebuehr | 139 |
| Element XML-Rueckzahlung-Table / ausnahme | 140 |
| Element XML-Rueckzahlungsdaten-Table / waehrung | 140 |
| Element XML-Rueckzahlungsdaten-Table / tagesbedingung | 140 |
| Element XML-Rueckzahlungsdaten-Table / zeitraumbedingung | 141 |
| Element XML-Rueckzahlungsdaten-Table / tarifpunktbedingung | 141 |
| Element XML-Rueckzahlungsdaten-Table / bewertungsbedingung | 141 |
| Element XML-Rueckzahlungsdaten-Table / verkehrsmittellinienbedingung | 142 |
| Element XML-Rueckzahlungsdaten-Table / mitnahmebedingung | 142 |
| Element XML-Rueckzahlungsdaten-Table / rabattmedienbedingung | 142 |
| Element XML-Rueckzahlungsdaten-Table / modulkontextbedingung | 143 |
| Element XML-Rueckzahlungsdaten-Table / spezialbedingung | 143 |
| Element XML-Rueckzahlungsdaten-Table / daten-pool | 143 |
| Element XML-Eigenprodukt-Item / ruckzahlungsausnahme-table | 144 |
| Element XML-Rueckzahlungsausnahme-Table / waehrung | 145 |
| Element XML-Rueckzahlungsausnahme-Table / tagesbedingung | 145 |
| Element XML-Rueckzahlungsausnahme-Table / zeitraumbedingung | 145 |
| Element XML-Rueckzahlungsausnahme-Table / tarifpunktbedingung | 146 |
| Element XML-Rueckzahlungsausnahme-Table / bewertungsbedingung | 146 |
| Element XML-Rueckzahlungsausnahme-Table / verkehrsmittellinienbedingung | 146 |
| Element XML-Rueckzahlungsausnahme-Table / mitnahmebedingung | 147 |
| Element XML-Rueckzahlungsausnahme-Table / rabattmedienbedingung | 147 |
| Element XML-Rueckzahlungsausnahme-Table / modulkontextbedingung | 147 |
| Element XML-Rueckzahlungsausnahme-Table / spezialbedingung | 147 |
| Element XML-Rueckzahlungsausnahme-Table / ausnahme | 148 |
| Element XML-Eigenprodukt-Item / ungueltigkeitszeitpunktsdaten-table | 148 |
| Element XML-Ungueltigkeitszeitpunkt-Table / tagesbedingung | 149 |
| Element XML-Ungueltigkeitszeitpunkt-Table / zeitraumbedingung | 149 |
| Element XML-Ungueltigkeitszeitpunkt-Table / modulkontextbedingung | 149 |
| Element XML-Ungueltigkeitszeitpunkt-Table / spezialbedingung | 150 |
| Element XML-Ungueltigkeitszeitpunkt-Table / daten-pool | 150 |
| Element XML-Ungueltigkeitszeitpunktsdaten-Pool / item | 150 |
| Element XML-Zeitrahmengrenze-Part / zeitspanne | 151 |
| Element XML-Zeitrahmengrenze-Part / uhrzeit | 151 |
| Element XML-Zeitrahmengrenze-Part / unbestimmt | 152 |
| Element XML-Zeitrahmengrenze-Part / zeitspanne | 152 |
| Element XML-Zeitrahmengrenze-Part / uhrzeit | 152 |
| Element XML-Ungueltigkeitszeitpunktsdaten-Item / zeitspanne | 153 |
| Element XML-Ungueltigkeitszeitpunktsdaten-Item / uhrzeit | 153 |
| Element XML-Ungueltigkeitszeitpunkt-Table / ausnahme | 153 |
| Element XML-Ungueltigkeitszeitpunktsdaten-Table / tagesbedingung | 154 |
| Element XML-Ungueltigkeitszeitpunktsdaten-Table / zeitraumbedingung | 154 |
| Element XML-Ungueltigkeitszeitpunktsdaten-Table / modulkontextbedingung | 154 |
| Element XML-Ungueltigkeitszeitpunktsdaten-Table / spezialbedingung | 154 |
| Element XML-Ungueltigkeitszeitpunktsdaten-Table / daten-pool | 155 |
| Element XML-Eigenprodukt-Item / ungueltigkeitszeitpunktsausnahme-table | 155 |
| Element XML-Ungueltigkeitszeitpunktsausnahme-Table / tagesbedingung | 156 |
| Element XML-Ungueltigkeitszeitpunktsausnahme-Table / zeitraumbedingung | 156 |
| Element XML-Ungueltigkeitszeitpunktsausnahme-Table / modulkontextbedingung | 156 |

| | |
|--|-----|
| Element XML-Ungueltigkeitszeitpunktsausnahme-Table / spezialbedingung | 157 |
| Element XML-Ungueltigkeitszeitpunktsausnahme-Table / ausnahme | 157 |
| Element XML-Eigenprodukt-Item / preisdaten-table | 157 |
| Element XML-Preis-Table / waehrung | 159 |
| Element XML-Preis-Table / bezahlartbedingung | 159 |
| Element XML-Preis-Table / zahlungsintervallbedingung | 159 |
| Element XML-Preis-Table / tagesbedingung | 160 |
| Element XML-Preis-Table / tageszeitbedingung | 160 |
| Element XML-Preis-Table / zeitraumbedingung | 160 |
| Element XML-Preis-Table / tarifpunktbedingung | 161 |
| Element XML-Preis-Table / bewertungsbedingung | 161 |
| Element XML-Preis-Table / verkehrsmittellinienbedingung | 161 |
| Element XML-Preis-Table / mitnahmebedingung | 162 |
| Element XML-Preis-Table / rabattmedienbedingung | 162 |
| Element XML-Preis-Table / modulkontextbedingung | 162 |
| Element XML-Preis-Table / spezialbedingung | 163 |
| Element XML-Preis-Table / daten-pool | 163 |
| Element XML-Preisdaten-Pool / item | 163 |
| Element XML-Preis-Table / ausnahme | 164 |
| Element XML-Preisdaten-Table / waehrung | 164 |
| Element XML-Preisdaten-Table / bezahlartbedingung | 164 |
| Element XML-Preisdaten-Table / zahlungsintervallbedingung | 165 |
| Element XML-Preisdaten-Table / tagesbedingung | 165 |
| Element XML-Preisdaten-Table / tageszeitbedingung | 165 |
| Element XML-Preisdaten-Table / zeitraumbedingung | 166 |
| Element XML-Preisdaten-Table / tarifpunktbedingung | 166 |
| Element XML-Preisdaten-Table / bewertungsbedingung | 166 |
| Element XML-Preisdaten-Table / verkehrsmittellinienbedingung | 167 |
| Element XML-Preisdaten-Table / mitnahmebedingung | 167 |
| Element XML-Preisdaten-Table / rabattmedienbedingung | 167 |
| Element XML-Preisdaten-Table / modulkontextbedingung | 168 |
| Element XML-Preisdaten-Table / spezialbedingung | 168 |
| Element XML-Preisdaten-Table / daten-pool | 168 |
| Element XML-Eigenprodukt-Item / preisausnahme-table | 169 |
| Element XML-Preisausnahme-Table / waehrung | 170 |
| Element XML-Preisausnahme-Table / bezahlartbedingung | 170 |
| Element XML-Preisausnahme-Table / zahlungsintervallbedingung | 171 |
| Element XML-Preisausnahme-Table / tagesbedingung | 171 |
| Element XML-Preisausnahme-Table / tageszeitbedingung | 171 |
| Element XML-Preisausnahme-Table / zeitraumbedingung | 172 |
| Element XML-Preisausnahme-Table / tarifpunktbedingung | 172 |
| Element XML-Preisausnahme-Table / bewertungsbedingung | 172 |
| Element XML-Preisausnahme-Table / verkehrsmittellinienbedingung | 173 |
| Element XML-Preisausnahme-Table / mitnahmebedingung | 173 |
| Element XML-Preisausnahme-Table / rabattmedienbedingung | 173 |
| Element XML-Preisausnahme-Table / modulkontextbedingung | 174 |
| Element XML-Preisausnahme-Table / spezialbedingung | 174 |
| Element XML-Preisausnahme-Table / ausnahme | 174 |
| Element XML-Eigenprodukt-Item / gueltigkeitszeitrahmensdaten-table | 174 |
| Element XML-Gueltigkeitszeitrahmen-Table / tagesbedingung | 175 |
| Element XML-Gueltigkeitszeitrahmen-Table / tageszeitbedingung | 176 |
| Element XML-Gueltigkeitszeitrahmen-Table / tarifpunktbedingung | 176 |
| Element XML-Gueltigkeitszeitrahmen-Table / bewertungsbedingung | 176 |
| Element XML-Gueltigkeitszeitrahmen-Table / verkehrsmittellinienbedingung | 177 |
| Element XML-Gueltigkeitszeitrahmen-Table / spezialbedingung | 177 |
| Element XML-Gueltigkeitszeitrahmen-Table / daten-pool | 177 |
| Element XML-Gueltigkeitszeitrahmensdaten-Pool / item | 178 |
| Element XML-Gueltigkeitszeitrahmensdaten-Item / beginn | 178 |
| Element XML-Gueltigkeitszeitrahmensdaten-Item / ende | 178 |
| Element XML-Gueltigkeitszeitrahmen-Table / ausnahme | 179 |
| Element XML-Gueltigkeitszeitrahmensdaten-Table / tagesbedingung | 179 |
| Element XML-Gueltigkeitszeitrahmensdaten-Table / tageszeitbedingung | 179 |
| Element XML-Gueltigkeitszeitrahmensdaten-Table / tarifpunktbedingung | 180 |
| Element XML-Gueltigkeitszeitrahmensdaten-Table / bewertungsbedingung | 180 |
| Element XML-Gueltigkeitszeitrahmensdaten-Table / verkehrsmittellinienbedingung | 180 |
| Element XML-Gueltigkeitszeitrahmensdaten-Table / spezialbedingung | 181 |
| Element XML-Gueltigkeitszeitrahmensdaten-Table / daten-pool | 181 |
| Element XML-Eigenprodukt-Item / gueltigkeitszeitrahmensausnahme-table | 181 |
| Element XML-Gueltigkeitszeitrahmensausnahme-Table / tagesbedingung | 182 |
| Element XML-Gueltigkeitszeitrahmensausnahme-Table / tageszeitbedingung | 183 |
| Element XML-Gueltigkeitszeitrahmensausnahme-Table / tarifpunktbedingung | 183 |
| Element XML-Gueltigkeitszeitrahmensausnahme-Table / bewertungsbedingung | 183 |

| | |
|---|-----|
| Element XML-Gueltigkeitszeitrahmensausnahme-Table / verkehrsmittellinienbedingung | 184 |
| Element XML-Gueltigkeitszeitrahmensausnahme-Table / spezialbedingung | 184 |
| Element XML-Gueltigkeitszeitrahmensausnahme-Table / ausnahme | 184 |
| Element XML-Eigenprodukt-Item / nachfolgedaten-table | 185 |
| Element XML-Nachfolge-Table / kriterium | 185 |
| Element XML-Nachfolge-Table / vorgaenger | 186 |
| Element XML-Nachfolge-Table / nachfolger | 186 |
| Element XML-Nachfolge-Table / ausnahme | 186 |
| Element XML-Nachfolgedaten-Table / kriterium | 187 |
| Element XML-Nachfolgedaten-Table / vorgaenger | 187 |
| Element XML-Nachfolgedaten-Table / nachfolger | 187 |
| Element XML-Eigenprodukt-Item / nachfolgeausnahme-table | 187 |
| Element XML-Nachfolgeausnahme-Table / kriterium | 188 |
| Element XML-Nachfolgeausnahme-Table / vorgaenger | 188 |
| Element XML-Nachfolgeausnahme-Table / ausnahme | 189 |
| Element XML-Eigenprodukt-Item / efmprodukt | 189 |
| Element XML-Eigenprodukt-Item / identifikation | 189 |
| Element XML-Eigenprodukt-Item / kontingentierung | 190 |
| Element XML-Eigenprodukt-Item / preisanpassung | 190 |
| Element XML-Eigenprodukt-Item / extNr | 190 |
| Element XML-Eigenprodukt-Item / schluessel | 191 |
| Element XML-Schluessel-Part / mkpv | 191 |
| Element XML-Schluessel-Part / mktr | 192 |
| Element XML-Schluessel-Part / mkkvp | 192 |
| Element XML-Schluessel-Part / mkauth | 192 |
| Element XML-PVSchluessel-Part / mkpv | 193 |
| Element XML-PVSchluessel-Part / mktr | 193 |
| Element XML-PVSchluessel-Part / mkauth | 193 |
| Element XML-Eigenprodukt-Item / kontrolle | 194 |
| Element XML-Produktdaten-Part / funktion | 194 |
| Element XML-Produktdaten-Part / modulkontext | 195 |
| Element XML-Produktdaten-Part / unterstuetztab | 195 |
| Element XML-Produktdaten-Part / ausgangsdaten-matrix | 195 |
| Element XML-Ausgangsdaten-Matrix / ausgangsdaten | 196 |
| Element XML-Produktdaten-Part / abhaengigkeitsdaten-table | 196 |
| Element XML-Abhaengigkeit-Table / kriterium | 197 |
| Element XML-Abhaengigkeit-Table / vorausgesetzt | 197 |
| Element XML-Abhaengigkeit-Table / ausnahme | 197 |
| Element XML-Abhaengigkeitsdaten-Table / kriterium | 198 |
| Element XML-Abhaengigkeitsdaten-Table / vorausgesetzt | 198 |
| Element XML-Produktdaten-Part / abhaengigkeitsausnahme-table | 198 |
| Element XML-Abhaengigkeitsausnahme-Table / kriterium | 199 |
| Element XML-Abhaengigkeitsausnahme-Table / vorausgesetzt | 199 |
| Element XML-Abhaengigkeitsausnahme-Table / ausnahme | 199 |
| Element XML-Eigenprodukt-Item / erfassung | 200 |
| Element XML-Eigenprodukt-Item / anpassung | 200 |
| Element XML-Eigenprodukt-Item / darstellung | 201 |
| Element XML-Eigenprodukt-Item / produktermittlung | 201 |
| Element XML-Eigenprodukt-Item / transaktionsauswertung | 202 |
| Element XML-EFMPProdukt-Pool / item | 202 |
| Element XML-EFMPProdukt-Item / nr | 204 |
| Element XML-EFMPProdukt-Item / name | 204 |
| Element XML-EFMPProdukt-Item / text-matrix | 205 |
| Element XML-EFMPProdukt-Item / rueckzahlungsdaten-table | 205 |
| Element XML-EFMPProdukt-Item / rueckzahlungsausnahme-table | 207 |
| Element XML-EFMPProdukt-Item / ungueltigkeitszeitpunktsdaten-table | 208 |
| Element XML-EFMPProdukt-Item / ungueltigkeitszeitpunktsausnahme-table | 208 |
| Element XML-EFMPProdukt-Item / schluessel | 209 |
| Element XML-EFMPProdukt-Item / kontrolle | 210 |
| Element XML-EFMPProdukt-Item / erfassung | 210 |
| Element XML-EFMPProdukt-Item / anpassung | 211 |
| Element XML-EFMPProdukt-Item / darstellung | 211 |
| Element XML-EFMPProdukt-Item / produktermittlung | 212 |
| Element XML-EFMPProdukt-Item / transaktionsauswertung | 212 |
| Element XML-Tarifmodul / tarifprodukt-pool | 213 |
| Element XML-Tarifprodukt-Pool / item | 214 |
| Element XML-Tarifprodukt-Item / nr | 216 |
| Element XML-Tarifprodukt-Item / name | 217 |
| Element XML-Tarifprodukt-Item / text-matrix | 217 |
| Element XML-Tarifprodukt-Item / rueckzahlungsdaten-table | 217 |
| Element XML-Tarifprodukt-Item / rueckzahlungsausnahme-table | 219 |
| Element XML-Tarifprodukt-Item / ungueltigkeitszeitpunktsdaten-table | 220 |

| | |
|--|-----|
| Element XML-Tarifprodukt-Item / ungueltigkeitszeitpunktsausnahme-table | 220 |
| Element XML-Tarifprodukt-Item / preisdaten-table | 221 |
| Element XML-Tarifprodukt-Item / preisausnahme-table | 223 |
| Element XML-Tarifprodukt-Item / gueltigkeitszeitrahmensdaten-table | 225 |
| Element XML-Tarifprodukt-Item / gueltigkeitszeitrahmensausnahme-table | 226 |
| Element XML-Tarifprodukt-Item / nachfolgedaten-table | 226 |
| Element XML-Tarifprodukt-Item / nachfolgeausnahme-table | 227 |
| Element XML-Tarifprodukt-Item / efmprodukt | 228 |
| Element XML-Tarifprodukt-Item / identifikation | 228 |
| Element XML-Tarifprodukt-Item / kontingentierung | 228 |
| Element XML-Tarifprodukt-Item / preisanpassung | 229 |
| Element XML-Tarifprodukt-Item / extNr | 229 |
| Element XML-Tarifprodukt-Item / kontrolle | 229 |
| Element XML-Tarifprodukt-Item / erfassung | 230 |
| Element XML-Tarifprodukt-Item / anpassung | 230 |
| Element XML-Tarifprodukt-Item / darstellung | 231 |
| Element XML-Tarifprodukt-Item / produktermittlung | 231 |
| Element XML-Tarifprodukt-Item / transaktionsauswertung | 232 |
| Element XML-Tarifmodul / fremdprodukt-pool | 232 |
| Element XML-Fremdprodukt-Pool / item | 233 |
| Element XML-Fremdprodukt-Item / tarifstand | 234 |
| Element XML-Fremdprodukt-Item / pv | 234 |
| Element XML-Tarifmodul / produktadapter-pool | 234 |
| Element XML-Produktadapter-Pool / item | 235 |
| Element XML-Produktadapter-Item / schluessel | 236 |
| Element XML-RNSchluessel-Part / mkkvp | 236 |
| Element XML-Produktadapter-Item / kontrollkontext | 237 |
| Element XML-Produktadapter-Item / erfassungskontext | 237 |
| Element XML-Produktadapter-Item / anpassungskontext | 237 |
| Element XML-Produktadapter-Item / darstellungskontext | 238 |
| Element XML-Produktadapter-Item / produktermittlungskontext | 238 |
| Element XML-Produktadapter-Item / transaktionsauswertungskontext | 239 |
| Element XML-Produktadapter-Item / kvpProduktNr | 239 |
| Element XML-Tarifmodul / produktgruppe-pool | 239 |
| Element XML-NameGruppe-Pool / item | 240 |
| Element XML-NameGruppe-Item / element | 241 |
| Element XML-Produktgruppe-Pool / item | 241 |
| Element XML-Tarifmodul / kontingentierung-pool | 242 |
| Element XML-Kontingentierung-Pool / item | 242 |
| Element XML-Kontingentierung-Item / kontingentdaten-table | 243 |
| Element XML-Kontingent-Table / tagesbedingung | 243 |
| Element XML-Kontingent-Table / tarifpunktbedingung | 244 |
| Element XML-Kontingent-Table / verkehrsmittellinienbedingung | 244 |
| Element XML-Kontingent-Table / spezialbedingung | 244 |
| Element XML-Kontingent-Table / daten-pool | 245 |
| Element XML-Kontingentdaten-Pool / item | 245 |
| Element XML-Kontingentdaten-Item / url | 245 |
| Element XML-Kontingent-Table / ausnahme | 246 |
| Element XML-Kontingentdaten-Table / tagesbedingung | 246 |
| Element XML-Kontingentdaten-Table / tarifpunktbedingung | 246 |
| Element XML-Kontingentdaten-Table / verkehrsmittellinienbedingung | 247 |
| Element XML-Kontingentdaten-Table / spezialbedingung | 247 |
| Element XML-Kontingentdaten-Table / daten-pool | 247 |
| Element XML-Kontingentierung-Item / kontingentausnahme-table | 248 |
| Element XML-Kontingentausnahme-Table / tagesbedingung | 248 |
| Element XML-Kontingentausnahme-Table / tarifpunktbedingung | 249 |
| Element XML-Kontingentausnahme-Table / verkehrsmittellinienbedingung | 249 |
| Element XML-Kontingentausnahme-Table / spezialbedingung | 249 |
| Element XML-Kontingentausnahme-Table / ausnahme | 250 |
| Element XML-Tarifmodul / nachfolgekriterium-pool | 250 |
| Element XML-Nachfolgekriterium-Pool / item | 250 |
| Element XML-Nachfolgekriterium-Item / funktion | 251 |
| Element XML-Nachfolgekriterium-Item / vorgaenger | 251 |
| Element XML-Kriterienzeitraum-Part / beginn | 252 |
| Element XML-Kriterienzeitraum-Part / ende | 252 |
| Element XML-Nachfolgekriterium-Item / wirksamkeit | 252 |
| Element XML-Tarifmodul / abhaengigkeitskriterium-pool | 253 |
| Element XML-Abhaengigkeitskriterium-Pool / item | 253 |
| Element XML-Abhaengigkeitskriterium-Item / funktion | 254 |
| Element XML-Abhaengigkeitskriterium-Item / wirksamkeit | 254 |
| Element XML-Tarifmodul / identifikationsparameter-pool | 254 |
| Element XML-Identifikationsparameter-Pool / item | 255 |

| | |
|--|-----|
| Element XML-Identifikationsparameter-Item / wert-pool | 256 |
| Element XML-Identifikationsparameterwert-Pool / item | 256 |
| Element XML-Identifikationsparameterwert-Item / nr | 257 |
| Element XML-Identifikationsparameterwert-Item / name | 257 |
| Element XML-Identifikationsparameterwert-Item / text-matrix | 258 |
| Element XML-Tarifmodul / identifikationsparameteradapter-pool | 258 |
| Element XML-Identifikationsparameteradapter-Pool / item | 258 |
| Element XML-Identifikationsparameteradapter-Item / nr | 259 |
| Element XML-Identifikationsparameteradapter-Item / name | 259 |
| Element XML-Identifikationsparameteradapter-Item / wert-pool | 260 |
| Element XML-Identifikationsparameterwertadapter-Pool / item | 260 |
| Element XML-Identifikationsparameterwertadapter-Item / nr | 261 |
| Element XML-Identifikationsparameterwertadapter-Item / name | 262 |
| Element XML-Identifikationsparameterwertadapter-Item / text-matrix | 262 |
| Element XML-Tarifmodul / tarifpunkt-pool | 262 |
| Element XML-Flaecheelement-Pool / item | 263 |
| Element XML-Flaecheelement-Item / geobezug | 264 |
| Element XML-Flaecheelement-Item / typ | 264 |
| Element XML-Flaecheelement-Item / ortsbezug | 264 |
| Element XML-Flaecheelement-Item / tarifpunkt | 265 |
| Element XML-Flaecheelement-Item / tarifpunktfolge-pool | 265 |
| Element XML-Tarifpunktfolge-Pool / item | 266 |
| Element XML-Tarifpunktfolge-Item / ink | 266 |
| Element XML-Tarifpunktfolge-Item / exk | 266 |
| Element XML-Tarifpunkt-Pool / item | 267 |
| Element XML-Tarifpunkt-Item / nr | 268 |
| Element XML-Tarifpunkt-Item / name | 268 |
| Element XML-Tarifpunkt-Item / text-matrix | 268 |
| Element XML-Tarifpunkt-Item / geobezug | 269 |
| Element XML-Tarifpunkt-Item / typ | 269 |
| Element XML-Tarifpunkt-Item / ortsbezug | 269 |
| Element XML-Tarifmodul / tarifpunktadapter-pool | 269 |
| Element XML-Tarifpunktadapter-Pool / item | 270 |
| Element XML-Tarifpunktadapter-Item / nr | 271 |
| Element XML-Tarifpunktadapter-Item / name | 272 |
| Element XML-Tarifpunktadapter-Item / text-matrix | 272 |
| Element XML-Tarifpunktadapter-Item / geobezug | 272 |
| Element XML-Tarifpunktadapter-Item / typ | 273 |
| Element XML-Tarifmodul / tarifpunktgruppe-pool | 273 |
| Element XML-Tarifpunktgruppe-Pool / item | 274 |
| Element XML-Tarifpunktgruppe-Item / name | 274 |
| Element XML-Tarifpunktgruppe-Item / element | 275 |
| Element XML-Tarifmodul / tarifpunktreferenz-pool | 275 |
| Element XML-Tarifpunktreferenz-Pool / item | 276 |
| Element XML-Tarifpunktreferenz-Item / nr | 277 |
| Element XML-Tarifpunktreferenz-Item / name | 277 |
| Element XML-Tarifpunktreferenz-Item / text-matrix | 277 |
| Element XML-Tarifpunktreferenz-Item / geobezug | 278 |
| Element XML-Tarifpunktreferenz-Item / typ | 278 |
| Element XML-Tarifpunktreferenz-Item / ortsbezug | 278 |
| Element XML-Tarifpunktreferenz-Item / tarifpunkt | 279 |
| Element XML-Tarifmodul / tarifpunktreferenzadapter-pool | 279 |
| Element XML-Tarifpunktreferenzadapter-Pool / item | 280 |
| Element XML-Tarifpunktreferenzadapter-Item / nr | 281 |
| Element XML-Tarifpunktreferenzadapter-Item / name | 281 |
| Element XML-Tarifpunktreferenzadapter-Item / text-matrix | 282 |
| Element XML-Tarifpunktreferenzadapter-Item / geobezug | 282 |
| Element XML-Tarifpunktreferenzadapter-Item / typ | 282 |
| Element XML-Tarifmodul / zuordnungstyp-pool | 283 |
| Element XML-Zuordnungstyp-Pool / item | 283 |
| Element XML-Zuordnungstyp-Item / name | 284 |
| Element XML-Tarifmodul / zuordnungsdaten-matrix | 284 |
| Element XML-Zuordnung-Matrix / typ | 284 |
| Element XML-Zuordnungstyp-Entry / bezug | 285 |
| Element XML-Zuordnungsbezug-Entry / von | 285 |
| Element XML-Zuordnungsvon-Entry / zu | 286 |
| Element XML-Zuordnungsdaten-Matrix / typ | 286 |
| Element XML-Zuordnungsdatentyp-Entry / bezug | 287 |
| Element XML-Zuordnungsdatenbezug-Entry / von | 288 |
| Element XML-Zuordnungsdatenvon-Entry / zu | 288 |
| Element XML-Tarifmodul / zuordnungsausnahme-matrix | 289 |
| Element XML-Zuordnungsausnahme-Matrix / typ | 289 |

| | |
|---|-----|
| Element XML-Zuordnungsausnahmetyp-Entry / bezug | 290 |
| Element XML-Zuordnungsausnahmebezug-Entry / von | 291 |
| Element XML-Zuordnungsausnahmevon-Entry / zu | 291 |
| Element XML-Tarifmodul / wegevariante-pool | 292 |
| Element XML-Wegevariante-Pool / item | 293 |
| Element XML-Wegevariante-Item / nr | 294 |
| Element XML-Wegevariante-Item / name | 294 |
| Element XML-Wegevariante-Item / text-matrix | 294 |
| Element XML-Wegevariante-Item / geobezug | 295 |
| Element XML-Wegevariante-Item / tarifpunktfolge-pool | 295 |
| Element XML-Tarifmodul / wegevariantenadapter-pool | 295 |
| Element XML-Wegevariantenadapter-Pool / item | 296 |
| Element XML-Wegevariantenadapter-Item / nr | 297 |
| Element XML-Wegevariantenadapter-Item / name | 297 |
| Element XML-Wegevariantenadapter-Item / text-matrix | 297 |
| Element XML-Wegevariantenadapter-Item / geobezug | 298 |
| Element XML-Tarifmodul / bewertungstyp-pool | 298 |
| Element XML-Bewertungstyp-Pool / item | 299 |
| Element XML-Bewertungstyp-Item / name | 299 |
| Element XML-Tarifmodul / bewertungsdaten-pool | 299 |
| Element XML-Bewertungsdaten-Pool / item | 300 |
| Element XML-Bewertungsdaten-Item / wert | 301 |
| Element XML-Bewertungsdaten-Item / text-matrix | 303 |
| Element XML-Tarifmodul / bewertungsdaten-matrix | 303 |
| Element XML-Bewertung-Matrix / typ | 304 |
| Element XML-Bewertungstyp-Entry / bezug | 304 |
| Element XML-Bewertungsbezug-Entry / von | 305 |
| Element XML-Bewertungsvon-Entry / nach | 305 |
| Element XML-Bewertungsnach-Entry / ueber | 306 |
| Element XML-Bewertungsdaten-Matrix / typ | 306 |
| Element XML-Bewertungsdatentyp-Entry / bezug | 307 |
| Element XML-Bewertungsdatenbezug-Entry / von | 307 |
| Element XML-Bewertungsdatenvon-Entry / nach | 308 |
| Element XML-Bewertungsdatennach-Entry / ueber | 309 |
| Element XML-Tarifmodul / bewertungsausnahme-matrix | 309 |
| Element XML-Bewertungsausnahme-Matrix / typ | 310 |
| Element XML-Bewertungsausnahmetyp-Entry / bezug | 310 |
| Element XML-Bewertungsausnahmebezug-Entry / von | 311 |
| Element XML-Bewertungsausnahmevon-Entry / nach | 312 |
| Element XML-Bewertungsausnahmenach-Entry / ueber | 312 |
| Element XML-Tarifmodul / linie-pool | 313 |
| Element XML-Linie-Pool / item | 313 |
| Element XML-Linie-Item / bezug | 314 |
| Element XML-Tarifmodul / linienadapter-pool | 314 |
| Element XML-Linienadapter-Pool / item | 315 |
| Element XML-Linienadapter-Item / nr | 316 |
| Element XML-Linienadapter-Item / name | 316 |
| Element XML-Linienadapter-Item / text-matrix | 316 |
| Element XML-Tarifmodul / verkehrsmitteltyp-pool | 317 |
| Element XML-Verkehrsmitteltyp-Pool / item | 317 |
| Element XML-Verkehrsmitteltyp-Item / nr | 318 |
| Element XML-Verkehrsmitteltyp-Item / name | 319 |
| Element XML-Verkehrsmitteltyp-Item / text-matrix | 319 |
| Element XML-Verkehrsmitteltyp-Item / bezug | 319 |
| Element XML-Tarifmodul / verkehrsmitteltypadapter-pool | 320 |
| Element XML-Verkehrsmitteltypadapter-Pool / item | 320 |
| Element XML-Verkehrsmitteltypadapter-Item / nr | 321 |
| Element XML-Verkehrsmitteltypadapter-Item / name | 321 |
| Element XML-Verkehrsmitteltypadapter-Item / text-matrix | 321 |
| Element XML-Tarifmodul / verkehrsmittellinienbezug-pool | 322 |
| Element XML-Verkehrsmittellinienbezug-Pool / item | 322 |
| Element XML-Verkehrsmittellinienbezug-Item / name | 323 |
| Element XML-Tarifmodul / bezahlart-pool | 323 |
| Element XML-Bezahlart-Pool / item | 324 |
| Element XML-Bezahlart-Item / nr | 325 |
| Element XML-Bezahlart-Item / name | 325 |
| Element XML-Bezahlart-Item / text-matrix | 325 |
| Element XML-Tarifmodul / bezahlartadapter-pool | 326 |
| Element XML-Bezahlartadapter-Pool / item | 326 |
| Element XML-Bezahlartadapter-Item / nr | 327 |
| Element XML-Bezahlartadapter-Item / name | 327 |
| Element XML-Bezahlartadapter-Item / text-matrix | 328 |

| | |
|---|-----|
| Element XML-Tarifmodul / waehrung-pool | 328 |
| Element XML-Waehrung-Pool / item | 329 |
| Element XML-Waehrung-Item / nr | 329 |
| Element XML-Waehrung-Item / name | 330 |
| Element XML-Waehrung-Item / text-matrix | 330 |
| Element XML-Tarifmodul / waehrungsadapter-pool | 330 |
| Element XML-Waehrungsadapter-Pool / item | 331 |
| Element XML-Waehrungsadapter-Item / nr | 332 |
| Element XML-Waehrungsadapter-Item / name | 332 |
| Element XML-Waehrungsadapter-Item / text-matrix | 332 |
| Element XML-Tarifmodul / zahlungsintervall-pool | 333 |
| Element XML-Zahlungsintervall-Pool / item | 333 |
| Element XML-Zahlungsintervall-Item / nr | 334 |
| Element XML-Zahlungsintervall-Item / name | 334 |
| Element XML-Zahlungsintervall-Item / text-matrix | 335 |
| Element XML-Tarifmodul / zahlungsintervalladapter-pool | 335 |
| Element XML-Zahlungsintervalladapter-Pool / item | 336 |
| Element XML-Zahlungsintervalladapter-Item / nr | 336 |
| Element XML-Zahlungsintervalladapter-Item / name | 337 |
| Element XML-Zahlungsintervalladapter-Item / text-matrix | 337 |
| Element XML-Tarifmodul / mitnahmetyp-pool | 337 |
| Element XML-Mitnahmetyp-Pool / item | 338 |
| Element XML-Mitnahmetyp-Item / nr | 339 |
| Element XML-Mitnahmetyp-Item / name | 339 |
| Element XML-Mitnahmetyp-Item / text-matrix | 339 |
| Element XML-Tarifmodul / mitnahmetypadapter-pool | 340 |
| Element XML-Mitnahmetypadapter-Pool / item | 340 |
| Element XML-Mitnahmetypadapter-Item / nr | 341 |
| Element XML-Mitnahmetypadapter-Item / name | 341 |
| Element XML-Mitnahmetypadapter-Item / text-matrix | 342 |
| Element XML-Tarifmodul / rabattmedientyp-pool | 342 |
| Element XML-Rabattmedientyp-Pool / item | 343 |
| Element XML-Rabattmedientyp-Item / nr | 343 |
| Element XML-Rabattmedientyp-Item / name | 344 |
| Element XML-Rabattmedientyp-Item / text-matrix | 344 |
| Element XML-Tarifmodul / rabattmedientypadapter-pool | 344 |
| Element XML-Rabattmedientypadapter-Pool / item | 345 |
| Element XML-Rabattmedientypadapter-Item / nr | 346 |
| Element XML-Rabattmedientypadapter-Item / name | 346 |
| Element XML-Rabattmedientypadapter-Item / text-matrix | 346 |
| Element XML-Tarifmodul / modulkontext-pool | 347 |
| Element XML-Modulkontext-Pool / item | 347 |
| Element XML-Modulkontext-Item / nr | 348 |
| Element XML-Modulkontext-Item / name | 348 |
| Element XML-Tarifmodul / modulkontextadapter-pool | 349 |
| Element XML-Modulkontextadapter-Pool / item | 349 |
| Element XML-Modulkontextadapter-Item / nr | 350 |
| Element XML-Modulkontextadapter-Item / name | 350 |
| Element XML-Tarifmodul / spezialbedingung-pool | 350 |
| Element XML-Spezialbedingung-Pool / item | 351 |
| Element XML-Spezialbedingung-Item / funktion | 352 |
| Element XML-Tarifmodul / tagesbedingung-pool | 352 |
| Element XML-Tagesbedingung-Pool / item | 352 |
| Element XML-Tagesbedingung-Item / wochentag-pool | 353 |
| Element XML-Tagesbedingung-Item / kalendertag-pool | 353 |
| Element XML-Kalendertag-Pool / datum | 354 |
| Element XML-Tarifmodul / tageszeitbedingung-pool | 354 |
| Element XML-Tageszeitbedingung-Pool / item | 355 |
| Element XML-Tageszeitbedingung-Item / zeitraum-pool | 355 |
| Element XML-Zeitabschnitt-Pool / item | 355 |
| Element XML-Zeitabschnitt-Item / von | 356 |
| Element XML-Zeitabschnitt-Item / bis | 356 |
| Element XML-Tarifmodul / zeitraumbedingung-pool | 356 |
| Element XML-Zeitraumbedingung-Pool / item | 357 |
| Element XML-Zeitraumbedingung-Item / zeitraum-pool | 358 |
| Element XML-Zeitraum-Pool / item | 358 |
| Element XML-Zeitraum-Item / beginn | 358 |
| Element XML-Zeitraum-Item / ende | 359 |
| Element XML-Tarifmodul / tarifpunktbedingung-pool | 359 |
| Element XML-Tarifpunktbedingung-Pool / item | 360 |
| Element XML-Tarifpunktbedingung-Item / von | 360 |
| Element XML-Tarifpunktbedingung-Item / nach | 361 |

| | |
|---|-----|
| Element XML-Tarifpunktbedingung-Item / ueber | 361 |
| Element XML-Tarifmodul / bewertungsbedingung-pool | 361 |
| Element XML-Bewertungsbedingung-Pool / item | 362 |
| Element XML-Bewertungsbedingung-Item / bewertungstyp | 362 |
| Element XML-Bewertungsbedingung-Item / werte | 363 |
| Element XML-Tarifmodul / geosegmentbedingung-pool | 365 |
| Element XML-Geosegmentbedingung-Pool / item | 365 |
| Element XML-Geosegmentbedingung-Item / geosegment-pool | 366 |
| Element XML-Geosegment-Pool / nr | 366 |
| Element XML-Tarifmodul / verkehrsmittellinienbedingung-pool | 367 |
| Element XML-Verkehrsmittellinienbedingung-Pool / item | 367 |
| Element XML-Verkehrsmittellinienbedingung-Item / name | 368 |
| Element XML-Verkehrsmittellinienbedingung-Item / element | 368 |
| Element XML-Tarifmodul / bezahlartbedingung-pool | 369 |
| Element XML-Bezahlartbedingung-Pool / item | 370 |
| Element XML-Bezahlartbedingung-Item / name | 370 |
| Element XML-Bezahlartbedingung-Item / element | 370 |
| Element XML-Tarifmodul / zahlungsintervallbedingung-pool | 371 |
| Element XML-Zahlungsintervallbedingung-Pool / item | 372 |
| Element XML-Zahlungsintervallbedingung-Item / name | 372 |
| Element XML-Zahlungsintervallbedingung-Item / element | 372 |
| Element XML-Tarifmodul / mitnahmebedingung-pool | 373 |
| Element XML-Mitnahmebedingung-Pool / item | 373 |
| Element XML-Mitnahmebedingung-Item / anzahl-matrix | 374 |
| Element XML-Mitnahmeanzahl-Matrix / anzahl | 374 |
| Element XML-Tarifmodul / rabattmedienbedingung-pool | 375 |
| Element XML-Rabattmedienbedingung-Pool / item | 375 |
| Element XML-Rabattmedienbedingung-Item / name | 376 |
| Element XML-Rabattmedienbedingung-Item / element | 376 |
| Element XML-Tarifmodul / modulkontextbedingung-pool | 377 |
| Element XML-Modulkontextbedingung-Pool / item | 378 |
| Element XML-Modulkontextbedingung-Item / name | 378 |
| Element XML-Modulkontextbedingung-Item / element | 378 |
| Element XML-Tarifmodul / bifainterpretation-pool | 379 |
| Element XML-BIFAInterpretation-Pool / item | 379 |
| Element XML-BIFAInterpretation-Item / abfahrtszeit | 380 |
| Element XML-BIFAInterpretation-Item / ankunftszeit | 381 |
| Element XML-BIFAInterpretation-Item / vontarifpunkt | 381 |
| Element XML-BIFAInterpretation-Item / nachtarifpunkt | 381 |
| Element XML-BIFAInterpretation-Item / uebertarifpunkte | 382 |
| Element XML-BIFAInterpretation-Item / ueberwegevariante | 382 |
| Element XML-BIFAInterpretation-Item / verkehrsmittellinienbezug | 382 |
| Element XML-BIFAInterpretation-Item / produktgrenzpunktdaten-table | 383 |
| Element XML-Produktgrenzpunkt-Table / vorherproduktgruppe | 384 |
| Element XML-Produktgrenzpunkt-Table / vorhertagesbedingung | 384 |
| Element XML-Produktgrenzpunkt-Table / vorhertageszeitbedingung | 384 |
| Element XML-Produktgrenzpunkt-Table / vorhertarifpunktbedingung | 385 |
| Element XML-Produktgrenzpunkt-Table / vorherbewertungsbedingung | 385 |
| Element XML-Produktgrenzpunkt-Table / vorherverkehrsmittellinienbedingung | 385 |
| Element XML-Produktgrenzpunkt-Table / nachherproduktgruppe | 386 |
| Element XML-Produktgrenzpunkt-Table / nachhertagesbedingung | 386 |
| Element XML-Produktgrenzpunkt-Table / nachhertageszeitbedingung | 386 |
| Element XML-Produktgrenzpunkt-Table / nachhertarifpunktbedingung | 387 |
| Element XML-Produktgrenzpunkt-Table / nachherbewertungsbedingung | 387 |
| Element XML-Produktgrenzpunkt-Table / nachherverkehrsmittellinienbedingung | 387 |
| Element XML-Produktgrenzpunkt-Table / spezialbedingung | 388 |
| Element XML-Produktgrenzpunkt-Table / ausnahme | 388 |
| Element XML-Produktgrenzpunktdaten-Table / vorherproduktgruppe | 388 |
| Element XML-Produktgrenzpunktdaten-Table / vorhertagesbedingung | 389 |
| Element XML-Produktgrenzpunktdaten-Table / vorhertageszeitbedingung | 389 |
| Element XML-Produktgrenzpunktdaten-Table / vorhertarifpunktbedingung | 389 |
| Element XML-Produktgrenzpunktdaten-Table / vorherbewertungsbedingung | 390 |
| Element XML-Produktgrenzpunktdaten-Table / vorherverkehrsmittellinienbedingung | 390 |
| Element XML-Produktgrenzpunktdaten-Table / nachherproduktgruppe | 390 |
| Element XML-Produktgrenzpunktdaten-Table / nachhertagesbedingung | 391 |
| Element XML-Produktgrenzpunktdaten-Table / nachhertageszeitbedingung | 391 |
| Element XML-Produktgrenzpunktdaten-Table / nachhertarifpunktbedingung | 391 |
| Element XML-Produktgrenzpunktdaten-Table / nachherbewertungsbedingung | 392 |
| Element XML-Produktgrenzpunktdaten-Table / nachherverkehrsmittellinienbedingung | 392 |
| Element XML-Produktgrenzpunktdaten-Table / spezialbedingung | 392 |
| Element XML-BIFAInterpretation-Item / produktgrenzpunktausnahme-table | 392 |
| Element XML-Produktgrenzpunktausnahme-Table / vorherproduktgruppe | 394 |

| | |
|--|-----|
| Element XML-Produktgrenzpunktausnahme-Table / vorhertagesbedingung | 394 |
| Element XML-Produktgrenzpunktausnahme-Table / vorhertageszeitbedingung | 394 |
| Element XML-Produktgrenzpunktausnahme-Table / vorhertarifpunktbedingung | 395 |
| Element XML-Produktgrenzpunktausnahme-Table / vorherbewertungsbedingung | 395 |
| Element XML-Produktgrenzpunktausnahme-Table / vorherverkehrsmittellinienbedingung | 395 |
| Element XML-Produktgrenzpunktausnahme-Table / nachherproduktgruppe | 396 |
| Element XML-Produktgrenzpunktausnahme-Table / nachhertagesbedingung | 396 |
| Element XML-Produktgrenzpunktausnahme-Table / nachhertageszeitbedingung | 396 |
| Element XML-Produktgrenzpunktausnahme-Table / nachhertarifpunktbedingung | 397 |
| Element XML-Produktgrenzpunktausnahme-Table / nachherbewertungsbedingung | 397 |
| Element XML-Produktgrenzpunktausnahme-Table / nachherverkehrsmittellinienbedingung | 397 |
| Element XML-Produktgrenzpunktausnahme-Table / spezialbedingung | 398 |
| Element XML-Produktgrenzpunktausnahme-Table / ausnahme | 398 |
| Element XML-Tarifmodul / nummerninterpretation-pool | 398 |
| Element XML-Nummerninterpretation-Pool / item | 399 |
| Element XML-Nummerninterpretation-Item / nummerntext-pool | 399 |
| Element XML-Nummerntext-Pool / item | 400 |
| Element XML-Nummerntext-Item / nr | 401 |
| Element XML-Nummerntext-Item / name | 401 |
| Element XML-Nummerntext-Item / text-matrix | 401 |
| Element XML-Tarifmodul / bitleisteninterpretation-pool | 401 |
| Element XML-Bitleisteninterpretation-Pool / item | 402 |
| Element XML-Bitleisteninterpretation-Item / tarifpunkt | 403 |
| Element XML-Tarifmodul / raumnummerninterpretation-pool | 403 |
| Element XML-Raumnummerninterpretation-Pool / item | 404 |
| Element XML-Raumnummerninterpretation-Item / raummodifikation-pool | 404 |
| Element XML-Raummodifikation-Pool / item | 405 |
| Element XML-Raummodifikation-Item / ink | 405 |
| Element XML-Raummodifikation-Item / exk | 406 |
| Element XML-Tarifmodul / schluessel-pool | 406 |
| Element XML-Schluessel-Pool / item | 407 |
| Element XML-Schluessel-Item / nr | 407 |
| Element XML-Schluessel-Item / name | 407 |
| Element XML-Tarifmodul / tarifmodul-pool | 408 |
| Element XML-Tarifmodul-Pool / item | 408 |
| Element XML-Tarifmodul-Item / tarifmodul | 410 |
| Element XML-Tarifmodul / kommentar-pool | 413 |
| Element XML-Kommentar-Pool / item | 413 |
| Element XML-Kommentar-Item / text | 414 |
| Element XML-Kommentar-Item / item | 414 |
| Element XML-Tarifmodul / signatur | 414 |
| Element XML-Signatur-Part / type | 415 |
| Element XML-Signatur-Part / data | 415 |
| Element XML-Tarifmodul / annotation | 415 |
| Element XML-Annotation-Part / data | 416 |
| Element XML-PVTarifmodul / version | 416 |
| Element XML-PVTarifmodul / herausgeber | 417 |
| Element XML-PVTarifmodul / fachablauf | 417 |
| Element XML-PVFachablauf-Part / kontrollstart | 418 |
| Element XML-PVFachablauf-Part / erfassungsstart | 419 |
| Element XML-PVFachablauf-Part / anpassungsstart | 419 |
| Element XML-PVFachablauf-Part / darstellungsstart | 420 |
| Element XML-PVFachablauf-Part / produkttermittlungsstart | 420 |
| Element XML-PVFachablauf-Part / transaktionsauswertungsstart | 421 |
| Element XML-PVFachablauf-Part / pruefungin | 421 |
| Element XML-PVFachablauf-Part / pruefungvor | 421 |
| Element XML-PVFachablauf-Part / pruefungnach | 422 |
| Element XML-PVTarifmodul / text-matrix | 422 |
| Element XML-PVTarifmodul / sprache-pool | 422 |
| Element XML-PVTarifmodul / eingangsschnittstelle-pool | 423 |
| Element XML-PVTarifmodul / ausgangsschnittstelle-pool | 423 |
| Element XML-PVTarifmodul / ausgangskontext-pool | 424 |
| Element XML-PVTarifmodul / datentabelle-pool | 425 |
| Element XML-PVTarifmodul / schritt-pool | 425 |
| Element XML-PVTarifmodul / variable-pool | 426 |
| Element XML-PVTarifmodul / funktion-pool | 426 |
| Element XML-PVTarifmodul / ausnahme-pool | 427 |
| Element XML-PVTarifmodul / auswahldaten-pool | 427 |
| Element XML-PVTarifmodul / auswahloption-pool | 428 |
| Element XML-PVTarifmodul / ausgangsdaten-pool | 429 |
| Element XML-PVTarifmodul / ausgangsdatenfamilie-pool | 429 |
| Element XML-PVTarifmodul / organisation-pool | 430 |

| | |
|--|-----|
| Element XML-PVTarifmodul / efmprodukt-pool | 430 |
| Element XML-PVTarifmodul / tarifprodukt-pool | 431 |
| Element XML-PVTarifmodul / fremdprodukt-pool | 431 |
| Element XML-PVTarifmodul / produktgruppe-pool | 432 |
| Element XML-PVTarifmodul / kontingentierung-pool | 432 |
| Element XML-PVTarifmodul / nachfolgekriterium-pool | 433 |
| Element XML-PVTarifmodul / abhaengigkeitskriterium-pool | 433 |
| Element XML-PVTarifmodul / identifikationsparameter-pool | 434 |
| Element XML-PVTarifmodul / tarifpunkt-pool | 434 |
| Element XML-PVTarifmodul / tarifpunktgruppe-pool | 435 |
| Element XML-PVTarifmodul / tarifpunktreferenz-pool | 435 |
| Element XML-PVTarifmodul / zuordnungstyp-pool | 436 |
| Element XML-PVTarifmodul / zuordnungsdaten-matrix | 437 |
| Element XML-PVTarifmodul / zuordnungsausnahme-matrix | 437 |
| Element XML-PVTarifmodul / wegevariante-pool | 438 |
| Element XML-PVTarifmodul / bewertungstyp-pool | 438 |
| Element XML-PVTarifmodul / bewertungsdaten-pool | 439 |
| Element XML-PVTarifmodul / bewertungsdaten-matrix | 439 |
| Element XML-PVTarifmodul / bewertungsausnahme-matrix | 440 |
| Element XML-PVTarifmodul / linie-pool | 440 |
| Element XML-PVTarifmodul / verkehrsmitteltyp-pool | 441 |
| Element XML-PVTarifmodul / verkehrsmittellinienbezug-pool | 441 |
| Element XML-PVTarifmodul / bezahlart-pool | 442 |
| Element XML-PVTarifmodul / waehrung-pool | 442 |
| Element XML-PVTarifmodul / zahlungsintervall-pool | 443 |
| Element XML-PVTarifmodul / mitnahmetyp-pool | 444 |
| Element XML-PVTarifmodul / rabattmedientyp-pool | 444 |
| Element XML-PVTarifmodul / modulkontext-pool | 445 |
| Element XML-PVTarifmodul / spezialbedingung-pool | 445 |
| Element XML-PVTarifmodul / tagesbedingung-pool | 446 |
| Element XML-PVTarifmodul / tageszeitbedingung-pool | 446 |
| Element XML-PVTarifmodul / zeitraumbedingung-pool | 447 |
| Element XML-PVTarifmodul / tarifpunktbedingung-pool | 447 |
| Element XML-PVTarifmodul / bewertungsbedingung-pool | 448 |
| Element XML-PVTarifmodul / geosegmentbedingung-pool | 448 |
| Element XML-PVTarifmodul / verkehrsmittellinienbedingung-pool | 449 |
| Element XML-PVTarifmodul / bezahlartbedingung-pool | 450 |
| Element XML-PVTarifmodul / zahlungsintervallbedingung-pool | 450 |
| Element XML-PVTarifmodul / mitnahmebedingung-pool | 451 |
| Element XML-PVTarifmodul / rabattmedienbedingung-pool | 451 |
| Element XML-PVTarifmodul / modulkontextbedingung-pool | 452 |
| Element XML-PVTarifmodul / bifainterpretation-pool | 452 |
| Element XML-PVTarifmodul / nummerninterpretation-pool | 453 |
| Element XML-PVTarifmodul / bitleisteninterpretation-pool | 453 |
| Element XML-PVTarifmodul / raumnummerninterpretation-pool | 454 |
| Element XML-PVTarifmodul / schluessel-pool | 454 |
| Element XML-PVTarifmodul / kommentar-pool | 455 |
| Element XML-PVTarifmodul / signatur | 455 |
| Element XML-PVTarifmodul / annotation | 456 |
| Element XML-Tarifmodul-Item / preisanpassung-matrix | 456 |
| Element XML-Preisanpassung-Matrix / a | 456 |
| Element XML-Preisanpassung-Entry / betrag | 457 |
| Element XML-Tarifmodul-Item / modulkontextadapter-matrix | 457 |
| Element XML-Eingangsadapter-Matrix / e | 457 |
| Element XML-Tarifmodul-Item / produkteingangsadapter-matrix | 458 |
| Element XML-Tarifmodul-Item / produktausgangsadapter-matrix | 458 |
| Element XML-Ausgangsadapter-Matrix / a | 459 |
| Element XML-Tarifmodul-Item / tarifpunkteingangsadapter-matrix | 459 |
| Element XML-Tarifmodul-Item / tarifpunktausgangsadapter-matrix | 459 |
| Element XML-Tarifmodul-Item / tarifpunktreferenzeingangsadapter-matrix | 460 |
| Element XML-Tarifmodul-Item / tarifpunktreferenzausgangsadapter-matrix | 460 |
| Element XML-Tarifmodul-Item / linieneingangsadapter-matrix | 460 |
| Element XML-Tarifmodul-Item / linienausgangsadapter-matrix | 461 |
| Element XML-Tarifmodul-Item / verkehrsmitteltypeingangsadapter-matrix | 461 |
| Element XML-Tarifmodul-Item / verkehrsmitteltypausgangsadapter-matrix | 461 |
| Element XML-Tarifmodul-Item / wegevarianteneingangsadapter-matrix | 462 |
| Element XML-Tarifmodul-Item / wegevariantenausgangsadapter-matrix | 462 |
| Element XML-Tarifmodul-Item / bezahlarteingangsadapter-matrix | 462 |
| Element XML-Tarifmodul-Item / bezahlartausgangsadapter-matrix | 463 |
| Element XML-Tarifmodul-Item / waehrungseingangsadapter-matrix | 463 |
| Element XML-Tarifmodul-Item / waehrungsausgangsadapter-matrix | 463 |
| Element XML-Tarifmodul-Item / zahlungsintervalleingangsadapter-matrix | 464 |

| | |
|--|-----|
| Element XML-Tarifmodul-Item / zahlungsintervallausgangsadapter-matrix | 464 |
| Element XML-Tarifmodul-Item / mitnahmetypeeingangsadapter-matrix | 464 |
| Element XML-Tarifmodul-Item / mitnahmetypausgangsadapter-matrix | 465 |
| Element XML-Tarifmodul-Item / rabattmedientypeeingangsadapter-matrix | 465 |
| Element XML-Tarifmodul-Item / rabattmedientypausgangsadapter-matrix | 465 |
| Element XML-Tarifmodul-Item / identifikationsparameterwerteingangadapter-matrix | 465 |
| Element XML-Tarifmodul-Item / identifikationsparameterwertausgangsadapter-matrix | 466 |
| Element XML-RNTarifmodul / version | 466 |
| Element XML-RNTarifmodul / herausgeber | 467 |
| Element XML-RNTarifmodul / fachablauf | 467 |
| Element XML-RNFachablauf-Part / produkttermittlungsstart | 468 |
| Element XML-RNTarifmodul / text-matrix | 469 |
| Element XML-RNTarifmodul / sprache-pool | 469 |
| Element XML-RNTarifmodul / eingangsschnittstelle-pool | 469 |
| Element XML-RNTarifmodul / ausgangsschnittstelle-pool | 470 |
| Element XML-RNTarifmodul / ausgangskontext-pool | 471 |
| Element XML-RNTarifmodul / datentabelle-pool | 471 |
| Element XML-RNTarifmodul / schritt-pool | 472 |
| Element XML-RNTarifmodul / variable-pool | 472 |
| Element XML-RNTarifmodul / funktion-pool | 473 |
| Element XML-RNTarifmodul / ausnahme-pool | 473 |
| Element XML-RNTarifmodul / auswahldaten-pool | 474 |
| Element XML-RNTarifmodul / auswahloption-pool | 474 |
| Element XML-RNTarifmodul / ausgangsdaten-pool | 475 |
| Element XML-RNTarifmodul / produktadapter-pool | 476 |
| Element XML-RNTarifmodul / identifikationsparameteradapter-pool | 476 |
| Element XML-RNTarifmodul / tarifpunktadapter-pool | 477 |
| Element XML-RNTarifmodul / tarifpunktreferenzadapter-pool | 477 |
| Element XML-RNTarifmodul / wegevariantenadapter-pool | 478 |
| Element XML-RNTarifmodul / linienadapter-pool | 479 |
| Element XML-RNTarifmodul / verkehrsmitteltypadapter-pool | 479 |
| Element XML-RNTarifmodul / bezahlartadapter-pool | 480 |
| Element XML-RNTarifmodul / waehrungsadapter-pool | 481 |
| Element XML-RNTarifmodul / zahlungsintervalladapter-pool | 481 |
| Element XML-RNTarifmodul / mitnahmetypadapter-pool | 482 |
| Element XML-RNTarifmodul / rabattmedientypadapter-pool | 482 |
| Element XML-RNTarifmodul / modulkontextadapter-pool | 483 |
| Element XML-RNTarifmodul / nummerninterpretation-pool | 484 |
| Element XML-RNTarifmodul / schluessel-pool | 484 |
| Element XML-RNTarifmodul / tarifmodul-pool | 485 |
| Element XML-RNTarifmodul / kommentar-pool | 485 |
| Element XML-RNTarifmodul / signatur | 486 |
| Element XML-RNTarifmodul / annotation | 486 |
| Element pvtm | 486 |
| Element XML-Produktgruppe-Item / name | 489 |
| Element XML-Produktgruppe-Item / element | 489 |
| Element pkm-testanfrage | 490 |
| Element XML-Testdaten / zeitpunkt | 490 |
| Element XML-Testdaten / bemerkung | 490 |
| Element XML-Testdaten / testfall-pool | 491 |
| Element XML-Testfalldaten-Pool / item | 491 |
| Element XML-Testfalldaten-Item / status | 492 |
| Element XML-Testfalldaten-Item / bemerkung | 492 |
| Element XML-Testfalldaten-Item / eingabewert-matrix | 492 |
| Element XML-Testdaten-Matrix / schnittstelle | 493 |
| Element XML-Testdatenschnittstelle-Entry / parameter | 493 |
| Element XML-Testdatenparameter-Entry / ablauf | 494 |
| Element XML-Testdatenablauf-Entry / wert | 494 |
| Element XML-Testdaten-Array / bits | 496 |
| Element XML-Testdaten-Array / text | 496 |
| Element XML-Testdaten-Array / zahl | 497 |
| Element XML-Testdaten-Array / liste | 497 |
| Element XML-Testdaten-Array / datum | 499 |
| Element XML-Testdaten-Array / uhrzeit | 499 |
| Element XML-Testdaten-Array / zeitpunkt | 500 |
| Element XML-Testdaten-Array / zeitspanne | 500 |
| Element XML-Testdaten-Array / ja | 500 |
| Element XML-Testdaten-Array / nein | 500 |
| Element XML-Testdaten-Array / undefiniert | 501 |
| Element XML-Testdaten-Value / bits | 501 |
| Element XML-Testdaten-Value / text | 501 |
| Element XML-Testdaten-Value / zahl | 501 |

| | |
|---|-----|
| Element XML-Testdaten-Value / liste | 502 |
| Element XML-Testdaten-Value / datum | 504 |
| Element XML-Testdaten-Value / uhrzeit | 504 |
| Element XML-Testdaten-Value / zeitpunkt | 505 |
| Element XML-Testdaten-Value / zeitspanne | 505 |
| Element XML-Testdaten-Value / ja | 505 |
| Element XML-Testdaten-Value / nein | 505 |
| Element XML-Testdaten-Value / undefiniert | 506 |
| Element XML-Testfalldaten-Item / ausgabewert-matrix | 506 |
| Element XML-Testfalldaten-Item / erwartungswert-matrix | 506 |
| Element XML-Testdaten / testmodul-pool | 506 |
| Element XML-Testmodul-Pool / item | 507 |
| Element XML-Testmodul-Item / moduldaten | 507 |
| Element XML-Testanfrage / zeitpunkt | 509 |
| Element XML-Testanfrage / bemerkung | 510 |
| Element XML-Testanfrage / testfall-pool | 510 |
| Element XML-Testfallanfrage-Pool / item | 510 |
| Element XML-Testfallanfrage-Item / nr | 511 |
| Element XML-Testfallanfrage-Item / name | 512 |
| Element XML-Testfallanfrage-Item / eingabewert-matrix | 512 |
| Element XML-Testfallanfrage-Item / erwartungswert-matrix | 512 |
| Element XML-Testanfrage / testmodul-pool | 512 |
| Element pkms-testergebnis | 513 |
| Element XML-Testergebnis / zeitpunkt | 513 |
| Element XML-Testergebnis / bemerkung | 514 |
| Element XML-Testergebnis / testfall-pool | 514 |
| Element XML-Testfallergebnis-Pool / item | 514 |
| Element XML-Testfallergebnis-Item / nr | 515 |
| Element XML-Testfallergebnis-Item / name | 516 |
| Element XML-Testfallergebnis-Item / status | 516 |
| Element XML-Testfallergebnis-Item / bemerkung | 516 |
| Element XML-Testfallergebnis-Item / eingabewert-matrix | 517 |
| Element XML-Testfallergebnis-Item / ausgabewert-matrix | 517 |
| Element XML-Testfallergebnis-Item / erwartungswert-matrix | 517 |
| Element XML-Testergebnis / testmodul-pool | 518 |
| Simple Type(s) | 518 |
| Simple Type pkms:Modulversion_NUMMER | 518 |
| Simple Type pkms:Modulstatus_CODE | 518 |
| Simple Type XML-DatetimeContent | 519 |
| Simple Type XML-IntegerContent | 519 |
| Simple Type XML-StringContent | 520 |
| Simple Type XML-Ref | 520 |
| Simple Type XML-DurationContent | 520 |
| Simple Type XML-BinaryContent | 521 |
| Simple Type XML-DateContent | 521 |
| Simple Type XML-TimeContent | 521 |
| Simple Type XML-BooleanContent | 521 |
| Simple Type XML-PolygonContent | 522 |
| Simple Type XML-IntegerArrayContent | 522 |
| Simple Type XML-Testablauf-Ref | 522 |
| Complex Type(s) | 522 |
| Complex Type pkms:TX_MODUL | 522 |
| Complex Type pkms:TX_MODUL_Daten | 523 |
| Complex Type pkms:TX_MODUL_Bereitstellung | 524 |
| Complex Type pkms:TX_MODUL_Lieferung | 525 |
| Complex Type pkms:TXVPVTM_Type | 526 |
| Complex Type XML-RNTarifmodul | 526 |
| Complex Type XML-Tarifmodul | 528 |
| Complex Type XML-Version-Part | 531 |
| Complex Type XML-DatetimeValue | 532 |
| Complex Type XML-IntegerValue | 533 |
| Complex Type XML-StringValue | 533 |
| Complex Type XML-Organisation-Part | 534 |
| Complex Type XML-NrName-Item | 534 |
| Complex Type XML-Fachablauf-Part | 535 |
| Complex Type XML-Ref11 | 535 |
| Complex Type XML-Ref01 | 536 |
| Complex Type XML-DurationValue | 536 |
| Complex Type XML-Ausgangstext-Matrix | 537 |
| Complex Type XML-Ausgangstext-Entry | 537 |
| Complex Type XML-Sprache-Pool | 538 |
| Complex Type XML-NrName-Pool | 538 |

| | |
|--|-----|
| Complex Type XML-Pool | 539 |
| Complex Type XML-Sprache-Item | 539 |
| Complex Type XML-Eingangsschnittstelle-Pool | 540 |
| Complex Type XML-Eingangsschnittstelle-Item | 541 |
| Complex Type XML-Eingangsparameter-Pool | 541 |
| Complex Type XML-Eingangsparameter-Item | 542 |
| Complex Type XML-Ausgangsschnittstelle-Pool | 542 |
| Complex Type XML-Ausgangsschnittstelle-Item | 543 |
| Complex Type XML-Ausgangsparameter-Pool | 544 |
| Complex Type XML-Ausgangsparameter-Item | 544 |
| Complex Type XML-Ausgangskontext-Pool | 545 |
| Complex Type XML-Ausgangskontext-Item | 546 |
| Complex Type XML-Name-Item | 546 |
| Complex Type XML-RefSet1N | 547 |
| Complex Type XML-RefSet0N | 547 |
| Complex Type XML-RefList0N | 548 |
| Complex Type XML-Datentabelle-Pool | 549 |
| Complex Type XML-Datentabelle-Item | 550 |
| Complex Type XML-ArrayValue | 551 |
| Complex Type XML-CommonFunction | 552 |
| Complex Type XML-BinaryValue | 553 |
| Complex Type XML-DateValue | 553 |
| Complex Type XML-TimeValue | 554 |
| Complex Type XML-TrueValue | 554 |
| Complex Type XML-FalseValue | 554 |
| Complex Type XML-ObjectValue | 554 |
| Complex Type XML-FunctionValue | 555 |
| Complex Type XML-CompositeFunction | 557 |
| Complex Type XML-VoidValue | 559 |
| Complex Type XML-ParamFunction | 559 |
| Complex Type XML-Schritt-Pool | 559 |
| Complex Type XML-Schritt-Item | 560 |
| Complex Type XML-Ausgangsschritt-Part | 561 |
| Complex Type XML-Auswahlschritt-Part | 561 |
| Complex Type XML-RefList1N | 561 |
| Complex Type XML-Berechnungsschritt-Part | 562 |
| Complex Type XML-Entscheidungsschritt-Part | 562 |
| Complex Type XML-Parallelisierungsschritt-Part | 562 |
| Complex Type XML-Variable-Pool | 563 |
| Complex Type XML-Name-Pool | 563 |
| Complex Type XML-Variable-Item | 564 |
| Complex Type XML-Funktion-Pool | 565 |
| Complex Type XML-Funktion-Item | 565 |
| Complex Type XML-ValueFunction | 566 |
| Complex Type XML-Ausnahme-Pool | 568 |
| Complex Type XML-Ausgangstext-Pool | 569 |
| Complex Type XML-Ausgangstext-Item | 569 |
| Complex Type XML-Ausnahme-Item | 570 |
| Complex Type XML-Auswahldaten-Pool | 570 |
| Complex Type XML-Ausgangssequenz-Pool | 571 |
| Complex Type XML-Ausgangssequenz-Item | 572 |
| Complex Type XML-Ausgangssequenz-Matrix | 572 |
| Complex Type XML-Ausgangssequenz-Entry | 573 |
| Complex Type XML-Auswahldaten-Item | 573 |
| Complex Type XML-Auswahloption-Pool | 574 |
| Complex Type XML-Ausgangsdaten-Pool | 574 |
| Complex Type XML-Ausgangsdaten-Item | 575 |
| Complex Type XML-Auswahloption-Item | 576 |
| Complex Type XML-Ausgangsdatenfamilie-Pool | 577 |
| Complex Type XML-Ausgangsdatenfamilie-Item | 577 |
| Complex Type XML-Organisation-Pool | 578 |
| Complex Type XML-Organisation-Item | 578 |
| Complex Type XML-Ergaenzungsanforderung-Pool | 579 |
| Complex Type XML-Wochentag-Pool | 579 |
| Complex Type XML-EFMProdukt-Pool | 579 |
| Complex Type XML-Eigenprodukt-Pool | 580 |
| Complex Type XML-Eigenprodukt-Item | 581 |
| Complex Type XML-Rueckzahlungsdaten-Table | 582 |
| Complex Type XML-Rueckzahlung-Table | 584 |
| Complex Type XML-Rueckzahlungsdaten-Pool | 584 |
| Complex Type XML-Rueckzahlungsdaten-Item | 585 |
| Complex Type XML-Preisdaten-Item | 585 |

| | |
|---|-----|
| Complex Type XML-Rueckzahlungsausnahme-Table | 585 |
| Complex Type XML-Ungueltigkeitszeitpunktsdaten-Table | 587 |
| Complex Type XML-Ungueltigkeitszeitpunkt-Table | 587 |
| Complex Type XML-Ungueltigkeitszeitpunktsdaten-Pool | 588 |
| Complex Type XML-Ungueltigkeitszeitpunktsdaten-Item | 588 |
| Complex Type XML-Zeitraumsgrenze-Part | 589 |
| Complex Type XML-Zeitrahmensgrenze-Part | 589 |
| Complex Type XML-Ungueltigkeitszeitpunktsausnahme-Table | 590 |
| Complex Type XML-Preisdaten-Table | 590 |
| Complex Type XML-Preis-Table | 592 |
| Complex Type XML-Preisdaten-Pool | 593 |
| Complex Type XML-Preisausnahme-Table | 593 |
| Complex Type XML-Gueltigkeitszeitrahmensdaten-Table | 595 |
| Complex Type XML-Gueltigkeitszeitrahmen-Table | 596 |
| Complex Type XML-Gueltigkeitszeitrahmensdaten-Pool | 596 |
| Complex Type XML-Gueltigkeitszeitrahmensdaten-Item | 596 |
| Complex Type XML-Gueltigkeitszeitrahmensausnahme-Table | 597 |
| Complex Type XML-Nachfolgedaten-Table | 598 |
| Complex Type XML-Nachfolge-Table | 598 |
| Complex Type XML-Nachfolgeausnahme-Table | 599 |
| Complex Type XML-BooleanValue | 599 |
| Complex Type XML-PVSSchluessel-Part | 600 |
| Complex Type XML-Schluessel-Part | 600 |
| Complex Type XML-Produktdaten-Part | 600 |
| Complex Type XML-Ausgangsdaten-Matrix | 601 |
| Complex Type XML-Ausgangsdaten-Entry | 601 |
| Complex Type XML-Abhaengigkeitsdaten-Table | 602 |
| Complex Type XML-Abhaengigkeit-Table | 602 |
| Complex Type XML-Abhaengigkeitsausnahme-Table | 603 |
| Complex Type XML-EFMProdukt-Item | 603 |
| Complex Type XML-Tarifprodukt-Pool | 605 |
| Complex Type XML-Tarifprodukt-Item | 606 |
| Complex Type XML-Fremdprodukt-Pool | 608 |
| Complex Type XML-Fremdprodukt-Item | 609 |
| Complex Type XML-Produktadapter-Pool | 610 |
| Complex Type XML-Produktadapter-Item | 610 |
| Complex Type XML-RNSchluessel-Part | 611 |
| Complex Type XML-Produktgruppe-Pool | 612 |
| Complex Type XML-NameGruppe-Pool | 612 |
| Complex Type XML-NameGruppe-Item | 613 |
| Complex Type XML-Kontingentierung-Pool | 614 |
| Complex Type XML-Kontingentierung-Item | 614 |
| Complex Type XML-Kontingentdaten-Table | 615 |
| Complex Type XML-Kontingent-Table | 615 |
| Complex Type XML-Kontingentdaten-Pool | 616 |
| Complex Type XML-Kontingentdaten-Item | 616 |
| Complex Type XML-Kontingentausnahme-Table | 616 |
| Complex Type XML-Nachfolgekriterium-Pool | 617 |
| Complex Type XML-Nachfolgekriterium-Item | 618 |
| Complex Type XML-Kriterienzeitraum-Part | 618 |
| Complex Type XML-Abhaengigkeitskriterium-Pool | 619 |
| Complex Type XML-Abhaengigkeitskriterium-Item | 619 |
| Complex Type XML-Identifikationsparameter-Pool | 620 |
| Complex Type XML-Identifikationsparameter-Item | 620 |
| Complex Type XML-Identifikationsparameterwert-Pool | 621 |
| Complex Type XML-Identifikationsparameterwert-Item | 621 |
| Complex Type XML-Identifikationsparameteradapter-Pool | 622 |
| Complex Type XML-Identifikationsparameteradapter-Item | 623 |
| Complex Type XML-Identifikationsparameterwertadapter-Pool | 624 |
| Complex Type XML-Identifikationsparameterwertadapter-Item | 624 |
| Complex Type XML-Tarifpunkt-Pool | 625 |
| Complex Type XML-Flaechenelement-Pool | 626 |
| Complex Type XML-Flaechenelement-Item | 627 |
| Complex Type XML-Geobezug-Part | 627 |
| Complex Type XML-Tarifpunktfolge-Pool | 628 |
| Complex Type XML-Tarifpunktfolge-Item | 628 |
| Complex Type XML-TarifpunktfolgeninklusionValue | 628 |
| Complex Type XML-TarifpunktfolgenexklusionValue | 628 |
| Complex Type XML-Tarifpunkt-Item | 629 |
| Complex Type XML-Tarifpunktadapter-Pool | 630 |
| Complex Type XML-Tarifpunktadapter-Item | 630 |
| Complex Type XML-Tarifpunktgruppe-Pool | 631 |

| | |
|---|-----|
| Complex Type XML-Tarifpunktgruppe-Item | 632 |
| Complex Type XML-Tarifpunktreferenz-Pool | 633 |
| Complex Type XML-Tarifpunktreferenz-Item | 633 |
| Complex Type XML-Tarifpunktreferenzadapter-Pool | 635 |
| Complex Type XML-Tarifpunktreferenzadapter-Item | 635 |
| Complex Type XML-Zuordnungstyp-Pool | 637 |
| Complex Type XML-Zuordnungstyp-Item | 637 |
| Complex Type XML-Zuordnungsdaten-Matrix | 638 |
| Complex Type XML-Zuordnung-Matrix | 638 |
| Complex Type XML-Zuordnungstyp-Entry | 639 |
| Complex Type XML-Zuordnungsbezug-Entry | 639 |
| Complex Type XML-Zuordnungsvon-Entry | 639 |
| Complex Type XML-Zuordnungszu-Entry | 640 |
| Complex Type XML-Zuordnungsdatentyp-Entry | 640 |
| Complex Type XML-Zuordnungsdatenbezug-Entry | 641 |
| Complex Type XML-Zuordnungsdatenvon-Entry | 642 |
| Complex Type XML-Zuordnungsdatenzu-Entry | 642 |
| Complex Type XML-Zuordnungsausnahme-Matrix | 643 |
| Complex Type XML-Zuordnungsausnahmetyp-Entry | 643 |
| Complex Type XML-Zuordnungsausnahmebezug-Entry | 644 |
| Complex Type XML-Zuordnungsausnahmevon-Entry | 644 |
| Complex Type XML-Zuordnungsausnahmezu-Entry | 645 |
| Complex Type XML-Wegevariante-Pool | 646 |
| Complex Type XML-Wegevariante-Item | 646 |
| Complex Type XML-Wegevariantenadapter-Pool | 647 |
| Complex Type XML-Wegevariantenadapter-Item | 648 |
| Complex Type XML-Bewertungstyp-Pool | 649 |
| Complex Type XML-Bewertungstyp-Item | 650 |
| Complex Type XML-Bewertungsdaten-Pool | 651 |
| Complex Type XML-Bewertungsdaten-Item | 651 |
| Complex Type XML-Bewertungsdaten-Matrix | 652 |
| Complex Type XML-Bewertung-Matrix | 652 |
| Complex Type XML-Bewertungstyp-Entry | 652 |
| Complex Type XML-Bewertungsbezug-Entry | 653 |
| Complex Type XML-Bewertungsvon-Entry | 653 |
| Complex Type XML-Bewertungsnach-Entry | 654 |
| Complex Type XML-Bewertungsueber-Entry | 654 |
| Complex Type XML-Bewertungsdatentyp-Entry | 655 |
| Complex Type XML-Bewertungsdatenbezug-Entry | 655 |
| Complex Type XML-Bewertungsdatenvon-Entry | 656 |
| Complex Type XML-Bewertungsdatennach-Entry | 656 |
| Complex Type XML-Bewertungsdatenueber-Entry | 657 |
| Complex Type XML-Bewertungsausnahme-Matrix | 658 |
| Complex Type XML-Bewertungsausnahmetyp-Entry | 658 |
| Complex Type XML-Bewertungsausnahmebezug-Entry | 659 |
| Complex Type XML-Bewertungsausnahmevon-Entry | 659 |
| Complex Type XML-Bewertungsausnahmenach-Entry | 660 |
| Complex Type XML-Bewertungsausnahmeueber-Entry | 660 |
| Complex Type XML-Linie-Pool | 661 |
| Complex Type XML-Linie-Item | 662 |
| Complex Type XML-Linienadapter-Pool | 662 |
| Complex Type XML-Linienadapter-Item | 663 |
| Complex Type XML-Verkehrsmitteltyp-Pool | 663 |
| Complex Type XML-Verkehrsmitteltyp-Item | 664 |
| Complex Type XML-Verkehrsmitteltypadapter-Pool | 665 |
| Complex Type XML-Verkehrsmitteltypadapter-Item | 666 |
| Complex Type XML-Verkehrsmittellinienbezug-Pool | 666 |
| Complex Type XML-Verkehrsmittellinienbezug-Item | 667 |
| Complex Type XML-Bezahlart-Pool | 668 |
| Complex Type XML-Bezahlart-Item | 668 |
| Complex Type XML-Bezahlartadapter-Pool | 669 |
| Complex Type XML-Bezahlartadapter-Item | 670 |
| Complex Type XML-Waehrung-Pool | 670 |
| Complex Type XML-Waehrung-Item | 671 |
| Complex Type XML-Waehrungsadapter-Pool | 672 |
| Complex Type XML-Waehrungsadapter-Item | 672 |
| Complex Type XML-Zahlungsintervall-Pool | 673 |
| Complex Type XML-Zahlungsintervall-Item | 674 |
| Complex Type XML-Zahlungsintervalladapter-Pool | 675 |
| Complex Type XML-Zahlungsintervalladapter-Item | 675 |
| Complex Type XML-Mitnahmetyp-Pool | 676 |
| Complex Type XML-Mitnahmetyp-Item | 677 |

| | |
|---|-----|
| Complex Type XML-Mitnahmetypadapter-Pool | 677 |
| Complex Type XML-Mitnahmetypadapter-Item | 678 |
| Complex Type XML-Rabattmedientyp-Pool | 679 |
| Complex Type XML-Rabattmedientyp-Item | 679 |
| Complex Type XML-Rabattmedientypadapter-Pool | 680 |
| Complex Type XML-Rabattmedientypadapter-Item | 681 |
| Complex Type XML-Modulkontext-Pool | 681 |
| Complex Type XML-Modulkontext-Item | 682 |
| Complex Type XML-Modulkontextadapter-Pool | 682 |
| Complex Type XML-Modulkontextadapter-Item | 683 |
| Complex Type XML-Spezialbedingung-Pool | 684 |
| Complex Type XML-Spezialbedingung-Item | 684 |
| Complex Type XML-Tagesbedingung-Pool | 685 |
| Complex Type XML-Tagesbedingung-Item | 685 |
| Complex Type XML-Kalendertag-Pool | 686 |
| Complex Type XML-Tageszeitbedingung-Pool | 686 |
| Complex Type XML-Tageszeitbedingung-Item | 687 |
| Complex Type XML-Zeitabschnitt-Pool | 687 |
| Complex Type XML-Zeitabschnitt-Item | 687 |
| Complex Type XML-Zeitraumbedingung-Pool | 688 |
| Complex Type XML-Zeitraumbedingung-Item | 688 |
| Complex Type XML-Zeitraum-Pool | 689 |
| Complex Type XML-Zeitraum-Item | 689 |
| Complex Type XML-Tarifpunktbedingung-Pool | 689 |
| Complex Type XML-Tarifpunktbedingung-Item | 690 |
| Complex Type XML-Bewertungsbedingung-Pool | 690 |
| Complex Type XML-Bewertungsbedingung-Item | 691 |
| Complex Type XML-Geosegmentbedingung-Pool | 691 |
| Complex Type XML-Geosegmentbedingung-Item | 692 |
| Complex Type XML-Geosegment-Pool | 692 |
| Complex Type XML-Verkehrsmittellinienbedingung-Pool | 693 |
| Complex Type XML-Verkehrsmittellinienbedingung-Item | 694 |
| Complex Type XML-Bezahlartbedingung-Pool | 694 |
| Complex Type XML-Bezahlartbedingung-Item | 695 |
| Complex Type XML-Zahlungsintervallbedingung-Pool | 695 |
| Complex Type XML-Zahlungsintervallbedingung-Item | 696 |
| Complex Type XML-Mitnahmebedingung-Pool | 697 |
| Complex Type XML-Mitnahmebedingung-Item | 697 |
| Complex Type XML-Mitnahmeanzahl-Matrix | 698 |
| Complex Type XML-Mitnahmeanzahl-Entry | 698 |
| Complex Type XML-Rabattmedienbedingung-Pool | 699 |
| Complex Type XML-Rabattmedienbedingung-Item | 699 |
| Complex Type XML-Modulkontextbedingung-Pool | 700 |
| Complex Type XML-Modulkontextbedingung-Item | 701 |
| Complex Type XML-BIFAInterpretation-Pool | 701 |
| Complex Type XML-BIFAInterpretation-Item | 702 |
| Complex Type XML-Produktgrenzpunktdaten-Table | 703 |
| Complex Type XML-Produktgrenzpunkt-Table | 704 |
| Complex Type XML-Produktgrenzpunktausnahme-Table | 705 |
| Complex Type XML-Nummerninterpretation-Pool | 706 |
| Complex Type XML-Nummerninterpretation-Item | 707 |
| Complex Type XML-Nummerntext-Pool | 707 |
| Complex Type XML-Nummerntext-Item | 708 |
| Complex Type XML-Bitleisteninterpretation-Pool | 708 |
| Complex Type XML-Bitleisteninterpretation-Item | 709 |
| Complex Type XML-Raumnummerninterpretation-Pool | 709 |
| Complex Type XML-Raumnummerninterpretation-Item | 710 |
| Complex Type XML-Raummodifikation-Pool | 710 |
| Complex Type XML-Raummodifikation-Item | 711 |
| Complex Type XML-Schluessel-Pool | 712 |
| Complex Type XML-Schluessel-Item | 712 |
| Complex Type XML-Tarifmodul-Pool | 713 |
| Complex Type XML-Tarifmodul-Item | 713 |
| Complex Type XML-Item | 715 |
| Complex Type XML-PVTarifmodul | 715 |
| Complex Type XML-Kommentar-Pool | 718 |
| Complex Type XML-Kommentar-Item | 718 |
| Complex Type XML-Signatur-Part | 719 |
| Complex Type XML-Annotation-Part | 719 |
| Complex Type XML-PVFachablauf-Part | 719 |
| Complex Type XML-Preisanpassung-Matrix | 720 |
| Complex Type XML-Preisanpassung-Entry | 721 |

| | |
|---|-----|
| Complex Type XML-Eingangsadapter-Matrix | 721 |
| Complex Type XML-Eingangsadapter-Entry | 722 |
| Complex Type XML-Ausgangsadapter-Matrix | 722 |
| Complex Type XML-Ausgangsadapter-Entry | 722 |
| Complex Type XML-RNFachablauf-Part | 723 |
| Complex Type XML-Produktgruppe-Item | 724 |
| Complex Type XML-Testanfrage | 724 |
| Complex Type XML-Testdaten | 725 |
| Complex Type XML-Testfalldaten-Pool | 725 |
| Complex Type XML-Testfalldaten-Item | 725 |
| Complex Type XML-Testdaten-Matrix | 726 |
| Complex Type XML-Testdatenschnittstelle-Entry | 726 |
| Complex Type XML-Testdatenparameter-Entry | 727 |
| Complex Type XML-Testdatenablauf-Entry | 727 |
| Complex Type XML-Testdaten-Value | 728 |
| Complex Type XML-Testdaten-Array | 730 |
| Complex Type XML-Testmodul-Pool | 732 |
| Complex Type XML-Testmodul-Item | 732 |
| Complex Type XML-Testfallanfrage-Pool | 733 |
| Complex Type XML-Testfallanfrage-Item | 733 |
| Complex Type XML-Testergebnis | 734 |
| Complex Type XML-Testfallergebnis-Pool | 735 |
| Complex Type XML-Testfallergebnis-Item | 736 |
| Namespace: "http://vdv/ka/common/types/2" | 737 |
| Schema(s) | 737 |
| Imported schema XML-Schema_Common_Types.xsd | 737 |
| Simple Type(s) | 737 |
| Simple Type tns:ReferenceNumberFour | 737 |
| Simple Type tns:INT4 | 737 |
| Simple Type tns:ReferenceNumberOne | 738 |
| Simple Type tns:INT1 | 738 |
| Simple Type tns:DateTimeCompact | 738 |
| Simple Type tns:DateCompact | 739 |
| Simple Type tns:ReferenceNumberTwo | 739 |
| Simple Type tns:INT2 | 740 |
| Simple Type tns:SequenceNumberFour | 740 |
| Simple Type tns:DateTime | 741 |
| Simple Type tns:BitString16 | 741 |
| Simple Type tns:BitString1 | 741 |
| Simple Type tns:BitString8 | 742 |
| Simple Type tns:Date | 742 |
| Simple Type tns:Datef | 742 |
| Simple Type tns:INT3 | 743 |
| Simple Type tns:OctetString1 | 743 |
| Simple Type tns:OctetString4 | 743 |
| Simple Type tns:OctetString8 | 743 |
| Simple Type tns:OctetString10 | 744 |
| Simple Type tns:OctetString12 | 744 |
| Simple Type tns:OctetString128 | 744 |
| Simple Type tns:OctetString200 | 745 |
| Simple Type tns:ReferenceNumberThree | 745 |
| Simple Type tns:SequenceNumberOne | 745 |
| Simple Type tns:SequenceNumberTwo | 746 |
| Simple Type tns:SequenceNumberThree | 746 |
| Namespace: "http://vdv/ka/common/2" | 747 |
| Schema(s) | 747 |
| Imported schema XML-Schema_KA_Common.xsd | 747 |
| Element(s) | 747 |
| Element tns:VX | 747 |
| Simple Type(s) | 747 |
| Simple Type tns:Organisation_ID | 747 |
| Simple Type tns:KommunikationsPartnerRolle | 748 |
| Simple Type tns:StatusCode | 749 |
| Simple Type tns:StatusText | 750 |
| Complex Type(s) | 751 |
| Complex Type tns:VX_Message_Type | 751 |
| Namespace: "http://vdv/ka/ion/2" | 751 |
| Schema(s) | 751 |
| Imported schema XML-Schema_ION.xsd | 751 |
| Element(s) | 751 |
| Element tns:TXB | 751 |
| Element tns:TXA | 752 |

| | |
|--|-----|
| Element tns:TXBRequest | 753 |
| Element tns:TXARequest | 753 |
| Element tns:TXDEABER | 754 |
| Element tns:TXSMITA | 754 |
| Element tns:TXSFREIMITA | 755 |
| Element tns:TXSANFSYMK | 756 |
| Element tns:TXSANFASYMK | 756 |
| Element tns:TXSAANFSYMK | 757 |
| Element tns:TXSAANFASYMK | 758 |
| Element tns:TXSFREIMITSYMK | 758 |
| Element tns:TXSFREIMITASYMK | 759 |
| Element tns:TXSMITSYMK | 760 |
| Element tns:TXSMITASYMK | 760 |
| Element tns:TXSNAWA | 761 |
| Element tns:TXSNAWB | 762 |
| Simple Type(s) | 762 |
| Simple Type tns:PrintableString | 762 |
| Simple Type tns:TransSignatur_Type | 763 |
| Simple Type tns:CommonServiceResultCode | 763 |
| Simple Type tns:NmTransaktionsTyp_CODE | 764 |
| Simple Type tns:OrtsTyp_CODE_Type | 767 |
| Simple Type tns:AuftragsTyp_CODE | 767 |
| Simple Type tns:Abrechnungsverfahren_CODE_Type | 768 |
| Simple Type tns:Bezahlart_CODE_Type | 768 |
| Simple Type tns:TerminalTyp_CODE_Type | 769 |
| Simple Type tns:SAM_ID_Type | 769 |
| Simple Type tns:Mitteilung_CODE_Type | 770 |
| Simple Type tns:SperrlistenZyklusNummer_Type | 770 |
| Complex Type(s) | 771 |
| Complex Type tns:TX_BASE_Type | 771 |
| Complex Type tns:ION_TX_HEADER_Type | 771 |
| Complex Type tns:IONTransaktion_ID_Type | 772 |
| Complex Type tns:Ort_ID_Type | 773 |
| Complex Type tns:Terminal_ID_Type | 773 |
| Complex Type tns:NmApplikationInstanz_ID_Type | 774 |
| Complex Type tns:Berechtigung_ID_Type | 774 |
| Complex Type tns:EFMPProdukt_ID_Type | 774 |
| Complex Type tns:Transaktionsdatensatz_Type | 775 |
| Complex Type tns:SymSchluessel_ID_Type | 775 |
| Complex Type tns:ASymSchluessel_ID_Type | 776 |
| Complex Type tns:appNmTransaktionMAC_Type | 776 |
| Complex Type tns:berNmTransaktionMAC_Type | 776 |
| Complex Type tns:TX_RET_Type | 777 |
| Complex Type tns:TX_SMIT_Type | 777 |
| Complex Type tns:TX_SANF_Type | 778 |
| Complex Type tns:TX_BER_Type | 779 |
| Complex Type tns:TXA_Type | 779 |
| Complex Type tns:TXB_Type | 780 |
| Complex Type tns:TXAS_Type | 780 |
| Complex Type tns:TXDEABER_Req_Type | 781 |
| Complex Type tns:TXSMITA_Type | 782 |
| Complex Type tns:TXSFREIMITA_Type | 782 |
| Complex Type tns:TXSANFSYMK_Type | 783 |
| Complex Type tns:TXSANFASYMK_Type | 783 |
| Complex Type tns:TXSAANFSYMK_Type | 784 |
| Complex Type tns:TXSAANFASYMK_Type | 785 |
| Complex Type tns:TXSFREIMITSYMK_Type | 785 |
| Complex Type tns:TXSFREIMITASYMK_Type | 786 |
| Complex Type tns:TXSMITSYMK_Type | 786 |
| Complex Type tns:TXSMITASYMK_Type | 787 |
| Complex Type tns:TXSNAWA_Req_Type | 788 |
| Complex Type tns:TXSNAWB_Req_Type | 789 |
| Namespace: "" | 789 |
| Element(s) | 789 |
| Element pkm:TX_MODUL / modulgueltigkeitsbeginn | 789 |
| Element pkm:TX_MODUL / modulversion | 790 |
| Element pkm:TX_MODUL / modulstatus | 790 |
| Element pkm:TX_MODUL / schnittstellenversion | 790 |
| Element pkm:TX_MODUL / modulnamenszusatz | 791 |
| Element pkm:TX_MODUL / bemerkung | 791 |
| Element pkm:TX_MODUL_Daten / pvtarifmodul | 791 |
| Element pkm:TX_MODUL_Bereitstellung / url | 792 |

















| | |
|---|-----|
| Element pkm:TX_MODUL_Bereitstellung / bereitstellungsdatum | 792 |
| Element pkm:TX_MODUL_Lieferung / lieferart | 792 |
| Element pkm:TX_MODUL_Lieferung / sendedatum | 792 |
| Element tns:TX_BASE_Type / txbase | 793 |
| Element tns:ION_TX_HEADER_Type / transAuftrag | 794 |
| Element tns:ION_TX_HEADER_Type / transEmpfaenger_ID | 794 |
| Element tns:ION_TX_HEADER_Type / transEmpfaengerRolle | 794 |
| Element tns:ION_TX_HEADER_Type / transStatus | 795 |
| Element tns:ION_TX_HEADER_Type / transTransaktion_ID | 795 |
| Element tns:IONTransaktion_ID_Type / transSequenznummer | 795 |
| Element tns:IONTransaktion_ID_Type / transSenderRolle | 796 |
| Element tns:IONTransaktion_ID_Type / transSender_ID | 796 |
| Element tns:ION_TX_HEADER_Type / transTransaktionsTyp | 797 |
| Element tns:ION_TX_HEADER_Type / transTransaktionsZeitpunkt | 797 |
| Element tns:ION_TX_HEADER_Type / transVersion | 797 |
| Element tns:ION_TX_HEADER_Type / transWiederholungsZaehler | 798 |
| Element tns:ION_TX_HEADER_Type / transSignaturTyp | 798 |
| Element tns:ION_TX_HEADER_Type / transSignaturZertifikat | 798 |
| Element tns:ION_TX_HEADER_Type / transSignatur | 798 |
| Element pkm:TXVPVTM_Type / modulinformationDaten | 799 |
| Element pkm:TXVPVTM_Type / modulinformationBereitstellung | 799 |
| Element pkm:TXVPVTM_Type / modulinformationLieferung | 800 |
| Element tns:VX_Message_Type / StatusCode | 801 |
| Element tns:VX_Message_Type / StatusText | 802 |
| Element tns:Ort_ID_Type / ortTyp | 802 |
| Element tns:Ort_ID_Type / ortNummer | 802 |
| Element tns:Ort_ID_Type / ortDomaene_ID | 803 |
| Element tns:Terminal_ID_Type / terminalTyp | 803 |
| Element tns:Terminal_ID_Type / terminalNummer | 803 |
| Element tns:Terminal_ID_Type / terminalOwner_ID | 804 |
| Element tns:NmApplikationInstanz_ID_Type / NmAppInstanznummer | 804 |
| Element tns:NmApplikationInstanz_ID_Type / kvp_ID | 804 |
| Element tns:Berechtigung_ID_Type / berechtigungNummer | 805 |
| Element tns:Berechtigung_ID_Type / kvp_ID | 805 |
| Element tns:EFMProdukt_ID_Type / produktNummer | 805 |
| Element tns:EFMProdukt_ID_Type / organisationID | 806 |
| Element tns:Transaktionsdatensatz_Type / Transaktionsdaten | 806 |
| Element tns:SymSchluessel_ID_Type / schluesselNummer | 806 |
| Element tns:SymSchluessel_ID_Type / schluesselVersion | 807 |
| Element tns:SymSchluessel_ID_Type / schluesselInhaber_ID | 807 |
| Element tns:ASymSchluessel_ID_Type / signaturSchluessel | 807 |
| Element tns:appNmTransaktionMAC_Type / appMAC_AH | 807 |
| Element tns:appNmTransaktionMAC_Type / appMAC_KVP | 808 |
| Element tns:appNmTransaktionMAC_Type / appMAC_AH_Schluessel_ID | 808 |
| Element tns:appNmTransaktionMAC_Type / appMAC_KVP_Schluessel_ID | 808 |
| Element tns:berNmTransaktionMAC_Type / berMAC_PV | 809 |
| Element tns:berNmTransaktionMAC_Type / berMAC_KVP | 809 |
| Element tns:berNmTransaktionMAC_Type / berMAC_PV_Schluessel_ID | 809 |
| Element tns:berNmTransaktionMAC_Type / berMAC_KVP_Schluessel_ID | 809 |
| Element tns:TX_RET_Type / transOrigID | 810 |
| Element tns:TX_RET_Type / transOrigSignatur | 810 |
| Element tns:TX_RET_Type / transOriginalZeit | 810 |
| Element tns:TX_SMIT_Type / sperrAnforderungBezug | 811 |
| Element tns:TX_SMIT_Type / sperrEntscheidung | 811 |
| Element tns:TX_SANF_Type / sperrSperrgrund | 811 |
| Element tns:TX_BER_Type / berGueltigkeitsbeginn | 811 |
| Element tns:TX_BER_Type / berGueltigkeitsende | 812 |
| Element tns:TX_BER_Type / prodAbrechnungsverfahren | 812 |
| Element tns:TX_BER_Type / berBezahlArt | 812 |
| Element tns:TX_BER_Type / berBezahlMittel | 813 |
| Element tns:TXA_Type / transAblehnungGrund | 813 |
| Element tns:TXAS_Type / transSendeAuftrag | 814 |
| Element tns:TXAS_Type / transSendeAuftragstyp | 814 |
| Element tns:TXDEABER_Req_Type / prodAkzeptanzEnde | 814 |
| Element tns:TXDEABER_Req_Type / prodProdukt_ID | 814 |
| Element tns:TXSMITA_Type / appSperrkandidat | 815 |
| Element tns:TXSANFSYMK_Type / keySperrkandidatsym | 815 |
| Element tns:TXSANFASYMK_Type / keySperrkandidatasym | 816 |
| Element tns:TXSFREIMITSYMK_Type / keySperrkandidatsym | 816 |
| Element tns:TXSFREIMITASYMK_Type / keySperrkandidatasym | 816 |
| Element tns:TXSMITSYMK_Type / keySperrkandidatsym | 817 |
| Element tns:TXSMITASYMK_Type / keySperrkandidatasym | 817 |

| | |
|---|-----|
| Element tns:TXSNAWA_Req_Type / samSperrkandidat | 817 |
| Element tns:TXSNAWA_Req_Type / orgSperrkandidat | 818 |
| Element tns:TXSNAWA_Req_Type / zyklusNummer | 818 |
| Element tns:TXSNAWA_Req_Type / sperrtransaktionApplikation | 818 |
| Element tns:TXSNAWA_Req_Type / appNmTransaktionMAC | 819 |
| Element tns:TXSNAWB_Req_Type / samSperrkandidat | 819 |
| Element tns:TXSNAWB_Req_Type / orgSperrkandidat | 819 |
| Element tns:TXSNAWB_Req_Type / zyklusNummer | 820 |
| Element tns:TXSNAWB_Req_Type / sperrtransaktionBerechtigung | 820 |
| Element tns:TXSNAWB_Req_Type / berNmTransaktionMAC | 821 |
| Attribute(s) | 821 |
| Attribute XML-Ausgangstext-Entry / @ref | 821 |
| Attribute XML-Pool / @key | 821 |
| Attribute XML-ArrayValue / @ref | 821 |
| Attribute XML-CompositeFunction / @ref | 822 |
| Attribute XML-CommonFunction / @ref | 822 |
| Attribute XML-Ausgangssequenz-Entry / @ref | 822 |
| Attribute XML-Ausgangsdaten-Entry / @ref | 822 |
| Attribute XML-Zuordnungszu-Entry / @ref | 823 |
| Attribute XML-Zuordnungsvon-Entry / @ref | 823 |
| Attribute XML-Zuordnungsbezug-Entry / @ref | 823 |
| Attribute XML-Zuordnungstyp-Entry / @ref | 823 |
| Attribute XML-Zuordnungsdatenzu-Entry / @ref | 823 |
| Attribute XML-Zuordnungs Ausnahmezu-Entry / @ref | 824 |
| Attribute XML-Bewertungsueber-Entry / @ref | 824 |
| Attribute XML-Bewertungsnach-Entry / @ref | 824 |
| Attribute XML-Bewertungsvon-Entry / @ref | 824 |
| Attribute XML-Bewertungsbezug-Entry / @ref | 824 |
| Attribute XML-Bewertungstyp-Entry / @ref | 825 |
| Attribute XML-Mitnahmeanzahl-Entry / @ref | 825 |
| Attribute XML-Preis Anpassung-Entry / @ref | 825 |
| Attribute XML-Eingangsadapter-Entry / @ref | 825 |
| Attribute XML-Ausgangsadapter-Entry / @ref | 826 |
| Attribute XML-Testdatenablauf-Entry / @ref | 826 |
| Attribute XML-Testdatenparameter-Entry / @nr | 826 |
| Attribute XML-Testdatenschnittstelle-Entry / @id | 826 |

Resource hierarchy:

Legend:  Import,  Include,  Redefine,  Override,  Cycle detected

XML-Schema_PKM_TX.xsd

-   XML-Schema_Common_Types.xsd
-   XML-Schema_KA_Common.xsd
-   XML-Schema_Common_Types.xsd
-   XML-Schema_ION.xsd
-   XML-Schema_Common_Types.xsd
-   XML-Schema_KA_Common.xsd
-   XML-Schema_Common_Types.xsd
-   XML-Schema_PKM.xsd

Namespace: "http://vdv/ka/pkm/2"

Schema(s)

Main schema XML-Schema_PKM_TX.xsd

| | |
|-------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | Ersetzt XML-Schema_PKM_TX aus der Version 1.3.0 mit Namensraum http://vdv/ka/pkm/1. Fuer das neue Modul (zusammen mit KA Release 1.6.0) wird der neue Namensraum http://vdv/ka/pkm/2 verwendet. |

| | |
|-----------------|--|
| | Die Hilfsdatentypen (TX_MODUL, etc.) in diesem Schema mussten aufgrund des neuen Namensraumes gedoppelt werden. |
| Properties | attribute form default: unqualified |
| | element form default: unqualified |
| | version: 1.11.1 |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Included schema XML-Schema_PKM.xsd

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | Neue Version PKM, eingefuert mit KA Release 1.6.0. Diese neue Version ersetzt die bisherige Version PKM, die mit KA Release 1.3.0 eingefuehrt wurde. Aus diesem Grund wurde ein neuer Namensraum http://vdv/ka/pkm/2 verwendet. Aktuelle Version 1.11.1 |
| Properties | attribute form default: unqualified |
| | element form default: qualified |
| | version: 1.11.1 |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element(s)

Element pkm:TXVPVTM

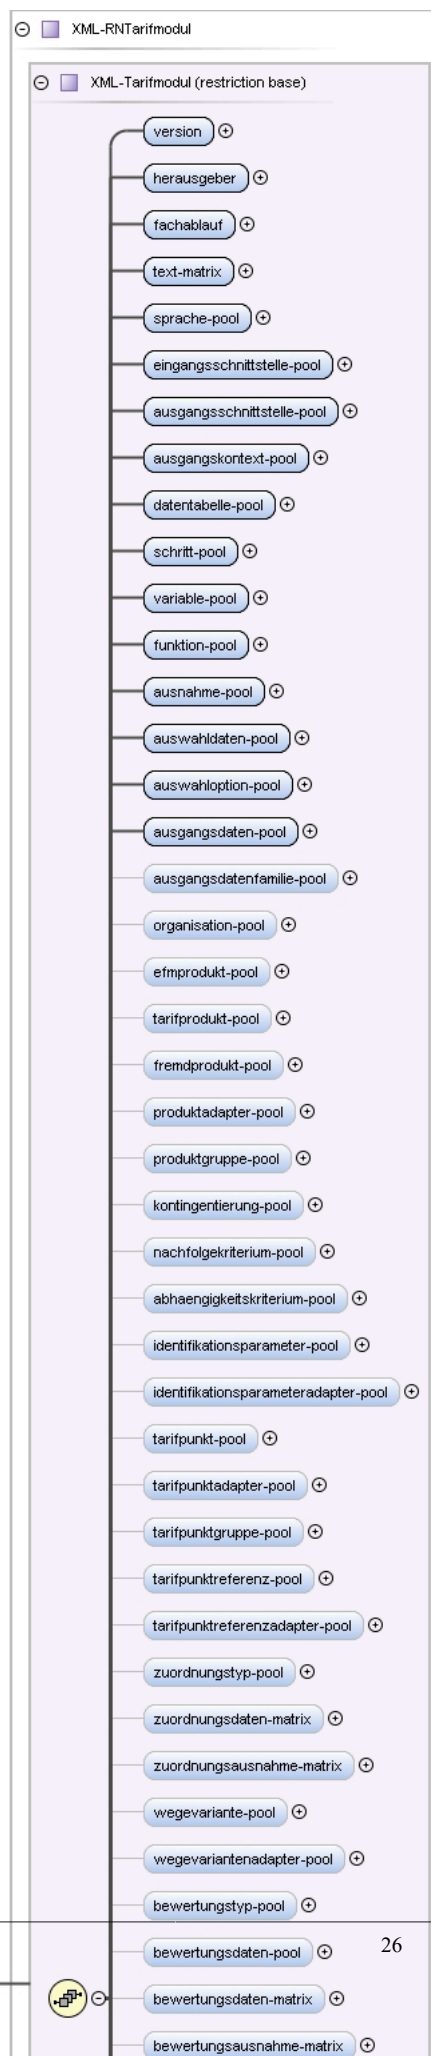
| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | Element zur Verwendung im ION (WSDL). Verteilung von PV-Tarifmodulen, auf deren Basis die Preisberechnung fuer die ausgegebenen Berechtigungen erfolgt. |
| Diagram | <pre> classDiagram class tnsTXVPVTM_Type { Base Type ionTX_BASE_Type } class ionTX_BASE_Type { txbase } class TXVPVTM { Type tnsTXVPVTM_Type } class modulinformationDaten { Type tnsTX_MODUL_Daten } class modulinformationBereitstellung { Type tnsTX_MODUL_Bereitstellung } class modulinformationLieferung { Type tnsTX_MODUL_Lieferung } tnsTXVPVTM_Type -- > ionTX_BASE_Type TXVPVTM -- tnsTXVPVTM_Type ionTX_BASE_Type -- txbase TXVPVTM -- modulinformationDaten TXVPVTM -- modulinformationBereitstellung TXVPVTM -- modulinformationLieferung </pre> |
| Type | pkm:TXVPVTM_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type pkm:TXVPVTM_Type |
| Properties | content: complex |
| Model | txbase , (modulinformationDaten modulinformationBereitstellung modulinformationLieferung) |
| Children | modulinformationBereitstellung, modulinformationDaten, modulinformationLieferung, txbase |
| Instance | <pre> <pkm:TXVPVTM xmlns:pkm="http://vdv/ka/pkm/2"> <txbase>{1,1}</txbase> <modulinformationDaten>{1,1}</modulinformationDaten> <modulinformationBereitstellung>{1,1}</modulinformationBereitstellung> <modulinformationLieferung>{1,1}</modulinformationLieferung> </pkm:TXVPVTM> </pre> |
| Source | <pre> <xs:element name="TXVPVTM" type="tns:TXVPVTM_Type"> <xs:annotation> <xs:documentation>Element zur Verwendung im ION (WSDL). Verteilung von PV-Tarifmodulen, auf deren Basis die Preisberechnung fuer die ausgegebenen Berechtigungen erfolgt.</xs:documentation> </xs:annotation> </xs:element> </pre> |

| | |
|-----------------|--|
| | <code></xs:annotation></code> <code></xs:element></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Element `rntm`

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|-----------------|--|
| Type | XML-RNTarifmodul |
| Type hierarchy | <ul style="list-style-type: none"> XML-Tarifmodul XML-RNTarifmodul |
| Properties | content: complex |
| Model | version , herausgeber , fachablauf , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , datentabelle-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , produktadapter-pool , identifikationsparameteradapter-pool , tarifpunktadapter-pool , tarifpunktreferenzadapter-pool , wegevariantenadapter-pool , linienadapter-pool , verkehrsmitteltypadapter-pool , bezahlartadapter-pool , waehrungsadapter-pool , zahlungsintervalladapter-pool , mitnahmetypadapter-pool , rabattmedientypadapter-pool , modulkontextadapter-pool , nummerninterpretation-pool , schluessel-pool , tarifmodul-pool , kommentar-pool , signatur , annotation |
| Children | annotation, ausgangsdaten-pool, ausgangskontext-pool, ausgangsschnittstelle-pool, ausnahme-pool, auswahldaten-pool, auswahloption-pool, bezahlartadapter-pool, datentabelle-pool, eingangsschnittstelle-pool, fachablauf, funktion-pool, herausgeber, identifikationsparameteradapter-pool, kommentar-pool, linienadapter-pool, mitnahmetypadapter-pool, modulkontextadapter-pool, nummerninterpretation-pool, produktadapter-pool, rabattmedientypadapter-pool, schluessel-pool, schritt-pool, signatur, sprache-pool, tarifmodul-pool, tarifpunktadapter-pool, tarifpunktreferenzadapter-pool, text-matrix, variable-pool, verkehrsmitteltypadapter-pool, version, waehrungsadapter-pool, wegevariantenadapter-pool, zahlungsintervalladapter-pool |
| Instance | <pre> <rntm xmlns="http://vdv/ka/pkm/2"> <version>{1,1}</version> <herausgeber>{1,1}</herausgeber> <fachablauf>{1,1}</fachablauf> <text-matrix>{1,1}</text-matrix> <sprache-pool key="">{1,1}</sprache-pool> <eingangsschnittstelle-pool key="">{1,1}</eingangsschnittstelle-pool> <ausgangsschnittstelle-pool key="">{1,1}</ausgangsschnittstelle-pool> <ausgangskontext-pool key="">{1,1}</ausgangskontext-pool> <datentabelle-pool key="">{1,1}</datentabelle-pool> <schritt-pool key="">{1,1}</schritt-pool> <variable-pool key="">{1,1}</variable-pool> <funktion-pool key="">{1,1}</funktion-pool> <ausnahme-pool key="">{1,1}</ausnahme-pool> <auswahldaten-pool key="">{1,1}</auswahldaten-pool> <auswahloption-pool key="">{1,1}</auswahloption-pool> <ausgangsdaten-pool key="">{1,1}</ausgangsdaten-pool> <produktadapter-pool key="">{1,1}</produktadapter-pool> <identifikationsparameteradapter-pool key="">{1,1}</identifikationsparameteradapter-pool> <tarifpunktadapter-pool key="">{1,1}</tarifpunktadapter-pool> <tarifpunktreferenzadapter-pool key="">{1,1}</tarifpunktreferenzadapter-pool> <wegevariantenadapter-pool key="">{1,1}</wegevariantenadapter-pool> <linienadapter-pool key="">{1,1}</linienadapter-pool> <verkehrsmitteltypadapter-pool key="">{1,1}</verkehrsmitteltypadapter-pool> <bezahlartadapter-pool key="">{1,1}</bezahlartadapter-pool> <waehrungsadapter-pool key="">{1,1}</waehrungsadapter-pool> <zahlungsintervalladapter-pool key="">{1,1}</zahlungsintervalladapter-pool> <mitnahmetypadapter-pool key="">{1,1}</mitnahmetypadapter-pool> <rabattmedientypadapter-pool key="">{1,1}</rabattmedientypadapter-pool> <modulkontextadapter-pool key="">{1,1}</modulkontextadapter-pool> <nummerninterpretation-pool key="">{1,1}</nummerninterpretation-pool> <schluessel-pool key="">{1,1}</schluessel-pool> <tarifmodul-pool key="">{1,1}</tarifmodul-pool> <kommentar-pool>{1,1}</kommentar-pool> <signatur>{1,1}</signatur> <annotation>{1,1}</annotation> </rntm> </pre> |
| Source | <xs:element name="rntm" type="XML-RNTarifmodul" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / version

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

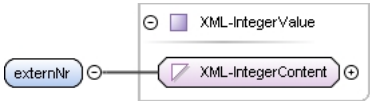
| | |
|-----------------|--|
| Diagram | |
| Type | XML-Version-Part |
| Properties | content: complex |
| Model | gueltigkeitsbeginn , externNr , internNr , modulstatus , modulspezifikation , modulnamenszusatz , speicherzeitpunkt , bearbeiter , freigeber , bemerkung , vorgaengerversion {0,1} |
| Children | bearbeiter, bemerkung, externNr, freigeber, gueltigkeitsbeginn, internNr, modulnamenszusatz, modulspezifikation, modulstatus, speicherzeitpunkt, vorgaengerversion |
| Instance | <pre> <version xmlns="http://vdv/ka/pkm/2"> <gueltigkeitsbeginn>{1,1}</gueltigkeitsbeginn> <externNr>{1,1}</externNr> <internNr>{1,1}</internNr> <modulstatus>{1,1}</modulstatus> <modulspezifikation>{1,1}</modulspezifikation> <modulnamenszusatz>{1,1}</modulnamenszusatz> <speicherzeitpunkt>{1,1}</speicherzeitpunkt> <bearbeiter>{1,1}</bearbeiter> <freigeber>{1,1}</freigeber> <bemerkung>{1,1}</bemerkung> <vorgaengerversion>{0,1}</vorgaengerversion> </version> </pre> |
| Source | <xs:element name="version" type="XML-Version-Part" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Version-Part / gueltigkeitsbeginn

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:dateTime XML-DatetimeContent XML-DatetimeValue |
| Properties | content: complex |
| Source | <xs:element name="gueltigkeitsbeginn" type="XML-DatetimeValue" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Version-Part / externNr


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="externNr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Version-Part / internNr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="internNr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Version-Part / modulstatus

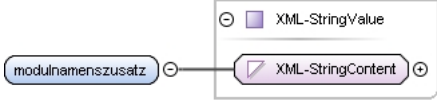
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="modulstatus" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Version-Part / modulspezifikation

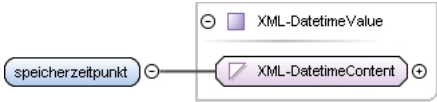
| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringContent |
| Type hierarchy | <ul style="list-style-type: none"> xs:string |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> • XML-StringContent • XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="modulspezifikation" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

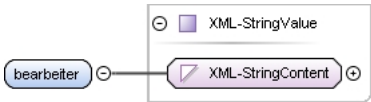
Element XML-Version-Part / modulnamenszusatz

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:string • XML-StringContent • XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="modulnamenszusatz" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Version-Part / speicherzeitpunkt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:dateTime • XML-DatetimeContent • XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="speicherzeitpunkt" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Version-Part / bearbeiter

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:string • XML-StringContent • XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="bearbeiter" type="XML-StringValue"/></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

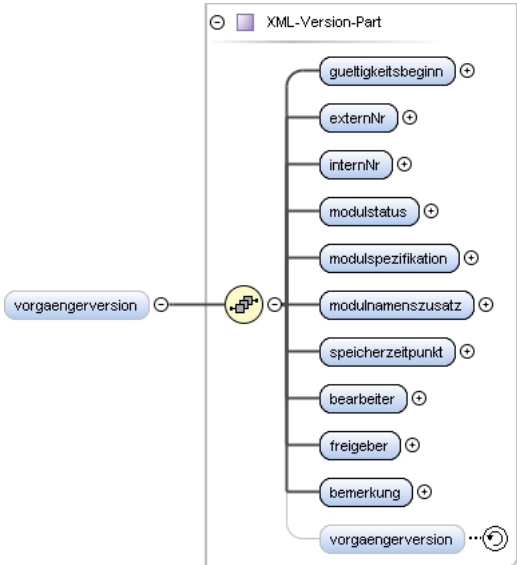
Element XML-Version-Part / freigeber

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="freigeber" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Version-Part / bemerkung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="bemerkung" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Version-Part / vorgaengerversion

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|--|
| Type | XML-Version-Part |
| Properties | content: complex |
| | minOccurs: 0 |
| Model | gueltigkeitsbeginn , externNr , internNr , modulstatus , modulspezifikation , modulnamenszusatz , speicherzeitpunkt , bearbeiter , freigeber , bemerkung , vogaengerversion{0,1} |
| Children | bearbeiter, bemerkung, externNr, freigeber, gueltigkeitsbeginn, internNr, modulnamenszusatz, modulspezifikation, modulstatus, speicherzeitpunkt, vogaengerversion |
| Instance | <pre><vogaengerversion xmlns="http://vdv/ka/pkm/2"> <gueltigkeitsbeginn>{1,1}</gueltigkeitsbeginn> <externNr>{1,1}</externNr> <internNr>{1,1}</internNr> <modulstatus>{1,1}</modulstatus> <modulspezifikation>{1,1}</modulspezifikation> <modulnamenszusatz>{1,1}</modulnamenszusatz> <speicherzeitpunkt>{1,1}</speicherzeitpunkt> <bearbeiter>{1,1}</bearbeiter> <freigeber>{1,1}</freigeber> <bemerkung>{1,1}</bemerkung> <vogaengerversion>{0,1}</vogaengerversion> </vogaengerversion></pre> |
| Source | <xs:element name="vogaengerversion" type="XML-Version-Part" minOccurs="0"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / herausgeber

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Organisation-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Organisation-Part |
| Properties | content: complex |
| Model | nr , name |
| Children | name, nr |
| Instance | <pre><herausgeber xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> </herausgeber></pre> |
| Source | <xs:element name="herausgeber" type="XML-Organisation-Part" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-NrName-Item / nr

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> • XML-IntegerContent • XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-NrName-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:string • XML-StringContent • XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Organisation-Part / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:long • XML-IntegerContent • XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Organisation-Part / name

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:string • XML-StringContent • XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Tarifmodul / fachablauf


| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Fachablauf-Part |
| Properties | content: complex |
| Model | kontrollstart{0,1}, erfassungsstart{0,1}, anpassungsstart{0,1}, darstellungsstart{0,1}, produktermittlungsstart, transaktionsauswertungsstart{0,1}, pruefungin{0,1}, pruefungvor{0,1}, pruefungnach{0,1} |
| Children | anpassungsstart, darstellungsstart, erfassungsstart, kontrollstart, produktermittlungsstart, pruefungin, pruefungnach, pruefungvor, transaktionsauswertungsstart |
| Instance | <pre><fachablauf xmlns="http://vdv/ka/pkm/2"> <kontrollstart>{0,1}</kontrollstart> <erfassungsstart>{0,1}</erfassungsstart> <anpassungsstart>{0,1}</anpassungsstart> <darstellungsstart>{0,1}</darstellungsstart> <produktermittlungsstart>{1,1}</produktermittlungsstart> <transaktionsauswertungsstart>{0,1}</transaktionsauswertungsstart> <pruefungin>{0,1}</pruefungin> <pruefungvor>{0,1}</pruefungvor> <pruefungnach>{0,1}</pruefungnach> </fachablauf></pre> |
| Source | <xs:element name="fachablauf" type="XML-Fachablauf-Part" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Fachablauf-Part / kontrollstart


| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex minOccurs: 0 |
| Model | ref |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><kontrollstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </kontrollstart></pre> |
| Source | <pre><xs:element name="kontrollstart" type="XML-Ref11" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

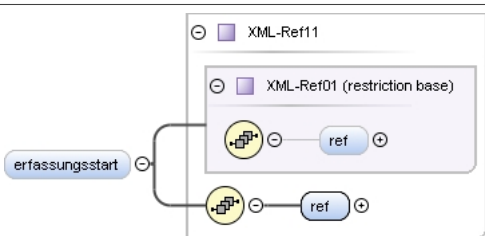
Element XML-Ref01 / ref

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref |
| Properties | content: simple minOccurs: 0 |
| Facets | minInclusive 1 |
| Source | <pre><xs:element name="ref" type="XML-Ref" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ref11 / ref

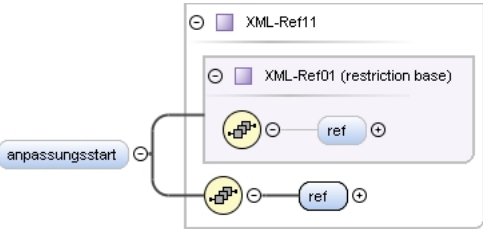
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref |
| Properties | content: simple |
| Facets | minInclusive 1 |
| Source | <pre><xs:element name="ref" type="XML-Ref" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Fachablauf-Part / erfassungsstart

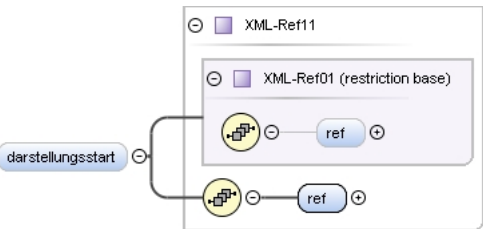
| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex minOccurs: 0 |
| Model | ref |
| Children | ref |
| Instance | <pre><erfassungsstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </erfassungsstart></pre> |
| Source | <pre><xs:element name="erfassungsstart" type="XML-Ref11" minOccurs="0"/></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Fachablauf-Part / anpassungsstart

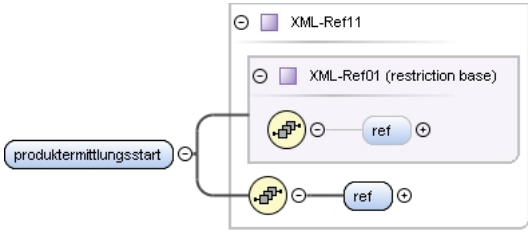
| | | | | | |
|-----------------|---|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram |  | | | | |
| Type | XML-Ref11 | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | ref | | | | |
| Children | ref | | | | |
| Instance | <pre><anpassungsstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </anpassungsstart></pre> | | | | |
| Source | <pre><xs:element name="anpassungsstart" type="XML-Ref11" minOccurs="0"/></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Fachablauf-Part / darstellungsstart

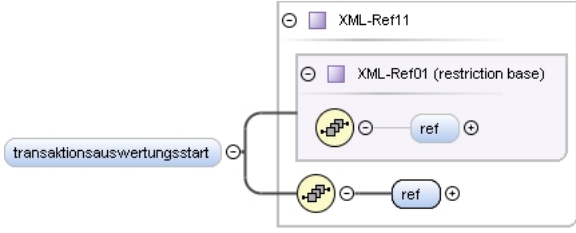
| | | | | | |
|-----------------|---|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram |  | | | | |
| Type | XML-Ref11 | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | ref | | | | |
| Children | ref | | | | |
| Instance | <pre><darstellungsstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </darstellungsstart></pre> | | | | |
| Source | <pre><xs:element name="darstellungsstart" type="XML-Ref11" minOccurs="0"/></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Fachablauf-Part / produktermittlungsstart

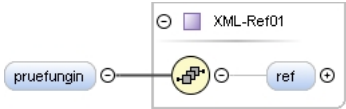
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><produkttermittlungsstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </produkttermittlungsstart></pre> |
| Source | <pre><xs:element name="produkttermittlungsstart" type="XML-Ref11"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Fachablauf-Part / transaktionsauswertungsstart


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex minOccurs: 0 |
| Model | ref |
| Children | ref |
| Instance | <pre><transaktionsauswertungsstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </transaktionsauswertungsstart></pre> |
| Source | <pre><xs:element name="transaktionsauswertungsstart" type="XML-Ref11" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Fachablauf-Part / pruefungin


| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |

| | |
|-----------------|---|
| | minOccurs: 0 |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><pruefungin xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </pruefungin></pre> |
| Source | <pre><xs:element name="pruefungin" type="XML-Ref01" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

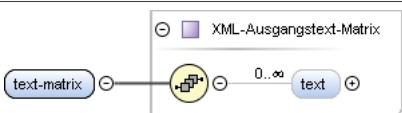
Element XML-Fachablauf-Part / pruefungvor

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:duration <ul style="list-style-type: none"> XML-DurationContent XML-DurationValue |
| Properties | content: complex minOccurs: 0 |
| Source | <pre><xs:element name="pruefungvor" type="XML-DurationValue" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Fachablauf-Part / pruefungnach

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:duration <ul style="list-style-type: none"> XML-DurationContent XML-DurationValue |
| Properties | content: complex minOccurs: 0 |
| Source | <pre><xs:element name="pruefungnach" type="XML-DurationValue" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / text-matrix

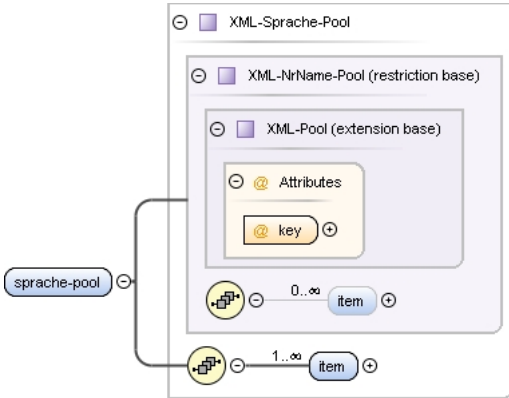
| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |

| | |
|-----------------|---|
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="#">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangstext-Matrix / text

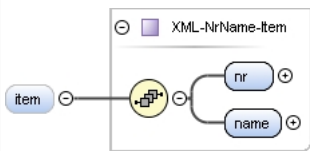
| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|--|--|----------|---------|------------|---|------------|-----------|----------|--|
| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | | |
| Diagram | | | | | | | | | | | | |
| Type | XML-Ausgangstext-Entry | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">xs:string<ul style="list-style-type: none">XML-StringContent<ul style="list-style-type: none">XML-StringValue<ul style="list-style-type: none">XML-Ausgangstext-Entry | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | | | | QName | Type | Use | | ref | XML-Ref | required | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="text" type="XML-Ausgangstext-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Tarifmodul / sprache-pool

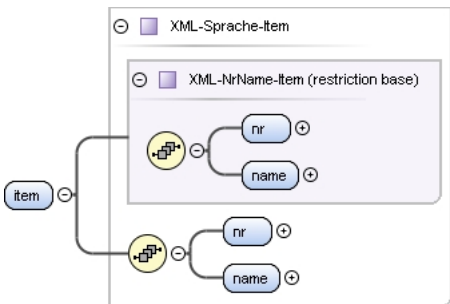
| | | | |
|-----------|---|--|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  | | |
| Type | XML-Sprache-Pool | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Sprache-Pool | | | |
| Properties | content: complex | | | |
| Model | item+ | | | |
| Children | item | | | |
| Instance | <pre><sprache-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </sprache-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="sprache-pool" type="XML-Sprache-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-NrName-Pool / item

| | | | |
|-----------------|--|-----------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | |
| Diagram |  | | |
| Type | XML-NrName-Item | | |
| Properties | content: | complex | |
| | minOccurs: | 0 | |
| | maxOccurs: | unbounded | |
| Model | nr , name | | |
| Children | name, nr | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> </item></pre> | | |
| Source | <pre><xs:element name="item" type="XML-NrName-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Sprache-Pool / item

| | | | | |
|-------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} | | | |
| Diagram |  <p>The diagram shows a container box labeled 'XML-Sprache-Item'. Inside, there is a yellow circle with a plus sign and a minus sign, representing a choice or sequence. This circle is connected to two blue rounded rectangles labeled 'nr' and 'name', each with a plus sign and a minus sign, indicating they are optional elements. A separate box labeled 'XML-NrName-Item (restriction base)' is shown, containing the same 'nr' and 'name' elements, indicating that the 'XML-Sprache-Item' is a restriction of 'XML-NrName-Item'.</p> | | | |

| | | | | | |
|-----------------|---|----------|---------|------------|-----------|
| Type | XML-Sprache-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Sprache-Item | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | nr , name | | | | |
| Children | name, nr | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> </item></pre> | | | | |
| Source | <pre><xs:element name="item" type="XML-Sprache-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Sprache-Item / nr

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Sprache-Item / name

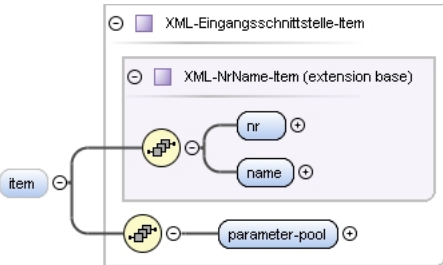
| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Tarifmodul / eingangsschnittstelle-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-Eingangsschnittstelle-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eingangsschnittstelle-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><eingangsschnittstelle-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </eingangsschnittstelle-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="eingangsschnittstelle-pool" type="XML-Eingangsschnittstelle-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Eingangsschnittstelle-Pool / item

| | | | | | | | |
|----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram |  | | | | | | |
| Type | XML-Eingangsschnittstelle-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Eingangsschnittstelle-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , parameter-pool | | | | | | |
| Children | name, nr, parameter-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <parameter-pool key="">{1,1}</parameter-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Eingangsschnittstelle-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Eingangsschnittstelle-Item / parameter-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Eingangssparameter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Eingangssparameter-Pool | | | |
| Properties | content: | complex | | |
| Model | item+ | | | |
| Children | item | | | |
| Instance | <pre><parameter-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </parameter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="parameter-pool" type="XML-Eingangssparameter-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Eingangsschnittstelle-Item / item

| | | | | |
|----------------|--|-----------|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Eingangsschnittstelle-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Eingangsschnittstelle-Item XML-Eingangsschnittstelle-Item | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |

| | |
|-----------------|---|
| Model | nr , name |
| Children | name, nr |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Eingangsparameter-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eingangsparameter-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eingangsparameter-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / ausgangsschnittstelle-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|
| Type | XML-Ausgangsschnittstelle-Pool | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eingangsschnittstelle-Pool<ul style="list-style-type: none">XML-Ausgangsschnittstelle-Pool | | | | | | | | |
| Properties | content: complex | | | | | | | | |
| Model | item* | | | | | | | | |
| Children | item | | | | | | | | |
| Instance | <pre><ausgangsschnittstelle-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausgangsschnittstelle-pool></pre> | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| key | XML-Ref | required | | | | | | | |
| Source | <pre><xs:element name="ausgangsschnittstelle-pool" type="XML-Ausgangsschnittstelle-Pool"/></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | |

Element XML-Ausgangsschnittstelle-Pool / item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} |
| Diagram | |
| Type | XML-Ausgangsschnittstelle-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Eingangsschnittstelle-Item XML-Ausgangsschnittstelle-Item |
| Properties | content: complex |

| | |
|-----------------|---|
| | minOccurs: 0 maxOccurs: unbounded |
| Model | nr , name , parameter-pool |
| Children | name, nr, parameter-pool |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <parameter-pool key="">{1,1}</parameter-pool> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Ausgangsschnittstelle-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangsschnittstelle-Item / nr

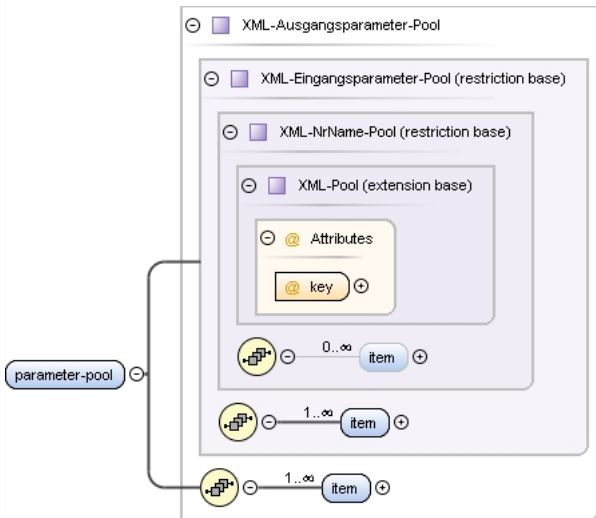
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangsschnittstelle-Item / name

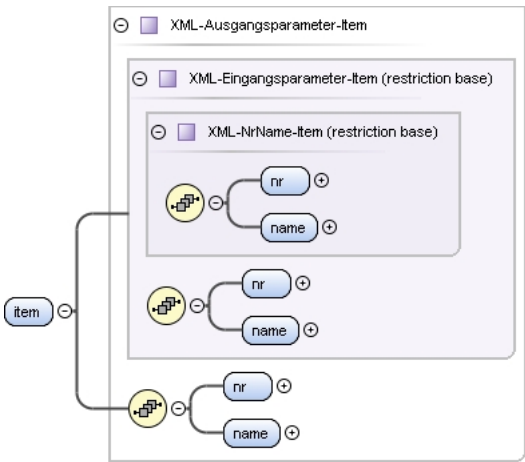
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangsschnittstelle-Item / parameter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram |  | | | |
| Type | XML-Ausgangspool-Parameter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Eingangspool-Parameter-Pool<ul style="list-style-type: none">XML-Ausgangspool-Parameter-Pool | | | |
| Properties | content: | complex | | |
| Model | item+ | | | |
| Children | item | | | |
| Instance | <pre><parameter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </parameter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="parameter-pool" type="XML-Ausgangspool-Parameter-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Ausgangspool-Parameter-Pool / item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} |
| Diagram |  |
| Type | XML-Ausgangspool-Parameter-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item |

| | | | | | |
|-----------------|---|----------|---------|------------|-----------|
| | <ul style="list-style-type: none"> • XML-Eingangsparameter-Item • XML-Ausgangsparameter-Item | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | nr , name | | | | |
| Children | name, nr | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> </item></pre> | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausgangsparameter-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Ausgangsparameter-Item / nr

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> • xs:long • XML-IntegerContent • XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Ausgangsparameter-Item / name

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> • xs:string • XML-StringContent • XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Tarifmodul / ausgangskontext-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|


| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-Ausgangskontext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangskontext-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausgangskontext-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausgangskontext-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausgangskontext-pool" type="XML-Ausgangskontext-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Ausgangskontext-Pool / item

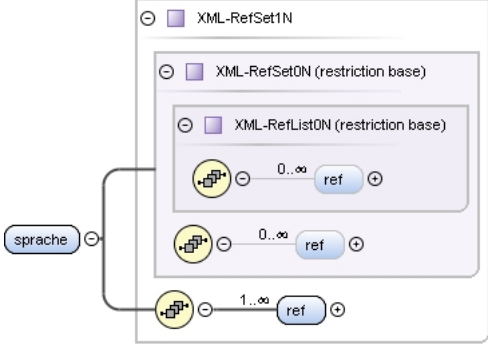
| | | | | | | | |
|----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | <pre>classDiagram class XML_Ausgangskontext_Item { XML_Name_Item "0" sprache "0..1" parameter "0..1" } class XML_Name_Item { name "1..1" } XML_Ausgangskontext_Item "0..*" -- "1..1" XML_Name_Item XML_Ausgangskontext_Item "0..*" -- "1..1" sprache XML_Ausgangskontext_Item "0..*" -- "1..1" parameter</pre> | | | | | | |
| Type | XML-Ausgangskontext-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Ausgangskontext-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , sprache , parameter | | | | | | |
| Children | name, parameter, sprache | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <sprache>{1,1}</sprache> <parameter>{1,1}</parameter> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausgangskontext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|


Element XML-Name-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a blue rounded rectangle labeled 'name' connected by a line to a purple rounded rectangle labeled 'XML-StringContent'. The 'XML-StringContent' rectangle has a small circle with a minus sign in the top-left corner and a small circle with a plus sign in the top-right corner. |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangskontext-Item / sprache

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a blue rounded rectangle labeled 'sprache' connected by a line to a purple rounded rectangle labeled 'XML-RefSet1N'. The 'XML-RefSet1N' rectangle has a small circle with a minus sign in the top-left corner and a small circle with a plus sign in the top-right corner. Inside 'XML-RefSet1N' is a purple rounded rectangle labeled 'XML-RefSet0N (restriction base)' with a small circle with a minus sign in the top-left corner and a small circle with a plus sign in the top-right corner. Inside 'XML-RefSet0N' is a purple rounded rectangle labeled 'XML-RefList0N (restriction base)' with a small circle with a minus sign in the top-left corner and a small circle with a plus sign in the top-right corner. Inside 'XML-RefList0N' are three yellow rounded rectangles labeled 'ref' with a small circle with a minus sign in the top-left corner and a small circle with a plus sign in the top-right corner. The first 'ref' is connected to 'XML-RefList0N' by a line with '0..∞' above it. The second 'ref' is connected to 'XML-RefList0N' by a line with '0..∞' above it. The third 'ref' is connected to 'XML-RefList0N' by a line with '1..∞' above it. |
| Type | XML-RefSet1N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N XML-RefSet1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <code><sprache xmlns="http://vdv/ka/pkm/2"> <ref>{ 1, unbounded}</ref> </sprache></code> |
| Source | <code><xs:element name="sprache" type="XML-RefSet1N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-RefList0N / ref

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a blue rounded rectangle labeled 'ref' connected by a line to a purple rounded rectangle labeled 'XML-Ref'. The 'XML-Ref' rectangle has a small circle with a minus sign in the top-left corner and a small circle with a plus sign in the top-right corner. |
| Type | XML-Ref |
| Properties | content: simple minOccurs: 0 |

| | |
|-----------------|--|
| | maxOccurs: unbounded |
| Facets | minInclusive 1 |
| Source | <code><xs:element name="ref" type="XML-Ref" minOccurs="0" maxOccurs="unbounded" /></code> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-RefSet0N / ref

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach Inhalt} |
| Diagram | |
| Type | XML-Ref |
| Properties | content: simple minOccurs: 0 maxOccurs: unbounded |
| Facets | minInclusive 1 |
| Source | <pre><xs:element name="ref" type="XML-Ref" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-RefSet1N / ref

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach Inhalt} |
| Diagram | |
| Type | XML-Ref |
| Properties | content: simple maxOccurs: unbounded |
| Facets | minInclusive 1 |
| Source | <pre><xs:element name="ref" type="XML-Ref" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangskontext-Item / parameter

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-RefSet1N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N XML-RefSet1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><parameter xmlns="http://vdv/ka/pkm/2"> <ref>{1,unbounded}</ref> </parameter></pre> |
| Source | <code><xs:element name="parameter" type="XML-RefSet1N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / datentabelle-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Datentabelle-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Datentabelle-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><datentabelle-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </datentabelle-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <code><xs:element name="datentabelle-pool" type="XML-Datentabelle-Pool"/></code> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Datentabelle-Pool / item

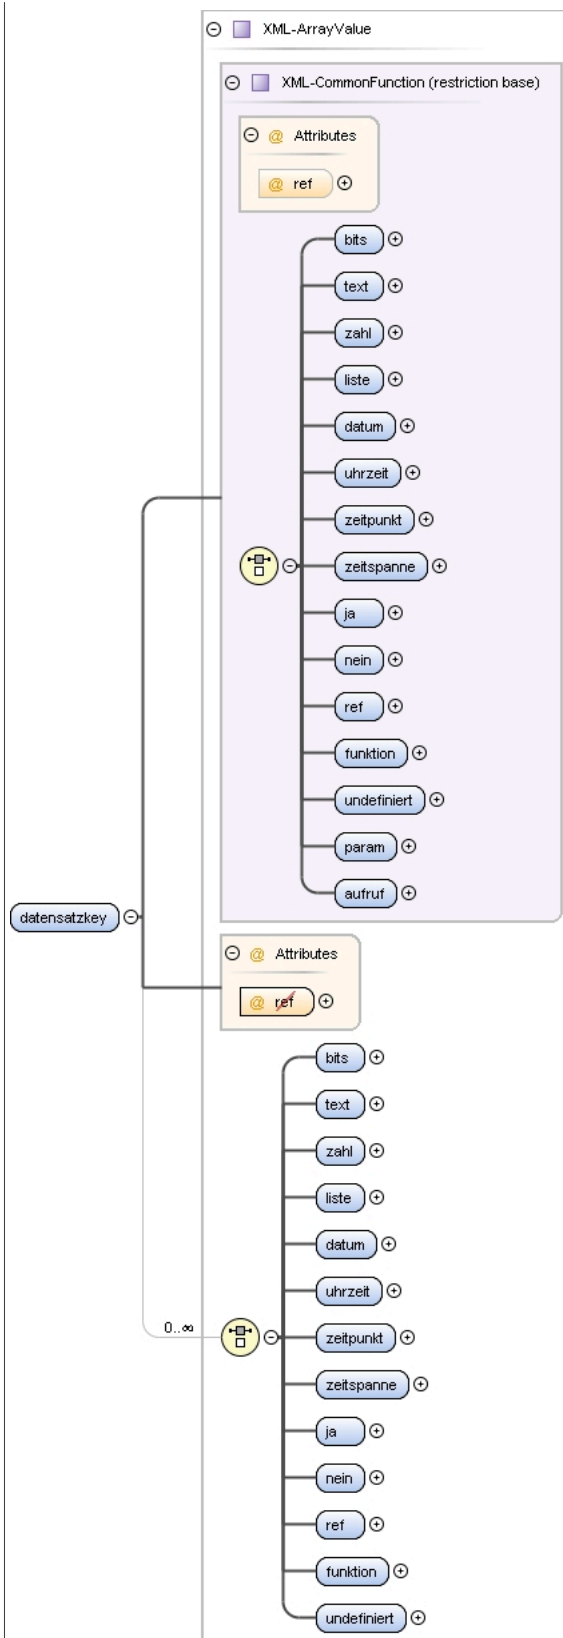
| | | | | |
|-------------|------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram | | | | |

| | |
|-----------------|--|
| Type | XML-Datentabelle-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Datentabelle-Item |
| Properties | content: complex |
| | minOccurs: 0 |
| | maxOccurs: unbounded |
| Model | nr , name , datensatzkey , datensatzvalue |
| Children | datensatzkey, datensatzvalue, name, nr |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <datensatzkey>{1,1}</datensatzkey> <datensatzvalue>{1,1}</datensatzvalue> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Datentabelle-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Datentabelle-Item / datensatzkey

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-ArrayValue |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><datensatzkey xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </datensatzkey></pre> |
| Source | <code><xs:element name="datensatzkey" type="XML-ArrayValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CommonFunction / bits

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-BinaryValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:hexBinary XML-BinaryContent XML-BinaryValue |
| Properties | content: complex |
| Source | <code><xs:element name="bits" type="XML-BinaryValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CommonFunction / text

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="text" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CommonFunction / zahl

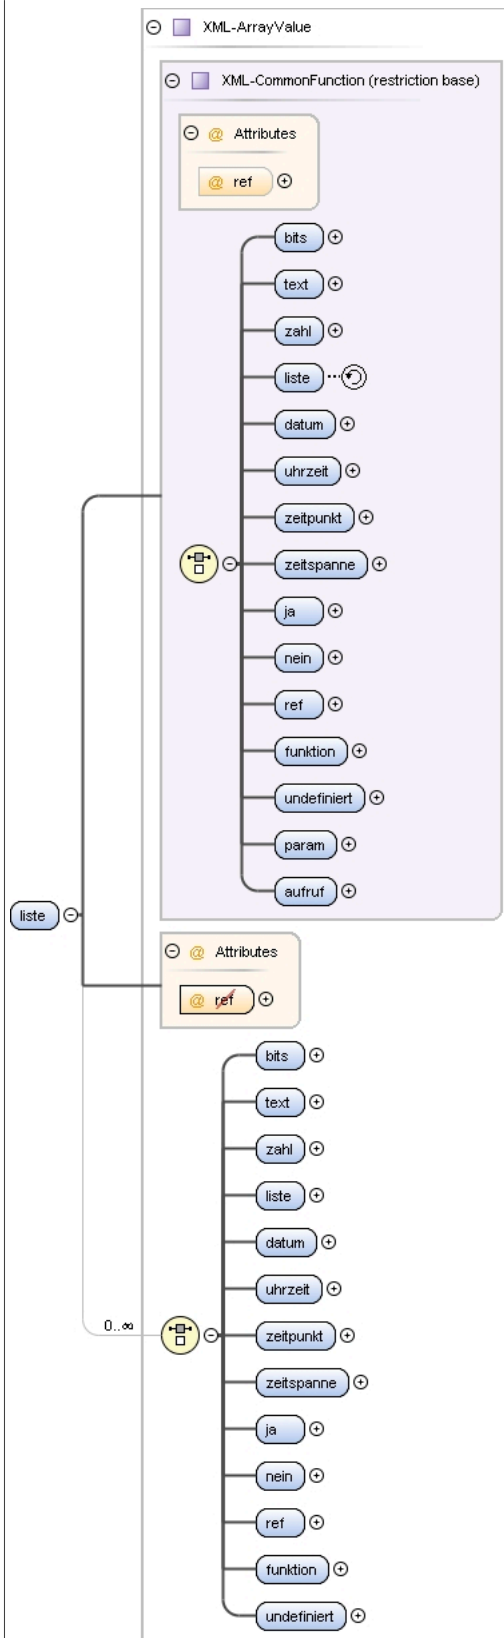
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none">• xs:long• XML-IntegerContent• XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="zahl" type="XML-IntegerValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CommonFunction / liste

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-ArrayValue |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><liste xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </liste></pre> |
| Source | <code><xs:element name="liste" type="XML-ArrayValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ArrayValue / bits

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-BinaryValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:hexBinary XML-BinaryContent XML-BinaryValue |
| Properties | content: complex |
| Source | <code><xs:element name="bits" type="XML-BinaryValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ArrayValue / text

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="text" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ArrayValue / zahl

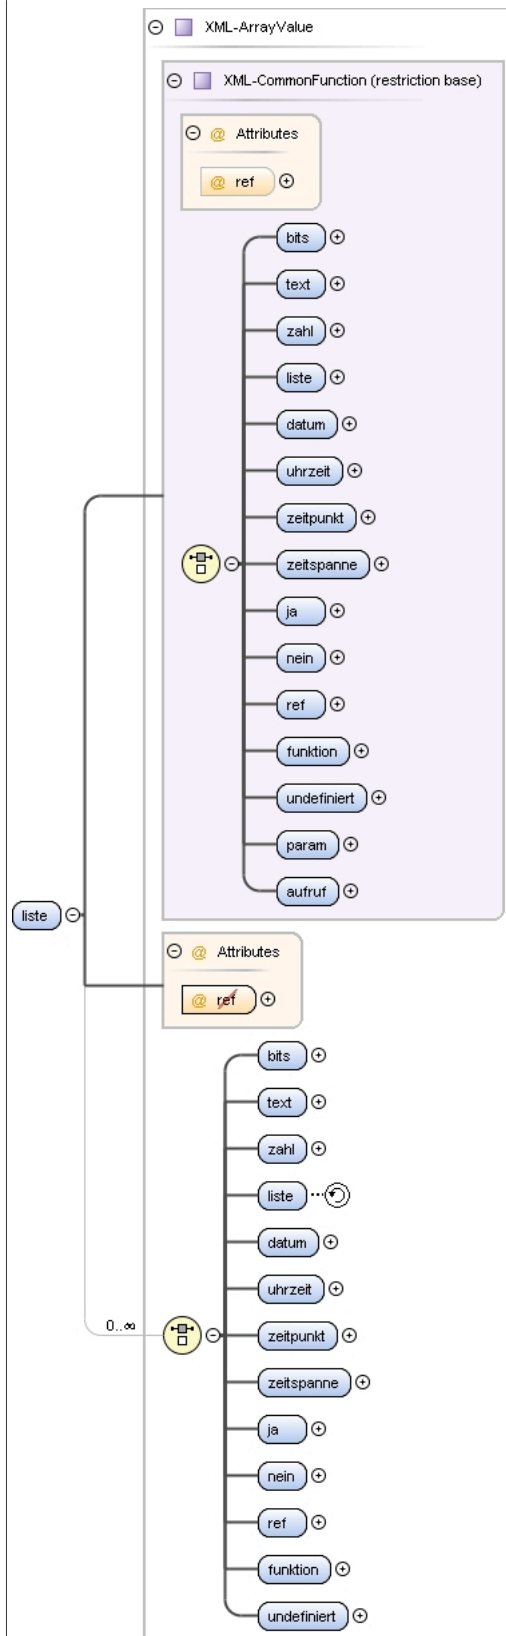
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none">• xs:long• XML-IntegerContent• XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="zahl" type="XML-IntegerValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ArrayValue / liste

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-ArrayValue |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><liste xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </liste></pre> |
| Source | <code><xs:element name="liste" type="XML-ArrayValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ArrayValue / datum

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DateValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:date • XML-DateContent • XML-DateValue |
| Properties | content: complex |
| Source | <code><xs:element name="datum" type="XML-DateValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ArrayValue / uhrzeit


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-TimeValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:time • XML-TimeContent • XML-TimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ArrayValue / zeitpunkt


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:dateTime XML-DatetimeContent XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitpunkt" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-ArrayValue / zeitspanne

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:duration XML-DurationContent XML-DurationValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitspanne" type="XML-DurationValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-ArrayValue / ja

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-TrueValue |
| Properties | content: complex |
| Source | <code><xs:element name="ja" type="XML-TrueValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ArrayValue / nein

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-FalseValue |
| Properties | content: complex |
| Source | <code><xs:element name="nein" type="XML-FalseValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ArrayValue / ref

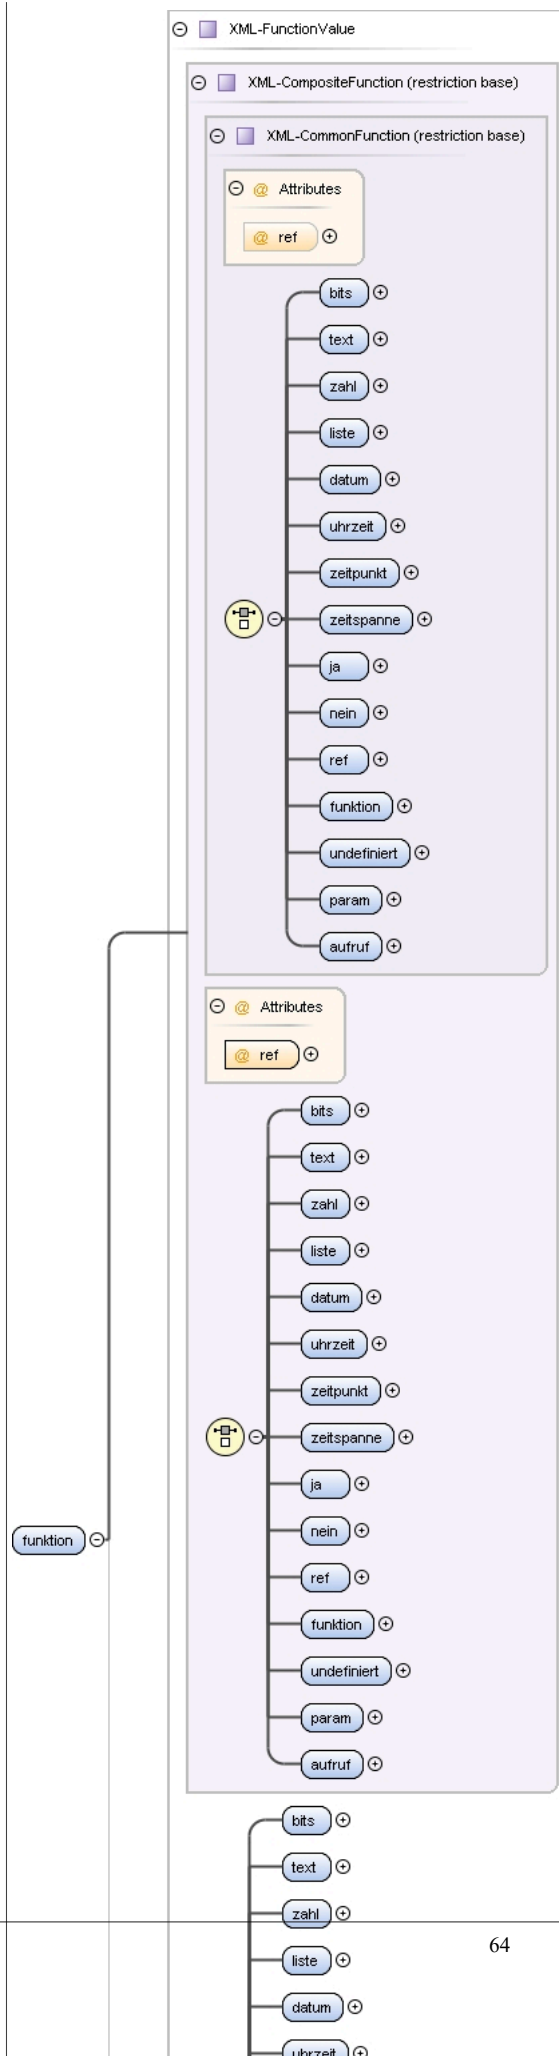
| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|--|
| Type | XML-ObjectValue |
| Type hierarchy | <ul style="list-style-type: none">• xs:int<ul style="list-style-type: none">• XML-Ref<ul style="list-style-type: none">• XML-ObjectValue |
| Properties | content: complex |
| Source | <code><xs:element name="ref" type="XML-ObjectValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ArrayValue / funktion

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-FunctionValue | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-CompositeFunction XML-FunctionValue | | | |
| Properties | content: complex | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Instance | <pre><funktion ref="" xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </funktion></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <xs:element name="funktion" type="XML-FunctionValue"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-CommonFunction / datum

| | | | | |
|-----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-DateValue | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:date XML-DateContent XML-DateValue | | | |
| Properties | content: complex | | | |
| Source | <xs:element name="datum" type="XML-DateValue"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-CommonFunction / uhrzeit

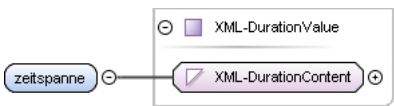
| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-TimeValue | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:time XML-TimeContent XML-TimeValue | | | |

| | |
|-----------------|---|
| Properties | content: complex |
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-CommonFunction / zeitpunkt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:dateTime <ul style="list-style-type: none"> • XML-DatetimeContent • XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitpunkt" type="XML-DatetimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-CommonFunction / zeitspanne

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:duration <ul style="list-style-type: none"> • XML-DurationContent • XML-DurationValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitspanne" type="XML-DurationValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CommonFunction / ja

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-TrueValue |
| Properties | content: complex |
| Source | <code><xs:element name="ja" type="XML-TrueValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CommonFunction / nein

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|---|
| Type | XML-FalseValue |
| Properties | content: complex |
| Source | <code><xs:element name="nein" type="XML-FalseValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

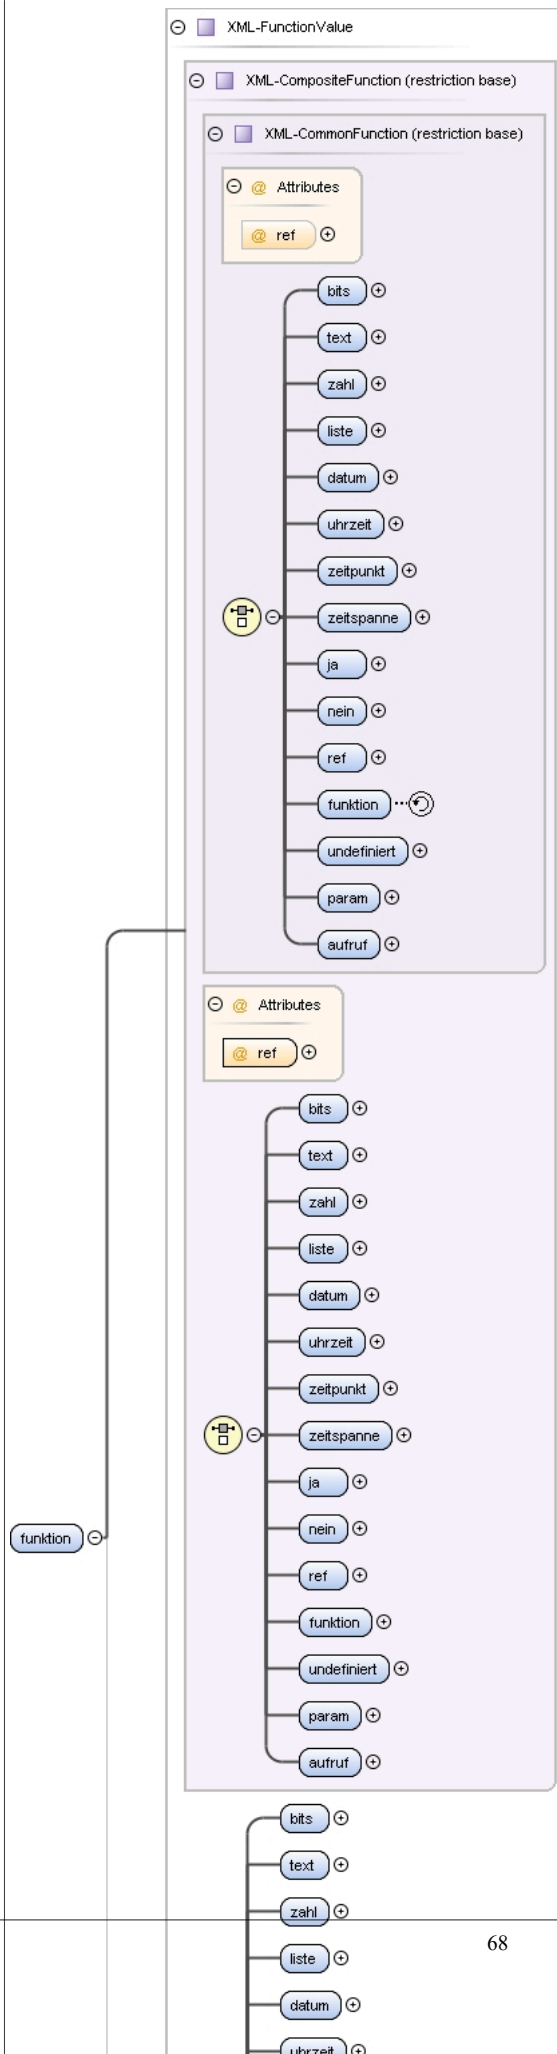
Element XML-CommonFunction / ref

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-ObjectValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:int <ul style="list-style-type: none"> XML-Ref <ul style="list-style-type: none"> XML-ObjectValue |
| Properties | content: complex |
| Source | <code><xs:element name="ref" type="XML-ObjectValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CommonFunction / funktion

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-FunctionValue | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-CompositeFunction XML-FunctionValue | | | |
| Properties | content: complex | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Instance | <pre><funktion ref="" xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </funktion></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <xs:element name="funktion" type="XML-FunctionValue"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-FunctionValue / bits

| | | | | |
|-----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-BinaryValue | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:hexBinary XML-BinaryContent XML-BinaryValue | | | |
| Properties | content: complex | | | |
| Source | <xs:element name="bits" type="XML-BinaryValue"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-FunctionValue / text

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-StringValue | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | | |

| | |
|-----------------|---|
| Properties | content: complex |
| Source | <code><xs:element name="text" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

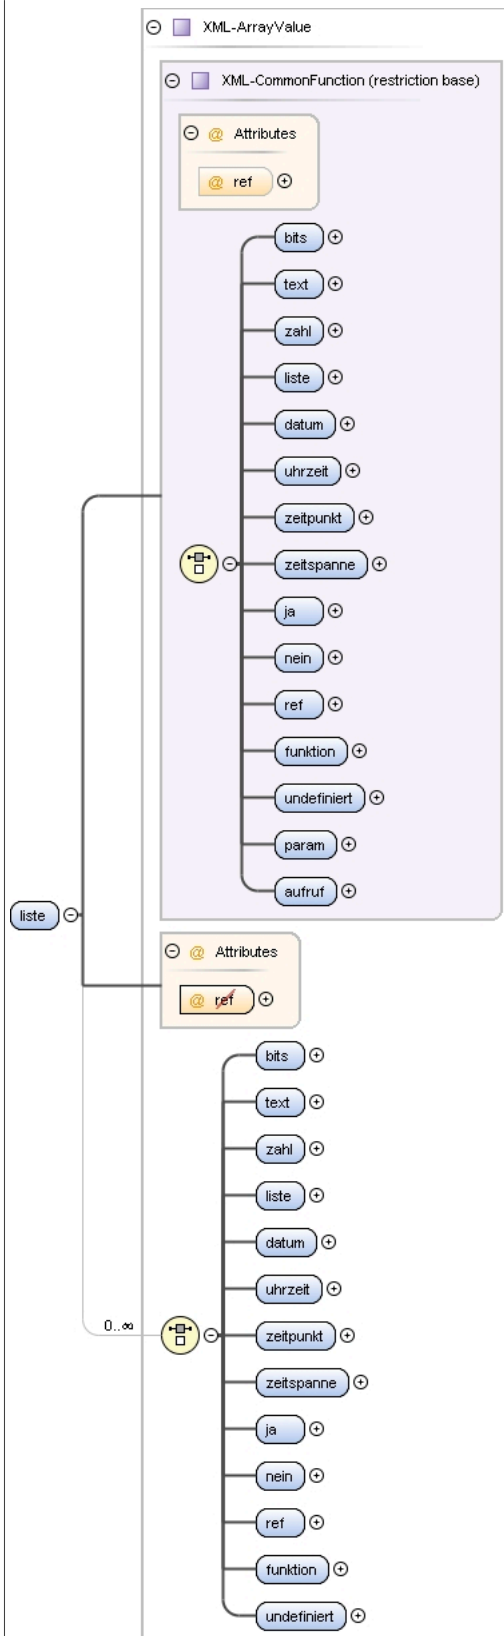
Element XML-FunctionValue / zahl

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="zahl" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-FunctionValue / liste

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-ArrayValue |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><liste xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </liste></pre> |
| Source | <code><xs:element name="liste" type="XML-ArrayValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ArrayValue / undefiniert

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-VoidValue |
| Properties | content: complex |
| Source | <code><xs:element name="undefiniert" type="XML-VoidValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-FunctionValue / datum

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DateValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:date <ul style="list-style-type: none"> XML-DateContent XML-DateValue |
| Properties | content: complex |
| Source | <code><xs:element name="datum" type="XML-DateValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-FunctionValue / uhrzeit

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-TimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:time <ul style="list-style-type: none"> XML-TimeContent |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> XML-TimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-FunctionValue / zeitpunkt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:dateTime XML-DatetimeContent XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitpunkt" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-FunctionValue / zeitspanne


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:duration XML-DurationContent XML-DurationValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitspanne" type="XML-DurationValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-FunctionValue / ja

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-TrueValue |
| Properties | content: complex |
| Source | <code><xs:element name="ja" type="XML-TrueValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-FunctionValue / nein

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram |  A diagram showing a blue rounded rectangle labeled 'nein' connected by a line to a purple square labeled 'XML-FalseValue'. |
| Type | XML-FalseValue |
| Properties | content: complex |
| Source | <code><xs:element name="nein" type="XML-FalseValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

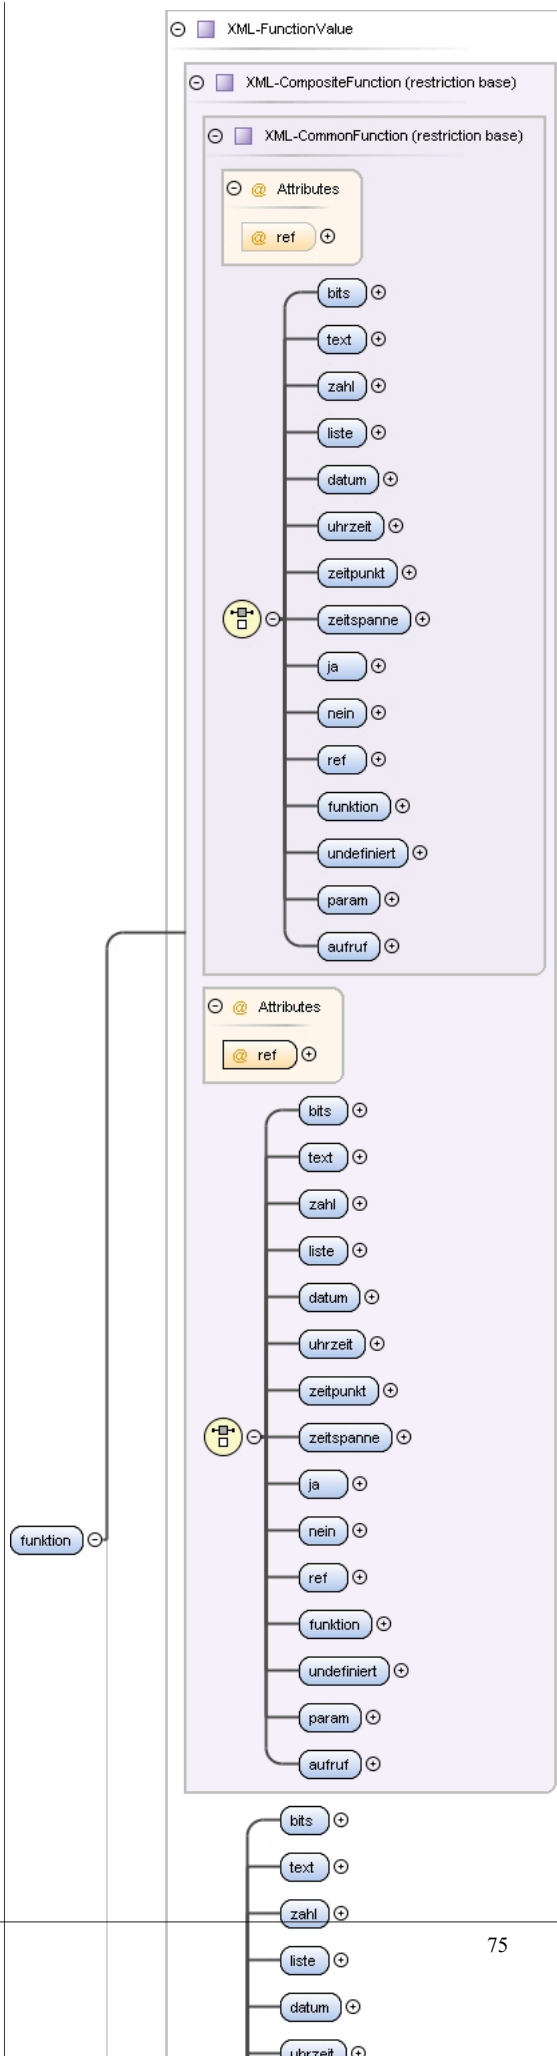
Element XML-FunctionValue / ref

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  A diagram showing a blue rounded rectangle labeled 'ref' connected by a line to a purple rounded rectangle labeled 'XML-Ref'. Above 'XML-Ref' is a purple square labeled 'XML-ObjectValue'. |
| Type | XML-ObjectValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:int • XML-Ref • XML-ObjectValue |
| Properties | content: complex |
| Source | <code><xs:element name="ref" type="XML-ObjectValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-FunctionValue / funktion


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-FunctionValue | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-CommonFunction<ul style="list-style-type: none">XML-CompositeFunction<ul style="list-style-type: none">XML-FunctionValue | | | |
| Properties | content: complex | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Instance | <pre><funktion ref="" xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </funktion></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <xs:element name="funktion" type="XML-FunctionValue" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-FunctionValue / undefiniert

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-VoidValue |
| Properties | content: complex |
| Source | <xs:element name="undefiniert" type="XML-VoidValue"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-FunctionValue / param

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the 'param' element. It is a complex type derived from the 'XML-ParamFunction' base type. The 'param' element is shown as a rounded rectangle with a blue border. A line connects it to a larger rounded rectangle representing the 'XML-ParamFunction' base type, which is also a complex type. Inside the 'XML-ParamFunction' box, there is a smaller rounded rectangle representing the 'xs:unsignedShort' primitive type, which is connected to the 'XML-ParamFunction' box by a line. The 'XML-ParamFunction' box has a small circle with a minus sign in the top left corner, indicating it is a complex type. The 'xs:unsignedShort' box has a small square with a diagonal line in the top left corner, indicating it is a primitive type.</p> |
| Type | XML-ParamFunction |
| Properties | content: complex |
| Source | <xs:element name="param" type="XML-ParamFunction"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-FunctionValue / aufruf

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
|-----------|---------------------|--|--|--|

| | | | | |
|-----------------|--|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none">XML-CommonFunction<ul style="list-style-type: none">XML-CompositeFunction | | | |
| Properties | content: complex | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Instance | <pre><aufruf ref=" " xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </aufruf></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <xs:element name="aufruf" type="XML-CompositeFunction"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-CompositeFunction / bits

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates a UML class or element structure. On the left, there is a blue rounded rectangle labeled 'bits'. A line connects it to a larger, light purple rounded rectangle labeled 'XML-BinaryContent'. This rectangle has a small circle with a minus sign at its top-left corner and a small circle with a plus sign at its top-right corner. Above the 'XML-BinaryContent' rectangle is a smaller, light purple rectangle labeled 'XML-BinaryValue', which also has a small circle with a minus sign at its top-left corner. A line connects the 'XML-BinaryValue' rectangle to the 'XML-BinaryContent' rectangle, indicating a generalization or inheritance relationship.</p> |
| Type | XML-BinaryValue |
| Type hierarchy | <ul style="list-style-type: none">• xs:hexBinary<ul style="list-style-type: none">• XML-BinaryContent<ul style="list-style-type: none">• XML-BinaryValue |
| Properties | content: complex |
| Source | <code><xs:element name="bits" type="XML-BinaryValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CompositeFunction / text

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates a class hierarchy and an instance. A box labeled 'XML-StringValue' contains a smaller box labeled 'XML-StringContent'. A line connects a 'text' element to an instance of 'XML-StringContent'.</p> |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none">xs:string<ul style="list-style-type: none">XML-StringContent<ul style="list-style-type: none">XML-StringValue |
| Properties | content: complex |
| Source | <xs:element name="text" type="XML-StringValue"/> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

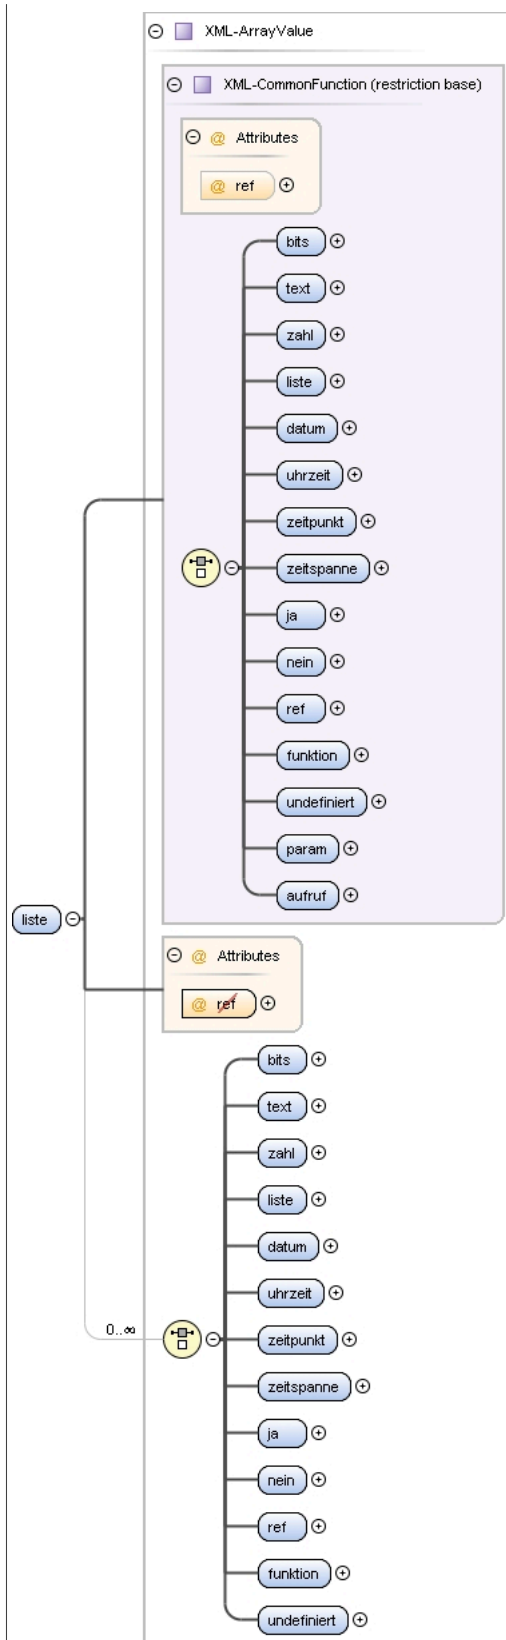
Element XML-CompositeFunction / zahl

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <pre> classDiagram class XMLIntegerValue { XMLIntegerContent } class XMLIntegerContent { zahl } XMLIntegerValue -- XMLIntegerContent </pre> |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="zahl" type="XML-IntegerValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CompositeFunction / liste

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-ArrayValue |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><liste xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </liste></pre> |
| Source | <code><xs:element name="liste" type="XML-ArrayValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CompositeFunction / datum

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DateValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:date • XML-DateContent • XML-DateValue |
| Properties | content: complex |
| Source | <code><xs:element name="datum" type="XML-DateValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CompositeFunction / uhrzeit


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-TimeValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:time • XML-TimeContent • XML-TimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CompositeFunction / zeitpunkt


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:dateTime XML-DatetimeContent XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitpunkt" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-CompositeFunction / zeitspanne

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:duration XML-DurationContent XML-DurationValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitspanne" type="XML-DurationValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-CompositeFunction / ja

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-TrueValue |
| Properties | content: complex |
| Source | <code><xs:element name="ja" type="XML-TrueValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CompositeFunction / nein

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-FalseValue |
| Properties | content: complex |
| Source | <code><xs:element name="nein" type="XML-FalseValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CompositeFunction / ref

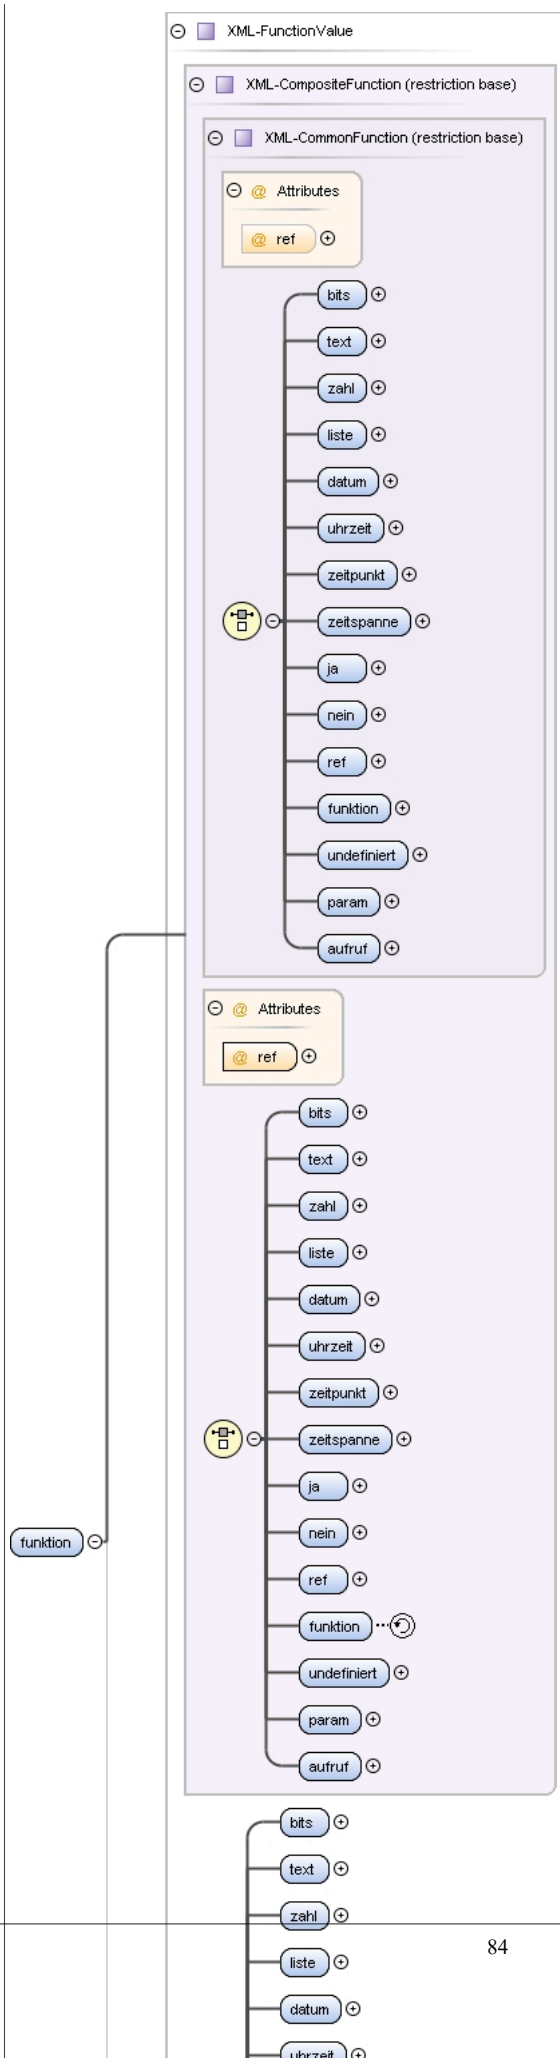
| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|--|
| Type | XML-ObjectValue |
| Type hierarchy | <ul style="list-style-type: none">• xs:int<ul style="list-style-type: none">• XML-Ref<ul style="list-style-type: none">• XML-ObjectValue |
| Properties | content: complex |
| Source | <code><xs:element name="ref" type="XML-ObjectValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-CompositeFunction / funktion

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-FunctionValue | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-CompositeFunction XML-FunctionValue | | | |
| Properties | content: complex | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Instance | <pre><funktion ref="" xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </funktion></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <xs:element name="funktion" type="XML-FunctionValue"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-CompositeFunction / undefiniert

| | | | | |
|-----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-VoidValue | | | |
| Properties | content: complex | | | |
| Source | <xs:element name="undefiniert" type="XML-VoidValue"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

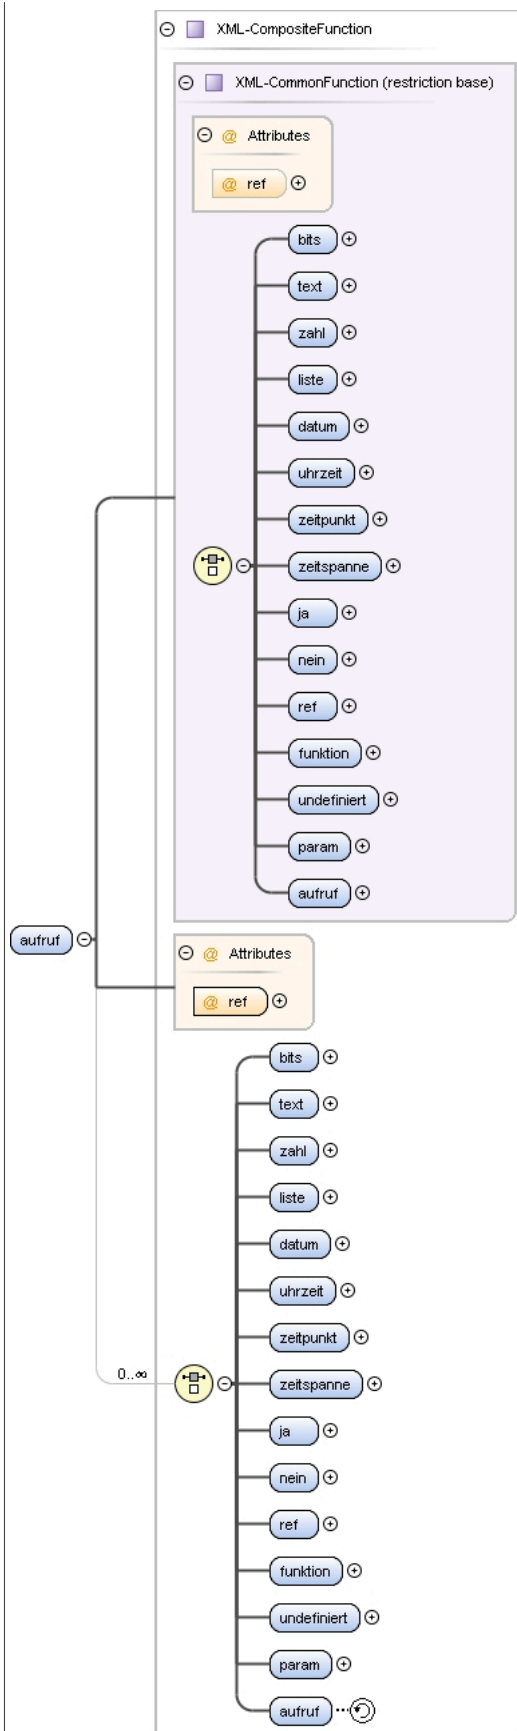
Element XML-CompositeFunction / param

| | | | | |
|-----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-ParamFunction | | | |
| Properties | content: complex | | | |
| Source | <xs:element name="param" type="XML-ParamFunction"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-CompositeFunction / aufruf

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
|-----------|---------------------|--|--|--|


Diagram



Type XML-CompositeFunction

| | | | | |
|-----------------|--|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none">XML-CommonFunction<ul style="list-style-type: none">XML-CompositeFunction | | | |
| Properties | content: complex | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Instance | <pre><aufruf ref=" " xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </aufruf></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <xs:element name="aufruf" type="XML-CompositeFunction"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-CommonFunction / undefiniert

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-VoidValue |
| Properties | content: complex |
| Source | <xs:element name="undefiniert" type="XML-VoidValue" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

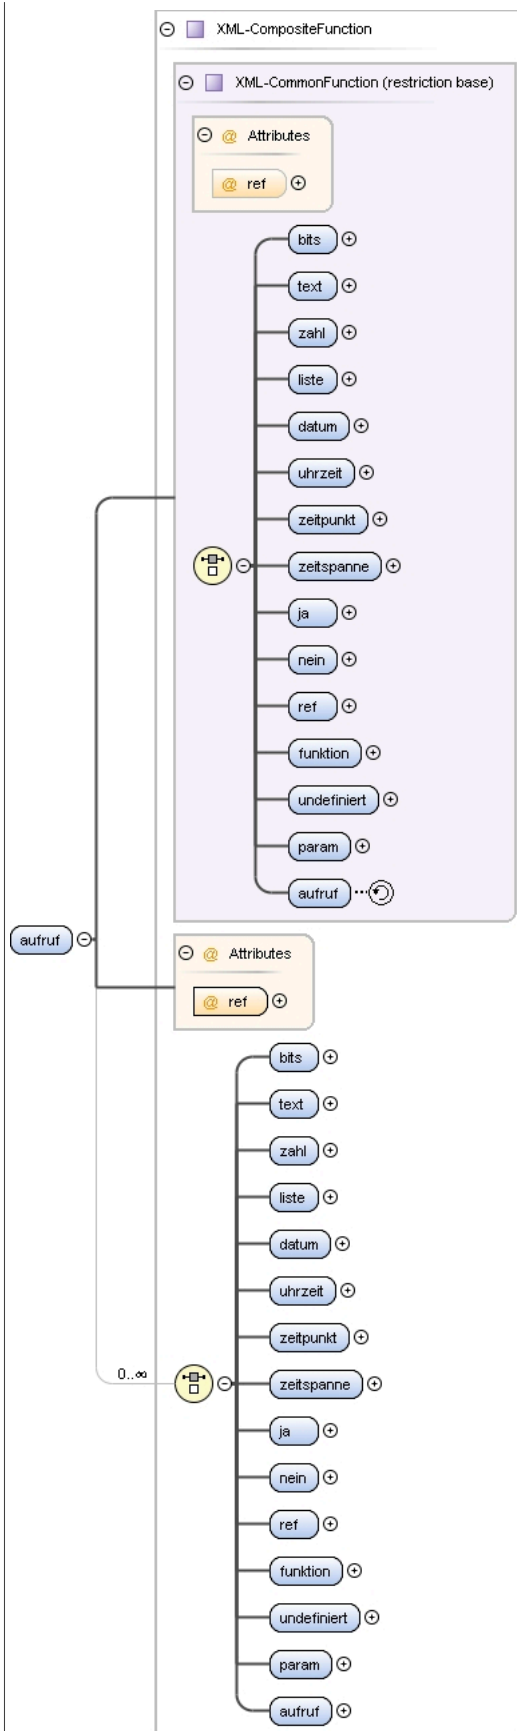
Element XML-CommonFunction / param

| | | | |
|-----------------|--|---------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | <p>The diagram illustrates the structure of the 'param' element. It is represented as a rounded rectangle labeled 'param' with a small circle containing a minus sign to its right. A line connects this circle to a larger rounded rectangle labeled 'XML-ParamFunction'. Inside the 'XML-ParamFunction' box, there is a smaller rounded rectangle labeled 'xs:unsignedShort' with a small circle containing a minus sign to its left. A legend in the top right corner shows a purple square next to the text 'XML-ParamFunction'.</p> | | |
| Type | XML-ParamFunction | | |
| Properties | content: | complex | |
| Source | <code><xs:element name="param" type="XML-ParamFunction" /></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-CommonFunction / aufruf

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
|-----------|---------------------|--|--|--|

Diagram



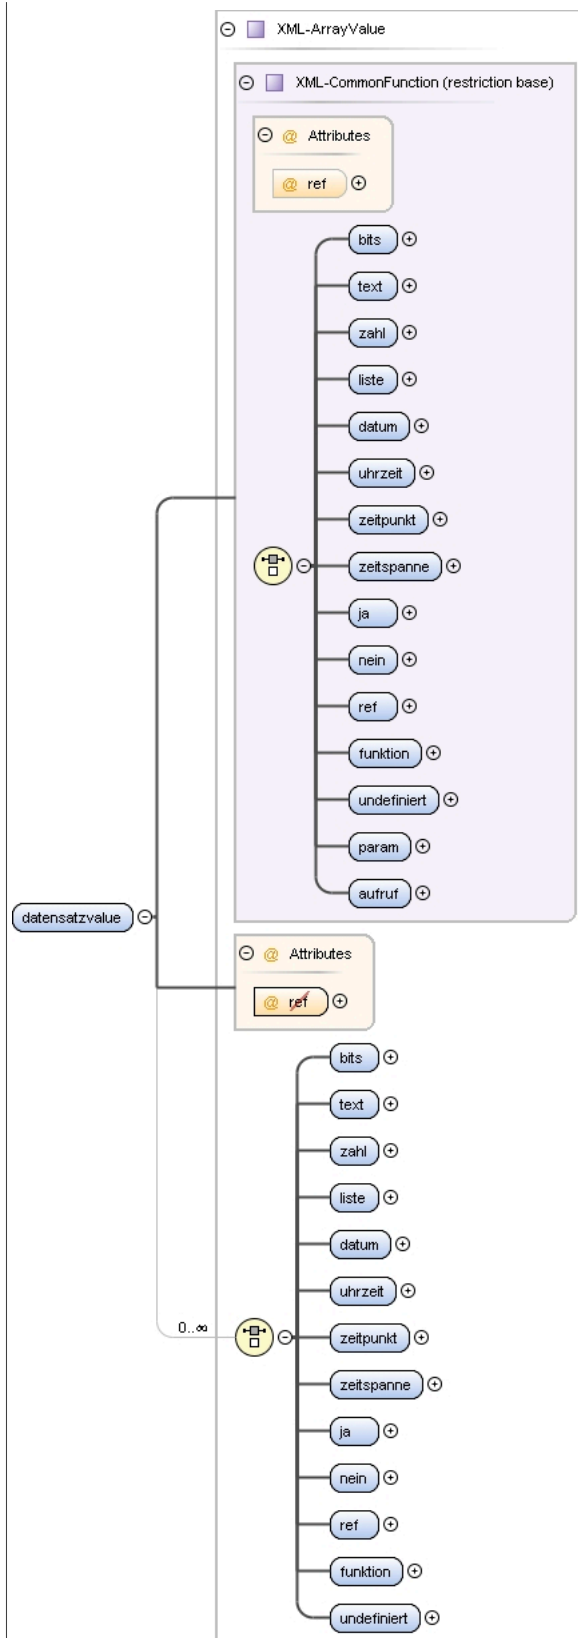
Type XML-CompositeFunction

| | | | | |
|-----------------|--|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-CompositeFunction | | | |
| Properties | content: complex | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Instance | <pre><aufruf ref=" " xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </aufruf></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <xs:element name="aufruf" type="XML-CompositeFunction" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Datentabelle-Item / datensatzvalue

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

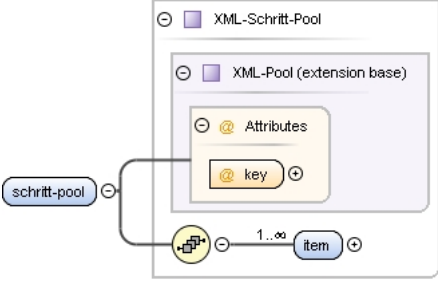
Diagram



| | |
|----------------|--|
| Type | XML-ArrayValue |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><datensatzvalue xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </datensatzvalue></pre> |
| Source | <code><xs:element name="datensatzvalue" type="XML-ArrayValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / schritt-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Schritt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Schritt-Pool | | | |
| Properties | content: | complex | | |
| Model | item+ | | | |
| Children | item | | | |
| Instance | <pre><schritt-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </schritt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="schritt-pool" type="XML-Schritt-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Schritt-Pool / item

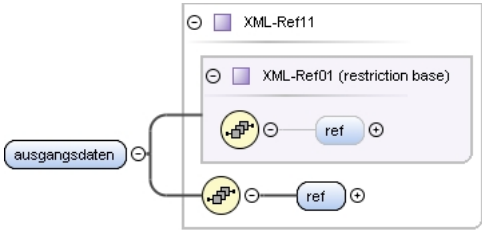
| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

| | | | | | |
|-----------------|---|----------|---------|------------|-----------|
| Diagram | | | | | |
| Type | XML-Schritt-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Schritt-Item | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | name , (ausgang auswahl berechnung entscheidung parallelisierung) | | | | |
| Children | ausgang, auswahl, berechnung, entscheidung, name, parallelisierung | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <ausgang>{1,1}</ausgang> <auswahl>{1,1}</auswahl> <berechnung>{1,1}</berechnung> <entscheidung>{1,1}</entscheidung> <parallelisierung>{1,1}</parallelisierung> </item></pre> | | | | |
| Source | <pre><xs:element name="item" type="XML-Schritt-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>[Implizites key Attribut]</xs:documentation> </xs:annotation> </xs:element></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

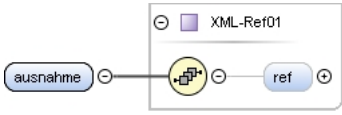
Element XML-Schritt-Item / ausgang

| | | | |
|-----------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-Ausgangsschritt-Part | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | ausgangsdaten , ausnahme , nachfolger | | |
| Children | ausgangsdaten, ausnahme, nachfolger | | |
| Instance | <pre><ausgang xmlns="http://vdv/ka/pkm/2"> <ausgangsdaten>{1,1}</ausgangsdaten> <ausnahme>{1,1}</ausnahme> <nachfolger>{1,1}</nachfolger> </ausgang></pre> | | |
| Source | <pre><xs:element name="ausgang" type="XML-Ausgangsschritt-Part" /></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Ausgangsschritt-Part / ausgangsdaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows the 'ausgangsdaten' element connected to a box labeled 'XML-Ref11'. Inside this box is a sub-box labeled 'XML-Ref01 (restriction base)'. Both boxes contain a 'ref' element. The 'ausgangsdaten' element is connected to the 'XML-Ref11' box, which in turn is connected to the 'XML-Ref01' box, which is connected to the 'ref' element. |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><ausgangsdaten xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </ausgangsdaten></pre> |
| Source | <pre><xs:element name="ausgangsdaten" type="XML-Ref11" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangsschritt-Part / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows the 'ausnahme' element connected to a box labeled 'XML-Ref01'. Inside this box is a 'ref' element. The 'ausnahme' element is connected to the 'XML-Ref01' box, which is connected to the 'ref' element. |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangsschritt-Part / nachfolger

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows the 'nachfolger' element connected to a box labeled 'XML-Ref01'. Inside this box is a 'ref' element. The 'nachfolger' element is connected to the 'XML-Ref01' box, which is connected to the 'ref' element. |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><nachfolger xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </nachfolger></pre> |
| Source | <pre><xs:element name="nachfolger" type="XML-Ref01" /></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Schritt-Item / auswahl

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Auswahlschritt-Part |
| Properties | content: complex |
| Model | auswahldaten , ausnahme , nachfolger |
| Children | ausnahme, auswahldaten, nachfolger |
| Instance | <pre><auswahl xmlns="http://vdv/ka/pkm/2"> <auswahldaten>{1,1}</auswahldaten> <ausnahme>{1,1}</ausnahme> <nachfolger>{1,1}</nachfolger> </auswahl></pre> |
| Source | <pre><xs:element name="auswahl" type="XML-Auswahlschritt-Part"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Auswahlschritt-Part / auswahldaten

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><auswahldaten xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </auswahldaten></pre> |
| Source | <pre><xs:element name="auswahldaten" type="XML-Ref11"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Auswahlschritt-Part / ausnahme

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Auswahlschritt-Part / nachfolger

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList1N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefList1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><nachfolger xmlns="http://vdv/ka/pkm/2"> <ref>{1,unbounded}</ref> </nachfolger></pre> |
| Source | <pre><xs:element name="nachfolger" type="XML-RefList1N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-RefList1N / ref

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref |
| Properties | content: simple maxOccurs: unbounded |
| Facets | minInclusive 1 |
| Source | <pre><xs:element name="ref" type="XML-Ref" maxOccurs="unbounded" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Schritt-Item / berechnung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|--|
| Type | XML-Berechnungsschritt-Part |
| Properties | content: complex |
| Model | funktion , ausnahme , nachfolger |
| Children | ausnahme, funktion, nachfolger |
| Instance | <pre><berechnung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <ausnahme>{1,1}</ausnahme> <nachfolger>{1,1}</nachfolger> </berechnung></pre> |
| Source | <code><xs:element name="berechnung" type="XML-Berechnungsschritt-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Berechnungsschritt-Part / funktion


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </funktion></pre> |
| Source | <code><xs:element name="funktion" type="XML-Ref11" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Berechnungsschritt-Part / ausnahme

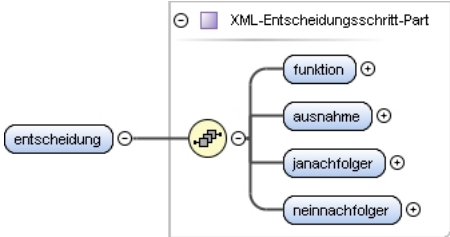
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </ausnahme></pre> |
| Source | <code><xs:element name="ausnahme" type="XML-Ref01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Berechnungsschritt-Part / nachfolger

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><nachfolger xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </nachfolger></pre> |
| Source | <pre><xs:element name="nachfolger" type="XML-Ref01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Schritt-Item / entscheidung

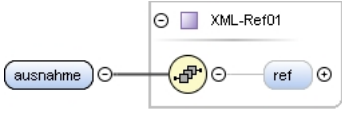
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Entscheidungsschritt-Part |
| Properties | content: complex |
| Model | funktion , ausnahme , janachfolger , neinnachfolger |
| Children | ausnahme, funktion, janachfolger, neinnachfolger |
| Instance | <pre><entscheidung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <ausnahme>{1,1}</ausnahme> <janachfolger>{1,1}</janachfolger> <neinnachfolger>{1,1}</neinnachfolger> </entscheidung></pre> |
| Source | <pre><xs:element name="entscheidung" type="XML-Entscheidungsschritt-Part"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Entscheidungsschritt-Part / funktion

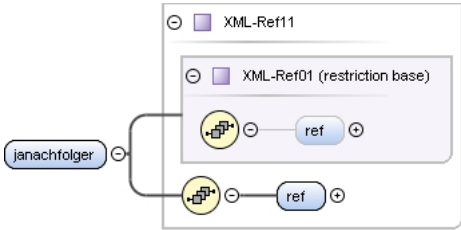
| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </funktion></pre> |
| Source | <pre><xs:element name="funktion" type="XML-Ref11" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Entscheidungsschritt-Part / ausnahme

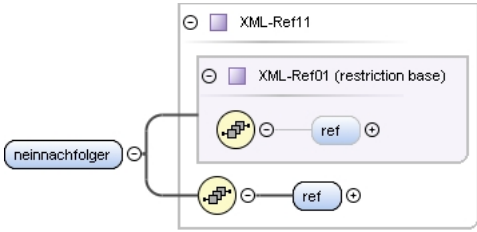
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a box labeled 'XML-Ref01'. Inside the box, there is a yellow circle with a crosshair icon, which is connected to a blue oval labeled 'ref'. |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Entscheidungsschritt-Part / janachfolger

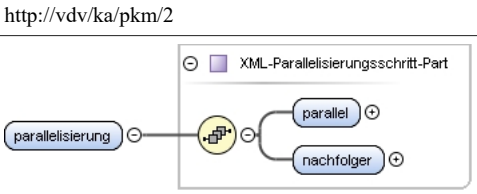
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a box labeled 'XML-Ref11'. Inside, there is a yellow circle with a crosshair icon connected to a blue oval labeled 'ref'. This entire structure is enclosed within a larger box labeled 'XML-Ref01 (restriction base)'. The 'XML-Ref11' box is also connected to a blue oval labeled 'janachfolger'. |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><janachfolger xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </janachfolger></pre> |
| Source | <pre><xs:element name="janachfolger" type="XML-Ref11" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Entscheidungsschritt-Part / neinnachfolger

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><neinnachfolger xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </neinnachfolger></pre> |
| Source | <pre><xs:element name="neinnachfolger" type="XML-Ref11"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Schritt-Item / parallelisierung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Parallelisierungsschritt-Part |
| Properties | content: complex |
| Model | parallel , nachfolger |
| Children | nachfolger, parallel |
| Instance | <pre><parallelisierung xmlns="http://vdv/ka/pkm/2"> <parallel>{1,1}</parallel> <nachfolger>{1,1}</nachfolger> </parallelisierung></pre> |
| Source | <pre><xs:element name="parallelisierung" type="XML-Parallelisierungsschritt-Part"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Parallelisierungsschritt-Part / parallel

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><parallel xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </parallel></pre> |
| Source | <pre><xs:element name="parallel" type="XML-RefList0N"/></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Parallelisierungsschritt-Part / nachfolger

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a blue rounded rectangle labeled 'nachfolger' connected to a yellow circle with a plus sign, which is then connected to a blue rounded rectangle labeled 'ref'. A legend box titled 'XML-Ref01' contains a purple square icon. |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><nachfolger xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </nachfolger></pre> |
| Source | <pre><xs:element name="nachfolger" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / variable-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Variable-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool<ul style="list-style-type: none">XML-Variable-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><variable-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </variable-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="variable-pool" type="XML-Variable-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Name-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Name-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name | | | | | | |
| Children | name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Name-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Variable-Pool / item

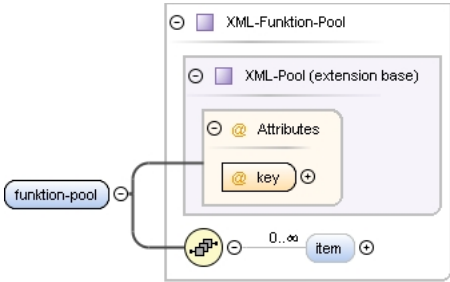
| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Variable-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Variable-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name | | | | | | |
| Children | name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Variable-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Variable-Item / name

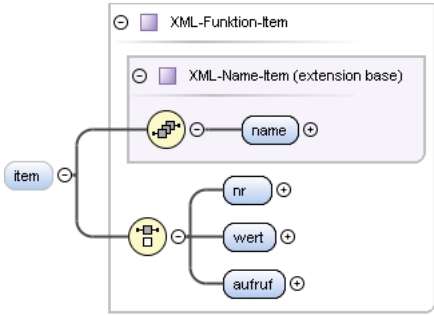
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / funktion-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  <p>The diagram shows the structure of the XML-Funktion-Pool element. It is a container for a sequence of 'item' elements. The 'item' element is a complex type that contains an 'Attributes' group (which includes a 'key' attribute) and a 'name' attribute. The 'item' element is also associated with the 'XML-Pool (extension base)' and 'XML-Funktion-Pool' types.</p> | | | |
| Type | XML-Funktion-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Funktion-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><funktion-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </funktion-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <code><xs:element name="funktion-pool" type="XML-Funktion-Pool" /></code> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Funktion-Pool / item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram |  <p>The diagram shows the structure of the XML-Funktion-Item element. It is a complex type that contains a 'name' attribute and a 'value' attribute. The 'value' attribute is a sequence of three elements: 'nr', 'wert', and 'aufruf'. The 'item' element is also associated with the 'XML-Name-Item (extension base)' and 'XML-Funktion-Item' types.</p> | | | |
| Type | XML-Funktion-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Funktion-Item | | | |

| | |
|-----------------|--|
| Properties | content: complex |
| | minOccurs: 0 |
| | maxOccurs: unbounded |
| Model | name , (nr wert aufruf) |
| Children | aufruf, name, nr, wert |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <nr>{1,1}</nr> <wert>{1,1}</wert> <aufruf ref="">{1,1}</aufruf> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Funktion-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

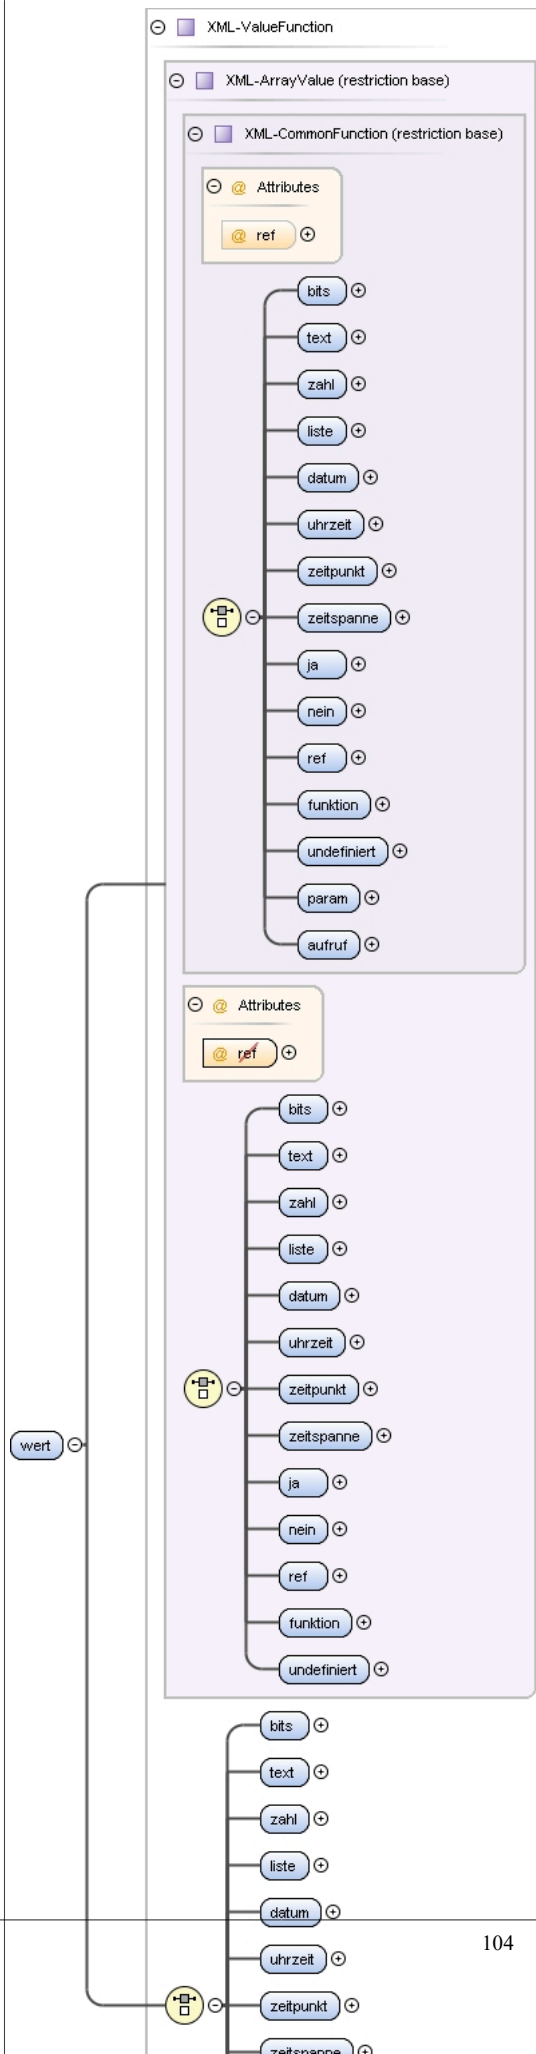
Element XML-Funktion-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Funktion-Item / wert

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|-----------------|---|
| Type | XML-ValueFunction |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction <ul style="list-style-type: none"> XML-ArrayValue <ul style="list-style-type: none"> XML-ValueFunction |
| Properties | content: complex |
| Model | bits text zahl liste datum uhrzeit Zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, Zeitpunkt, zeitspanne |
| Instance | <pre><wert xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <Zeitpunkt>{1,1}</Zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </wert></pre> |
| Source | <code><xs:element name="wert" type="XML-ValueFunction"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

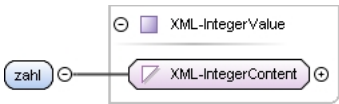
Element XML-ValueFunction / bits

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-BinaryValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:hexBinary <ul style="list-style-type: none"> XML-BinaryContent <ul style="list-style-type: none"> XML-BinaryValue |
| Properties | content: complex |
| Source | <code><xs:element name="bits" type="XML-BinaryValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ValueFunction / text

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string <ul style="list-style-type: none"> XML-StringContent <ul style="list-style-type: none"> XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="text" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

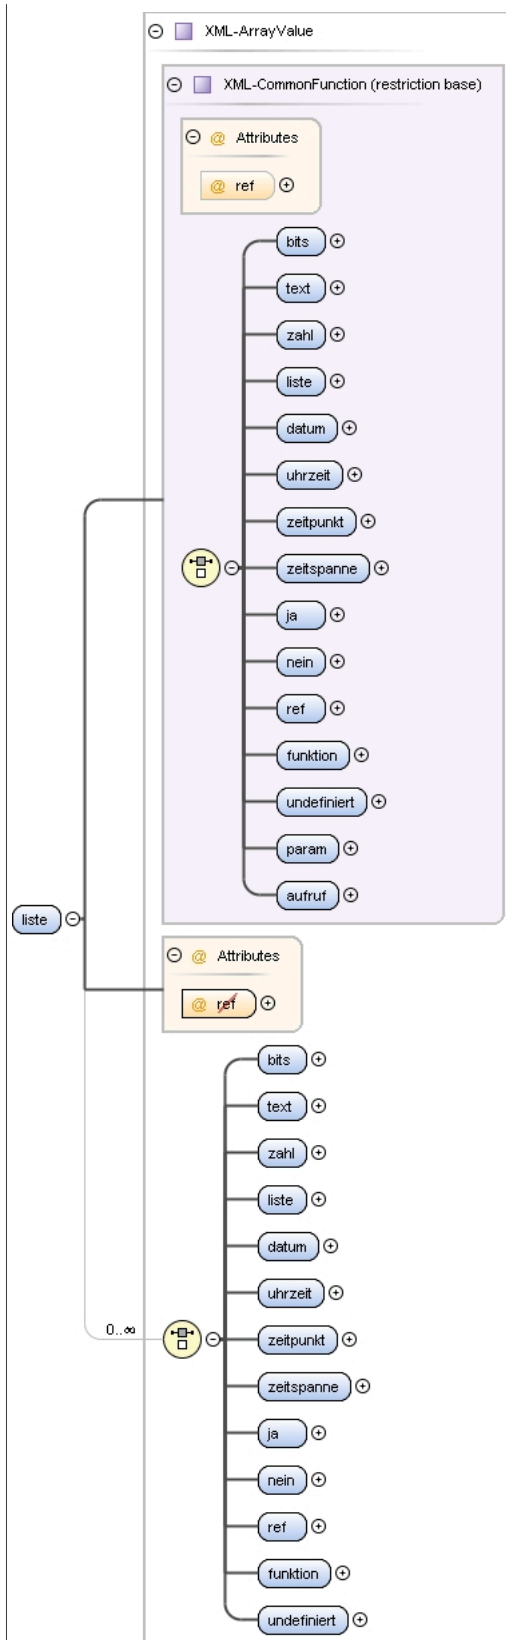
Element XML-ValueFunction / zahl

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none">• xs:long<ul style="list-style-type: none">• XML-IntegerContent• XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="zahl" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ValueFunction / liste

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-ArrayValue |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre> <liste xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </liste> </pre> |
| Source | <code><xs:element name="liste" type="XML-ArrayValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ValueFunction / datum

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DateValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:date XML-DateContent XML-DateValue |
| Properties | content: complex |
| Source | <code><xs:element name="datum" type="XML-DateValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ValueFunction / uhrzeit


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-TimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:time XML-TimeContent XML-TimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ValueFunction / zeitpunkt


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:dateTime XML-DatetimeContent XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitpunkt" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-ValueFunction / zeitspanne

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:duration XML-DurationContent XML-DurationValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitspanne" type="XML-DurationValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-ValueFunction / ja

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-TrueValue |
| Properties | content: complex |
| Source | <code><xs:element name="ja" type="XML-TrueValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ValueFunction / nein

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-FalseValue |
| Properties | content: complex |
| Source | <code><xs:element name="nein" type="XML-FalseValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ValueFunction / ref

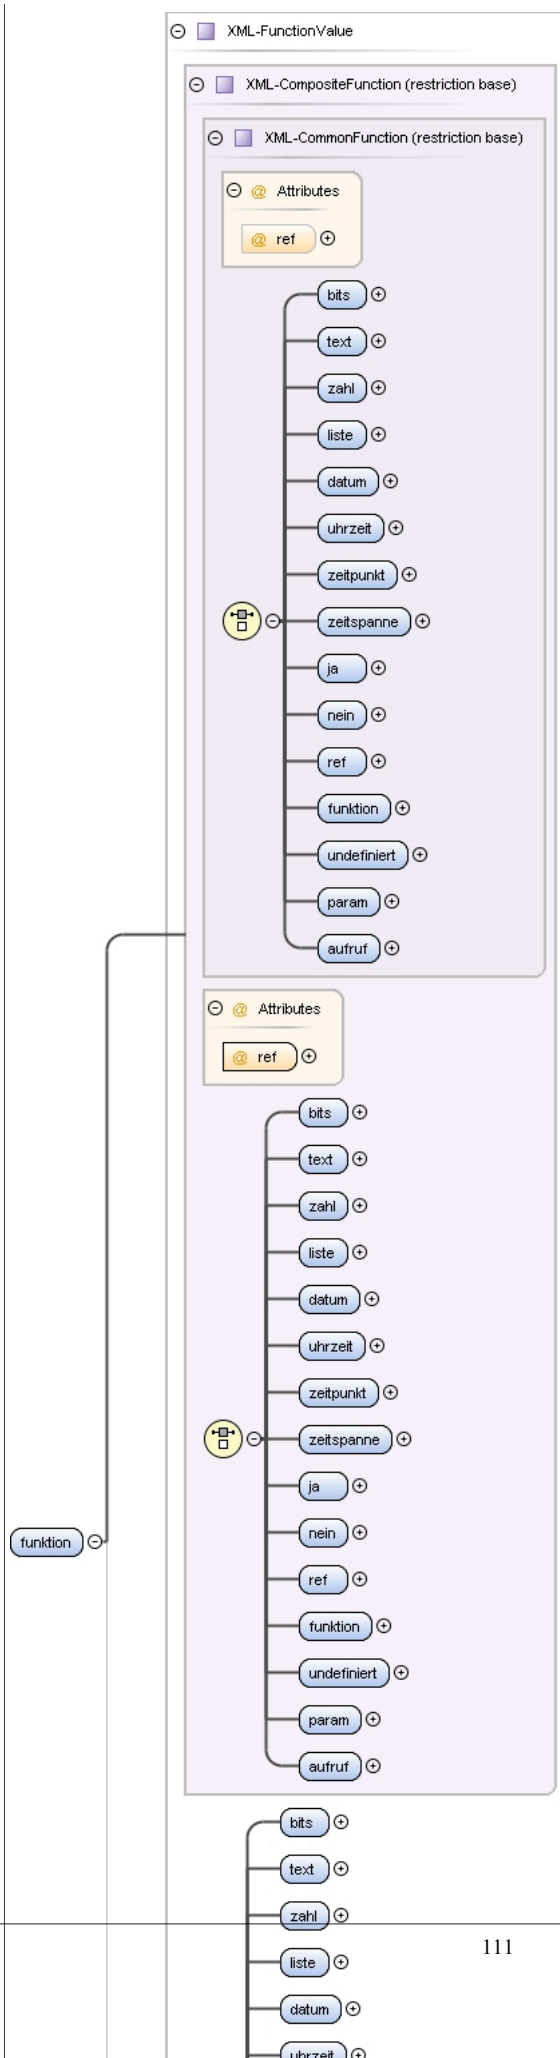
| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|--|
| Type | XML-ObjectValue |
| Type hierarchy | <ul style="list-style-type: none">• xs:int<ul style="list-style-type: none">• XML-Ref<ul style="list-style-type: none">• XML-ObjectValue |
| Properties | content: complex |
| Source | <code><xs:element name="ref" type="XML-ObjectValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-ValueFunction / funktion

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-FunctionValue | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-CompositeFunction XML-FunctionValue | | | |
| Properties | content: complex | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Instance | <pre><funktion ref="" xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </funktion></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <xs:element name="funktion" type="XML-FunctionValue"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

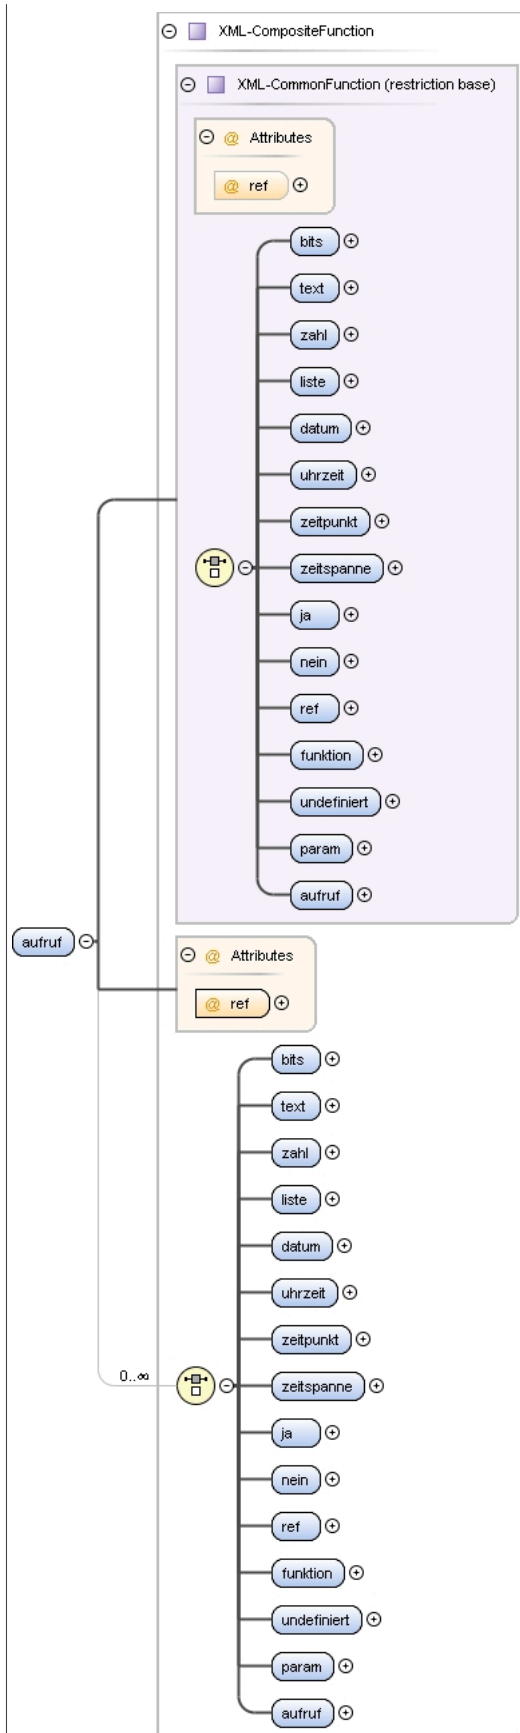
Element XML-ValueFunction / undefiniert

| | | | | |
|-----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-VoidValue | | | |
| Properties | content: complex | | | |
| Source | <xs:element name="undefiniert" type="XML-VoidValue"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Funktion-Item / aufruf

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



Type XML-CompositeFunction

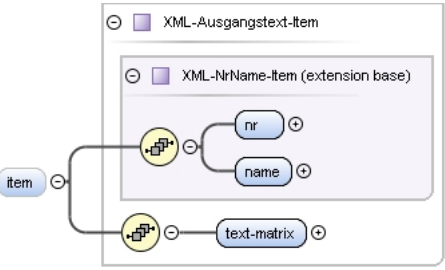
| | | | | |
|-----------------|--|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-CompositeFunction | | | |
| Properties | content: complex | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Instance | <pre><aufruf ref=" " xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> <param>{1,1}</param> <aufruf ref="">{1,1}</aufruf> </aufruf></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <xs:element name="aufruf" type="XML-CompositeFunction" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Tarifmodul / ausnahme-pool


| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Ausnahme-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Ausgangstext-Pool XML-Ausnahme-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausnahme-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausnahme-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="ausnahme-pool" type="XML-Ausnahme-Pool" /> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Ausgangstext-Pool / item

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram |  | | | | | | |
| Type | XML-Ausgangstext-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name, text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausgangstext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Ausgangstext-Item / text-matrix

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  | | |
| Type | XML-Ausgangstext-Matrix | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | text* | | |
| Children | text | | |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> | | |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Ausnahme-Pool / item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Ausnahme-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Ausnahme-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name, text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausnahme-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Ausnahme-Item / nr

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Ausnahme-Item / name

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausnahme-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / auswahldaten-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Auswahldaten-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangssequenz-Pool XML-Auswahldaten-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |

| | | | | |
|-----------------|---|---------|----------|--|
| Instance | <pre><auswahldaten-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </auswahldaten-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="auswahldaten-pool" type="XML-Auswahldaten-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Ausgangssequenz-Pool / item

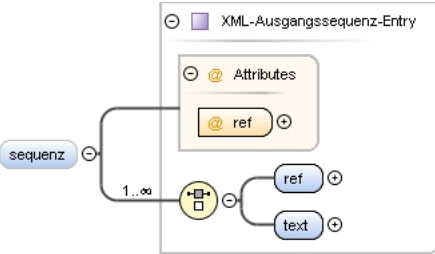
| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut} | | | | | | |
| Diagram | <pre>graph LR item((item)) --- name((name)) item --- seq((sequenz-matrix)) item --- def((defaultoption)) item --- aus((auswahloption)) name --- XMLNameItem[XML-Name-Item (extension base)]</pre> | | | | | | |
| Type | XML-Ausgangssequenz-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-ItemXML-Ausgangssequenz-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , sequenz-matrix , defaultoption{0,1} , auswahloption{0,1} | | | | | | |
| Children | auswahloption, defaultoption, name, sequenz-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <sequenz-matrix>{1,1}</sequenz-matrix> <defaultoption>{0,1}</defaultoption> <auswahloption>{0,1}</auswahloption> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausgangssequenz-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Ausgangssequenz-Item / sequenz-matrix


| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangssequenz-Matrix |
| Properties | content: complex |
| Model | sequenz* |
| Children | sequenz |
| Instance | <pre><sequenz-matrix xmlns="http://vdv/ka/pkm/2"> <sequenz ref="">{0,unbounded}</sequenz> </sequenz-matrix></pre> |

| | |
|-----------------|---|
| | <code></sequenz-matrix></code> |
| Source | <code><xs:element name="sequenz-matrix" type="XML-Ausgangssequenz-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangssequenz-Matrix / sequenz

| | | | | |
|-----------------|---|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram |  | | | |
| Type | XML-Ausgangssequenz-Entry | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| | maxOccurs: | unbounded | | |
| Model | ref text | | | |
| Children | ref, text | | | |
| Instance | <pre><sequenz ref="" xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> <text>{1,1}</text> </sequenz></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="sequenz" type="XML-Ausgangssequenz-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Ausgangssequenz-Entry / ref

| | | | |
|-----------------|---|--------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  | | |
| Type | XML-Ref | | |
| Properties | content: | simple | |
| Facets | minInclusive | 1 | |
| Source | <xs:element name="ref" type="XML-Ref" /> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Ausgangssequenz-Entry / text

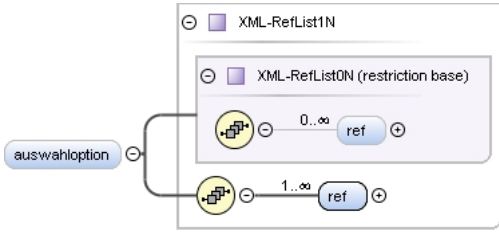
| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-StringValue | | | |

| | |
|-----------------|---|
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="text" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangssequenz-Item / defaultoption

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex minOccurs: 0 |
| Model | ref{0,1} |
| Children | ref |
| Instance | <code><defaultoption xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </defaultoption></code> |
| Source | <code><xs:element name="defaultoption" type="XML-Ref01" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangssequenz-Item / auswahloption

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList1N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefList1N |
| Properties | content: complex minOccurs: 0 |
| Model | ref+ |
| Children | ref |
| Instance | <code><auswahloption xmlns="http://vdv/ka/pkm/2"> <ref>{1,unbounded}</ref> </auswahloption></code> |
| Source | <code><xs:element name="auswahloption" type="XML-RefList1N" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Auswahldaten-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Auswahldaten-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Ausgangssequenz-Item XML-Auswahldaten-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , sequenz-matrix , defaultoption , auswahloption | | | | | | |
| Children | auswahloption, defaultoption, name, sequenz-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <sequenz-matrix>{1,1}</sequenz-matrix> <defaultoption>{1,1}</defaultoption> <auswahloption>{1,1}</auswahloption> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Auswahldaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Auswahldaten-Item / name

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringContent | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringContent" /></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Auswahldaten-Item / sequenz-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangssequenz-Matrix |
| Properties | content: complex |
| Model | sequenz* |
| Children | sequenz |
| Instance | <pre><sequenz-matrix xmlns="http://vdv/ka/pkm/2"> <sequenz ref="#">{0,unbounded}</sequenz> </sequenz-matrix></pre> |
| Source | <pre><xs:element name="sequenz-matrix" type="XML-Ausgangssequenz-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Auswahldaten-Item / defaultoption

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><defaultoption xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </defaultoption></pre> |
| Source | <pre><xs:element name="defaultoption" type="XML-Ref01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Auswahldaten-Item / auswahloption

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList1N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefList1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><auswahloption xmlns="http://vdv/ka/pkm/2"></pre> |

| | |
|-----------------|---|
| | <code><ref>{1,unbounded}</ref></code> <code></auswahloption></code> |
| Source | <code><xs:element name="auswahloption" type="XML-RefList1N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / auswahloption-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Auswahloption-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangssequenz-Pool<ul style="list-style-type: none">XML-Ausgangsdaten-Pool<ul style="list-style-type: none">XML-Auswahloption-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><auswahloption-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </auswahloption-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="auswahloption-pool" type="XML-Auswahloption-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Ausgangsdaten-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |


| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Ausgangsdaten-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Ausgangssequenz-Item XML-Ausgangsdaten-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , sequenz-matrix | | | | | | |
| Children | name, sequenz-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <sequenz-matrix>{1,1}</sequenz-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausgangsdaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Ausgangsdaten-Item / name

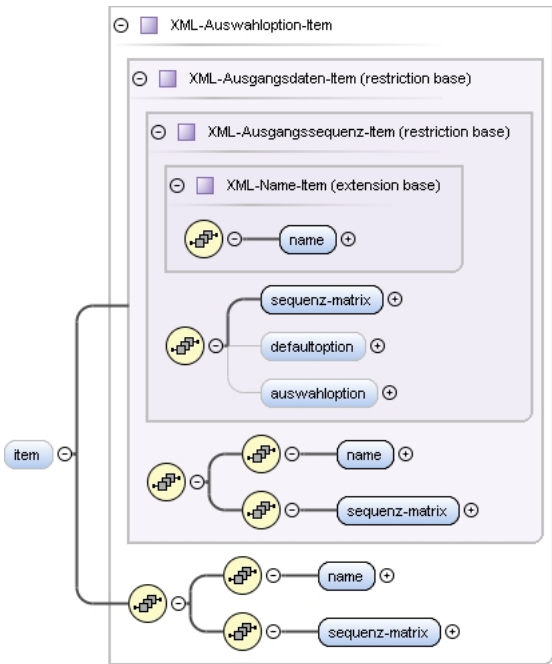
| | | | |
|-----------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringContent | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringContent" /></pre> | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Ausgangsdaten-Item / sequenz-matrix

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Ausgangssequenz-Matrix |
| Properties | content: complex |
| Model | sequenz* |
| Children | sequenz |
| Instance | <pre><sequenz-matrix xmlns="http://vdv/ka/pkm/2"> <sequenz ref="">{0,unbounded}</sequenz> </sequenz-matrix></pre> |
| Source | <pre><xs:element name="sequenz-matrix" type="XML-Ausgangssequenz-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Auswahloption-Pool / item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |
| Diagram |  |
| Type | XML-Auswahloption-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Ausgangssequenz-Item XML-Ausgangsdaten-Item XML-Auswahloption-Item |
| Properties | content: complex minOccurs: 0 maxOccurs: unbounded |
| Model | name , sequenz-matrix |
| Children | name, sequenz-matrix |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <sequenz-matrix>{1,1}</sequenz-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Auswahloption-Item" minOccurs="0" maxOccurs="unbounded"></pre> |

| | |
|-----------------|--|
| | <pre> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Auswahloption-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Auswahloption-Item / sequenz-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangssequenz-Matrix |
| Properties | content: complex |
| Model | sequenz* |
| Children | sequenz |
| Instance | <pre> <sequenz-matrix xmlns="http://vdv/ka/pkm/2"> <sequenz ref="">{0, unbounded}</sequenz> </sequenz-matrix> </pre> |
| Source | <pre><xs:element name="sequenz-matrix" type="XML-Ausgangssequenz-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / ausgangsdaten-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

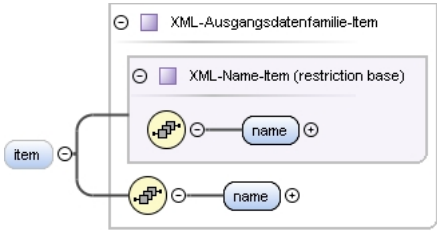
| | | | | |
|-----------------|--|---------|----------|--|
| Type | XML-Ausgangsdaten-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangssequenz-Pool<ul style="list-style-type: none">XML-Ausgangsdaten-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausgangsdaten-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausgangsdaten-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausgangsdaten-pool" type="XML-Ausgangsdaten-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Tarifmodul / ausgangsdatenfamilie-pool


| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Ausgangsdatenfamilie-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool<ul style="list-style-type: none">XML-Ausgangsdatenfamilie-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><ausgangsdatenfamilie-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausgangsdatenfamilie-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="ausgangsdatenfamilie-pool" type="XML-Ausgangsdatenfamilie-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Ausgangsdatenfamilie-Pool / item

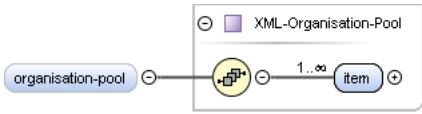
| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram |  The diagram shows a container box for 'XML-Ausgangsdatenfamilie-Item'. Inside, there is a 'restriction base' box labeled 'XML-Name-Item'. The main container has a yellow circle with a plus sign and a 'name' box. The 'restriction base' also has a yellow circle with a plus sign and a 'name' box. A line connects the 'name' box in the main container to the 'name' box in the 'restriction base'. | | | | | | |
| Type | XML-Ausgangsdatenfamilie-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Ausgangsdatenfamilie-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name | | | | | | |
| Children | name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Ausgangsdatenfamilie-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Implizites key Attribut</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Ausgangsdatenfamilie-Item / name

| | | | |
|-----------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  The diagram shows a container box for 'XML-StringContent'. Inside, there is a 'name' box. A line connects the 'name' box to the 'XML-StringContent' box. | | |
| Type | XML-StringContent | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Tarifmodul / organisation-pool

| | | | | | |
|------------|---|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram |  The diagram shows a container box for 'XML-Organisation-Pool'. Inside, there is a yellow circle with a plus sign and an 'item' box. A line connects the yellow circle to the 'item' box. The 'item' box has a '1..∞' cardinality. | | | | |
| Type | XML-Organisation-Pool | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | item+ | | | | |
| Children | item | | | | |
| Instance | <pre><organisation-pool xmlns="http://vdv/ka/pkm/2"></pre> | | | | |

| | |
|-----------------|--|
| | <pre><item>{1,unbounded}</item> </organisation-pool></pre> |
| Source | <pre><xs:element name="organisation-pool" type="XML-Organisation-Pool" minOccurs="0" /></pre> |
| Schema location | <pre>file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd</pre> |

Element XML-Organisation-Pool / item

| | | | | | |
|-----------------|---|----------|---------|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Annotations | {Sortiert nach erstem Element} | | | | |
| Diagram | | | | | |
| Type | XML-Organisation-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Organisation-Part XML-Organisation-Item | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | nr , name , anforderung | | | | |
| Children | anforderung, name, nr | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <anforderung>{1,1}</anforderung> </item></pre> | | | | |
| Source | <pre><xs:element name="item" type="XML-Organisation-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | |
| Schema location | <pre>file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd</pre> | | | | |

Element XML-Organisation-Item / anforderung

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ergaenzungsanforderung-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Wochentag-Pool |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> XML-Ergaenzungsanforderung-Pool |
| Properties | content: complex |
| Model | nr+ |
| Children | nr |
| Instance | <pre><anforderung xmlns="http://vdv/ka/pkm/2"> <nr>{1,unbounded}</nr> </anforderung></pre> |
| Source | <code><xs:element name="anforderung" type="XML-Ergaenzungsanforderung-Pool"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Wochentag-Pool / nr

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach Inhalt} |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex minOccurs: 0 maxOccurs: unbounded |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ergaenzungsanforderung-Pool / nr

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach Inhalt} |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex maxOccurs: unbounded |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

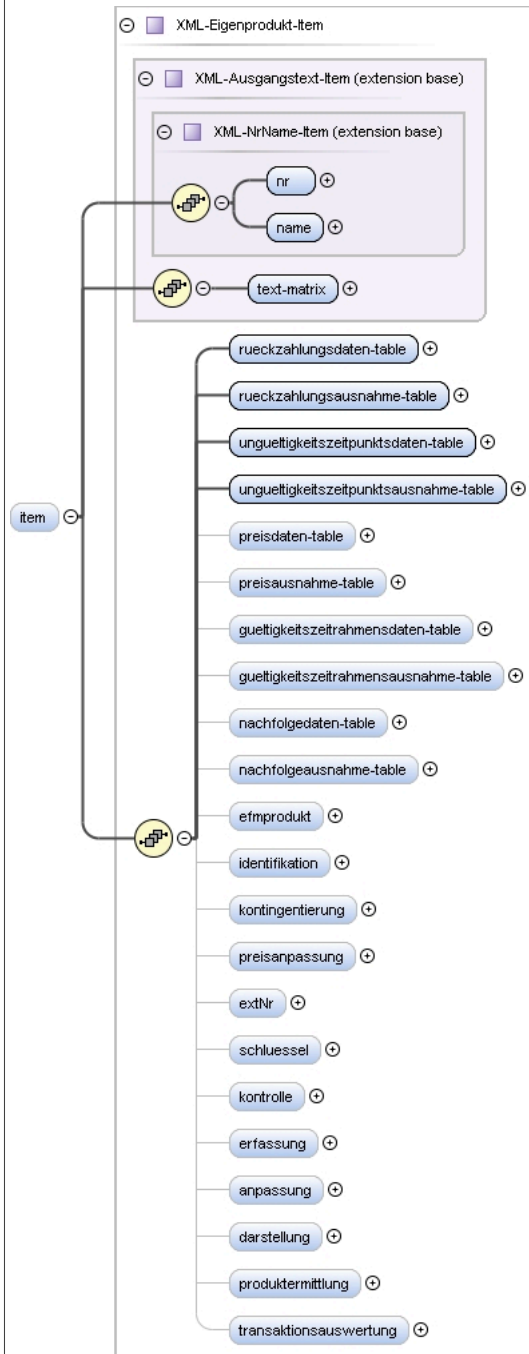
Element XML-Tarifmodul / efmprodukt-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | <p>The diagram illustrates the structure of the XML-EFMProdukt-Pool. It is a restriction base containing an extension base XML-Pool. XML-Pool contains an Attributes element with a key attribute and a 0..∞ item. The diagram also shows the efmprodukt-pool element with a 0..∞ item.</p> | | | | | | | | | | | |
| Type | XML-EFMProdukt-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eigenprodukt-Pool<ul style="list-style-type: none">XML-EFMProdukt-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><efmprodukt-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </efmprodukt-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="efmprodukt-pool" type="XML-EFMProdukt-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Eigenprodukt-Pool / item

| | |
|-------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} |

Diagram



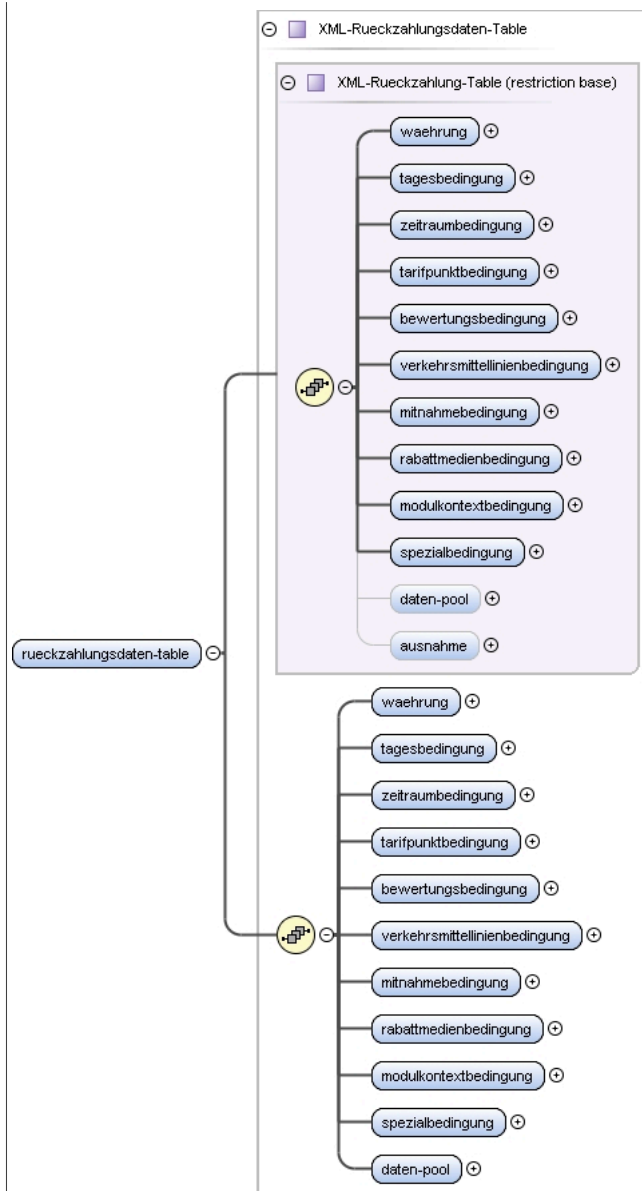
| | | | | | | | |
|----------------|--|----------|---------|------------|---|------------|-----------|
| Type | XML-Eigenprodukt-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Eigenprodukt-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name, text-matrix, rueckzahlungsdaten-table, rueckzahlungsausnahme-table, ungueltigkeitszeitpunktsdaten-table, ungueltigkeitszeitpunktsausnahme-table, preisdaten-table{0,1}, preisausnahme-table{0,1}, gueltigkeitszeitrahmensdaten-table{0,1}, gueltigkeitszeitrahmensausnahme-table{0,1}, nachfolgedaten-table{0,1}, nachfolgeausnahme-table{0,1}, efmprodukt{0,1}, identifikation{0,1}, kontingentierung{0,1}, preisanpassung{0,1}, extNr{0,1}, schluessel{0,1}, kontrolle{0,1}, erfassung{0,1}, anpassung{0,1}, darstellung{0,1}, produktermittlung{0,1}, transaktionsauswertung{0,1} | | | | | | |

| | |
|-----------------|--|
| Children | anpassung, darstellung, efmprodukt, erfassung, extNr, gueltigkeitszeitrahmensausnahme-table, gueltigkeitszeitrahmensdaten-table, identifikation, kontingentierung, kontrolle, nachfolgeausnahme-table, nachfolgedaten-table, name, nr, preisanpassung, preisausnahme-table, preisdaten-table, produktermittlung, rueckzahlungsausnahme-table, rueckzahlungsdaten-table, schluessel, text-matrix, transaktionsauswertung, ungueltigkeitszeitpunktsausnahme-table, ungueltigkeitszeitpunktsdaten-table |
| Instance | <pre> <item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <rueckzahlungsdaten-table>{1,1}</rueckzahlungsdaten-table> <rueckzahlungsausnahme-table>{1,1}</rueckzahlungsausnahme-table> <ungueltigkeitszeitpunktsdaten-table>{1,1}</ungueltigkeitszeitpunktsdaten-table> <ungueltigkeitszeitpunktsausnahme-table>{1,1}</ungueltigkeitszeitpunktsausnahme-table> <preisdaten-table>{0,1}</preisdaten-table> <preisausnahme-table>{0,1}</preisausnahme-table> <gueltigkeitszeitrahmensdaten-table>{0,1}</gueltigkeitszeitrahmensdaten-table> <gueltigkeitszeitrahmensausnahme-table>{0,1}</gueltigkeitszeitrahmensausnahme-table> <nachfolgedaten-table>{0,1}</nachfolgedaten-table> <nachfolgeausnahme-table>{0,1}</nachfolgeausnahme-table> <efmprodukt>{0,1}</efmprodukt> <identifikation>{0,1}</identifikation> <kontingentierung>{0,1}</kontingentierung> <preisanpassung>{0,1}</preisanpassung> <extNr>{0,1}</extNr> <schluessel>{0,1}</schluessel> <kontrolle>{0,1}</kontrolle> <erfassung>{0,1}</erfassung> <anpassung>{0,1}</anpassung> <darstellung>{0,1}</darstellung> <produktermittlung>{0,1}</produktermittlung> <transaktionsauswertung>{0,1}</transaktionsauswertung> </item> </pre> |
| Source | <pre> <xs:element name="item" type="XML-Eigenprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / rueckzahlungsdaten-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-Rueckzahlungsdaten-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Rueckzahlung-Table XML-Rueckzahlungsdaten-Table |
| Properties | content: complex |
| Model | waehrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zeitraumbedingung |
| Instance | <pre> <rueckzahlungsdaten-table xmlns="http://vdv/ka/pkm/2"> <waehrung>{1,1}</waehrung> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </rueckzahlungsdaten-table> </pre> |
| Source | <code><xs:element name="rueckzahlungsdaten-table" type="XML-Rueckzahlungsdaten-Table"/></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Rueckzahlung-Table / waehrung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><waehrung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </waehrung></pre> |
| Source | <pre><xs:element name="waehrung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

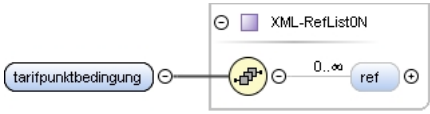
Element XML-Rueckzahlung-Table / tagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Rueckzahlung-Table / zeitraumbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Rueckzahlung-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlung-Table / bewertungsbedingung

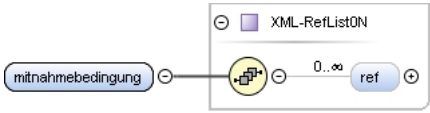
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <pre><xs:element name="bewertungsbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlung-Table / verkehrsmittellinienbedingung

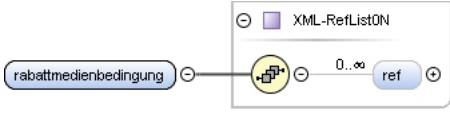
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlung-Table / mitnahmebedingung

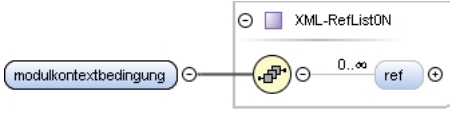
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram |  The diagram shows an element named 'mitnahmebedingung' connected to a yellow circle with a plus sign, which is then connected to a blue circle labeled 'ref'. A box labeled 'XML-RefList0N' is shown above the connection. The cardinality '0..∞' is indicated between the yellow circle and the 'ref' circle. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><mitnahmebedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </mitnahmebedingung></pre> |
| Source | <pre><xs:element name="mitnahmebedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

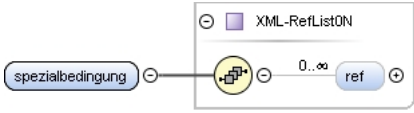
Element XML-Rueckzahlung-Table / rabattmedienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows an element named 'rabattmedienbedingung' connected to a yellow circle with a plus sign, which is then connected to a blue circle labeled 'ref'. A box labeled 'XML-RefList0N' is shown above the connection. The cardinality '0..∞' is indicated between the yellow circle and the 'ref' circle. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><rabattmedienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </rabattmedienbedingung></pre> |
| Source | <pre><xs:element name="rabattmedienbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlung-Table / modulkontextbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows an element named 'modulkontextbedingung' connected to a yellow circle with a plus sign, which is then connected to a blue circle labeled 'ref'. A box labeled 'XML-RefList0N' is shown above the connection. The cardinality '0..∞' is indicated between the yellow circle and the 'ref' circle. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlung-Table / spezialbedingung

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows an element named 'spezialbedingung' connected to a yellow circle with a plus sign, which is then connected to a blue circle labeled 'ref'. A box labeled 'XML-RefList0N' is shown above the connection. The cardinality '0..∞' is indicated between the yellow circle and the 'ref' circle. |

| | |
|-----------------|---|
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <code><xs:element name="spezialbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlung-Table / daten-pool

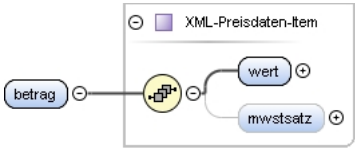
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Rueckzahlungsdaten-Pool |
| Properties | content: complex minOccurs: 0 |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <code><xs:element name="daten-pool" type="XML-Rueckzahlungsdaten-Pool" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Pool / item


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Rueckzahlungsdaten-Item |
| Properties | content: complex minOccurs: 0 maxOccurs: unbounded |
| Model | betrag , gebuehr |
| Children | betrag, gebuehr |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <betrag>{1,1}</betrag> <gebuehr>{1,1}</gebuehr> </item></pre> |
| Source | <code><xs:element name="item" type="XML-Rueckzahlungsdaten-Item" minOccurs="0" maxOccurs="unbounded"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Item / betrag


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Preisdaten-Item |
| Properties | content: complex |
| Model | wert , mwstsatz{0,1} |
| Children | mwstsatz, wert |
| Instance | <pre><betrag xmlns="http://vdv/ka/pkm/2"> <wert>{1,1}</wert> <mwstsatz>{0,1}</mwstsatz> </betrag></pre> |
| Source | <pre><xs:element name="betrag" type="XML-Preisdaten-Item" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Item / wert


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="wert" type="XML-IntegerValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Item / mwstsatz

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex minOccurs: 0 |
| Source | <pre><xs:element name="mwstsatz" type="XML-IntegerValue" minOccurs="0" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Item / gebuehr

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Preisdaten-Item |
| Properties | content: complex |
| Model | wert , mwstsatz{0,1} |
| Children | mwstsatz, wert |
| Instance | <pre><gebuehr xmlns="http://vdv/ka/pkm/2"> <wert>{1,1}</wert> <mwstsatz>{0,1}</mwstsatz> </gebuehr></pre> |
| Source | <pre><xs:element name="gebuehr" type="XML-Preisdaten-Item"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlung-Table / ausnahme


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex minOccurs: 0 |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / waehrung

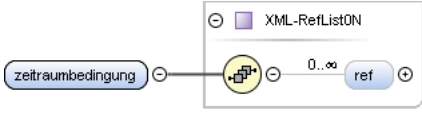
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><waehrung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </waehrung></pre> |
| Source | <pre><xs:element name="waehrung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / tagesbedingung

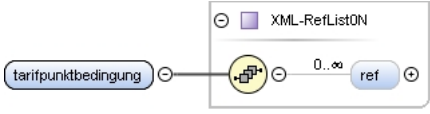
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram |  The diagram shows a box labeled 'XML-RefList0N' containing a sequence of elements: 'tagesbedingung' followed by a complex content marker (a circle with a plus sign and a small square) and then a 'ref' element. The 'ref' element has a cardinality of '0..∞'. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / zeitraumbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a box labeled 'XML-RefList0N' containing a sequence of elements: 'zeitraumbedingung' followed by a complex content marker (a circle with a plus sign and a small square) and then a 'ref' element. The 'ref' element has a cardinality of '0..∞'. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a box labeled 'XML-RefList0N' containing a sequence of elements: 'tarifpunktbedingung' followed by a complex content marker (a circle with a plus sign and a small square) and then a 'ref' element. The 'ref' element has a cardinality of '0..∞'. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / bewertungsbedingung

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a box labeled 'XML-RefList0N' containing a sequence of elements: 'bewertungsbedingung' followed by a complex content marker (a circle with a plus sign and a small square) and then a 'ref' element. The 'ref' element has a cardinality of '0..∞'. |

| | |
|-----------------|---|
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <pre><xs:element name="bewertungsbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / verkehrsmittellinienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / mitnahmebedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><mitnahmebedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </mitnahmebedingung></pre> |
| Source | <pre><xs:element name="mitnahmebedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / rabattmedienbedingung

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><rabattmedienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </rabattmedienbedingung></pre> |
| Source | <pre><xs:element name="rabattmedienbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / modulkontextbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsdaten-Table / daten-pool

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Rueckzahlungsdaten-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </daten-pool></pre> |

| | |
|-----------------|---|
| Source | <code><xs:element name="daten-pool" type="XML-Rueckzahlungsdaten-Pool" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / rueckzahlungsausnahme-table

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the <code>XML-Rueckzahlungsausnahme-Table</code> element. It is a complex type derived from <code>XML-Rueckzahlung-Table</code> (restriction base). The diagram shows a tree structure with a root node <code>rueckzahlungsausnahme-table</code> containing two main branches: <code>daten-pool</code> and <code>ausnahme</code>. Each branch contains a list of conditions: <code>waehrung</code>, <code>tagesbedingung</code>, <code>zeitraumbedingung</code>, <code>tarifpunktbedingung</code>, <code>bewertungsbedingung</code>, <code>verkehrsmittellinienbedingung</code>, <code>mitnahmebedingung</code>, <code>rabattmedienbedingung</code>, <code>modulkontextbedingung</code>, and <code>spezialbedingung</code>.</p> |
| Type | XML-Rueckzahlungsausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Rueckzahlung-Table XML-Rueckzahlungsausnahme-Table |
| Properties | content: complex |
| Model | waehrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zeitraumbedingung |
| Instance | <pre><rueckzahlungsausnahme-table xmlns="http://vdv/ka/pkm/2"> <waehrung>{1,1}</waehrung> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung></pre> |

| | |
|-----------------|---|
| | <pre> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </rueckzahlungsausnahme-table> </pre> |
| Source | <code><xs:element name="rueckzahlungsausnahme-table" type="XML-Rueckzahlungsausnahme-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / waehrung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <waehrung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </waehrung> </pre> |
| Source | <code><xs:element name="waehrung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / tagesbedingung

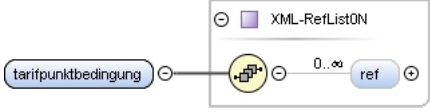
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung> </pre> |
| Source | <code><xs:element name="tagesbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / zeitraumbedingung

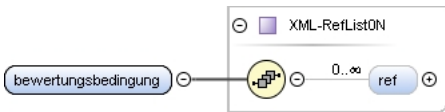
| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <zeitraumbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zeitraumbedingung> </pre> |

| | |
|-----------------|---|
| | <code></zeitraumbedingung></code> |
| Source | <code><xs:element name="zeitraumbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

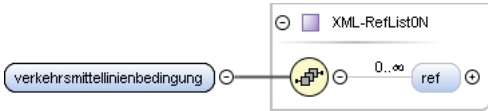
Element XML-Rueckzahlungsausnahme-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><tarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></code> |
| Source | <code><xs:element name="tarifpunktbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

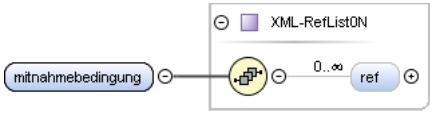
Element XML-Rueckzahlungsausnahme-Table / bewertungsbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><bewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bewertungsbedingung></code> |
| Source | <code><xs:element name="bewertungsbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Rueckzahlungsausnahme-Table / verkehrsmittellinienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></code> |
| Source | <code><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Rueckzahlungsausnahme-Table / mitnahmebedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><mitnahmebedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </mitnahmebedingung></pre> |
| Source | <pre><xs:element name="mitnahmebedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / rabattmedienbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><rabattmedienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </rabattmedienbedingung></pre> |
| Source | <pre><xs:element name="rabattmedienbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / modulkontextbedingung

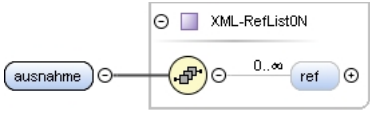
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / spezialbedingung

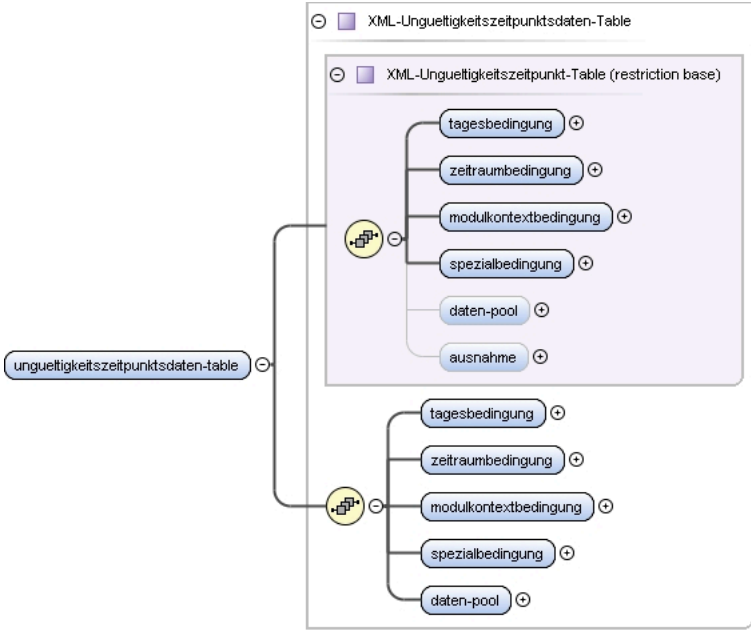
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  The diagram shows a box labeled 'XML-RefList0N'. Inside, there is a sequence of elements: 'spezialbedingung' (in a rounded rectangle), followed by a connector (a circle with a plus sign), and then a 'ref' element (in a rounded rectangle). The cardinality '0..∞' is indicated between the connector and the 'ref' element. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rueckzahlungsausnahme-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a box labeled 'XML-RefList0N'. Inside, there is a sequence of elements: 'ausnahme' (in a rounded rectangle), followed by a connector (a circle with a plus sign), and then a 'ref' element (in a rounded rectangle). The cardinality '0..∞' is indicated between the connector and the 'ref' element. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / ungeltigkeitszeitpunktsdaten-table

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a box labeled 'XML-Ungeltigkeitszeitpunktsdaten-Table'. Inside, there is a sequence of elements: 'ungeltigkeitszeitpunktsdaten-table' (in a rounded rectangle), followed by a connector (a circle with a plus sign), and then a 'ref' element (in a rounded rectangle). The cardinality '0..∞' is indicated between the connector and the 'ref' element. The 'ref' element points to a box labeled 'XML-Ungeltigkeitszeitpunkt-Table (restriction base)'. Inside this box, there is a sequence of elements: 'tagesbedingung', 'zeitraumbedingung', 'modulkontextbedingung', 'spezialbedingung', 'daten-pool', and 'ausnahme', each in a rounded rectangle and connected by connectors. The cardinality '0..∞' is indicated between the connector and the 'ref' element. |

| | |
|-----------------|--|
| Type | XML-Ungultigkeitszeitpunktsdaten-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ungultigkeitszeitpunkt-Table XML-Ungultigkeitszeitpunktsdaten-Table |
| Properties | content: complex |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | daten-pool, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Instance | <pre><ungultigkeitszeitpunktsdaten-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </ungultigkeitszeitpunktsdaten-table></pre> |
| Source | <pre><xs:element name="ungultigkeitszeitpunktsdaten-table" type="XML-Ungultigkeitszeitpunktsdaten-Table"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungultigkeitszeitpunkt-Table / tagesbedingung

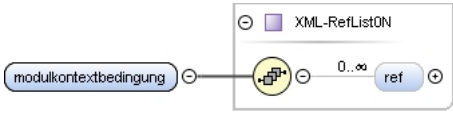
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungultigkeitszeitpunkt-Table / zeitraumbedingung

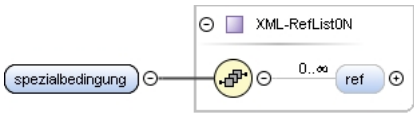
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungultigkeitszeitpunkt-Table / modulkontextbedingung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  A diagram showing the structure of the XML-RefList0N element. It consists of a container box labeled 'XML-RefList0N' containing a sequence of elements: 'modulkontextbedingung' followed by a 'ref' element. The 'ref' element has a cardinality of '0..∞'. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungeltigkeitszeitpunkt-Table / spezialbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  A diagram showing the structure of the XML-RefList0N element. It consists of a container box labeled 'XML-RefList0N' containing a sequence of elements: 'spezialbedingung' followed by a 'ref' element. The 'ref' element has a cardinality of '0..∞'. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungeltigkeitszeitpunkt-Table / daten-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  A diagram showing the structure of the XML-Ungeltigkeitszeitpunktsdaten-Pool element. It consists of a container box labeled 'XML-Ungeltigkeitszeitpunktsdaten-Pool' containing a sequence of elements: 'daten-pool' followed by an 'item' element. The 'item' element has a cardinality of '0..∞'. |
| Type | XML-Ungeltigkeitszeitpunktsdaten-Pool |
| Properties | content: complex minOccurs: 0 |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <pre><xs:element name="daten-pool" type="XML-Ungeltigkeitszeitpunktsdaten-Pool" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungeltigkeitszeitpunktsdaten-Pool / item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

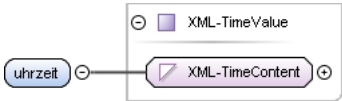
| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Ungultigkeitszeitpunktsdaten-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zeitrahmensegment-Part XML-Zeitrahmensegment-Part XML-Ungultigkeitszeitpunktsdaten-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | zeitspanne , uhrzeit | | | | | | |
| Children | uhrzeit, zeitspanne | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <zeitspanne>{1,1}</zeitspanne> <uhrzeit>{1,1}</uhrzeit> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Ungultigkeitszeitpunktsdaten-Item" minOccurs="0" maxOccurs="unbounded" /></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Zeitrahmensegment-Part / zeitspanne


| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-DurationValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:duration XML-DurationContent XML-DurationValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="zeitspanne" type="XML-DurationValue" /></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Zeitrahmensegment-Part / uhrzeit

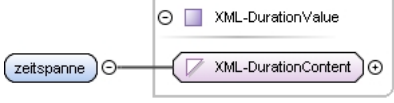
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-TimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:time <ul style="list-style-type: none"> XML-TimeContent <ul style="list-style-type: none"> XML-TimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zeitrahmengrenze-Part / unbestimmt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-VoidValue |
| Properties | content: complex |
| Source | <code><xs:element name="unbestimmt" type="XML-VoidValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zeitraumsgrenze-Part / zeitspanne

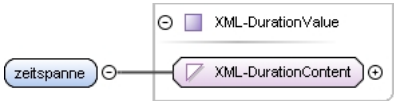
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:duration <ul style="list-style-type: none"> XML-DurationContent <ul style="list-style-type: none"> XML-DurationValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitspanne" type="XML-DurationValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zeitraumsgrenze-Part / uhrzeit

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-TimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:time <ul style="list-style-type: none"> XML-TimeContent <ul style="list-style-type: none"> XML-TimeValue |
| Properties | content: complex |

| | |
|-----------------|---|
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

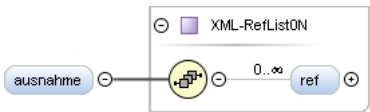
Element XML-Ungueligkeitszeitpunktsdaten-Item / zeitspanne

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:duration XML-DurationContent XML-DurationValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitspanne" type="XML-DurationValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

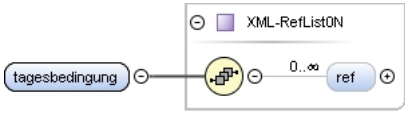
Element XML-Ungueligkeitszeitpunktsdaten-Item / uhrzeit

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-TimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:time XML-TimeContent XML-TimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

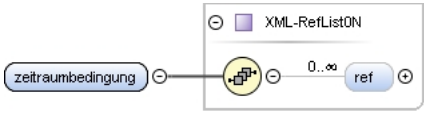
Element XML-Ungueligkeitszeitpunkt-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex minOccurs: 0 |
| Model | ref* |
| Children | ref |
| Instance | <code><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></code> |
| Source | <code><xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Ungueligkeitszeitpunktsdaten-Table / tagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungueligkeitszeitpunktsdaten-Table / zeitraumbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungueligkeitszeitpunktsdaten-Table / modulkontextbedingung

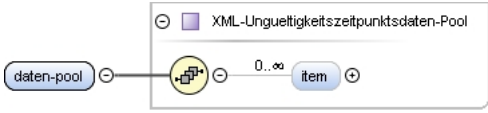
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungueligkeitszeitpunktsdaten-Table / spezialbedingung

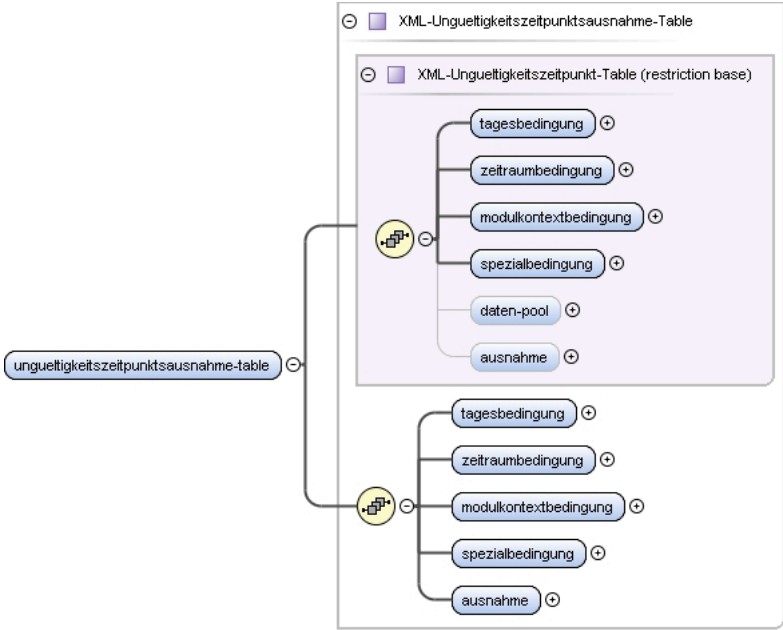
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  The diagram shows a container box labeled 'XML-RefList0N'. Inside, there is a sequence of elements: 'spezialbedingung' followed by a complex content marker (a circle with a plus sign and a small square) and then a 'ref' element. The 'ref' element has a cardinality of '0..∞'. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungeltigkeitszeitpunktsdaten-Table / daten-pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a container box labeled 'XML-Ungeltigkeitszeitpunktsdaten-Pool'. Inside, there is a sequence of elements: 'daten-pool' followed by a complex content marker (a circle with a plus sign and a small square) and then an 'item' element. The 'item' element has a cardinality of '0..∞'. |
| Type | XML-Ungeltigkeitszeitpunktsdaten-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <pre><xs:element name="daten-pool" type="XML-Ungeltigkeitszeitpunktsdaten-Pool"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / ungeltigkeitszeitpunktsausnahme-table

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a container box labeled 'XML-Ungeltigkeitszeitpunktsausnahme-Table'. Inside, there is a sequence of elements: 'ungeltigkeitszeitpunktsausnahme-table' followed by a complex content marker (a circle with a plus sign and a small square) and then a 'restriction base' box. The 'restriction base' box is labeled 'XML-Ungeltigkeitszeitpunkt-Table (restriction base)' and contains a sequence of elements: 'tagesbedingung', 'zeitraumbedingung', 'modulkontextbedingung', 'spezialbedingung', 'daten-pool', and 'ausnahme'. Each of these elements has a cardinality of '0..∞'. The 'restriction base' box is connected to the main container box by a line. |

| | |
|-----------------|--|
| Type | XML-Ungueltigkeitszeitpunktsausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ungueltigkeitszeitpunkt-Table XML-Ungueltigkeitszeitpunktsausnahme-Table |
| Properties | content: complex |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Instance | <pre><ungueltigkeitszeitpunktsausnahme-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </ungueltigkeitszeitpunktsausnahme-table></pre> |
| Source | <pre><xs:element name="ungueltigkeitszeitpunktsausnahme-table" type="XML- Ungueltigkeitszeitpunktsausnahme-Table" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungueltigkeitszeitpunktsausnahme-Table / tagesbedingung

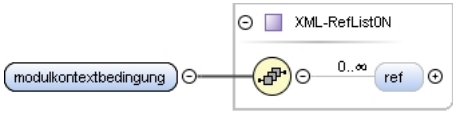
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungueltigkeitszeitpunktsausnahme-Table / zeitraumbedingung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungueltigkeitszeitpunktsausnahme-Table / modulkontextbedingung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  The diagram shows a sequence of elements: 'modulkontextbedingung' (blue rounded rectangle), a connector (yellow circle with a plus sign), 'XML-RefList0N' (purple square), another connector, and 'ref' (blue rounded rectangle). The cardinality '0..∞' is indicated between the second connector and the 'ref' element. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ungueltigkeitszeitpunktsausnahme-Table / spezialbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a sequence of elements: 'spezialbedingung' (blue rounded rectangle), a connector (yellow circle with a plus sign), 'XML-RefList0N' (purple square), another connector, and 'ref' (blue rounded rectangle). The cardinality '0..∞' is indicated between the second connector and the 'ref' element. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

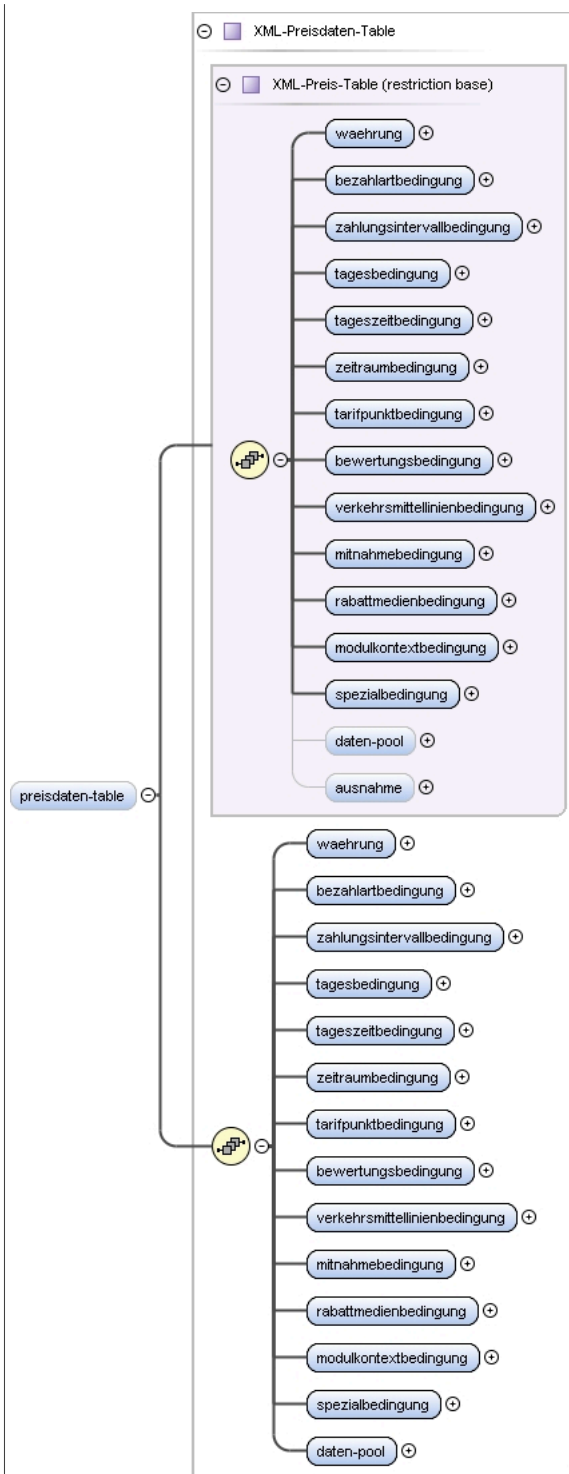
Element XML-Ungueltigkeitszeitpunktsausnahme-Table / ausnahme

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a sequence of elements: 'ausnahme' (blue rounded rectangle), a connector (yellow circle with a plus sign), 'XML-RefList0N' (purple square), another connector, and 'ref' (blue rounded rectangle). The cardinality '0..∞' is indicated between the second connector and the 'ref' element. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / preisdaten-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | | | | | |
|----------------|--|----------|---------|------------|---|
| Type | XML-Preisdaten-Table | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Preis-Table XML-Preisdaten-Table | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | wachrung , bezahlarartbedingung , zahlungsintervallbedingung , tagesbedingung , tageszeitbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool | | | | |

| | |
|-----------------|---|
| Children | bewertungsbedingung, bezahllartbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zahlungsintervallbedingung, zeitraumbedingung |
| Instance | <pre><preisdaten-table xmlns="http://vdv/ka/pkm/2"> <waehrung>{1,1}</waehrung> <bezahllartbedingung>{1,1}</bezahllartbedingung> <zahlungsintervallbedingung>{1,1}</zahlungsintervallbedingung> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </preisdaten-table></pre> |
| Source | <code><xs:element name="preisdaten-table" type="XML-Preisdaten-Table" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / waehrung

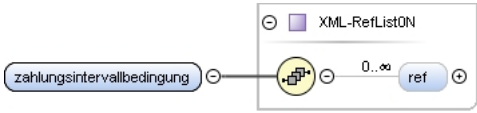
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><waehrung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </waehrung></pre> |
| Source | <code><xs:element name="waehrung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / bezahllartbedingung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bezahllartbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bezahllartbedingung></pre> |
| Source | <code><xs:element name="bezahllartbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / zahlungsintervallbedingung


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zahlungsintervallbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zahlungsintervallbedingung></pre> |
| Source | <pre><xs:element name="zahlungsintervallbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / tagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / tageszeitbedingung

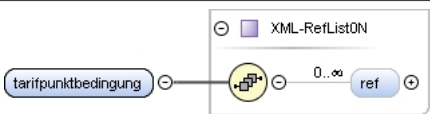
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tageszeitbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tageszeitbedingung></pre> |
| Source | <pre><xs:element name="tageszeitbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / zeitraumbedingung

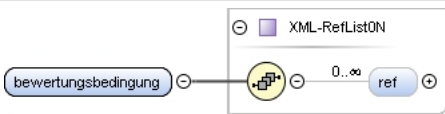
| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|---|
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

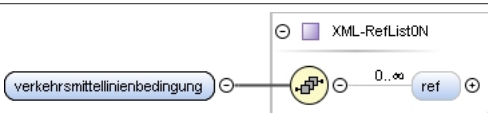
Element XML-Preis-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / bewertungsbedingung

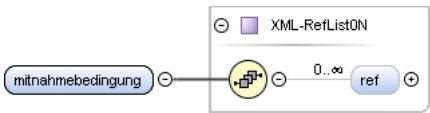
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <pre><xs:element name="bewertungsbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / verkehrsmittellinienbedingung

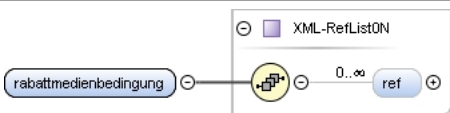
| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |

| | |
|-----------------|--|
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Preis-Table / mitnahmebedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows the 'mitnahmebedingung' element connected to a yellow circle with a plus sign, which is then connected to a 'ref' element. A box labeled 'XML-RefList0N' is positioned above the connection. The cardinality '0..∞' is indicated between the yellow circle and the 'ref' element. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><mitnahmebedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </mitnahmebedingung></pre> |
| Source | <pre><xs:element name="mitnahmebedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / rabattmedienbedingung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows the 'rabattmedienbedingung' element connected to a yellow circle with a plus sign, which is then connected to a 'ref' element. A box labeled 'XML-RefList0N' is positioned above the connection. The cardinality '0..∞' is indicated between the yellow circle and the 'ref' element. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><rabattmedienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </rabattmedienbedingung></pre> |
| Source | <pre><xs:element name="rabattmedienbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / modulkontextbedingung


| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows the 'modulkontextbedingung' element connected to a yellow circle with a plus sign, which is then connected to a 'ref' element. A box labeled 'XML-RefList0N' is positioned above the connection. The cardinality '0..∞' is indicated between the yellow circle and the 'ref' element. |
| Type | XML-RefList0N |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Preis-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a box labeled 'XML-RefList0N'. Inside, there is a 'spezialbedingung' element connected to a 'ref' element. The 'ref' element has a cardinality of '0..∞'. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / daten-pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a box labeled 'XML-Preisdaten-Pool'. Inside, there is a 'daten-pool' element connected to an 'item' element. The 'item' element has a cardinality of '0..∞'. |
| Type | XML-Preisdaten-Pool |
| Properties | content: complex minOccurs: 0 |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <pre><xs:element name="daten-pool" type="XML-Preisdaten-Pool" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Pool / item

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a box labeled 'XML-Preisdaten-Item'. Inside, there is an 'item' element connected to a complex content model. The content model has two children: 'wert' and 'mwstsatz'. |
| Type | XML-Preisdaten-Item |
| Properties | content: complex |

| | |
|-----------------|---|
| | minOccurs: 0 maxOccurs: unbounded |
| Model | wert , mwstsatz{0,1} |
| Children | mwstsatz, wert |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <wert>{1,1}</wert> <mwstsatz>{0,1}</mwstsatz> </item></pre> |
| Source | <code><xs:element name="item" type="XML-Preisdaten-Item" minOccurs="0" maxOccurs="unbounded"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preis-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex minOccurs: 0 |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <code><xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / waehrung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><waehrung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </waehrung></pre> |
| Source | <code><xs:element name="waehrung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / bezahlartbedingung


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bezahlartbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bezahlartbedingung></pre> |
| Source | <pre><xs:element name="bezahlartbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Preisdaten-Table / zahlungsintervallbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zahlungsintervallbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zahlungsintervallbedingung></pre> |
| Source | <pre><xs:element name="zahlungsintervallbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / tagesbedingung

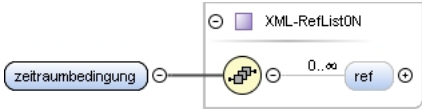
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / tageszeitbedingung

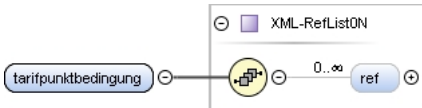
| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tageszeitbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tageszeitbedingung></pre> |
| Source | <pre><xs:element name="tageszeitbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

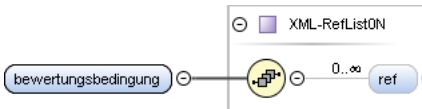
Element XML-Preisdaten-Table / zeitraumbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <pre><xs:element name="zeitraumbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / bewertungsbedingung

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <pre><xs:element name="bewertungsbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / verkehrsmittellinienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / mitnahmebedingung

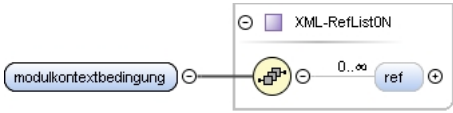
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><mitnahmebedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </mitnahmebedingung></pre> |
| Source | <pre><xs:element name="mitnahmebedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / rabattmedienbedingung


| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><rabattmedienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </rabattmedienbedingung></pre> |
| Source | <pre><xs:element name="rabattmedienbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

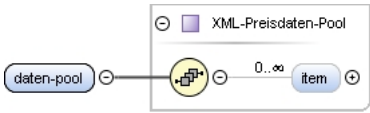
Element XML-Preisdaten-Table / modulkontextbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisdaten-Table / daten-pool

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Preisdaten-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/2"></pre> |

| | |
|-----------------|--|
| | <pre><item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <pre><xs:element name="daten-pool" type="XML-Preisdaten-Pool"/></pre> |
| Schema location | <pre>file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd</pre> |

Element XML-Eigenprodukt-Item / preisausnahme-table

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Preis-Ausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Preis-Table |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> XML-Preisausnahme-Table |
| Properties | content: complex minOccurs: 0 |
| Model | wahrung , bezahllartbedingung , zahlungsintervallbedingung , tagesbedingung , tageszeitbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, bezahllartbedingung, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, wahrung, zahlungsintervallbedingung, zeitraumbedingung |
| Instance | <pre><preisausnahme-table xmlns="http://vdv/ka/pkm/2"> <wahrung>{1,1}</wahrung> <bezahllartbedingung>{1,1}</bezahllartbedingung> <zahlungsintervallbedingung>{1,1}</zahlungsintervallbedingung> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </preisausnahme-table></pre> |
| Source | <xs:element name="preisausnahme-table" type="XML-Preisausnahme-Table" minOccurs="0"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / wahrung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><wahrung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </wahrung></pre> |
| Source | <xs:element name="wahrung" type="XML-RefList0N"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / bezahllartbedingung


| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bezahllartbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bezahllartbedingung></pre> |

| | |
|-----------------|---|
| | <code></bezahllartbedingung></code> |
| Source | <code><xs:element name="bezahllartbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Preisausnahme-Table / zahlungsintervallbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><zahlungsintervallbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zahlungsintervallbedingung></code> |
| Source | <code><xs:element name="zahlungsintervallbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / tagesbedingung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></code> |
| Source | <code><xs:element name="tagesbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / tageszeitbedingung


| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><tageszeitbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tageszeitbedingung></code> |

| | |
|-----------------|---|
| Source | <code><xs:element name="tageszeitbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Preisausnahme-Table / zeitraumbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><zeitraumbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </zeitraumbedingung></pre> |
| Source | <code><xs:element name="zeitraumbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / tarifpunktbedingung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <code><xs:element name="tarifpunktbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / bewertungsbedingung


| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <code><xs:element name="bewertungsbedingung" type="XML-RefList0N" /></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|


Element XML-Preisausnahme-Table / verkehrsmittellinienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / mitnahmebedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><mitnahmebedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </mitnahmebedingung></pre> |
| Source | <pre><xs:element name="mitnahmebedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / rabattmedienbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><rabattmedienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </rabattmedienbedingung></pre> |
| Source | <pre><xs:element name="rabattmedienbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / modulkontextbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontextbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </modulkontextbedingung></pre> |
| Source | <pre><xs:element name="modulkontextbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisausnahme-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / gueltigkeitszeitrahmensdaten-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | | |
|-----------------|--|----------|---------|------------|---|
| Diagram | | | | | |
| Type | XML-Gueltigkeitszeitrahmensdaten-Table | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Gueltigkeitszeitrahmen-Table XML-Gueltigkeitszeitrahmensdaten-Table | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | tagesbedingung , tageszeitbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , spezialbedingung , daten-pool | | | | |
| Children | bewertungsbedingung , daten-pool , spezialbedingung , tagesbedingung , tageszeitbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung | | | | |
| Instance | <pre><gueltigkeitszeitrahmensdaten-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </gueltigkeitszeitrahmensdaten-table></pre> | | | | |
| Source | <pre><xs:element name="gueltigkeitszeitrahmensdaten-table" type="XML-Gueltigkeitszeitrahmensdaten-Table" minOccurs="0" /></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Gueltigkeitszeitrahmen-Table / tagesbedingung

| | | | |
|------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-RefList0N | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | ref* | | |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmen-Table / tageszeitbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tageszeitbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tageszeitbedingung></pre> |
| Source | <pre><xs:element name="tageszeitbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmen-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmen-Table / bewertungsbedingung

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bewertungsbedingung></pre> |

| | |
|-----------------|---|
| | <code></bewertungsbedingung></code> |
| Source | <code><xs:element name="bewertungsbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmen-Table / verkehrsmittellinienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <code><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmen-Table / spezialbedingung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <code><xs:element name="spezialbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmen-Table / daten-pool

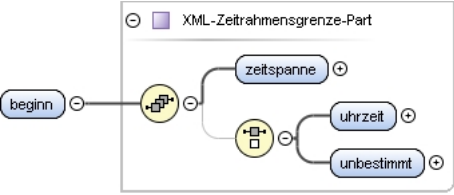
| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Gueltigkeitszeitrahmensdaten-Pool |
| Properties | content: complex minOccurs: 0 |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <code><xs:element name="daten-pool" type="XML-Gueltigkeitszeitrahmensdaten-Pool" minOccurs="0" /></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

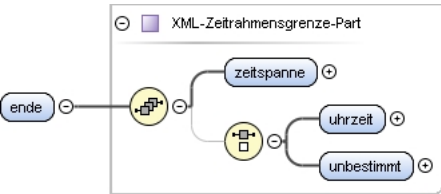
Element XML-Gueltigkeitszeitrahmensdaten-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Diagram |  | | | | | | |
| Type | XML-Gueltigkeitszeitrahmensdaten-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | beginn , ende | | | | | | |
| Children | beginn, ende | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <beginn>{1,1}</beginn> <ende>{1,1}</ende> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Gueltigkeitszeitrahmensdaten-Item" minOccurs="0" maxOccurs="unbounded" /></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Gueltigkeitszeitrahmensdaten-Item / beginn

| | | | |
|-----------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  | | |
| Type | XML-Zeitrahmensgrenze-Part | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | zeitspanne , (uhrzeit unbestimmt) | | |
| Children | uhrzeit, unbestimmt, zeitspanne | | |
| Instance | <pre><beginn xmlns="http://vdv/ka/pkm/2"> <zeitspanne>{1,1}</zeitspanne> <uhrzeit>{1,1}</uhrzeit> <unbestimmt>{1,1}</unbestimmt> </beginn></pre> | | |
| Source | <pre><xs:element name="beginn" type="XML-Zeitrahmensgrenze-Part" /></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Gueltigkeitszeitrahmensdaten-Item / ende

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|--|
| Type | XML-Zeitrahmengrenze-Part |
| Properties | content: complex |
| Model | zeitspanne , (uhrzeit unbestimmt) |
| Children | uhrzeit, unbestimmt, zeitspanne |
| Instance | <pre><ende xmlns="http://vdv/ka/pkm/2"> <zeitspanne>{1,1}</zeitspanne> <uhrzeit>{1,1}</uhrzeit> <unbestimmt>{1,1}</unbestimmt> </ende></pre> |
| Source | <code><xs:element name="ende" type="XML-Zeitrahmengrenze-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmen-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex minOccurs: 0 |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <code><xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensdaten-Table / tagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <code><xs:element name="tagesbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensdaten-Table / tageszeitbedingung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tageszeitbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tageszeitbedingung></pre> |
| Source | <code><xs:element name="tageszeitbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensdaten-Table / tarifypunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifypunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifypunktbedingung></pre> |
| Source | <code><xs:element name="tarifypunktbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensdaten-Table / bewertungsbedingung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <code><xs:element name="bewertungsbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensdaten-Table / verkehrsmittellinienbedingung


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |

| | |
|-----------------|--|
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensdaten-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensdaten-Table / daten-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Gueltigkeitszeitrahmensdaten-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <pre><xs:element name="daten-pool" type="XML-Gueltigkeitszeitrahmensdaten-Pool"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / gueltigkeitszeitrahmensausnahme-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|


| | |
|-----------------|--|
| Diagram | |
| Type | XML-Gueltigkeitszeitrahmensausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Gueltigkeitszeitrahmen-Table XML-Gueltigkeitszeitrahmensausnahme-Table |
| Properties | content: complex minOccurs: 0 |
| Model | tagesbedingung , tageszeitbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Instance | <pre><gueltigkeitszeitrahmensausnahme-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </gueltigkeitszeitrahmensausnahme-table></pre> |
| Source | <xs:element name="gueltigkeitszeitrahmensausnahme-table" type="XML-Gueltigkeitszeitrahmensausnahme-Table" minOccurs="0"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensausnahme-Table / tagesbedingung


| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensausnahme-Table / tageszeitbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tageszeitbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tageszeitbedingung></pre> |
| Source | <pre><xs:element name="tageszeitbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensausnahme-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensausnahme-Table / bewertungsbedingung

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |

| | |
|-----------------|---|
| Instance | <pre><bewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </bewertungsbedingung></pre> |
| Source | <pre><xs:element name="bewertungsbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensausnahme-Table / verkehrsmittellinienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensausnahme-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Gueltigkeitszeitrahmensausnahme-Table / ausnahme

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"></pre> |

| | |
|-----------------|---|
| | <code><ref>{0,unbounded}</ref></code> <code></ausnahme></code> |
| Source | <code><xs:element name="ausnahme" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / nachfolgedaten-table

| | | | | | |
|-----------------|--|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Type | XML-Nachfolgedaten-Table | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Nachfolge-Table XML-Nachfolgedaten-Table | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | kriterium , vorgaenger , nachfolger | | | | |
| Children | kriterium, nachfolger, vorgaenger | | | | |
| Instance | <pre><nachfolgedaten-table xmlns="http://vdv/ka/pkm/2"> <kriterium>{1,1}</kriterium> <vorgaenger>{1,1}</vorgaenger> <nachfolger>{1,1}</nachfolger> </nachfolgedaten-table></pre> | | | | |
| Source | <code><xs:element name="nachfolgedaten-table" type="XML-Nachfolgedaten-Table" minOccurs="0"/></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Nachfolge-Table / kriterium

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-RefList0N | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | ref* | | |
| Children | ref | | |
| Instance | <pre><kriterium xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </kriterium></pre> | | |
| Source | <code><xs:element name="kriterium" type="XML-RefList0N"/></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Nachfolge-Table / vorgaenger

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorgaenger xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorgaenger></pre> |
| Source | <pre><xs:element name="vorgaenger" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nachfolge-Table / nachfolger

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex minOccurs: 0 |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachfolger xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachfolger></pre> |
| Source | <pre><xs:element name="nachfolger" type="XML-RefList0N" minOccurs="0" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nachfolge-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex minOccurs: 0 |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nachfolgedaten-Table / kriterium

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><kriterium xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </kriterium></pre> |
| Source | <pre><xs:element name="kriterium" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nachfolgedaten-Table / vorgaenger

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorgaenger xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorgaenger></pre> |
| Source | <pre><xs:element name="vorgaenger" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nachfolgedaten-Table / nachfolger

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachfolger xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachfolger></pre> |
| Source | <pre><xs:element name="nachfolger" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / nachfolgeausnahme-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Nachfolgeausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Nachfolge-Table <ul style="list-style-type: none"> XML-Nachfolgeausnahme-Table |
| Properties | content: complex minOccurs: 0 |
| Model | kriterium , vorgaenger , ausnahme |
| Children | ausnahme, kriterium, vorgaenger |
| Instance | <pre><nachfolgeausnahme-table xmlns="http://vdv/ka/pkm/2"> <kriterium>{1,1}</kriterium> <vorgaenger>{1,1}</vorgaenger> <ausnahme>{1,1}</ausnahme> </nachfolgeausnahme-table></pre> |
| Source | <code><xs:element name="nachfolgeausnahme-table" type="XML-Nachfolgeausnahme-Table" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nachfolgeausnahme-Table / kriterium

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><kriterium xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </kriterium></pre> |
| Source | <code><xs:element name="kriterium" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nachfolgeausnahme-Table / vorgaenger

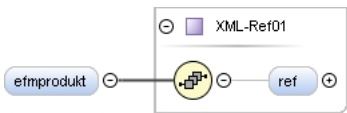
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorgaenger xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorgaenger></pre> |
| Source | <pre><xs:element name="vorgaenger" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

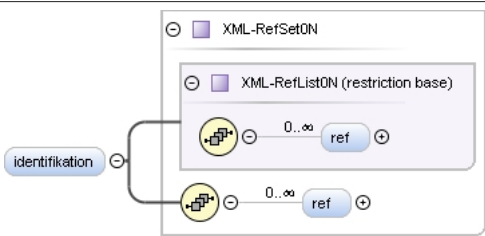
Element XML-Nachfolgeausnahme-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / efmprodukt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex minOccurs: 0 |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><efmprodukt xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </efmprodukt></pre> |
| Source | <pre><xs:element name="efmprodukt" type="XML-Ref01" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / identifikation

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|---|
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex minOccurs: 0 |
| Model | ref* |
| Children | ref |
| Instance | <pre><identifikation xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </identifikation></pre> |
| Source | <code><xs:element name="identifikation" type="XML-RefSet0N" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / kontingentierung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex minOccurs: 0 |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><kontingentierung xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </kontingentierung></pre> |
| Source | <code><xs:element name="kontingentierung" type="XML-Ref01" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / preisanpassung

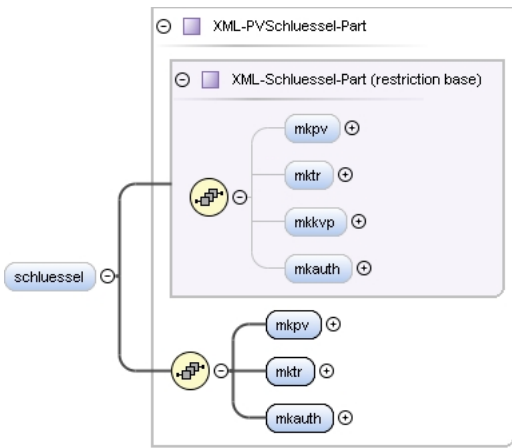
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-BooleanValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:boolean XML-BooleanContent XML-BooleanValue |
| Properties | content: complex minOccurs: 0 |
| Source | <code><xs:element name="preisanpassung" type="XML-BooleanValue" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / extNr

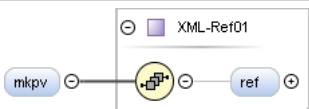
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | | |
|-----------------|---|----------|---------|------------|---|
| Diagram |  | | | | |
| Type | XML-StringValue | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | | | |
| Properties | <table border="1"> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Source | <code><xs:element name="extNr" type="XML-StringValue" minOccurs="0"/></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Eigenprodukt-Item / schluessel

| | | | | | |
|-----------------|--|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram |  | | | | |
| Type | XML-PVSchluessel-Part | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Schluessel-Part XML-PVSchluessel-Part | | | | |
| Properties | <table border="1"> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | mkpv , mktr , mkauth | | | | |
| Children | mkauth, mkpv, mktr | | | | |
| Instance | <pre><schluessel xmlns="http://vdv/ka/pkm/2"> <mkpv>{1,1}</mkpv> <mktr>{1,1}</mktr> <mkauth>{1,1}</mkauth> </schluessel></pre> | | | | |
| Source | <code><xs:element name="schluessel" type="XML-PVSchluessel-Part" minOccurs="0"/></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Schluessel-Part / mkpv

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |

| | |
|-----------------|---|
| Properties | content: complex |
| | minOccurs: 0 |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><mkpv xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </mkpv></pre> |
| Source | <code><xs:element name="mkpv" type="XML-Ref01" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Schlüssel-Part / mktr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex |
| | minOccurs: 0 |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><mktr xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </mktr></pre> |
| Source | <code><xs:element name="mktr" type="XML-Ref01" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Schlüssel-Part / mkkvp

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex |
| | minOccurs: 0 |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><mkkvp xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </mkkvp></pre> |
| Source | <code><xs:element name="mkkvp" type="XML-Ref01" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Schlüssel-Part / mkauth


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Ref01 |
| Properties | content: complex minOccurs: 0 |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><mkauth xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </mkauth></pre> |
| Source | <pre><xs:element name="mkauth" type="XML-Ref01" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

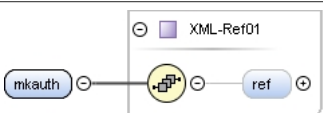
Element XML-PVSchluessel-Part / mkpv

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><mkpv xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </mkpv></pre> |
| Source | <pre><xs:element name="mkpv" type="XML-Ref01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVSchluessel-Part / mktr

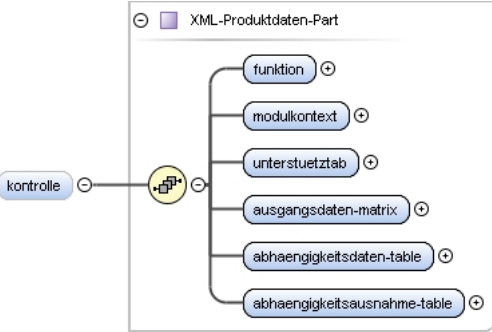
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><mktr xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </mktr></pre> |
| Source | <pre><xs:element name="mktr" type="XML-Ref01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVSchluessel-Part / mkauth


| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><mkauth xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </mkauth></pre> |
| Source | <pre><xs:element name="mkauth" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

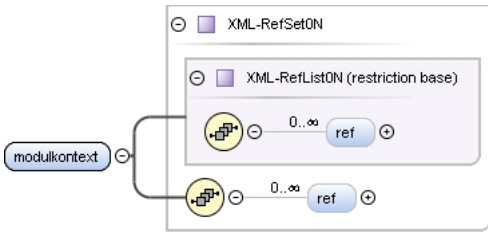
Element XML-Eigenprodukt-Item / kontrolle

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Produktdaten-Part |
| Properties | content: complex minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetzt-tab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetzt-tab |
| Instance | <pre><kontrolle xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetzt-tab>{1,1}</unterstuetzt-tab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </kontrolle></pre> |
| Source | <pre><xs:element name="kontrolle" type="XML-Produktdaten-Part" minOccurs="0" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktdaten-Part / funktion

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </funktion></pre> |
| Source | <pre><xs:element name="funktion" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

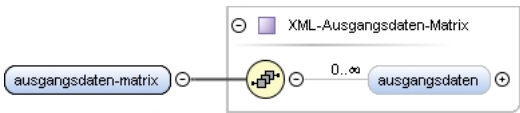
Element XML-Produktdaten-Part / modulkontext

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><modulkontext xmlns="http://vdv/ka/pkm/2"> <ref>{ 0,unbounded}</ref> </modulkontext></pre> |
| Source | <pre><xs:element name="modulkontext" type="XML-RefSet0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktdaten-Part / unterstuetztab

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DateValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:date XML-DateContent XML-DateValue |
| Properties | content: complex |
| Source | <pre><xs:element name="unterstuetztab" type="XML-DateValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktdaten-Part / ausgangsdaten-matrix

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangsdaten-Matrix |
| Properties | content: complex |
| Model | ausgangsdaten* |
| Children | ausgangsdaten |
| Instance | <pre><ausgangsdaten-matrix xmlns="http://vdv/ka/pkm/2"> <ausgangsdaten ref="">{ 0,unbounded}</ausgangsdaten> </ausgangsdaten-matrix></pre> |
| Source | <pre><xs:element name="ausgangsdaten-matrix" type="XML-Ausgangsdaten-Matrix" /></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Ausgangsdaten-Matrix / ausgangsdaten

| | | | |
|-----------------|---|-----------|----------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |
| Diagram | | | |
| Type | XML-Ausgangsdaten-Entry | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Ausgangsdaten-Entry | | |
| Properties | content: | complex | |
| | minOccurs: | 0 | |
| | maxOccurs: | unbounded | |
| Attributes | QName | Type | Use |
| | ref | XML-Ref | required |
| Source | <pre><xs:element name="ausgangsdaten" type="XML-Ausgangsdaten-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Produktdaten-Part / abhaengigkeitsdaten-table

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Abhaengigkeitsdaten-Table |
| Type hierarchy | <ul style="list-style-type: none">XML-Abhaengigkeit-Table<ul style="list-style-type: none">XML-Abhaengigkeitsdaten-Table |
| Properties | content: complex |
| Model | kriterium , vorausgesetzt |
| Children | kriterium, vorausgesetzt |
| Instance | <pre><abhaengigkeitsdaten-table xmlns="http://vdv/ka/pkm/2"> <kriterium>{1,1}</kriterium> <vorausgesetzt>{1,1}</vorausgesetzt> </abhaengigkeitsdaten-table></pre> |

| | |
|-----------------|---|
| Source | <code><xs:element name="abhaengigkeitsdaten-table" type="XML-Abhaengigkeitsdaten-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeit-Table / kriterium

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><kriterium xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </kriterium></pre> |
| Source | <code><xs:element name="kriterium" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeit-Table / vorausgesetzt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorausgesetzt xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorausgesetzt></pre> |
| Source | <code><xs:element name="vorausgesetzt" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeit-Table / ausnahme

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex minOccurs: 0 |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <code><xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0" /></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Abhaengigkeitsdaten-Table / kriterium

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><kriterium xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </kriterium></pre> |
| Source | <pre><xs:element name="kriterium" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeitsdaten-Table / vorausgesetzt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorausgesetzt xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorausgesetzt></pre> |
| Source | <pre><xs:element name="vorausgesetzt" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktdaten-Part / abhaengigkeitsausnahme-table

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Abhaengigkeitsausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Abhaengigkeit-Table |

| | |
|-----------------|--|
| | <ul style="list-style-type: none"> XML-Abhaengigkeitsausnahme-Table |
| Properties | content: complex |
| Model | kriterium , vorausgesetzt , ausnahme |
| Children | ausnahme, kriterium, vorausgesetzt |
| Instance | <pre><abhaengigkeitsausnahme-table xmlns="http://vdv/ka/pkm/2"> <kriterium>{1,1}</kriterium> <vorausgesetzt>{1,1}</vorausgesetzt> <ausnahme>{1,1}</ausnahme> </abhaengigkeitsausnahme-table></pre> |
| Source | <code><xs:element name="abhaengigkeitsausnahme-table" type="XML-Abhaengigkeitsausnahme-Table"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeitsausnahme-Table / kriterium

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><kriterium xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </kriterium></pre> |
| Source | <code><xs:element name="kriterium" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeitsausnahme-Table / vorausgesetzt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorausgesetzt xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorausgesetzt></pre> |
| Source | <code><xs:element name="vorausgesetzt" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeitsausnahme-Table / ausnahme

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <code><xs:element name="ausnahme" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / erfassung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |
| Properties | content: complex minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><erfassung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </erfassung></pre> |
| Source | <code><xs:element name="erfassung" type="XML-Produktdaten-Part" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / anpassung

| | |
|------------|-----------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |
| Properties | content: complex |

| | |
|-----------------|---|
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><anpassung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </anpassung></pre> |
| Source | <xs:element name="anpassung" type="XML-Produktdaten-Part" minOccurs="0"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / darstellung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |
| Properties | content: complex minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><darstellung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </darstellung></pre> |
| Source | <xs:element name="darstellung" type="XML-Produktdaten-Part" minOccurs="0"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Eigenprodukt-Item / produktermittlung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Produktdaten-Part |
| Properties | content: complex |
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><produktermittlung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </produktermittlung></pre> |
| Source | <xs:element name="produktermittlung" type="XML-Produktdaten-Part" minOccurs="0"/> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

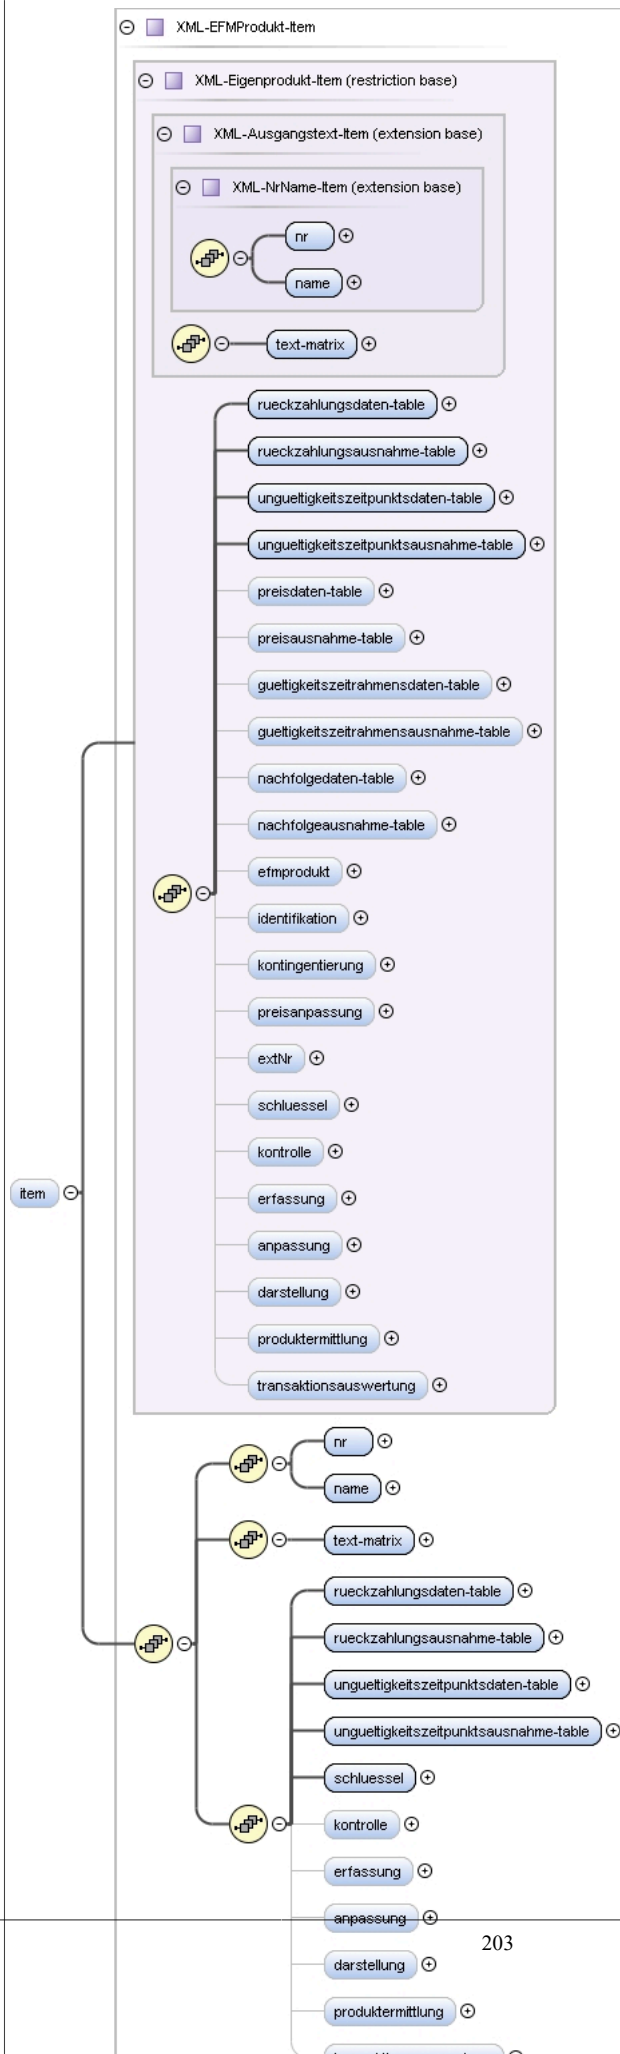
Element XML-Eigenprodukt-Item / transaktionsauswertung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |
| Properties | content: complex |
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><transaktionsauswertung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </transaktionsauswertung></pre> |
| Source | <xs:element name="transaktionsauswertung" type="XML-Produktdaten-Part" minOccurs="0"/> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-EFMPprodukt-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} |

Diagram



| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Type | XML-EFMProdukt-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item <ul style="list-style-type: none"> XML-Ausgangstext-Item <ul style="list-style-type: none"> XML-Eigenprodukt-Item <ul style="list-style-type: none"> XML-EFMProdukt-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , rueckzahlungsdaten-table , rueckzahlungsausnahme-table , unguelteigkeitszeitpunktsdaten-table , unguelteigkeitszeitpunktsausnahme-table , schluessel , kontrolle{0,1} , erfassung{0,1} , anpassung{0,1} , darstellung{0,1} , produktermittlung{0,1} , transaktionsauswertung{0,1} | | | | | | |
| Children | anpassung , darstellung , erfassung , kontrolle , name , nr , produktermittlung , rueckzahlungsausnahme-table , rueckzahlungsdaten-table , schluessel , text-matrix , transaktionsauswertung , unguelteigkeitszeitpunktsausnahme-table , unguelteigkeitszeitpunktsdaten-table | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <rueckzahlungsdaten-table>{1,1}</rueckzahlungsdaten-table> <rueckzahlungsausnahme-table>{1,1}</rueckzahlungsausnahme-table> <unguelteigkeitszeitpunktsdaten-table>{1,1}</unguelteigkeitszeitpunktsdaten-table> <unguelteigkeitszeitpunktsausnahme-table>{1,1}</unguelteigkeitszeitpunktsausnahme-table> <schluessel>{1,1}</schluessel> <kontrolle>{0,1}</kontrolle> <erfassung>{0,1}</erfassung> <anpassung>{0,1}</anpassung> <darstellung>{0,1}</darstellung> <produktermittlung>{0,1}</produktermittlung> <transaktionsauswertung>{0,1}</transaktionsauswertung> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-EFMProdukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-EFMProdukt-Item / nr

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long <ul style="list-style-type: none"> XML-IntegerContent <ul style="list-style-type: none"> XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-EFMProdukt-Item / name

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

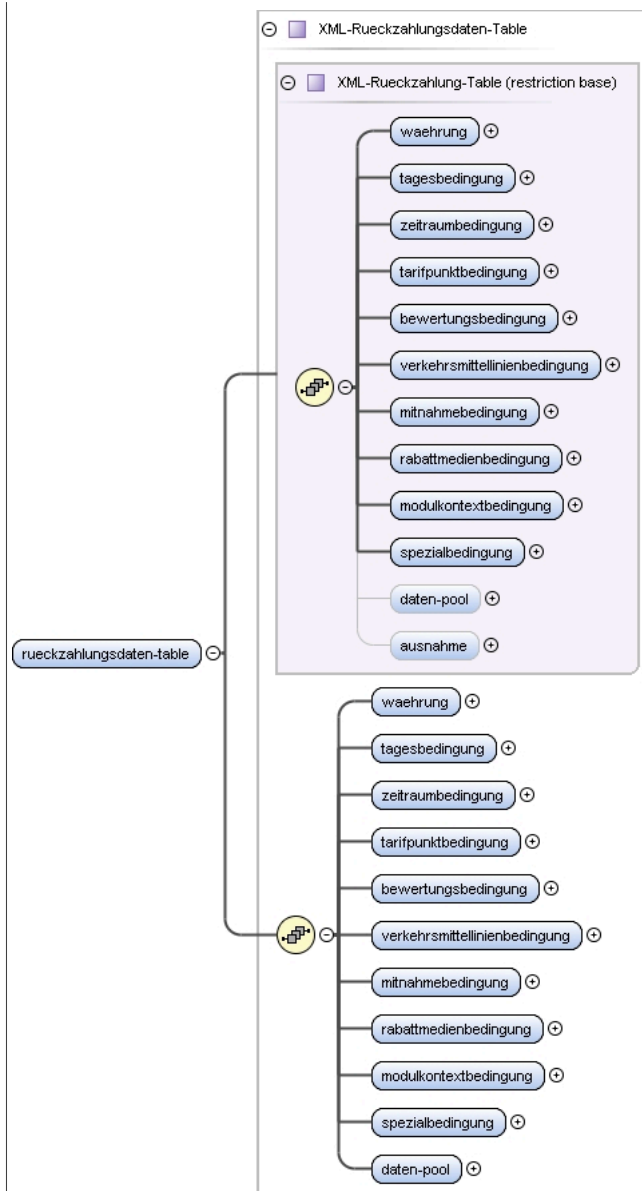
Element XML-EFMPprodukt-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref=" ">{0, unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-EFMPprodukt-Item / rueckzahlungsdaten-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-Rueckzahlungsdaten-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Rueckzahlung-Table XML-Rueckzahlungsdaten-Table |
| Properties | content: complex |
| Model | wahrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, wahrung, zeitraumbedingung |
| Instance | <pre> <rueckzahlungsdaten-table xmlns="http://vdv/ka/pkm/2"> <waehrung>{1,1}</waehrung> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </rueckzahlungsdaten-table> </pre> |
| Source | <xs:element name="rueckzahlungsdaten-table" type="XML-Rueckzahlungsdaten-Table"/> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-EFMProdukt-Item / rueckzahlungsausnahme-table

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Rueckzahlungsausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Rueckzahlung-Table XML-Rueckzahlungsausnahme-Table |
| Properties | content: complex |
| Model | wachrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zeitraumbedingung |
| Instance | <pre><rueckzahlungsausnahme-table xmlns="http://vdv/ka/pkm/2"> <waehrung>{1,1}</waehrung> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung></pre> |

| | |
|-----------------|--|
| | <pre> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </rueckzahlungsausnahme-table> </pre> |
| Source | <code><xs:element name="rueckzahlungsausnahme-table" type="XML-Rueckzahlungsausnahme-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-EFMProdukt-Item / ungueltigkeitszeitpunktsdaten-table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ungueltigkeitszeitpunktsdaten-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ungueltigkeitszeitpunkt-Table XML-Ungueltigkeitszeitpunktsdaten-Table |
| Properties | content: complex |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | daten-pool, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Instance | <pre> <ungueltigkeitszeitpunktsdaten-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </ungueltigkeitszeitpunktsdaten-table> </pre> |
| Source | <code><xs:element name="ungueltigkeitszeitpunktsdaten-table" type="XML-Ungueltigkeitszeitpunktsdaten-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-EFMProdukt-Item / ungueltigkeitszeitpunktsausnahme-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Ungueltigkeitszeitpunktsausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ungueltigkeitszeitpunkt-Table XML-Ungueltigkeitszeitpunktsausnahme-Table |
| Properties | content: complex |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Instance | <pre><ungueltigkeitszeitpunktsausnahme-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </ungueltigkeitszeitpunktsausnahme-table></pre> |
| Source | <pre><xs:element name="ungueltigkeitszeitpunktsausnahme-table" type="XML- Ungueltigkeitszeitpunktsausnahme-Table"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-EFMPProdukt-Item / schluessel

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-PVSchluessel-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Schluessel-Part |

| | |
|-----------------|--|
| | <ul style="list-style-type: none"> XML-PVSchluessel-Part |
| Properties | content: complex |
| Model | mkpv , mktr , mkauth |
| Children | mkauth, mkpv, mktr |
| Instance | <pre><schluessel xmlns="http://vdv/ka/pkm/2"> <mkpv>{1,1}</mkpv> <mktr>{1,1}</mktr> <mkauth>{1,1}</mkauth> </schluessel></pre> |
| Source | <code><xs:element name="schluessel" type="XML-PVSchluessel-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-EFMProdukt-Item / kontrolle

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |
| Properties | content: complex minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetzt-tab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetzt-tab |
| Instance | <pre><kontrolle xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetzt-tab>{1,1}</unterstuetzt-tab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </kontrolle></pre> |
| Source | <code><xs:element name="kontrolle" type="XML-Produktdaten-Part" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-EFMProdukt-Item / erfassung

| | |
|-----------|-----------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |

| | |
|-----------------|---|
| Properties | content: complex |
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><erfassung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </erfassung></pre> |
| Source | <code><xs:element name="erfassung" type="XML-Produktdaten-Part" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-EFMPProdukt-Item / anpassung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |
| Properties | content: complex |
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><anpassung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </anpassung></pre> |
| Source | <code><xs:element name="anpassung" type="XML-Produktdaten-Part" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-EFMPProdukt-Item / darstellung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Produktdaten-Part |
| Properties | content: complex |
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><darstellung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </darstellung></pre> |
| Source | <xs:element name="darstellung" type="XML-Produktdaten-Part" minOccurs="0"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-EFMPprodukt-Item / produktermittlung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |
| Properties | content: complex |
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><produktermittlung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </produktermittlung></pre> |
| Source | <xs:element name="produktermittlung" type="XML-Produktdaten-Part" minOccurs="0"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-EFMPprodukt-Item / transaktionsauswertung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | | |
|-----------------|---|----------|---------|------------|---|
| Diagram | | | | | |
| Type | XML-Produktdaten-Part | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | funktion , modulkontext , unterstuetzt-tab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table | | | | |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetzt-tab | | | | |
| Instance | <pre><transaktionsauswertung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetzt-tab>{1,1}</unterstuetzt-tab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </transaktionsauswertung></pre> | | | | |
| Source | <xs:element name="transaktionsauswertung" type="XML-Produktdaten-Part" minOccurs="0"/> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Tarifmodul / tarifprodukt-pool

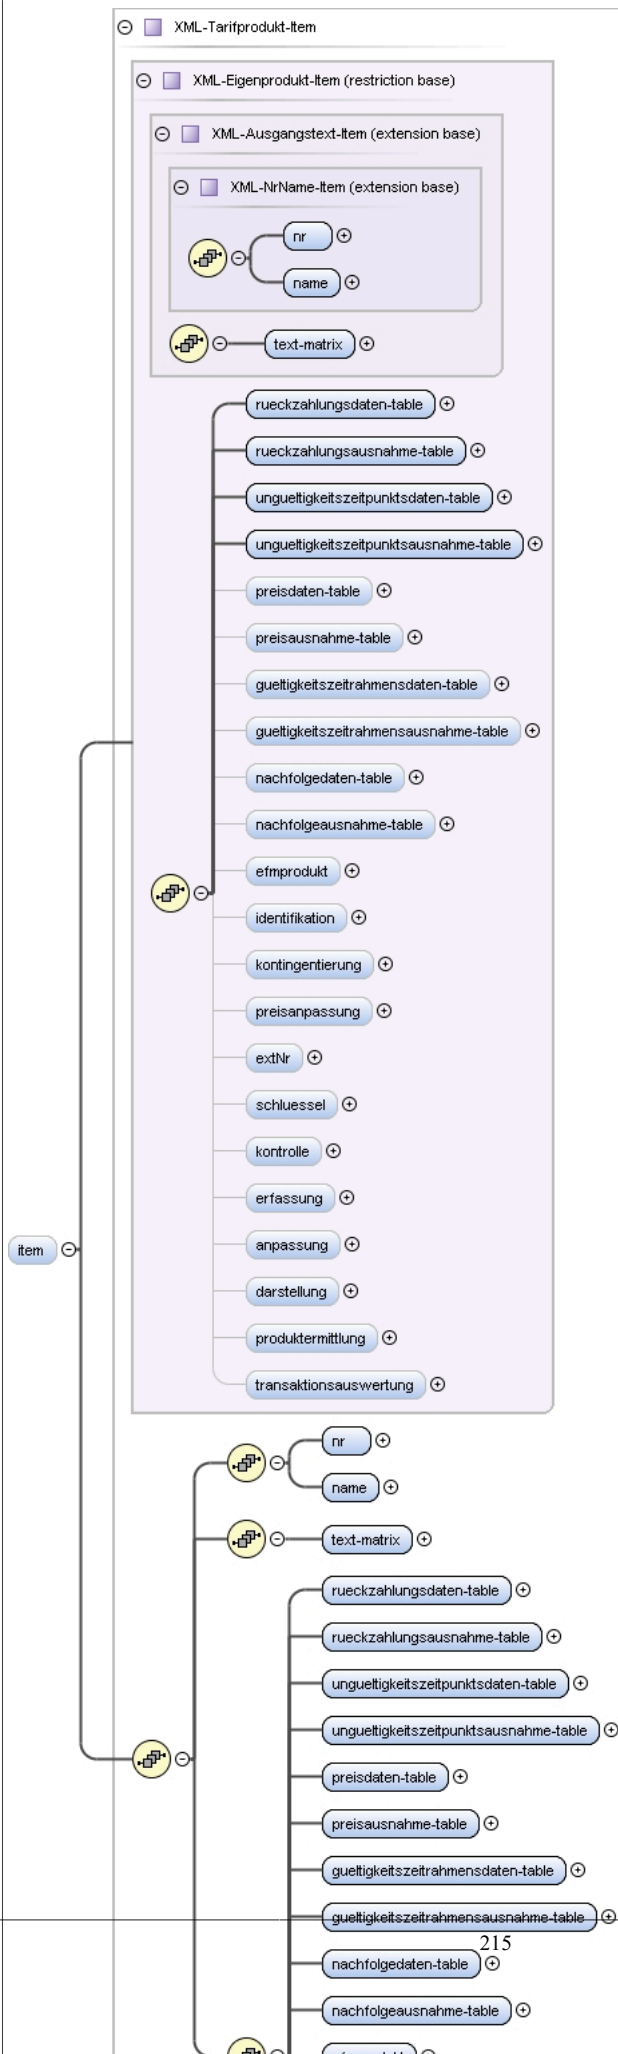
| | | | | | | | | |
|----------------|---|---------|----------|--|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Tarifprodukt-Pool. It is a container element that contains an XML-Eigenprodukt-Pool (restriction base). Inside the XML-Eigenprodukt-Pool is an XML-Pool (extension base). The XML-Pool contains a set of attributes, including a 'key' attribute, and a composition of 'item' elements. The 'tarifprodukt-pool' element is connected to the container via a composition relationship.</p> | | | | | | | |
| Type | XML-Tarifprodukt-Pool | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eigenprodukt-Pool<ul style="list-style-type: none">XML-Tarifprodukt-Pool | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 |
| content: | complex | | | | | | | |
| minOccurs: | 0 | | | | | | | |
| Model | item* | | | | | | | |
| Children | item | | | | | | | |
| Instance | <pre><tarifprodukt-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifprodukt-pool></pre> | | | | | | | |
| Attributes | QName | Type | Use | | | | | |
| | key | XML-Ref | required | | | | | |

| | |
|-----------------|---|
| Source | <code><xs:element name="tarifprodukt-pool" type="XML-Tarifprodukt-Pool" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Pool / item

| | |
|-------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} |

Diagram




| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Type | XML-Tarifprodukt-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item <ul style="list-style-type: none"> XML-Ausgangstext-Item <ul style="list-style-type: none"> XML-Eigenprodukt-Item <ul style="list-style-type: none"> XML-Tarifprodukt-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , rueckzahlungsdaten-table , rueckzahlungsausnahme-table , ungeltigkeitszeitpunktsdaten-table , ungeltigkeitszeitpunktsausnahme-table , preisdaten-table , preisausnahme-table , gueltigkeitszeitr Rahmensdaten-table , gueltigkeitszeitr Rahmensausnahme-table , nachfolgedaten-table , nachfolgeausnahme-table , efmprodukt , identifikation , kontingentierung , preisanpassung , extNr , kontrolle{0,1} , erfassung{0,1} , anpassung{0,1} , darstellung{0,1} , produktermittlung{0,1} , transaktionsauswertung{0,1} | | | | | | |
| Children | anpassung , darstellung , efmprodukt , erfassung , extNr , gueltigkeitszeitr Rahmensausnahme-table , gueltigkeitszeitr Rahmensdaten-table , identifikation , kontingentierung , kontrolle , nachfolgeausnahme-table , nachfolgedaten-table , name , nr , preisanpassung , preisausnahme-table , preisdaten-table , produktermittlung , rueckzahlungsausnahme-table , rueckzahlungsdaten-table , text-matrix , transaktionsauswertung , ungeltigkeitszeitpunktsausnahme-table , ungeltigkeitszeitpunktsdaten-table | | | | | | |
| Instance | <pre> <item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <rueckzahlungsdaten-table>{1,1}</rueckzahlungsdaten-table> <rueckzahlungsausnahme-table>{1,1}</rueckzahlungsausnahme-table> <ungeltigkeitszeitpunktsdaten-table>{1,1}</ungeltigkeitszeitpunktsdaten-table> <ungeltigkeitszeitpunktsausnahme-table>{1,1}</ungeltigkeitszeitpunktsausnahme-table> <preisdaten-table>{1,1}</preisdaten-table> <preisausnahme-table>{1,1}</preisausnahme-table> <gueltigkeitszeitr Rahmensdaten-table>{1,1}</gueltigkeitszeitr Rahmensdaten-table> <gueltigkeitszeitr Rahmensausnahme-table>{1,1}</gueltigkeitszeitr Rahmensausnahme-table> <nachfolgedaten-table>{1,1}</nachfolgedaten-table> <nachfolgeausnahme-table>{1,1}</nachfolgeausnahme-table> <efmprodukt>{1,1}</efmprodukt> <identifikation>{1,1}</identifikation> <kontingentierung>{1,1}</kontingentierung> <preisanpassung>{1,1}</preisanpassung> <extNr>{1,1}</extNr> <kontrolle>{0,1}</kontrolle> <erfassung>{0,1}</erfassung> <anpassung>{0,1}</anpassung> <darstellung>{0,1}</darstellung> <produktermittlung>{0,1}</produktermittlung> <transaktionsauswertung>{0,1}</transaktionsauswertung> </item> </pre> | | | | | | |
| Source | <pre> <xs:element name="item" type="XML-Tarifprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifprodukt-Item / nr


| | | | |
|----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long <ul style="list-style-type: none"> XML-IntegerContent <ul style="list-style-type: none"> XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre> <xs:element name="nr" type="XML-IntegerValue"/> </pre> | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Tarifprodukt-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

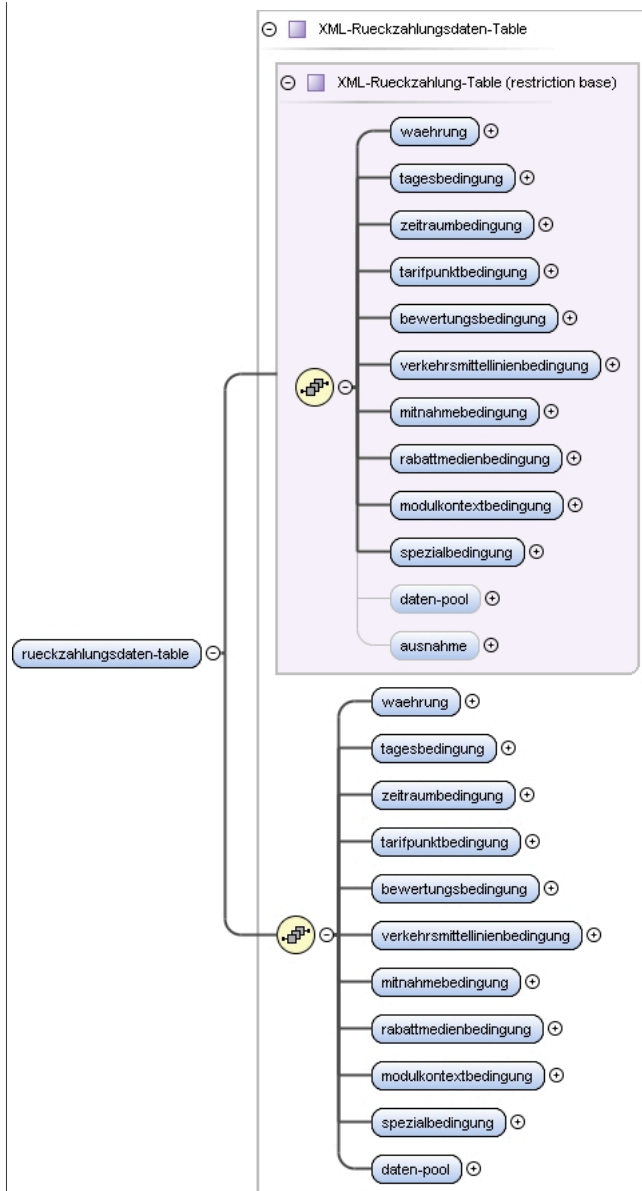
Element XML-Tarifprodukt-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <code><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></code> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / rueckzahlungsdaten-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-Rueckzahlungsdaten-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Rueckzahlung-Table XML-Rueckzahlungsdaten-Table |
| Properties | content: complex |
| Model | waehrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zeitraumbedingung |
| Instance | <pre> <rueckzahlungsdaten-table xmlns="http://vdv/ka/pkm/2"> <waehrung>{1,1}</waehrung> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </rueckzahlungsdaten-table> </pre> |
| Source | <code><xs:element name="rueckzahlungsdaten-table" type="XML-Rueckzahlungsdaten-Table"/></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Tarifprodukt-Item / rueckzahlungsausnahme-table

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Rueckzahlungsausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Rueckzahlung-Table XML-Rueckzahlungsausnahme-Table |
| Properties | content: complex |
| Model | wachrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zeitraumbedingung |
| Instance | <pre><rueckzahlungsausnahme-table xmlns="http://vdv/ka/pkm/2"> <waehrung>{1,1}</waehrung> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung></pre> |

| | |
|-----------------|--|
| | <pre> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </rueckzahlungsausnahme-table> </pre> |
| Source | <code><xs:element name="rueckzahlungsausnahme-table" type="XML-Rueckzahlungsausnahme-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / ungeltigkeitszeitpunktsdaten-table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ungeltigkeitszeitpunktsdaten-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ungeltigkeitszeitpunkt-Table XML-Ungeltigkeitszeitpunktsdaten-Table |
| Properties | content: complex |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | daten-pool, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Instance | <pre> <ungeltigkeitszeitpunktsdaten-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </ungeltigkeitszeitpunktsdaten-table> </pre> |
| Source | <code><xs:element name="ungeltigkeitszeitpunktsdaten-table" type="XML-Ungeltigkeitszeitpunktsdaten-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / ungeltigkeitszeitpunktsausnahme-table

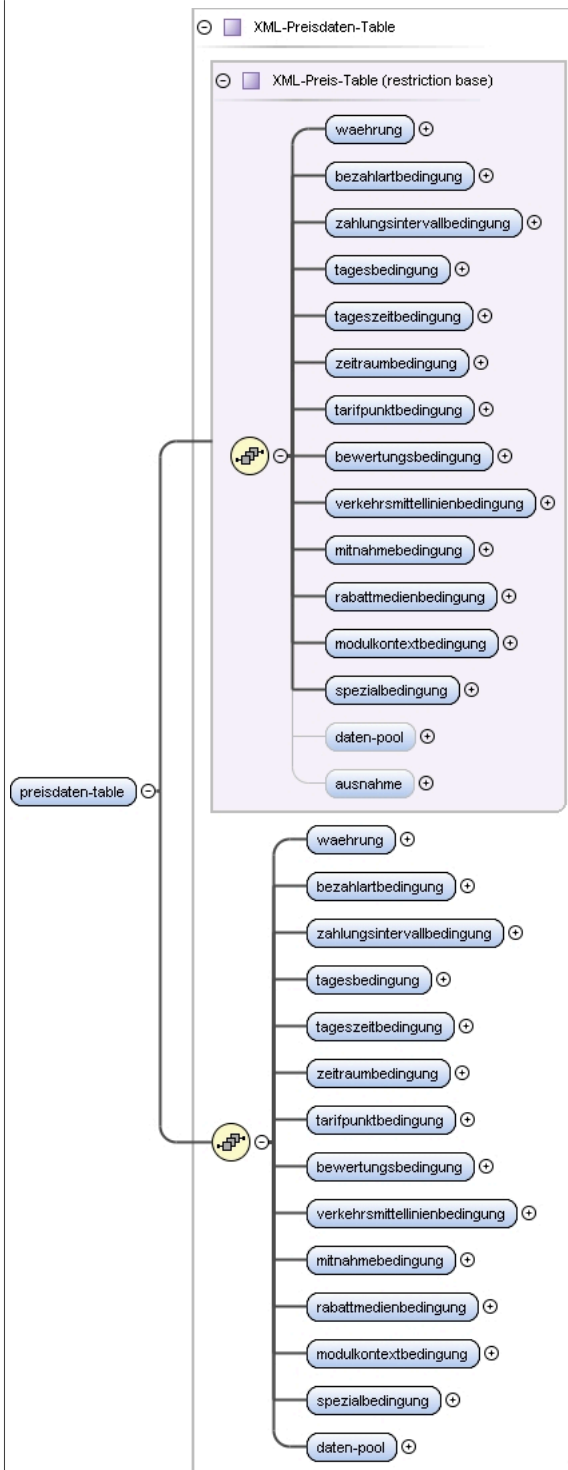
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Ungueltigkeitszeitpunktsausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ungueltigkeitszeitpunkt-Table XML-Ungueltigkeitszeitpunktsausnahme-Table |
| Properties | content: complex |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Instance | <pre><ungueltigkeitszeitpunktsausnahme-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </ungueltigkeitszeitpunktsausnahme-table></pre> |
| Source | <pre><xs:element name="ungueltigkeitszeitpunktsausnahme-table" type="XML- Ungueltigkeitszeitpunktsausnahme-Table"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / preisdaten-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



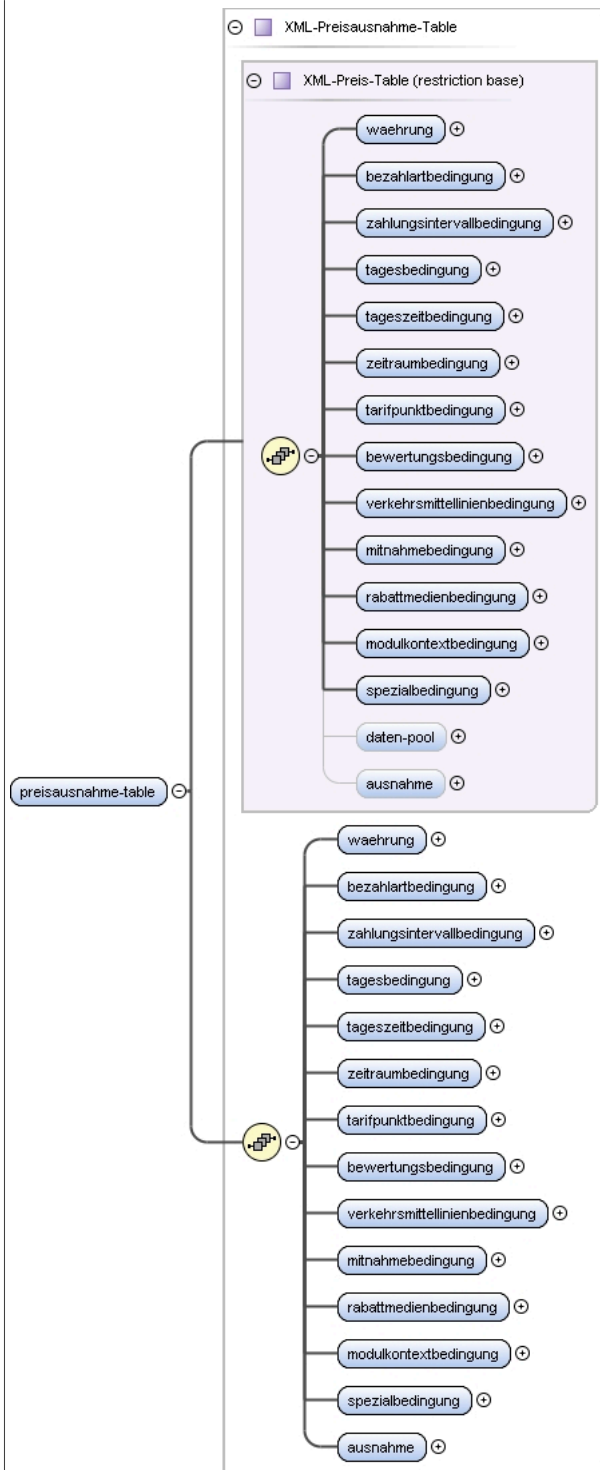
| | |
|----------------|--|
| Type | XML-Preisdaten-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Preis-Table XML-Preisdaten-Table |
| Properties | content: complex |
| Model | waehrung , bezahlartbedingung , zahlungsintervallbedingung , tagesbedingung , tageszeitbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, bezahlartbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zahlungsintervallbedingung, zeitraumbedingung |

| | |
|-----------------|---|
| Instance | <pre> <preisdaten-table xmlns="http://vdv/ka/pkm/2"> <waehrung>{1,1}</waehrung> <bezahlartbedingung>{1,1}</bezahlartbedingung> <zahlungsintervallbedingung>{1,1}</zahlungsintervallbedingung> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </preisdaten-table> </pre> |
| Source | <code><xs:element name="preisdaten-table" type="XML-Preisdaten-Table"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / preisausnahme-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-Preis-Ausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Preis-Table XML-Preis-Ausnahme-Table |
| Properties | content: complex |
| Model | waehrung , bezahlartbedingung , zahlungsintervallbedingung , tagesbedingung , tageszeitbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme , bewertungsbedingung , bezahlartbedingung , mitnahmebedingung , modulkontextbedingung , rabattmedienbedingung , spezialbedingung , tagesbedingung , tageszeitbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung , waehrung , zahlungsintervallbedingung , zeitraumbedingung |

| | |
|-----------------|---|
| Instance | <pre><preisausnahme-table xmlns="http://vdv/ka/pkm/2"> <waehrung>{1,1}</waehrung> <bezahlartbedingung>{1,1}</bezahlartbedingung> <zahlungsintervallbedingung>{1,1}</zahlungsintervallbedingung> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <zeitraumbedingung>{1,1}</zeitraumbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <mitnahmebedingung>{1,1}</mitnahmebedingung> <rabattmedienbedingung>{1,1}</rabattmedienbedingung> <modulkontextbedingung>{1,1}</modulkontextbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </preisausnahme-table></pre> |
| Source | <code><xs:element name="preisausnahme-table" type="XML-Preisausnahme-Table"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / gueltigkeitszeitrahmensdaten-table

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Gueltigkeitszeitrahmensdaten-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Gueltigkeitszeitrahmen-Table <ul style="list-style-type: none"> XML-Gueltigkeitszeitrahmensdaten-Table |
| Properties | content: complex |
| Model | tagesbedingung , tageszeitbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, daten-pool, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Instance | <pre><gueltigkeitszeitrahmensdaten-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung></pre> |

| | |
|-----------------|--|
| | <pre> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </gueltigkeitszeitrahmensdaten-table> </pre> |
| Source | <code><xs:element name="gueltigkeitszeitrahmensdaten-table" type="XML-Gueltigkeitszeitrahmensdaten-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / gueltigkeitszeitrahmensausnahme-table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Gueltigkeitszeitrahmensausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Gueltigkeitszeitrahmen-Table XML-Gueltigkeitszeitrahmensausnahme-Table |
| Properties | content: complex |
| Model | tagesbedingung , tageszeitbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Instance | <pre> <gueltigkeitszeitrahmensausnahme-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <tageszeitbedingung>{1,1}</tageszeitbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <bewertungsbedingung>{1,1}</bewertungsbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </gueltigkeitszeitrahmensausnahme-table> </pre> |
| Source | <code><xs:element name="gueltigkeitszeitrahmensausnahme-table" type="XML-Gueltigkeitszeitrahmensausnahme-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / nachfolgedaten-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Nachfolgedaten-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Nachfolge-Table <ul style="list-style-type: none"> XML-Nachfolgedaten-Table |
| Properties | content: complex |
| Model | kriterium , vorgaenger , nachfolger |
| Children | kriterium, nachfolger, vorgaenger |
| Instance | <pre><nachfolgedaten-table xmlns="http://vdv/ka/pkm/2"> <kriterium>{1,1}</kriterium> <vorgaenger>{1,1}</vorgaenger> <nachfolger>{1,1}</nachfolger> </nachfolgedaten-table></pre> |
| Source | <code><xs:element name="nachfolgedaten-table" type="XML-Nachfolgedaten-Table"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / nachfolgeausnahme-table

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Nachfolgeausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Nachfolge-Table <ul style="list-style-type: none"> XML-Nachfolgeausnahme-Table |
| Properties | content: complex |
| Model | kriterium , vorgaenger , ausnahme |
| Children | ausnahme, kriterium, vorgaenger |
| Instance | <pre><nachfolgeausnahme-table xmlns="http://vdv/ka/pkm/2"> <kriterium>{1,1}</kriterium> <vorgaenger>{1,1}</vorgaenger> <ausnahme>{1,1}</ausnahme> </nachfolgeausnahme-table></pre> |

| | |
|-----------------|---|
| | <code></nachfolgeausnahme-table></code> |
| Source | <code><xs:element name="nachfolgeausnahme-table" type="XML-Nachfolgeausnahme-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / efmprodukt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><efmprodukt xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </efmprodukt></pre> |
| Source | <code><xs:element name="efmprodukt" type="XML-Ref01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / identifikation

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><identifikation xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </identifikation></pre> |
| Source | <code><xs:element name="identifikation" type="XML-RefSet0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / kontingentierung

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><kontingentierung xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </kontingentierung></pre> |
| Source | <pre><xs:element name="kontingentierung" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / preisanpassung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-BooleanValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:boolean XML-BooleanContent XML-BooleanValue |
| Properties | content: complex |
| Source | <pre><xs:element name="preisanpassung" type="XML-BooleanValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / extNr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="extNr" type="XML-StringValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / kontrolle

| | |
|------------|-----------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-ProduktDaten-Part |
| Properties | content: complex |

| | |
|-----------------|---|
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><kontrolle xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </kontrolle></pre> |
| Source | <xs:element name="kontrolle" type="XML-Produktdaten-Part" minOccurs="0"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / erfassung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |
| Properties | content: complex minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><erfassung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </erfassung></pre> |
| Source | <xs:element name="erfassung" type="XML-Produktdaten-Part" minOccurs="0"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / anpassung

| | |
|-----------|-----------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |

| | |
|-----------------|---|
| Properties | content: complex |
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><anpassung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </anpassung></pre> |
| Source | <xs:element name="anpassung" type="XML-Produktdaten-Part" minOccurs="0" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / darstellung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |
| Properties | content: complex |
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><darstellung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </darstellung></pre> |
| Source | <xs:element name="darstellung" type="XML-Produktdaten-Part" minOccurs="0" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / produktermittlung

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Produktdaten-Part |
| Properties | content: complex |
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><produktermittlung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </produktermittlung></pre> |
| Source | <xs:element name="produktermittlung" type="XML-Produktdaten-Part" minOccurs="0" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifprodukt-Item / transaktionsauswertung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktdaten-Part |
| Properties | content: complex |
| | minOccurs: 0 |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab |
| Instance | <pre><transaktionsauswertung xmlns="http://vdv/ka/pkm/2"> <funktion>{1,1}</funktion> <modulkontext>{1,1}</modulkontext> <unterstuetztztab>{1,1}</unterstuetztztab> <ausgangsdaten-matrix>{1,1}</ausgangsdaten-matrix> <abhaengigkeitsdaten-table>{1,1}</abhaengigkeitsdaten-table> <abhaengigkeitsausnahme-table>{1,1}</abhaengigkeitsausnahme-table> </transaktionsauswertung></pre> |
| Source | <xs:element name="transaktionsauswertung" type="XML-Produktdaten-Part" minOccurs="0" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / fremdprodukt-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Fremdprodukt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Fremdprodukt-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><fremdprodukt-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </fremdprodukt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="fremdprodukt-pool" type="XML-Fremdprodukt-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

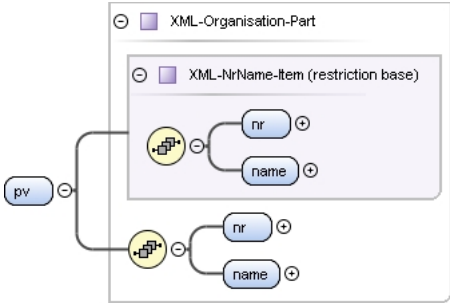
Element XML-Fremdprodukt-Pool / item

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Fremdprodukt-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-ItemXML-Ausgangstext-ItemXML-Fremdprodukt-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , tarifstand , pv | | | | | | |
| Children | name, nr, pv, tarifstand, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <tarifstand>{1,1}</tarifstand> <pv>{1,1}</pv> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Fremdprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

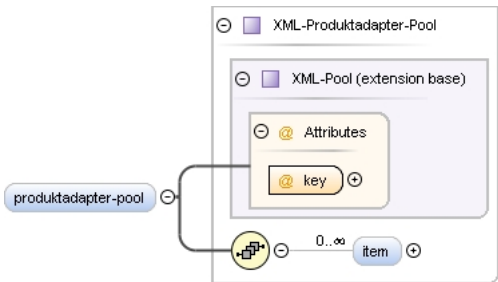
Element XML-Fremdprodukt-Item / tarifstand

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="tarifstand" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Fremdprodukt-Item / pv

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Organisation-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Organisation-Part |
| Properties | content: complex |
| Model | nr, name |
| Children | name, nr |
| Instance | <pre><pv xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> </pv></pre> |
| Source | <code><xs:element name="pv" type="XML-Organisation-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / produktadapter-pool

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Produktadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Produktadapter-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><produktadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </produktadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="produktadapter-pool" type="XML-Produktadapter-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Produktadapter-Pool / item

| | | | | | | | |
|----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Produktadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Ausgangstext-Item<ul style="list-style-type: none">XML-Produktadapter-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name, text-matrix, schluessel, kontrollkontext, erfassungskontext, anpassungskontext, darstellungskontext, produktermittlungskontext, transaktionsauswertungskontext, kvpProduktNr | | | | | | |
| Children | anpassungskontext, darstellungskontext, erfassungskontext, kontrollkontext, kvpProduktNr, name, nr, produktermittlungskontext, schluessel, text-matrix, transaktionsauswertungskontext | | | | | | |

| | |
|-----------------|--|
| Instance | <pre> <item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <schluessel>{1,1}</schluessel> <kontrollkontext>{1,1}</kontrollkontext> <erfassungskontext>{1,1}</erfassungskontext> <anpassungskontext>{1,1}</anpassungskontext> <darstellungskontext>{1,1}</darstellungskontext> <produktermittlungskontext>{1,1}</produktermittlungskontext> <transaktionsauswertungskontext>{1,1}</transaktionsauswertungskontext> <kvpProduktNr>{1,1}</kvpProduktNr> </item> </pre> |
| Source | <pre> <xs:element name="item" type="XML-Produktadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Item / schluessel

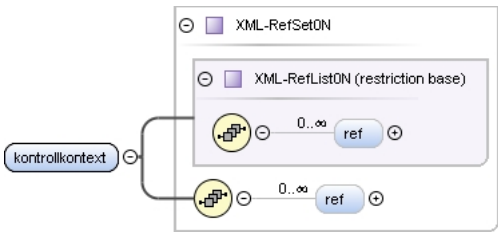
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RNSchluessel-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Schluessel-Part XML-RNSchluessel-Part |
| Properties | content: complex |
| Model | mkkvp |
| Children | mkkvp |
| Instance | <pre> <schluessel xmlns="http://vdv/ka/pkm/2"> <mkkvp>{1,1}</mkkvp> </schluessel> </pre> |
| Source | <pre> <xs:element name="schluessel" type="XML-RNSchluessel-Part"/> </pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-RNSchluessel-Part / mkkvp

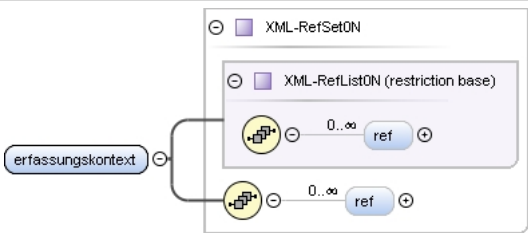
| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre> <mkkvp xmlns="http://vdv/ka/pkm/2"> <ref> </pre> |

| | |
|-----------------|---|
| | <code><ref>{0,1}</ref></code> <code></mkkvp></code> |
| Source | <code><xs:element name="mkkvp" type="XML-Ref01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Item / kontrollkontext

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a container element 'XML-RefSet0N' which contains a restriction base 'XML-RefList0N (restriction base)'. This base contains two 'ref' elements, each with a cardinality of '0..∞'. The 'kontrollkontext' element is shown as a child of the 'XML-RefSet0N' container. |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><kontrollkontext xmlns="http://vdv/ka/pkm/2"></code> <code><ref>{0,unbounded}</ref></code> <code></kontrollkontext></code> |
| Source | <code><xs:element name="kontrollkontext" type="XML-RefSet0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Item / erfassungskontext

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a container element 'XML-RefSet0N' which contains a restriction base 'XML-RefList0N (restriction base)'. This base contains two 'ref' elements, each with a cardinality of '0..∞'. The 'erfassungskontext' element is shown as a child of the 'XML-RefSet0N' container. |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><erfassungskontext xmlns="http://vdv/ka/pkm/2"></code> <code><ref>{0,unbounded}</ref></code> <code></erfassungskontext></code> |
| Source | <code><xs:element name="erfassungskontext" type="XML-RefSet0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Item / anpassungskontext

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><anpassungskontext xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </anpassungskontext></pre> |
| Source | <pre><xs:element name="anpassungskontext" type="XML-RefSet0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Item / darstellungskontext

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><darstellungskontext xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </darstellungskontext></pre> |
| Source | <pre><xs:element name="darstellungskontext" type="XML-RefSet0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Item / produktermittlungskontext

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefSet0N |

| | |
|-----------------|---|
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><produktermittlungskontext xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </produktermittlungskontext></pre> |
| Source | <pre><xs:element name="produktermittlungskontext" type="XML-RefSet0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Item / transaktionsauswertungskontext

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><transaktionsauswertungskontext xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </transaktionsauswertungskontext></pre> |
| Source | <pre><xs:element name="transaktionsauswertungskontext" type="XML-RefSet0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktadapter-Item / kvpProduktNr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="kvpProduktNr" type="XML-StringValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / produktgruppe-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram | <p>The diagram illustrates the structure of the XML-Produktgruppe-Pool. It is a restriction base for XML-NameGruppe-Pool, which is an extension base for XML-Pool. XML-Pool contains an Attributes group (key) and a sequence of 0..∞ items. The diagram also shows the 'produktgruppe-pool' element in the source code.</p> | | | | | | | | | | | |
|-----------------|--|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Type | XML-Produktgruppe-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Produktgruppe-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><produktgruppe-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </produktgruppe-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="produktgruppe-pool" type="XML-Produktgruppe-Pool" minOccurs="0" /></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-NameGruppe-Pool / item

| | | | | | | | |
|----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-NameGruppe-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-NameGruppe-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , element | | | | | | |
| Children | element, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <element>{1,1}</element> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-NameGruppe-Item" minOccurs="0" maxOccurs="unbounded"></pre> | | | | | | |

| | |
|-----------------|--|
| | <pre> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-NameGruppe-Item / element

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <element xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </element> </pre> |
| Source | <xs:element name="element" type="XML-RefSet0N" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgruppe-Pool / item

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implizites key Attribut} |
| Diagram | |
| Type | XML-NameGruppe-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-NameGruppe-Item |
| Properties | content: complex minOccurs: 0 maxOccurs: unbounded |
| Model | name , element |
| Children | element, name |
| Instance | <pre> <item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <element>{1,1}</element> </item> </pre> |
| Source | <pre> <xs:element name="item" type="XML-NameGruppe-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </pre> |

| | |
|-----------------|---|
| | <code></xs:element></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / kontingentierung-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Kontingentierung-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Kontingentierung-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><kontingentierung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </kontingentierung-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="kontingentierung-pool" type="XML-Kontingentierung-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Kontingentierung-Pool / item

| | | | | | | | |
|----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut} | | | | | | |
| Diagram | <pre>graph LR item((item)) --- container[XML-Kontingentierung-Item] container --- extension[XML-Name-Item (extension base)] extension --- choice(()) choice --- name((name)) choice --- sequence(()) sequence --- kdt[kontingentdaten-table] sequence --- kta[kontingentausnahme-table]</pre> | | | | | | |
| Type | XML-Kontingentierung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Kontingentierung-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , kontingentdaten-table , kontingentausnahme-table | | | | | | |
| Children | kontingentausnahme-table, kontingentdaten-table, name | | | | | | |
| Instance | <code><item xmlns="http://vdv/ka/pkm/2"></code> | | | | | | |

| | |
|-----------------|--|
| | <pre> <name>{1,1}</name> <kontingentdaten-table>{1,1}</kontingentdaten-table> <kontingentausnahme-table>{1,1}</kontingentausnahme-table> </item> </pre> |
| Source | <pre> <xs:element name="item" type="XML-Kontingentierung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentierung-Item / kontingentdaten-table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Kontingentdaten-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Kontingent-Table XML-Kontingentdaten-Table |
| Properties | content: complex |
| Model | tagesbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung , spezialbedingung , daten-pool |
| Children | daten-pool, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Instance | <pre> <kontingentdaten-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <spezialbedingung>{1,1}</spezialbedingung> <daten-pool>{1,1}</daten-pool> </kontingentdaten-table> </pre> |
| Source | <pre> <xs:element name="kontingentdaten-table" type="XML-Kontingentdaten-Table"/> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingent-Table / tagesbedingung


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Kontingent-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingent-Table / verkehrsmittellinienbedingung


| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingent-Table / spezialbedingung


| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

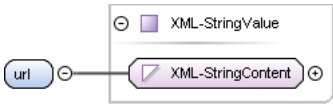
Element XML-Kontingent-Table / daten-pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a container box labeled 'XML-Kontingentdaten-Pool'. Inside, there is a sequence of elements: a blue box labeled 'daten-pool', followed by a yellow circle with a plus sign and a minus sign, and then a blue box labeled 'item'. A line connects 'daten-pool' to the circle, and another line connects the circle to 'item'. The 'item' box has a '0..∞' cardinality next to it. |
| Type | XML-Kontingentdaten-Pool |
| Properties | content: complex minOccurs: 0 |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </daten-pool></pre> |
| Source | <pre><xs:element name="daten-pool" type="XML-Kontingentdaten-Pool" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentdaten-Pool / item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a container box labeled 'XML-Kontingentdaten-Item'. Inside, there is a sequence of elements: a blue box labeled 'item', followed by a yellow circle with a plus sign and a minus sign, and then a blue box labeled 'url'. A line connects 'item' to the circle, and another line connects the circle to 'url'. The 'url' box has a '1..1' cardinality next to it. |
| Type | XML-Kontingentdaten-Item |
| Properties | content: complex minOccurs: 0 maxOccurs: unbounded |
| Model | url |
| Children | url |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <url>{1,1}</url> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Kontingentdaten-Item" minOccurs="0" maxOccurs="unbounded"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentdaten-Item / url

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a container box labeled 'XML-StringContent'. Inside, there is a blue box labeled 'url'. A line connects the 'url' box to the container box. The container box has a '1..1' cardinality next to it. |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> • XML-StringContent • XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="url" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingent-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex minOccurs: 0 |
| Model | ref* |
| Children | ref |
| Instance | <code><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></code> |
| Source | <code><xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentdaten-Table / tagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></code> |
| Source | <code><xs:element name="tagesbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentdaten-Table / tarifpunktbedingung

| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |

| | |
|-----------------|---|
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentsdaten-Table / verkehrsmittellinienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentsdaten-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentsdaten-Table / daten-pool

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Kontingentsdaten-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><daten-pool xmlns="http://vdv/ka/pkm/2"></pre> |

| | |
|-----------------|---|
| | <code><item>{0,unbounded}</item></code> <code></daten-pool></code> |
| Source | <code><xs:element name="daten-pool" type="XML-Kontingentdaten-Pool"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentierung-Item / kontingentausnahme-table


| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Kontingentausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Kontingent-Table XML-Kontingentausnahme-Table |
| Properties | content: complex |
| Model | tagesbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Instance | <pre><kontingentausnahme-table xmlns="http://vdv/ka/pkm/2"> <tagesbedingung>{1,1}</tagesbedingung> <tarifpunktbedingung>{1,1}</tarifpunktbedingung> <verkehrsmittellinienbedingung>{1,1}</verkehrsmittellinienbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </kontingentausnahme-table></pre> |
| Source | <code><xs:element name="kontingentausnahme-table" type="XML-Kontingentausnahme-Table"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentausnahme-Table / tagesbedingung


| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |

| | |
|-----------------|---|
| Instance | <pre><tagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tagesbedingung></pre> |
| Source | <pre><xs:element name="tagesbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentausnahme-Table / tarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><tarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </tarifpunktbedingung></pre> |
| Source | <pre><xs:element name="tarifpunktbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentausnahme-Table / verkehrsmittellinienbedingung


| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </verkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentausnahme-Table / spezialbedingung

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |

| | |
|-----------------|---|
| | <code></spezialbedingung></code> |
| Source | <code><xs:element name="spezialbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kontingentausnahme-Table / ausnahme

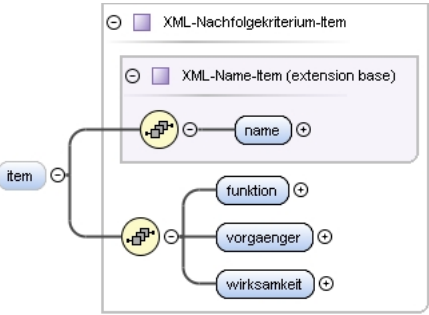
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <code><xs:element name="ausnahme" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / nachfolgekriterium-pool


| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|---------|----------|------------|---|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Nachfolgekriterium-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Nachfolgekriterium-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td colspan="3">complex</td></tr><tr><td>minOccurs:</td><td colspan="3">0</td></tr></table> | | | | content: | complex | | | minOccurs: | 0 | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><nachfolgekriterium-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </nachfolgekriterium-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="nachfolgekriterium-pool" type="XML-Nachfolgekriterium-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Nachfolgekriterium-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram |  | | | | | | |
| Type | XML-Nachfolgekriterium-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Nachfolgekriterium-Item | | | | | | |
| Properties | <table border="1"> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , funktion , vorgaenger , wirksamkeit | | | | | | |
| Children | funktion, name, vorgaenger, wirksamkeit | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <funktion>{1,1}</funktion> <vorgaenger>{1,1}</vorgaenger> <wirksamkeit>{1,1}</wirksamkeit> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Nachfolgekriterium-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Nachfolgekriterium-Item / funktion

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </funktion></pre> |
| Source | <pre><xs:element name="funktion" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nachfolgekriterium-Item / vorgaenger

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|---|
| Type | XML-Kriterienzeitraum-Part |
| Properties | content: complex |
| Model | beginn, ende |
| Children | beginn, ende |
| Instance | <pre><vorgaenger xmlns="http://vdv/ka/pkm/2"> <beginn>{1,1}</beginn> <ende>{1,1}</ende> </vorgaenger></pre> |
| Source | <code><xs:element name="vorgaenger" type="XML-Kriterienzeitraum-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kriterienzeitraum-Part / beginn

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:dateTime XML-DatetimeContent XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="beginn" type="XML-DatetimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kriterienzeitraum-Part / ende

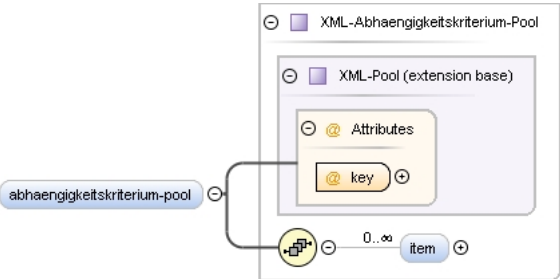
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:dateTime XML-DatetimeContent XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="ende" type="XML-DatetimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nachfolgekriterium-Item / wirksamkeit

| | |
|------------|----------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Kriterienzeitraum-Part |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | beginn , ende |
| Children | beginn, ende |
| Instance | <pre><wirksamkeit xmlns="http://vdv/ka/pkm/2"> <beginn>{1,1}</beginn> <ende>{1,1}</ende> </wirksamkeit></pre> |
| Source | <code><xs:element name="wirksamkeit" type="XML-Kriterienzeitraum-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / abhaengigkeitskriterium-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Abhaengigkeitskriterium-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Abhaengigkeitskriterium-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><abhaengigkeitskriterium-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </abhaengigkeitskriterium-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="abhaengigkeitskriterium-pool" type="XML-Abhaengigkeitskriterium-Pool" minOccurs="0" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Abhaengigkeitskriterium-Pool / item

| | | | | |
|----------------|---|---------|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram | | | | |
| Type | XML-Abhaengigkeitskriterium-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Abhaengigkeitskriterium-Item | | | |
| Properties | content: | complex | | |

| | |
|-----------------|---|
| | minOccurs: 0 maxOccurs: unbounded |
| Model | name , funktion , wirksamkeit |
| Children | funktion, name, wirksamkeit |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <funktion>{1,1}</funktion> <wirksamkeit>{1,1}</wirksamkeit> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Abhaengigkeitskriterium-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeitskriterium-Item / funktion

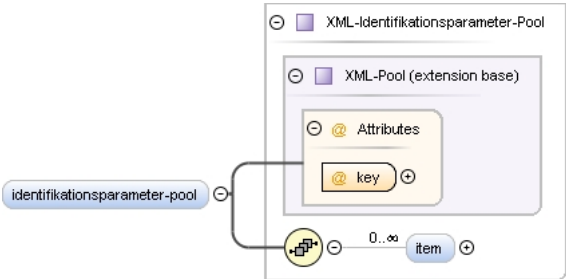
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </funktion></pre> |
| Source | <pre><xs:element name="funktion" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Abhaengigkeitskriterium-Item / wirksamkeit

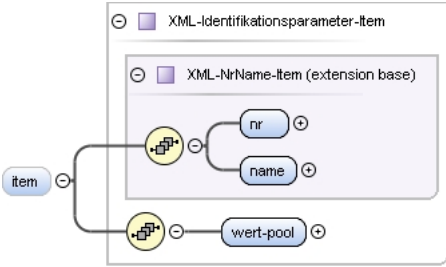
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Kriterienzeitraum-Part |
| Properties | content: complex |
| Model | beginn , ende |
| Children | beginn, ende |
| Instance | <pre><wirksamkeit xmlns="http://vdv/ka/pkm/2"> <beginn>{1,1}</beginn> <ende>{1,1}</ende> </wirksamkeit></pre> |
| Source | <pre><xs:element name="wirksamkeit" type="XML-Kriterienzeitraum-Part" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / identifikationsparameter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram |  | | | |
| Type | XML-Identifikationsparameter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Identifikationsparameter-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><identifikationsparameter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </identifikationsparameter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="identifikationsparameter-pool" type="XML-Identifikationsparameter-Pool" minOccurs="0" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Identifikationsparameter-Pool / item

| | | | | | | | |
|----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram |  | | | | | | |
| Type | XML-Identifikationsparameter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Identifikationsparameter-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , wert-pool | | | | | | |
| Children | name, nr, wert-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <wert-pool key="">{1,1}</wert-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Identifikationsparameter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation></pre> | | | | | | |

| | |
|-----------------|---|
| | <pre></xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Identifikationsparameterwert-Item / wert-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Identifikationsparameterwert-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Identifikationsparameterwert-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><wert-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </wert-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="wert-pool" type="XML-Identifikationsparameterwert-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Identifikationsparameterwert-Pool / item

| | | | | |
|-------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |

| | |
|-----------------|--|
| Type | XML-Identifikationsparameterwert-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item <ul style="list-style-type: none"> XML-Ausgangstext-Item <ul style="list-style-type: none"> XML-Identifikationsparameterwert-Item |
| Properties | content: complex |
| | minOccurs: 0 |
| | maxOccurs: unbounded |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Identifikationsparameterwert-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Identifikationsparameterwert-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long <ul style="list-style-type: none"> XML-IntegerContent <ul style="list-style-type: none"> XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Identifikationsparameterwert-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string <ul style="list-style-type: none"> XML-StringContent <ul style="list-style-type: none"> XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Identifikationsparameterwert-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / identifikationsparameteradapter-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|---|--|--|
| Diagram | | | | | | | | | | |
| Type | XML-Identifikationsparameteradapter-Pool | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Identifikationsparameter-Pool<ul style="list-style-type: none">XML-Identifikationsparameteradapter-Pool | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | |
| content: | complex | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | |
| Model | item* | | | | | | | | | |
| Children | item | | | | | | | | | |
| Instance | <pre><identifikationsparameteradapter-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </identifikationsparameteradapter-pool></pre> | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td></tr></table> | QName | Type | Use | key | XML-Ref | required | | | |
| QName | Type | Use | | | | | | | | |
| key | XML-Ref | required | | | | | | | | |
| Source | <pre><xs:element name="identifikationsparameteradapter-pool" type="XML-Identifikationsparameteradapter-Pool" minOccurs="0"/></pre> | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | |

Element XML-Identifikationsparameteradapter-Pool / item

| | |
|-------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} |


| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Identifikationsparameteradapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Identifikationsparameter-Item XML-Identifikationsparameteradapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , wert-pool | | | | | | |
| Children | name, nr, wert-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <wert-pool key="">{1,1}</wert-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Identifikationsparameteradapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Identifikationsparameteradapter-Item / nr

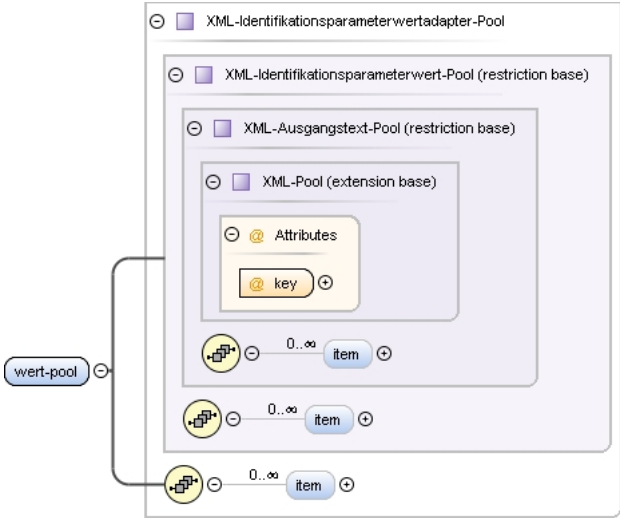
| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Identifikationsparameteradapter-Item / name

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Identifikationsparameteradapter-Item / wert-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Identifikationsparameterwertadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangstext-Pool XML-Identifikationsparameterwert-Pool XML-Identifikationsparameterwertadapter-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><wert-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </wert-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <code><xs:element name="wert-pool" type="XML-Identifikationsparameterwertadapter-Pool" /></code> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Identifikationsparameterwertadapter-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} |


| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Identifikationsparameterwertadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Identifikationsparameterwert-Item XML-Identifikationsparameterwertadapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Identifikationsparameterwertadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Identifikationsparameterwertadapter-Item / nr


| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |

| | |
|-----------------|---|
| Properties | content: complex |
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

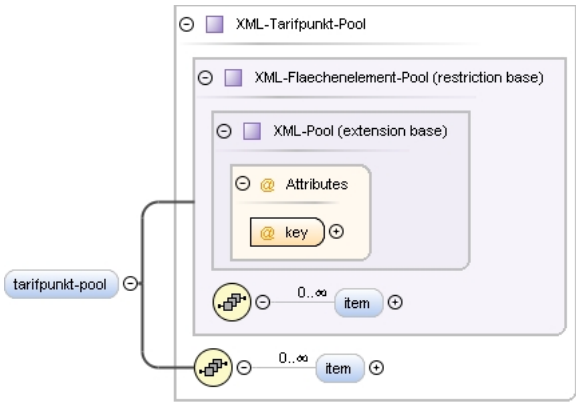
Element XML-Identifikationsparameterwertadapter-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Identifikationsparameterwertadapter-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0, unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / tarifpunkt-pool

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | | | | |
|-----------------|--|---------|----------|--|
| Type | XML-Tarifpunkt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaecheelement-Pool<ul style="list-style-type: none">XML-Tarifpunkt-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunkt-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunkt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunkt-pool" type="XML-Tarifpunkt-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Flaecheelement-Pool / item

| | | | | | | | |
|----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implicites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | <pre>classDiagram class XML_Flaecheelement_Item { geobezug typ ortsbezug tarifpunkt tarifpunktfolge_pool } class XML_Ausgangstext_Item { nr name } class XML_NrName_Item { text_matrix } class item XML_Flaecheelement_Item < -- XML_Ausgangstext_Item XML_Flaecheelement_Item < -- XML_NrName_Item item *-- XML_Flaecheelement_Item</pre> | | | | | | |
| Type | XML-Flaecheelement-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Ausgangstext-Item<ul style="list-style-type: none">XML-Flaecheelement-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , geobezug , typ{0,1} , ortsbezug{0,1} , tarifpunkt{0,1} , tarifpunktfolge-pool{0,1} | | | | | | |
| Children | geobezug, name, nr, ortsbezug, tarifpunkt, tarifpunktfolge-pool, text-matrix, typ | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <geobezug>{1,1}</geobezug> <typ>{0,1}</typ></pre> | | | | | | |

| | |
|-----------------|--|
| | <pre> <ortsbezug>{0,1}</ortsbezug> <tarifpunkt>{0,1}</tarifpunkt> <tarifpunktfolge-pool>{0,1}</tarifpunktfolge-pool> </item> </pre> |
| Source | <pre> <xs:element name="item" type="XML-Flaecheelement-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Flaecheelement-Item / geobezug

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Geobezug-Part |
| Type hierarchy | <ul style="list-style-type: none"> xs:anySimpleType XML-IntegerArrayContent XML-PolygonContent XML-Geobezug-Part |
| Properties | content: complex |
| Source | <pre> <xs:element name="geobezug" type="XML-Geobezug-Part" /> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Flaecheelement-Item / typ

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex minOccurs: 0 |
| Source | <pre> <xs:element name="typ" type="XML-StringValue" minOccurs="0" /> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Flaecheelement-Item / ortsbezug

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string |

| | | | | | |
|-----------------|---|----------|---------|------------|---|
| | <ul style="list-style-type: none"> XML-StringContent XML-StringValue | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Source | <code><xs:element name="ortsbezug" type="XML-StringValue" minOccurs="0"/></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Flaechenelement-Item / tarifpunkt

| | | | | | |
|-----------------|---|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Type | XML-RefSet1N | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N XML-RefSet1N | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | ref+ | | | | |
| Children | ref | | | | |
| Instance | <pre><tarifpunkt xmlns="http://vdv/ka/pkm/2"> <ref>{1,unbounded}</ref> </tarifpunkt></pre> | | | | |
| Source | <code><xs:element name="tarifpunkt" type="XML-RefSet1N" minOccurs="0"/></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Flaechenelement-Item / tarifpunktfolge-pool

| | | | | | |
|------------|--|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Type | XML-Tarifpunktfolge-Pool | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | item* | | | | |
| Children | item | | | | |
| Instance | <pre><tarifpunktfolge-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunktfolge-pool></pre> | | | | |
| Source | <code><xs:element name="tarifpunktfolge-pool" type="XML-Tarifpunktfolge-Pool" minOccurs="0"/></code> | | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Tarifpunktfolge-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Tarifpunktfolge-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | ink exk | | | | | | |
| Children | exk, ink | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <ink>{1,1}</ink> <exk>{1,1}</exk> </item></pre> | | | | | | |
| Source | <code><xs:element name="item" type="XML-Tarifpunktfolge-Item" minOccurs="0" maxOccurs="unbounded" /></code> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktfolge-Item / ink

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-TarifpunktfolgeninklusionValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-TarifpunktfolgeninklusionValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <code><xs:element name="ink" type="XML-TarifpunktfolgeninklusionValue" /></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Tarifpunktfolge-Item / exk

| | | | |
|----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-TarifpunktfolgenexklusionValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-TarifpunktfolgenexklusionValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |

| | |
|-----------------|---|
| Source | <code><xs:element name="exk" type="XML-TarifpunktfolgenexklusionValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunkt-Pool / item

| | | | | | | | |
|----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Tarifpunkt-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Flaecheelement-Item XML-Tarifpunkt-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , geobezug , typ , ortsbezug | | | | | | |
| Children | geobezug, name, nr, ortsbezug, text-matrix, typ | | | | | | |
| Instance | <pre> <item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <geobezug>{1,1}</geobezug> <typ>{1,1}</typ> <ortsbezug>{1,1}</ortsbezug> </item> </pre> | | | | | | |
| Source | <pre> <xs:element name="item" type="XML-Tarifpunkt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </pre> | | | | | | |

| | |
|-----------------|---|
| | <pre></xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunkt-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Tarifpunkt-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunkt-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Tarifpunkt-Item / geobezug

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Geobezug-Part |
| Type hierarchy | <ul style="list-style-type: none"> xs:anySimpleType XML-IntegerArrayContent XML-PolygonContent XML-Geobezug-Part |
| Properties | content: complex |
| Source | <code><xs:element name="geobezug" type="XML-Geobezug-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunkt-Item / typ

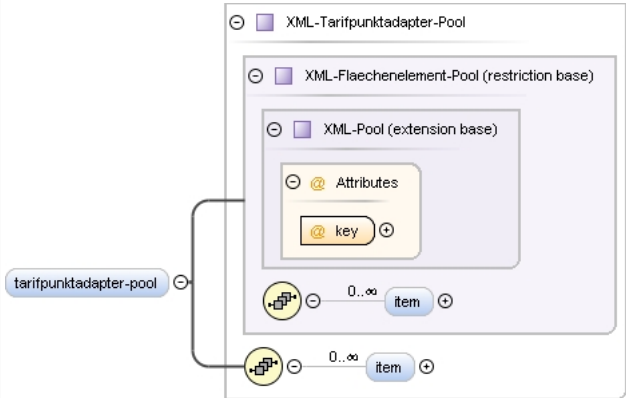
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="typ" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunkt-Item / ortsbezug

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="ortsbezug" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / tarifpunktadapter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram |  | | | |
| Type | XML-Tarifpunktadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaecheelement-PoolXML-Tarifpunktadapter-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunktadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunktadapter-pool" type="XML-Tarifpunktadapter-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |


Element XML-Tarifpunktadapter-Pool / item

| | |
|-------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribute, Sorted by first Element} |


| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Tarifpunktadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Flaecheelement-Item XML-Tarifpunktadapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , geobezug , typ | | | | | | |
| Children | geobezug, name, nr, text-matrix, typ | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <geobezug>{1,1}</geobezug> <typ>{1,1}</typ> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tarifpunktadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktadapter-Item / nr


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

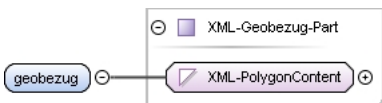
Element XML-Tarifpunktadapter-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktadapter-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="#">{0,unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktadapter-Item / geobezug

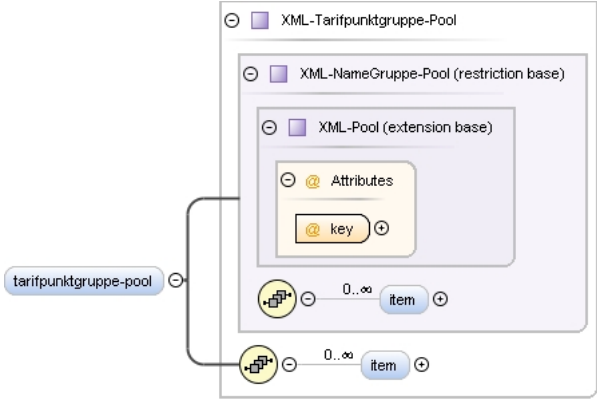
| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|--|
| Type | XML-Geobezug-Part |
| Type hierarchy | <ul style="list-style-type: none"> xs:anySimpleType XML-IntegerArrayContent XML-PolygonContent XML-Geobezug-Part |
| Properties | content: complex |
| Source | <code><xs:element name="geobezug" type="XML-Geobezug-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktadapter-Item / typ

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="typ" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / tarifpunktgruppe-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Tarifpunktgruppe-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-NameGruppe-Pool XML-Tarifpunktgruppe-Pool |
| Properties | content: complex minOccurs: 0 |
| Model | item* |
| Children | item |
| Instance | <code><tarifpunktgruppe-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item></code> |

| | | | | |
|-----------------|---|---------|----------|--|
| | </tarifpunktgruppe-pool> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="tarifpunktgruppe-pool" type="XML-Tarifpunktgruppe-Pool" minOccurs="0"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Tarifpunktgruppe-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Tarifpunktgruppe-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-ItemXML-NameGruppe-ItemXML-Tarifpunktgruppe-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , element | | | | | | |
| Children | element, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <element>{1,1}</element> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tarifpunktgruppe-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktgruppe-Item / name

| | | | |
|----------------|---|--|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringContent | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |

| | |
|-----------------|---|
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktgruppe-Item / element

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><element xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </element></pre> |
| Source | <code><xs:element name="element" type="XML-RefSet0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / tarifpunktreferenz-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Tarifpunktreferenz-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Flaechenelement-Pool XML-Tarifpunktreferenz-Pool |
| Properties | content: complex minOccurs: 0 |
| Model | item* |
| Children | item |
| Instance | <pre><tarifpunktreferenz-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item></pre> |

| | | | | |
|-----------------|---|---------|----------|--|
| | </tarifpunktreferenz-pool> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="tarifpunktreferenz-pool" type="XML-Tarifpunktreferenz-Pool" minOccurs="0" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Tarifpunktreferenz-Pool / item

| | | | |
|----------------|--|-----------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | |
| Diagram | | | |
| Type | XML-Tarifpunktreferenz-Item | | |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Ausgangstext-Item<ul style="list-style-type: none">XML-Flaecheelement-Item<ul style="list-style-type: none">XML-Tarifpunktreferenz-Item | | |
| Properties | content: | complex | |
| | minOccurs: | 0 | |
| | maxOccurs: | unbounded | |
| Model | nr , name , text-matrix , geobezug , typ , ortsbezug , tarifpunkt | | |
| Children | geobezug, name, nr, ortsbezug, tarifpunkt, text-matrix, typ | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix></pre> | | |

| | |
|-----------------|--|
| | <pre> <geobezug>{1,1}</geobezug> <typ>{1,1}</typ> <ortsbezug>{1,1}</ortsbezug> <tarifpunkt>{1,1}</tarifpunkt> </item> </pre> |
| Source | <pre> <xs:element name="item" type="XML-Tarifpunktreferenz-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktreferenz-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre> <xs:element name="nr" type="XML-IntegerValue"/> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktreferenz-Item / name


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre> <xs:element name="name" type="XML-StringValue"/> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktreferenz-Item / text-matrix


| | |
|------------|-------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |

| | |
|-----------------|---|
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="#">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Tarifpunktreferenz-Item / geobezug

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Geobezug-Part |
| Type hierarchy | <ul style="list-style-type: none"> xs:anySimpleType <ul style="list-style-type: none"> XML-IntegerArrayContent XML-PolygonContent XML-Geobezug-Part |
| Properties | content: complex |
| Source | <pre><xs:element name="geobezug" type="XML-Geobezug-Part" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktreferenz-Item / typ

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string <ul style="list-style-type: none"> XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="typ" type="XML-StringValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktreferenz-Item / ortsbezug

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string <ul style="list-style-type: none"> XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="ortsbezug" type="XML-StringValue" /></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Tarifpunktreferenz-Item / tarifpunkt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefSet1N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N XML-RefSet1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><tarifpunkt xmlns="http://vdv/ka/pkm/2"> <ref>{1,unbounded}</ref> </tarifpunkt></pre> |
| Source | <pre><xs:element name="tarifpunkt" type="XML-RefSet1N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / tarifpunktreferenzadapter-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Tarifpunktreferenzadapter-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Flaechenelement-Pool XML-Tarifpunktadapter-Pool |

| | | | | |
|-----------------|--|---------|----------|--|
| | <ul style="list-style-type: none">XML-Tarifpunktreferenzadapter-Pool | | | |
| Properties | content: complex | | | |
| | minOccurs: 0 | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktreferenzadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunktreferenzadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunktreferenzadapter-pool" type="XML-Tarifpunktreferenzadapter-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Tarifpunktreferenzadapter-Pool / item

[illegible]

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Type | XML-Tarifpunktreferenzadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item <ul style="list-style-type: none"> XML-Ausgangstext-Item <ul style="list-style-type: none"> XML-Flaecheelement-Item <ul style="list-style-type: none"> XML-Tarifpunktadapter-Item <ul style="list-style-type: none"> XML-Tarifpunktreferenzadapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , geobezug , typ | | | | | | |
| Children | geobezug, name, nr, text-matrix, typ | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <geobezug>{1,1}</geobezug> <typ>{1,1}</typ> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tarifpunktreferenzadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktreferenzadapter-Item / nr

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long <ul style="list-style-type: none"> XML-IntegerContent <ul style="list-style-type: none"> XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Tarifpunktreferenzadapter-Item / name

| | | | |
|----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string <ul style="list-style-type: none"> XML-StringContent <ul style="list-style-type: none"> XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |

| | |
|-----------------|---|
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktreferenzadapter-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

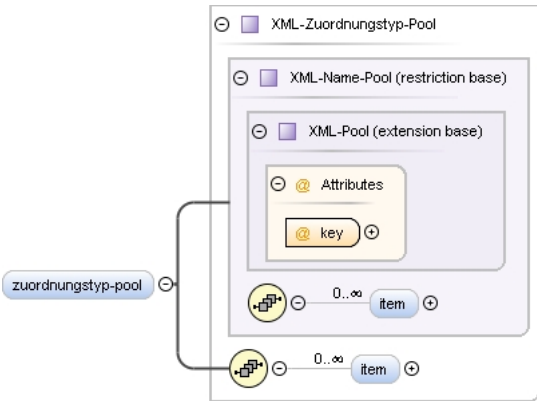
Element XML-Tarifpunktreferenzadapter-Item / geobezug

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Geobezug-Part |
| Type hierarchy | <ul style="list-style-type: none"> xs:anySimpleType XML-IntegerArrayContent XML-PolygonContent XML-Geobezug-Part |
| Properties | content: complex |
| Source | <code><xs:element name="geobezug" type="XML-Geobezug-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktreferenzadapter-Item / typ

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="typ" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / zuordnungstyp-pool


| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | XML-Zuordnungstyp-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool<ul style="list-style-type: none">XML-Zuordnungstyp-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><zuordnungstyp-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </zuordnungstyp-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="zuordnungstyp-pool" type="XML-Zuordnungstyp-Pool" minOccurs="0" /></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Zuordnungstyp-Pool / item

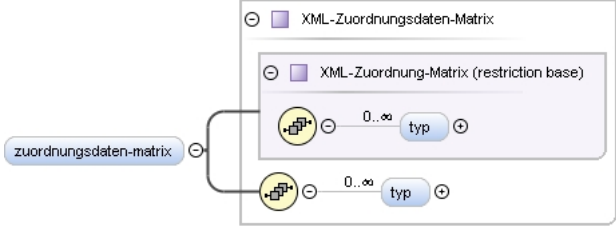
| | | | |
|----------------|---|-----------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Annotations | {Implies key Attribut} | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Zuordnungstyp-Item. It is a container class (represented by a rectangle with a purple header) that contains two instances of the XML-Name-Item (restriction base) class (represented by rounded rectangles with purple headers). Each XML-Name-Item instance has a name attribute (represented by a rounded rectangle with a blue header). The XML-Zuordnungstyp-Item class also has a name attribute. The diagram shows that the XML-Zuordnungstyp-Item class is a specialization of the XML-Name-Item class, as indicated by the inheritance arrow pointing from the XML-Zuordnungstyp-Item class to the XML-Name-Item class.</p> | | |
| Type | XML-Zuordnungstyp-Item | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Zuordnungstyp-Item | | |
| Properties | content: | complex | |
| | minOccurs: | 0 | |
| | maxOccurs: | unbounded | |
| Model | name | | |
| Children | name | | |

| | |
|-----------------|---|
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Zuordnungstyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zuordnungstyp-Item / name

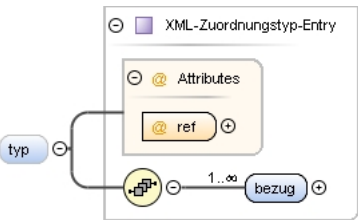
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / zuordnungsdaten-matrix

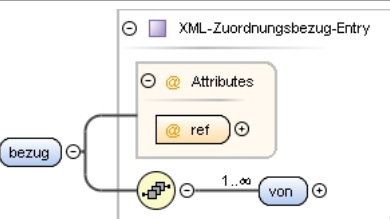
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Zuordnungsdaten-Matrix |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zuordnung-Matrix XML-Zuordnungsdaten-Matrix |
| Properties | content: complex minOccurs: 0 |
| Model | typ* |
| Children | typ |
| Instance | <pre><zuordnungsdaten-matrix xmlns="http://vdv/ka/pkm/2"> <typ ref="">{0,unbounded}</typ> </zuordnungsdaten-matrix></pre> |
| Source | <pre><xs:element name="zuordnungsdaten-matrix" type="XML-Zuordnungsdaten-Matrix" minOccurs="0"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zuordnung-Matrix / typ

| | |
|-------------|---------------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach erstem Attribut} |

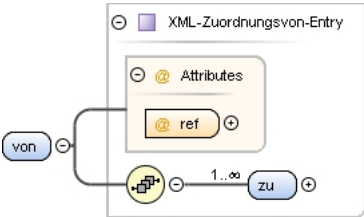
| | | | | |
|-----------------|---|-----------|----------|--|
| Diagram |  | | | |
| Type | XML-Zuordnungstyp-Entry | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| | maxOccurs: | unbounded | | |
| Model | bezug+ | | | |
| Children | bezug | | | |
| Instance | <pre><typ ref=" " xmlns="http://vdv/ka/pkm/2"> <bezug ref=" ">{1,unbounded}</bezug> </typ></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="typ" type="XML-Zuordnungstyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Zuordnungstyp-Entry / bezug

| | | | | |
|-----------------|---|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram |  | | | |
| Type | XML-Zuordnungsbezug-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Model | von+ | | | |
| Children | von | | | |
| Instance | <pre><bezug ref=" " xmlns="http://vdv/ka/pkm/2"> <von ref=" ">{1,unbounded}</von> </bezug></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="bezug" type="XML-Zuordnungsbezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Zuordnungsbezug-Entry / von

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|-----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | XML-Zuordnungsvon-Entry | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | | content: | complex | maxOccurs: | unbounded | | | | |
| content: | complex | | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | | |
| Model | zu+ | | | | | | | | | | | |
| Children | zu | | | | | | | | | | | |
| Instance | <pre><von ref=" " xmlns="http://vdv/ka/pkm/2"> <zu ref=" ">{1,unbounded}</zu> </von></pre> | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="von" type="XML-Zuordnungsvon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Zuordnungsvon-Entry / zu

| | | | | |
|-----------------|---|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Zuordnungsvon-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Zuordnungsvon-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | optional | |
| Source | <pre><xs:element name="zu" type="XML-Zuordnungsvon-Entry" maxOccurs="unbounded"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Zuordnungsdaten-Matrix / typ

| | | | | |
|-------------|---------------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |

| | | | | |
|-----------------|--|-----------|----------|--|
| Diagram | | | | |
| Type | XML-Zuordnungsdatentyp-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Zuordnungstyp-Entry<ul style="list-style-type: none">XML-Zuordnungsdatentyp-Entry | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| | maxOccurs: | unbounded | | |
| Model | bezug+ | | | |
| Children | bezug | | | |
| Instance | <pre><typ ref=" " xmlns="http://vdv/ka/pkm/2"> <bezug ref=" ">{1,unbounded}</bezug> </typ></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="typ" type="XML-Zuordnungsdatentyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Zuordnungsdatentyp-Entry / bezug

| | | | | | |
|----------------|---|----------|---------|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | | |
| Diagram | | | | | |
| Type | XML-Zuordnungsdatenbezug-Entry | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Zuordnungsbezug-Entry<ul style="list-style-type: none">XML-Zuordnungsdatenbezug-Entry | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | von+ | | | | |
| Children | von | | | | |
| Instance | <code><bezug ref="" xmlns="http://vdv/ka/pkm/2"></code> | | | | |

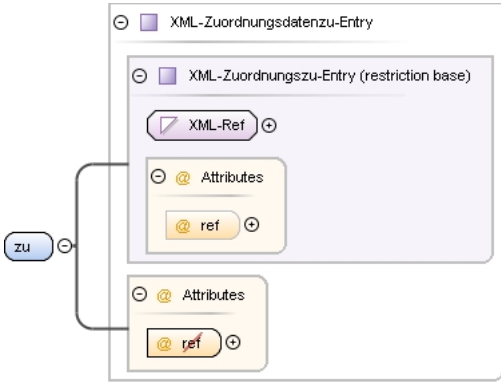
| | | | | |
|-----------------|--|-------------|------------|--|
| | <pre><von ref="">{1,unbounded}</von> </bezug></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="bezug" type="XML-Zuordnungsdatenbezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Zuordnungsdatenbezug-Entry / von

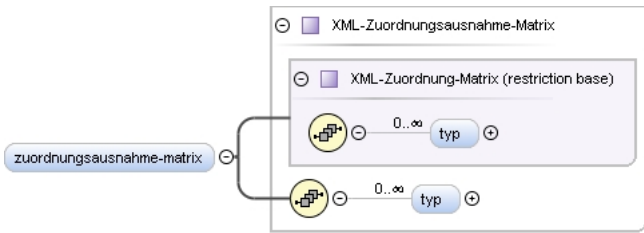
| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|-----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | | |
| Diagram | <pre>graph LR von((von)) --- container[XML-Zuordnungsdaten-von-Entry] zu((zu)) --- container zu --- ref((ref)) zu --- zu_card[1..∞] ref --- zu_card container --- von_card[1..∞]</pre> | | | | | | | | | | | |
| Type | XML-Zuordnungsdaten-von-Entry | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Zuordnungsdaten-von-EntryXML-Zuordnungsdaten-von-Entry | | | | | | | | | | | |
| Properties | content: | complex | | | | | | | | | | |
| | maxOccurs: | unbounded | | | | | | | | | | |
| Model | zu+ | | | | | | | | | | | |
| Children | zu | | | | | | | | | | | |
| Instance | <pre><von ref="" xmlns="http://vdv/ka/pkm/2"> <zu>{1,unbounded}</zu> </von></pre> | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="von" type="XML-Zuordnungsdaten-von-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Zuordnungsdatenvon-Entry / zu

| | | | | |
|-------------|------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach Inhalt} | | | |

| | | | | | |
|-----------------|---|----------|---------|------------|-----------|
| Diagram |  | | | | |
| Type | XML-Zuordnungsdatenzu-Entry | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Zuordnungszu-Entry XML-Zuordnungsdatenzu-Entry | | | | |
| Properties | <table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>maxOccurs:</td> <td>unbounded</td> </tr> </table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Source | <pre><xs:element name="zu" type="XML-Zuordnungsdatenzu-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Tarifmodul / zuordnungsausnahme-matrix

| | | | | | |
|-----------------|---|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram |  | | | | |
| Type | XML-Zuordnungsausnahme-Matrix | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zuordnung-Matrix XML-Zuordnungsausnahme-Matrix | | | | |
| Properties | <table border="1"> <tr> <td>content:</td> <td>complex</td> </tr> <tr> <td>minOccurs:</td> <td>0</td> </tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Model | typ* | | | | |
| Children | typ | | | | |
| Instance | <pre><zuordnungsausnahme-matrix xmlns="http://vdv/ka/pkm/2"> <typ ref="">{0,unbounded}</typ> </zuordnungsausnahme-matrix></pre> | | | | |
| Source | <pre><xs:element name="zuordnungsausnahme-matrix" type="XML-Zuordnungsausnahme-Matrix" minOccurs="0"/></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Zuordnungsausnahme-Matrix / typ

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

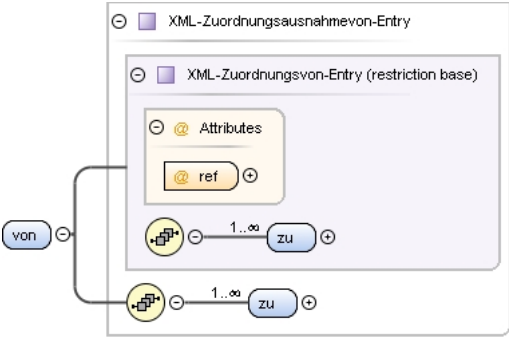
| | | | | |
|-----------------|---|-----------|----------|--|
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | | | | |
| Type | XML-Zuordnungsausnahmetyp-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Zuordnungstyp-Entry<ul style="list-style-type: none">XML-Zuordnungsausnahmetyp-Entry | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| | maxOccurs: | unbounded | | |
| Model | bezug+ | | | |
| Children | bezug | | | |
| Instance | <pre><typ ref=" " xmlns="http://vdv/ka/pkm/2"> <bezug ref=" ">{1,unbounded}</bezug> </typ></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="typ" type="XML-Zuordnungsausnahmetyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Zuordnungsausnahmetyp-Entry / bezug

| | | | | | |
|----------------|--|----------|---------|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | | |
| Diagram | | | | | |
| Type | XML-Zuordnungsbezug-Entry | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zuordnungsbezug-Entry <ul style="list-style-type: none"> XML-Zuordnungsbezug-Entry | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | von+ | | | | |
| Children | von | | | | |

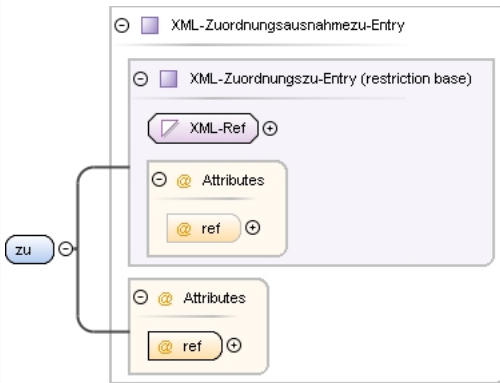
| | | | | |
|-----------------|---|-------------|------------|--|
| Instance | <pre><bezug ref="" xmlns="http://vdv/ka/pkm/2"> <von ref="">{1,unbounded}</von> </bezug></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="bezug" type="XML-Zuordnungsausnahmebezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Zuordnungsausnahmebezug-Entry / von

| | | | | |
|-----------------|---|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram |  | | | |
| Type | XML-Zuordnungsausnahmevon-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Zuordnungsvon-Entry<ul style="list-style-type: none">XML-Zuordnungsausnahmevon-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Model | zu+ | | | |
| Children | zu | | | |
| Instance | <pre><von ref="" xmlns="http://vdv/ka/pkm/2"> <zu ref="">{1,unbounded}</zu> </von></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="von" type="XML-Zuordnungsausnahmevon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Zuordnungsausnahmevon-Entry / zu

| | | | | |
|-------------|---------------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |

| Diagram |  | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|---------|----------|------------|-----------|--|--|
| Type | XML-Zuordnungsausnahmezu-Entry | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:int<ul style="list-style-type: none">• XML-Ref<ul style="list-style-type: none">• XML-Zuordnungszu-Entry<ul style="list-style-type: none">• XML-Zuordnungsausnahmezu-Entry | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td colspan="3">complex</td></tr><tr><td>maxOccurs:</td><td colspan="3">unbounded</td></tr></table> | | | | content: | complex | | | maxOccurs: | unbounded | | |
| content: | complex | | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="zu" type="XML-Zuordnungsausnahmezu-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Tarifmodul / wegevariante-pool

| | | | | | | | |
|----------------|--|--|--|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Wegevariante-Pool | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaecheelement-Pool<ul style="list-style-type: none">XML-Wegevariante-Pool | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | content: | complex | minOccurs: | 0 |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| Model | item* | | | | | | |
| Children | item | | | | | | |
| Instance | <pre><wegevariante-pool key=" " xmlns="http://vdv/ka/pkm/2"></pre> | | | | | | |

| | | | | |
|-----------------|---|-------------|------------|--|
| | <code><item>{0,unbounded}</item></code> <code></wegevariante-pool></code> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <code><xs:element name="wegevariante-pool" type="XML-Wegevariante-Pool" minOccurs="0"/></code> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Wegevariante-Pool / item

| | | | | | | | |
|----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Wegevariante-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-ItemXML-Ausgangstext-ItemXML-Flaecheelement-ItemXML-Wegevariante-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , geobezug , tarifpunktfolge-pool | | | | | | |
| Children | geobezug, name, nr, tarifpunktfolge-pool, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <geobezug>{1,1}</geobezug> <tarifpunktfolge-pool>{1,1}</tarifpunktfolge-pool> </item></pre> | | | | | | |

| | |
|-----------------|--|
| Source | <pre><xs:element name="item" type="XML-Wegevariante-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Wegevariante-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Wegevariante-Item / name


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Wegevariante-Item / text-matrix


| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0, unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

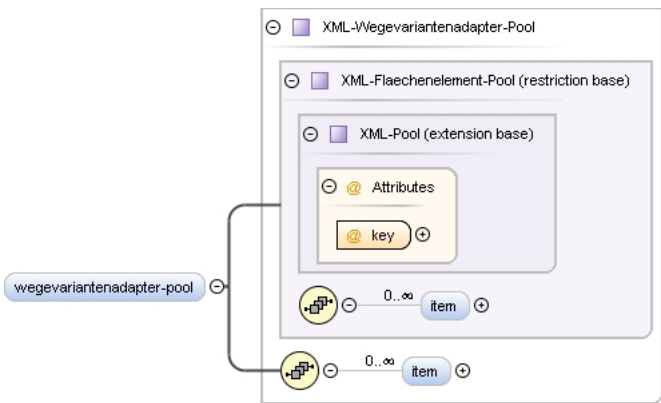
Element XML-Wegevariante-Item / geobezug

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a container box labeled 'XML-Geobezug-Part'. Inside, there is a blue rounded rectangle labeled 'geobezug' connected by a line to a purple rounded rectangle labeled 'XML-PolygonContent'. |
| Type | XML-Geobezug-Part |
| Type hierarchy | <ul style="list-style-type: none"> xs:anySimpleType XML-IntegerArrayContent XML-PolygonContent XML-Geobezug-Part |
| Properties | content: complex |
| Source | <code><xs:element name="geobezug" type="XML-Geobezug-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Wegevariante-Item / tarifpunktfolge-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a container box labeled 'XML-Tarifpunktfolge-Pool'. Inside, there is a blue rounded rectangle labeled 'tarifpunktfolge-pool' connected by a line to a yellow circle with a plus sign, which is then connected to a blue rounded rectangle labeled 'item'. The connection between the circle and 'item' has the cardinality '0..∞'. |
| Type | XML-Tarifpunktfolge-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><tarifpunktfolge-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunktfolge-pool></pre> |
| Source | <code><xs:element name="tarifpunktfolge-pool" type="XML-Tarifpunktfolge-Pool" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / wegevariantenadapter-pool

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a container box labeled 'XML-Wegevariantenadapter-Pool'. Inside, there is a blue rounded rectangle labeled 'wegevariantenadapter-pool' connected by a line to a yellow circle with a plus sign, which is then connected to a blue rounded rectangle labeled 'item'. The connection between the circle and 'item' has the cardinality '0..∞'. The entire structure is nested within a larger box labeled 'XML-Flaecheelement-Pool (restriction base)', which also contains a box labeled 'XML-Pool (extension base)' with an 'Attributes' section containing a 'key' attribute. |
| Type | XML-Wegevariantenadapter-Pool |

| | | | | |
|-----------------|--|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaecheelement-Pool<ul style="list-style-type: none">XML-Wegevariantenadapter-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><wegevariantenadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </wegevariantenadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="wegevariantenadapter-pool" type="XML-Wegevariantenadapter-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Wegevariantenadapter-Pool / item

| | | | | |
|----------------|--|---------|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Wegevariantenadapter-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Flaecheelement-Item XML-Wegevariantenadapter-Item | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |

| | |
|-----------------|--|
| | maxOccurs: unbounded |
| Model | nr , name , text-matrix , geobezug |
| Children | geobezug, name, nr, text-matrix |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <geobezug>{1,1}</geobezug> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Wegevariantenadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Implizites key Attribut, Sortiert nach erstem Element</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Wegevariantenadapter-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Wegevariantenadapter-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Wegevariantenadapter-Item / text-matrix

| | |
|-----------|-------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Wegevariantenadapter-Item / geobezug

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Geobezug-Part |
| Type hierarchy | <ul style="list-style-type: none"> xs:anySimpleType XML-IntegerArrayContent XML-PolygonContent XML-Geobezug-Part |
| Properties | content: complex |
| Source | <pre><xs:element name="geobezug" type="XML-Geobezug-Part" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / bewertungstyp-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Bewertungstyp-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Name-Pool XML-Bewertungstyp-Pool |
| Properties | content: complex minOccurs: 0 |
| Model | item* |
| Children | item |
| Instance | <pre><bewertungstyp-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bewertungstyp-pool></pre> |

| Attributes | QName | Type | Use | |
|-----------------|---|---------|----------|--|
| | key | XML-Ref | required | |
| Source | <xs:element name="bewertungstyp-pool" type="XML-Bewertungstyp-Pool" minOccurs="0"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungstyp-Pool / item

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Bewertungstyp-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Bewertungstyp-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name | | | | | | |
| Children | name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bewertungstyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Bewertungstyp-Item / name

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringContent | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringContent | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringContent"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Tarifmodul / bewertungsdaten-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram | | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Type | XML-Bewertungsdaten-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Bewertungsdaten-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><bewertungsdaten-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bewertungsdaten-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="bewertungsdaten-pool" type="XML-Bewertungsdaten-Pool" minOccurs="0" /></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Bewertungsdaten-Pool / item

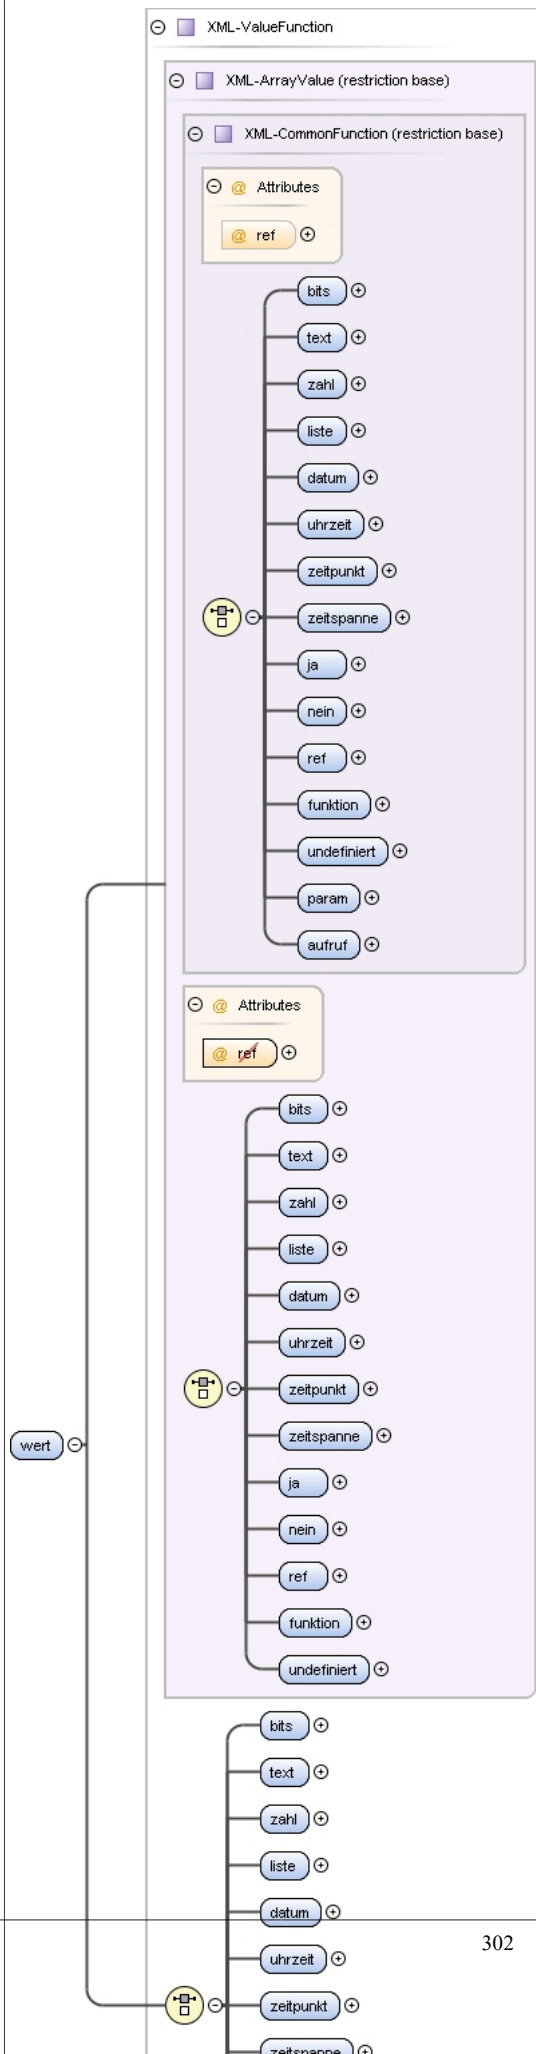
| | | | | | | | |
|----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Bewertungsdaten-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Bewertungsdaten-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , wert , text-matrix | | | | | | |
| Children | name, text-matrix, wert | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <wert>{1,1}</wert> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bewertungsdaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Bewertungsdaten-Item / wert

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|-----------------|---|
| Type | XML-ValueFunction |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue XML-ValueFunction |
| Properties | content: complex |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><wert xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </wert></pre> |
| Source | <code><xs:element name="wert" type="XML-ValueFunction"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Bewertungsdaten-Item / text-matrix

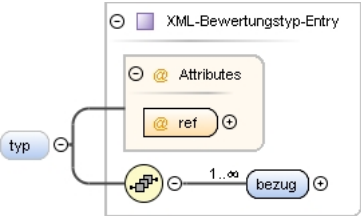
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0, unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / bewertungsdaten-matrix

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Bewertungsdaten-Matrix |
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertung-Matrix XML-Bewertungsdaten-Matrix |
| Properties | content: complex |

| | |
|-----------------|---|
| | minOccurs: 0 |
| Model | typ* |
| Children | typ |
| Instance | <pre><bewertungsdaten-matrix xmlns="http://vdv/ka/pkm/2"> <typ ref="">{0,unbounded}</typ> </bewertungsdaten-matrix></pre> |
| Source | <code><xs:element name="bewertungsdaten-matrix" type="XML-Bewertungsdaten-Matrix" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Bewertung-Matrix / typ

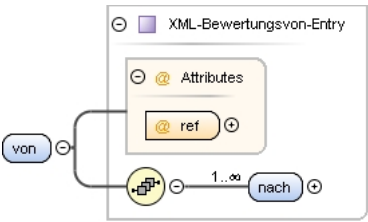
| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|------------|-----------|--|--|
| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | | |
| Diagram |  | | | | | | | | | | | |
| Type | XML-Bewertungstyp-Entry | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | | |
| Model | bezug+ | | | | | | | | | | | |
| Children | bezug | | | | | | | | | | | |
| Instance | <pre><typ ref="" xmlns="http://vdv/ka/pkm/2"> <bezug ref="">{1,unbounded}</bezug> </typ></pre> | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="typ" type="XML-Bewertungstyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Bewertungstyp-Entry / bezug

| | | | | | |
|-------------|---|----------|---------|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | | |
| Diagram | | | | | |
| Type | XML-Bewertungsbezug-Entry | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | von+ | | | | |
| Children | von | | | | |

| | | | | |
|-----------------|---|-------------|------------|--|
| Instance | <pre><bezug ref="" xmlns="http://vdv/ka/pkm/2"> <von ref="">{1,unbounded}</von> </bezug></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="bezug" type="XML-Bewertungsbezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsbezug-Entry / von

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|-----------|--|--|--|--|
| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | | |
| Diagram |  | | | | | | | | | | | |
| Type | XML-Bewertungsvon-Entry | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | | content: | complex | maxOccurs: | unbounded | | | | |
| content: | complex | | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | | |
| Model | nach+ | | | | | | | | | | | |
| Children | nach | | | | | | | | | | | |
| Instance | <pre><von ref="" xmlns="http://vdv/ka/pkm/2"> <nach ref="">{1,unbounded}</nach> </von></pre> | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="von" type="XML-Bewertungsvon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Bewertungsvon-Entry / nach

| | | | |
|-------------|---------------------------------|-----------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |
| Diagram | | | |
| Type | XML-Bewertungsnach-Entry | | |
| Properties | content: | complex | |
| | maxOccurs: | unbounded | |
| Model | ueber+ | | |
| Children | ueber | | |

| | | | | |
|-----------------|---|-------------|------------|--|
| Instance | <pre><nach ref="" xmlns="http://vdv/ka/pkm/2"> <ueber ref="">{1,unbounded}</ueber> </nach></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="nach" type="XML-Bewertungsnach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsnach-Entry / ueber

| | | | | |
|-----------------|--|-------------|------------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | | | | |
| Type | XML-Bewertungsnach-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Bewertungsnach-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="ueber" type="XML-Bewertungsnach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsdaten-Matrix / typ

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | | | | |
| Type | XML-Bewertungsdaten-Matrix-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertungstyp-Entry | | | |

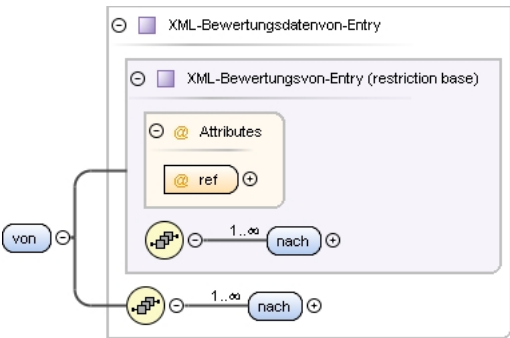
| | | | | |
|-----------------|--|-----------|----------|--|
| | <ul style="list-style-type: none">XML-Bewertungsdatentyp-Entry | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| | maxOccurs: | unbounded | | |
| Model | bezug+ | | | |
| Children | bezug | | | |
| Instance | <pre><typ ref=" " xmlns="http://vdv/ka/pkm/2"> <bezug ref=" ">{1,unbounded}</bezug> </typ></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="typ" type="XML-Bewertungsdatentyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsdatentyp-Entry / bezug

| | | | | |
|-----------------|--|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | | | | |
| Type | XML-Bewertungsdatenbezug-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Bewertungsbezug-Entry<ul style="list-style-type: none">XML-Bewertungsdatenbezug-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Model | von+ | | | |
| Children | von | | | |
| Instance | <pre><bezug ref="" xmlns="http://vdv/ka/pkm/2"> <von ref="">{1,unbounded}</von> </bezug></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="bezug" type="XML-Bewertungsdatenbezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsdatenbezug-Entry / von

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
|-----------|---------------------|--|--|--|

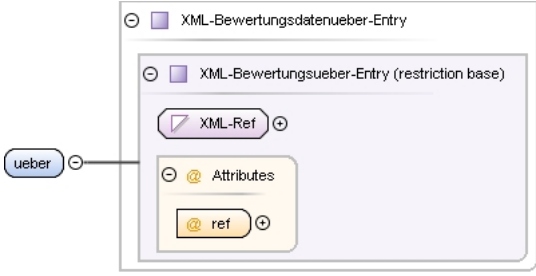
| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|-----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | XML-Bewertungsdaten-von-Entry | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Bewertungsdaten-von-Entry<ul style="list-style-type: none">XML-Bewertungsdaten-von-Entry | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | | content: | complex | maxOccurs: | unbounded | | | | |
| content: | complex | | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | | |
| Model | nach+ | | | | | | | | | | | |
| Children | nach | | | | | | | | | | | |
| Instance | <pre><von ref=" " xmlns="http://vdv/ka/pkm/2"> <nach ref=" ">{1,unbounded}</nach> </von></pre> | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="von" type="XML-Bewertungsdaten-von-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Bewertungsdatennach-Entry / nach

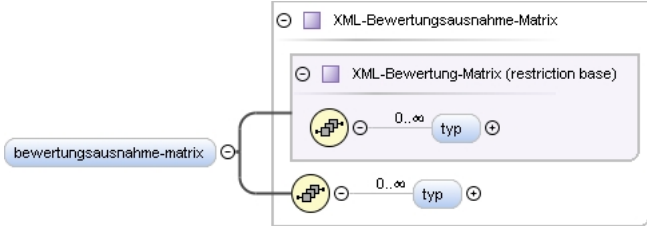
| | | | | | |
|----------------|---|----------|---------|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Bewertungsdatennach-Entry. It shows a sequence of elements: 'nach' (blue box) followed by a sequence of 'ueber' (blue box) elements. A 'ref' attribute (yellow box) is shown pointing to the 'ueber' element. The sequence is labeled 'XML-Bewertungsdatennach-Entry' and 'XML-Bewertungsdatennach-Entry (restriction base)'.</p> | | | | |
| Type | XML-Bewertungsdatennach-Entry | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Bewertungsdatennach-EntryXML-Bewertungsdatennach-Entry | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | ueber+ | | | | |
| Children | ueber | | | | |
| Instance | <nach ref=" " xmlns="http://vdv/ka/pkm/2"> | | | | |

| | | | | |
|-----------------|--|-------------|------------|--|
| | <pre><ueber ref="#">{1,unbounded}</ueber> </nach></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="nach" type="XML-Bewertungsdatennach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsdatennach-Entry / ueber

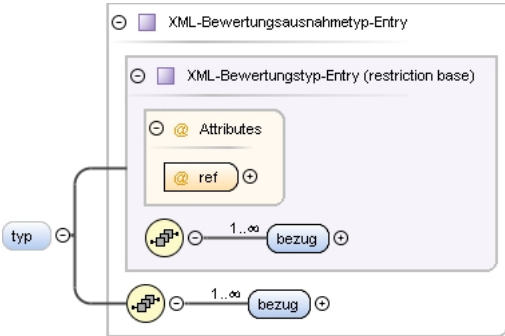
| | | | | |
|-----------------|---|-------------|------------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram |  | | | |
| Type | XML-Bewertungsdatennach-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Bewertungsueber-Entry XML-Bewertungsdatennach-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="ueber" type="XML-Bewertungsdatennach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Tarifmodul / bewertungsausnahme-matrix

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Bewertungsausnahme-Matrix | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertung-Matrix XML-Bewertungsausnahme-Matrix | | | |

| | |
|-----------------|--|
| Properties | content: complex |
| | minOccurs: 0 |
| Model | typ* |
| Children | typ |
| Instance | <pre><bewertungsausnahme-matrix xmlns="http://vdv/ka/pkm/2"> <typ ref="" {0,unbounded}</typ> </bewertungsausnahme-matrix></pre> |
| Source | <xs:element name="bewertungsausnahme-matrix" type="XML-Bewertungsausnahme-Matrix" minOccurs="0" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Bewertungsausnahme-Matrix / typ

| | | | | |
|-----------------|---|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram |  | | | |
| Type | XML-Bewertungsausnahmetyp-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Bewertungstyp-Entry<ul style="list-style-type: none">XML-Bewertungsausnahmetyp-Entry | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| | maxOccurs: | unbounded | | |
| Model | bezug+ | | | |
| Children | bezug | | | |
| Instance | <pre><typ ref="" xmlns="http://vdv/ka/pkm/2"> <bezug ref="" {1,unbounded}</bezug> </typ></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="typ" type="XML-Bewertungsausnahmetyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsausnahmetyp-Entry / bezug

| | |
|-------------|---------------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach erstem Attribut} |

| Diagram | | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|-----------|--|--|--|--|
| Type | XML-Bewertungsausnahmebezug-Entry | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Bewertungsbezug-Entry<ul style="list-style-type: none">XML-Bewertungsausnahmebezug-Entry | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | | content: | complex | maxOccurs: | unbounded | | | | |
| content: | complex | | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | | |
| Model | von+ | | | | | | | | | | | |
| Children | von | | | | | | | | | | | |
| Instance | <pre><bezug ref=" " xmlns="http://vdv/ka/pkm/2"> <von ref=" ">{1,unbounded}</von> </bezug></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="bezug" type="XML-Bewertungsausnahmebezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Bewertungsausnahmebezug-Entry / von

| | | | | | |
|----------------|--|----------|---------|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | | |
| Diagram | | | | | |
| Type | XML-Bewertungsausnahmevon-Entry | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Bewertungsvon-Entry<ul style="list-style-type: none">XML-Bewertungsausnahmevon-Entry | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | nach+ | | | | |
| Children | nach | | | | |
| Instance | <pre><von ref=" " xmlns="http://vdv/ka/pkm/2"> <nach ref=" ">{1,unbounded}</nach> </von></pre> | | | | |

| Attributes | QName | Type | Use | |
|-----------------|---|---------|----------|--|
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="von" type="XML-Bewertungsausnahmevon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsausnahmevon-Entry / nach

| | | | | |
|-----------------|---|-----------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Bewertungsausnahmenach-Entry. It is a container element that contains a restriction base, XML-Bewertungsnach-Entry (restriction base). This restriction base has an attribute named 'nach' and a child element named 'ueber'. The 'ueber' element has a cardinality of '1..∞'. The 'nach' attribute is also shown with a cardinality of '1..∞'.</p> | | | |
| Type | XML-Bewertungsausnahmenach-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Bewertungsnach-EntryXML-Bewertungsausnahmenach-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Model | ueber+ | | | |
| Children | ueber | | | |
| Instance | <pre><nach ref=" " xmlns="http://vdv/ka/pkm/2"> <ueber ref=" ">{1,unbounded}</ueber> </nach></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="nach" type="XML-Bewertungsausnahmenach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsausnahmenach-Entry / ueber

| | | | | |
|-------------|---------------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram | | | | |

| | | | | |
|-----------------|---|-----------|----------|--|
| Type | XML-Bewertungsausnahmeueber-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Bewertungsueber-Entry XML-Bewertungsausnahmeueber-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="ueber" type="XML-Bewertungsausnahmeueber-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Tarifmodul / linie-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Linie-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Linie-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><linie-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </linie-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="linie-pool" type="XML-Linie-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Linie-Pool / item

| | |
|-------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Linie-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Linie-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , bezug | | | | | | |
| Children | bezug, name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <bezug>{1,1}</bezug> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Linie-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Linie-Item / bezug

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><bezug xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </bezug></pre> |
| Source | <pre><xs:element name="bezug" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / linienadapter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram | <p>The diagram illustrates the structure of the XML-Linienadapter-Pool. It is a complex type with a restriction base of XML-Ausgangstext-Pool and an extension base of XML-Pool. The XML-Pool base contains an @Attributes element, which in turn contains a @key attribute. This @key attribute is linked to a key element. The XML-Linienadapter-Pool itself contains a 0..∞ item element, which is linked to an item element. The diagram also shows a link from the linienadapter-pool element to the XML-Linienadapter-Pool structure.</p> | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|---|--|--|
| Type | XML-Linienadapter-Pool | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Linienadapter-Pool | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | |
| content: | complex | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | |
| Model | item* | | | | | | | | | |
| Children | item | | | | | | | | | |
| Instance | <pre><linienadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </linienadapter-pool></pre> | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td></tr></table> | QName | Type | Use | key | XML-Ref | required | | | |
| QName | Type | Use | | | | | | | | |
| key | XML-Ref | required | | | | | | | | |
| Source | <pre><xs:element name="linienadapter-pool" type="XML-Linienadapter-Pool" minOccurs="0" /></pre> | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | |

Element XML-Linienadapter-Pool / item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Linienadapter-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Linienadapter-Item | | | |

| | |
|-----------------|---|
| Properties | content: complex |
| | minOccurs: 0 |
| | maxOccurs: unbounded |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Linienadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Linienadapter-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Linienadapter-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Linienadapter-Item / text-matrix

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / verkehrsmitteltyp-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Verkehrsmitteltyp-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Linie-Pool<ul style="list-style-type: none">XML-Verkehrsmitteltyp-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><verkehrsmitteltyp-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </verkehrsmitteltyp-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="verkehrsmitteltyp-pool" type="XML-Verkehrsmitteltyp-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Verkehrsmitteltyp-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} |


| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Verkehrsmitteltyp-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Linie-Item XML-Verkehrsmitteltyp-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix , bezug | | | | | | |
| Children | bezug, name, nr, text-matrix | | | | | | |
| Instance | <pre> <item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> <bezug>{1,1}</bezug> </item> </pre> | | | | | | |
| Source | <pre> <xs:element name="item" type="XML-Verkehrsmitteltyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Verkehrsmitteltyp-Item / nr


| | | | |
|----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |

| | |
|-----------------|---|
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Verkehrsmitteltyp-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Verkehrsmitteltyp-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Verkehrsmitteltyp-Item / bezug

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><bezug xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </bezug></pre> |
| Source | <code><xs:element name="bezug" type="XML-Ref01"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / verkehrsmitteltypadapter-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | <pre>classDiagram class XMLVerkehrsmitteltypadapterPool["XML-Verkehrsmitteltypadapter-Pool"] class XMLAusgangstextPool["XML-Ausgangstext-Pool (restriction base)"] class XMLPool["XML-Pool (extension base)"] class Attributes class key class item1["item"] class item2["item"] XMLVerkehrsmitteltypadapterPool -- XMLAusgangstextPool XMLAusgangstextPool -- XMLPool XMLPool -- Attributes Attributes -- key XMLVerkehrsmitteltypadapterPool -- item1 XMLVerkehrsmitteltypadapterPool -- item2</pre> | | | | | | | | | | | |
| Type | XML-Verkehrsmitteltypadapter-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Verkehrsmitteltypadapter-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><verkehrsmitteltypadapter-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </verkehrsmitteltypadapter-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="verkehrsmitteltypadapter-pool" type="XML-Verkehrsmitteltypadapter-Pool" minOccurs="0" /></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Verkehrsmitteltypadapter-Pool / item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Verkehrsmitteltypadapter-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item | | | |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| | <ul style="list-style-type: none"> XML-Ausgangstext-Item XML-Verkehrsmitteltypadapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Verkehrsmitteltypadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Verkehrsmitteltypadapter-Item / nr

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Verkehrsmitteltypadapter-Item / name

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Verkehrsmitteltypadapter-Item / text-matrix

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / verkehrsmittellinienbezug-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Verkehrsmittellinienbezug-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool<ul style="list-style-type: none">XML-Verkehrsmittellinienbezug-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><verkehrsmittellinienbezug-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </verkehrsmittellinienbezug-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="verkehrsmittellinienbezug-pool" type="XML-Verkehrsmittellinienbezug-Pool" minOccurs="0" /></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Verkehrsmittellinienbezug-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Verkehrsmittellinienbezug-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Verkehrsmittellinienbezug-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name | | | | | | |
| Children | name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Verkehrsmittellinienbezug-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Verkehrsmittellinienbezug-Item / name

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringContent | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringContent" /></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Tarifmodul / bezahlart-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | <pre>classDiagram class XMLBezahlartPool["XML-Bezahlart-Pool"] class XMLAusgangstextPool["XML-Ausgangstext-Pool (restriction base)"] class XMLPool["XML-Pool (extension base)"] class Attributes class key class item XMLBezahlartPool -- XMLAusgangstextPool XMLAusgangstextPool -- XMLPool XMLPool -- Attributes Attributes -- key XMLPool -- "0..∞" item XMLBezahlartPool -- "0..∞" item</pre> | | | |
| Type | XML-Bezahlart-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Bezahlart-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bezahlart-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bezahlart-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bezahlart-pool" type="XML-Bezahlart-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bezahlart-Pool / item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Bezahlart-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Bezahlart-Item | | | |

| | |
|-----------------|---|
| Properties | content: complex |
| | minOccurs: 0 |
| | maxOccurs: unbounded |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Bezahlart-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Bezahlart-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Bezahlart-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Bezahlart-Item / text-matrix

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / bezahlartadapter-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Bezahlartadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Bezahlartadapter-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bezahlartadapter-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bezahlartadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bezahlartadapter-pool" type="XML-Bezahlartadapter-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bezahlartadapter-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} |

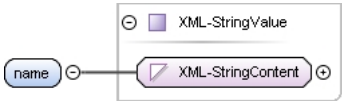
| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Bezahlartadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Bezahlartadapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bezahlartadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Bezahlartadapter-Item / nr

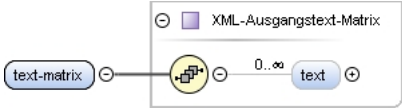
| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Bezahlartadapter-Item / name

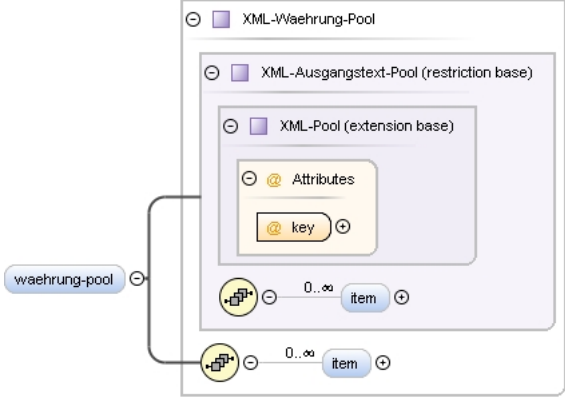
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Bezahlartadapter-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="#">{0,unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / waehrung-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Waehrung-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangstext-Pool XML-Waehrung-Pool |
| Properties | content: complex minOccurs: 0 |
| Model | item* |

| | | | | |
|-----------------|---|---------|----------|--|
| Children | item | | | |
| Instance | <pre><waehrung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </waehrung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="waehrung-pool" type="XML-Waehrung-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Waehrung-Pool / item

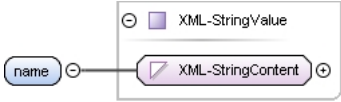
| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implicites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Waehrung-Item type. It is a complex type with a restriction base XML-Ausgangstext-Item and an extension base XML-NrName-Item. The diagram shows the 'item' element containing 'nr', 'name', and 'text-matrix' elements, with their respective cardinalities and relationships.</p> | | | | | | |
| Type | XML-Waehrung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-ItemXML-Ausgangstext-ItemXML-Waehrung-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Waehrung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Waehrung-Item / nr

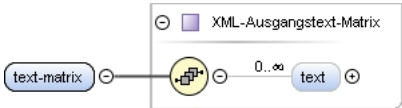
| | | | |
|-----------|---------------------|--|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |

| | |
|-----------------|---|
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Waehrung-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Waehrung-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref=" ">{0,unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / waehrungsadapter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram | | | | | | | | | | | | |
|-----------------|--|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Type | XML-Waehrungsadapter-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Waehrungsadapter-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><waehrungsadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </waehrungsadapter-pool></pre> | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="waehrungsadapter-pool" type="XML-Waehrungsadapter-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Waehrungsadapter-Pool / item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Waehrungsadapter-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Waehrungsadapter-Item | | | |

| | | |
|-----------------|--|-----------|
| Properties | content: | complex |
| | minOccurs: | 0 |
| | maxOccurs: | unbounded |
| Model | nr , name , text-matrix | |
| Children | name, nr, text-matrix | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | |
| Source | <pre><xs:element name="item" type="XML-Waehrungsadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Element XML-Waehrungsadapter-Item / nr

| | | |
|-----------------|---|---------|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram | | |
| Type | XML-IntegerValue | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | |
| Properties | content: | complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Element XML-Waehrungsadapter-Item / name

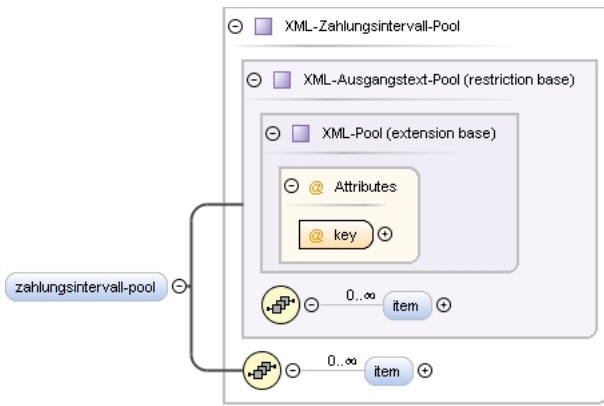
| | | |
|-----------------|---|---------|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram | | |
| Type | XML-StringValue | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | |
| Properties | content: | complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Element XML-Waehrungsadapter-Item / text-matrix

| | | |
|-----------|---------------------|--|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram | | |

| | |
|-----------------|---|
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / zahlungsintervall-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | XML-Zahlungsintervall-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Zahlungsintervall-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><zahlungintervall-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </zahlungintervall-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="zahlungintervall-pool" type="XML-Zahlungsintervall-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Zahlungsintervall-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} |

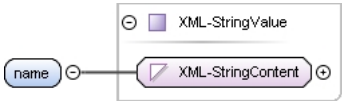
| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Zahlungsintervall-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Zahlungsintervall-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Zahlungsintervall-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Zahlungsintervall-Item / nr


| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Zahlungsintervall-Item / name

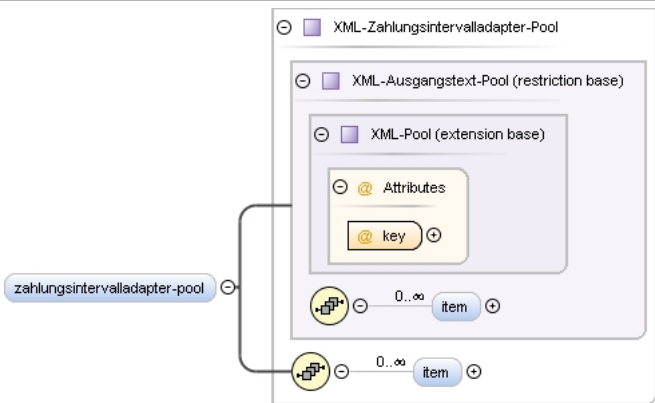
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zahlungsintervall-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / zahlungsintervalladapter-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Zahlungsintervalladapter-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangstext-Pool XML-Zahlungsintervalladapter-Pool |
| Properties | content: complex minOccurs: 0 |

| Model | item* | | | |
|-----------------|--|---------|----------|--|
| Children | item | | | |
| Instance | <pre><zahlungsintervalladapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </zahlungsintervalladapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="zahlungsintervalladapter-pool" type="XML-Zahlungsintervalladapter-Pool" minOccurs="0" /></pre> | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Zahlungsintervalladapter-Pool / item

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implicites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Zahlungsintervalladapter-Item. It is a complex type with a restriction base 'XML-Ausgangstext-Item' and an extension base 'XML-NrName-Item'. The diagram shows the 'item' element containing a sequence of 'nr', 'name', and 'text-matrix' elements, with a 'key' attribute.</p> | | | | | | |
| Type | XML-Zahlungsintervalladapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-ItemXML-Ausgangstext-ItemXML-Zahlungsintervalladapter-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Zahlungsintervalladapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Zahlungsintervalladapter-Item / nr

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zahlungsintervalladapter-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zahlungsintervalladapter-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref=" " >{0,unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / mitnahmetyp-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | | | | | |
|-----------------|---|---------|----------|--|----------|---------|------------|---|
| Diagram | | | | | | | | |
| Type | XML-Mitnahmetyp-Pool | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Mitnahmetyp-Pool | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 |
| content: | complex | | | | | | | |
| minOccurs: | 0 | | | | | | | |
| Model | item* | | | | | | | |
| Children | item | | | | | | | |
| Instance | <pre><mitnahmetyp-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </mitnahmetyp-pool></pre> | | | | | | | |
| Attributes | QName | Type | Use | | | | | |
| | key | XML-Ref | required | | | | | |
| Source | <pre><xs:element name="mitnahmetyp-pool" type="XML-Mitnahmetyp-Pool" minOccurs="0"/></pre> | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | |

Element XML-Mitnahmetyp-Pool / item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Mitnahmetyp-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Mitnahmetyp-Item | | | |

| | |
|-----------------|---|
| Properties | content: complex |
| | minOccurs: 0 |
| | maxOccurs: unbounded |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Mitnahmetyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Mitnahmetyp-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Mitnahmetyp-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Mitnahmetyp-Item / text-matrix

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / mitnahmetypadapter-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | <p>The diagram illustrates the structural composition of the XML-Mitnahmetypadapter-Pool. It is a restriction of the XML-Ausgangstext-Pool (restriction base). The XML-Ausgangstext-Pool is an extension of the XML-Pool (extension base). The XML-Pool contains an @Attributes attribute, which in turn contains a key attribute. The XML-Mitnahmetypadapter-Pool contains a 0..∞ item child.</p> | | | | | | | | | | | |
| Type | XML-Mitnahmetypadapter-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Mitnahmetypadapter-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><mitnahmetypadapter-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </mitnahmetypadapter-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="mitnahmetypadapter-pool" type="XML-Mitnahmetypadapter-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Mitnahmetypadapter-Pool / item

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} |

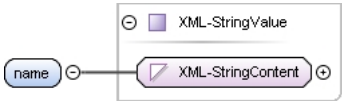
| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Mitnahmetyadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Mitnahmetyadapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Mitnahmetyadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Mitnahmetyadapter-Item / nr

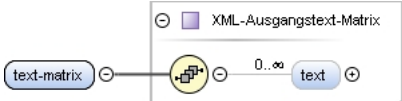
| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Mitnahmetyadapter-Item / name

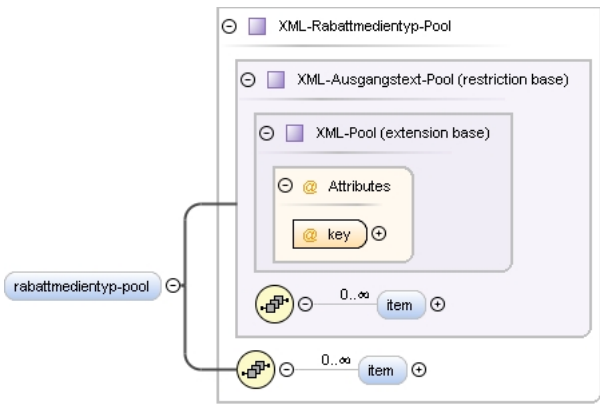
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Mitnahmetypadapter-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / rabattmedientyp-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Rabattmedientyp-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangstext-Pool XML-Rabattmedientyp-Pool |
| Properties | content: complex minOccurs: 0 |
| Model | item* |

| | | | | |
|-----------------|---|---------|----------|--|
| Children | item | | | |
| Instance | <pre><rabattmedientyp-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </rabattmedientyp-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="rabattmedientyp-pool" type="XML-Rabattmedientyp-Pool" minOccurs="0" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Rabattmedientyp-Pool / item


| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implicites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Rabattmedientyp-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-ItemXML-Ausgangstext-ItemXML-Rabattmedientyp-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Rabattmedientyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Rabattmedientyp-Item / nr


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rabattmedientyp-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Rabattmedientyp-Item / text-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / rabattmedientypadapter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

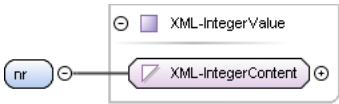
| Diagram | <pre>classDiagram class XML_Rabattmedientypadapter_Pool { XML_Ausgangstext_Pool XML-Ausgangstext-Pool (restriction base) XML_Pool XML-Pool (extension base) Attributes item 0..∞ item 0..∞ } class XML_Ausgangstext_Pool { XML_Pool XML-Pool (extension base) Attributes key } class XML_Pool { Attributes key } class Attributes { key } XML_Rabattmedientypadapter_Pool -- XML_Ausgangstext_Pool XML_Ausgangstext_Pool -- XML_Pool XML_Pool -- Attributes Attributes -- key XML_Rabattmedientypadapter_Pool -- item XML_Rabattmedientypadapter_Pool -- item</pre> | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Type | XML-Rabattmedientypadapter-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Rabattmedientypadapter-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><rabattmedientypadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </rabattmedientypadapter-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="rabattmedientypadapter-pool" type="XML-Rabattmedientypadapter-Pool" minOccurs="0" /></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Rabattmedientypadapter-Pool / item

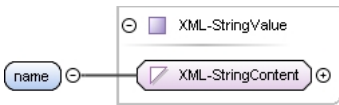
| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | |
| Diagram | | | | |
| Type | XML-Rabattmedientypadapter-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Rabattmedientypadapter-Item | | | |

| | | |
|-----------------|--|-----------|
| Properties | content: | complex |
| | minOccurs: | 0 |
| | maxOccurs: | unbounded |
| Model | nr , name , text-matrix | |
| Children | name, nr, text-matrix | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | |
| Source | <pre><xs:element name="item" type="XML-Rabattmedientypadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |


Element XML-Rabattmedientypadapter-Item / nr

| | | |
|-----------------|---|---------|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram |  | |
| Type | XML-IntegerValue | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | |
| Properties | content: | complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Element XML-Rabattmedientypadapter-Item / name

| | | |
|-----------------|---|---------|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram |  | |
| Type | XML-StringValue | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | |
| Properties | content: | complex |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Element XML-Rabattmedientypadapter-Item / text-matrix

| | | |
|-----------|---|--|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram |  | |

| | |
|-----------------|---|
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="">{0,unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / modulkontext-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Modulkontext-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Modulkontext-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><modulkontext-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </modulkontext-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="modulkontext-pool" type="XML-Modulkontext-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Modulkontext-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Modulkontext-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Modulkontext-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name | | | | | | |
| Children | name, nr | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Modulkontext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Modulkontext-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Modulkontext-Item / name

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / modulkontextadapter-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <pre>graph TD subgraph XML-Modulkontextadapter-Pool [XML-Modulkontextadapter-Pool] direction TB subgraph XML-NrName-Pool [XML-NrName-Pool (restriction base)] direction TB subgraph XML-Pool [XML-Pool (extension base)] direction TB subgraph Attributes [Attributes] direction TB key[key] end end item1[item 0..∞] item2[item 0..∞] end end</pre> | | | |
| Type | XML-Modulkontextadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Modulkontextadapter-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><modulkontextadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </modulkontextadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="modulkontextadapter-pool" type="XML-Modulkontextadapter-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Modulkontextadapter-Pool / item

| | | | |
|-------------|---|--|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Annotations | {Implicit key Attribute, Sorted by first Element} | | |
| Diagram | | | |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Type | XML-Modulkontextadapter-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Modulkontextadapter-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name | | | | | | |
| Children | name, nr | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Modulkontextadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Modulkontextadapter-Item / nr

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Modulkontextadapter-Item / name

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Tarifmodul / spezialbedingung-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-Spezialbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Spezialbedingung-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><spezialbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </spezialbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="spezialbedingung-pool" type="XML-Spezialbedingung-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Spezialbedingung-Pool / item

| | | | |
|-----------------|---|-----------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Annotations | {Implies key Attribut} | | |
| Diagram | <pre>classDiagram class XML_Spezialbedingung_Item { XML_Name_Item "1" item "*" } class XML_Name_Item { name funktion } XML_Spezialbedingung_Item "1" -- "*" item XML_Spezialbedingung_Item "1" -- "1" XML_Name_Item XML_Name_Item "1" -- "1" name XML_Name_Item "1" -- "1" funktion</pre> | | |
| Type | XML-Spezialbedingung-Item | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Spezialbedingung-Item | | |
| Properties | content: | complex | |
| | minOccurs: | 0 | |
| | maxOccurs: | unbounded | |
| Model | name , funktion | | |
| Children | funktion, name | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <funktion>{1,1}</funktion> </item></pre> | | |
| Source | <pre><xs:element name="item" type="XML-Spezialbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema PKM.xsd | | |

Element XML-Spezialbedingung-Item / funktion

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><funktion xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </funktion></pre> |
| Source | <pre><xs:element name="funktion" type="XML-Ref11" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / tagesbedingung-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Tagesbedingung-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tagesbedingung-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><tagesbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tagesbedingung-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="tagesbedingung-pool" type="XML-Tagesbedingung-Pool" minOccurs="0" /></pre> | | | | | | | | | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema PKM.xsd | | | | | | | | | | | |

Element XML-Tagesbedingung-Pool / item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Tagesbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Tagesbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , wochentag-pool , kalendertag-pool | | | | | | |
| Children | kalendertag-pool, name, wochentag-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <wochentag-pool>{1,1}</wochentag-pool> <kalendertag-pool>{1,1}</kalendertag-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tagesbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tagesbedingung-Item / wochentag-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Wochentag-Pool |
| Properties | content: complex |
| Model | nr* |
| Children | nr |
| Instance | <pre><wochentag-pool xmlns="http://vdv/ka/pkm/2"> <nr>{0,unbounded}</nr> </wochentag-pool></pre> |
| Source | <pre><xs:element name="wochentag-pool" type="XML-Wochentag-Pool"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tagesbedingung-Item / kalendertag-pool

| | |
|------------|----------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Kalendertag-Pool |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | datum* |
| Children | datum |
| Instance | <pre><kalendertag-pool xmlns="http://vdv/ka/pkm/2"> <datum>{0,unbounded}</datum> </kalendertag-pool></pre> |
| Source | <pre><xs:element name="kalendertag-pool" type="XML-Kalendertag-Pool" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kalendertag-Pool / datum

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Sortiert nach Inhalt} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-DateValue | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:date <ul style="list-style-type: none"> XML-DateContent XML-DateValue | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Source | <pre><xs:element name="datum" type="XML-DateValue" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifmodul / tageszeitbedingung-pool

| | | | | | | | | |
|----------------|---|---------|----------|--|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | | | | |
| Diagram | | | | | | | | |
| Type | XML-Tageszeitbedingung-Pool | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tageszeitbedingung-Pool | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 |
| content: | complex | | | | | | | |
| minOccurs: | 0 | | | | | | | |
| Model | item* | | | | | | | |
| Children | item | | | | | | | |
| Instance | <pre><tageszeitbedingung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tageszeitbedingung-pool></pre> | | | | | | | |
| Attributes | QName | Type | Use | | | | | |
| | key | XML-Ref | required | | | | | |

| | |
|-----------------|---|
| Source | <code><xs:element name="tageszeitbedingung-pool" type="XML-Tageszeitbedingung-Pool" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tageszeitbedingung-Pool / item

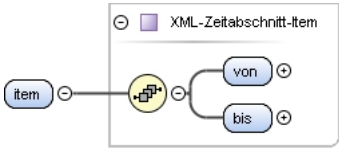
| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Tageszeitbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Tageszeitbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , zeitabschnitt-pool | | | | | | |
| Children | name, zeitabschnitt-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <zeitabschnitt-pool>{1,1}</zeitabschnitt-pool> </item></pre> | | | | | | |
| Source | <code><xs:element name="item" type="XML-Tageszeitbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></code> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tageszeitbedingung-Item / zeitabschnitt-pool

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-Zeitabschnitt-Pool | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | item+ | | |
| Children | item | | |
| Instance | <pre><zeitabschnitt-pool xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </zeitabschnitt-pool></pre> | | |
| Source | <code><xs:element name="zeitabschnitt-pool" type="XML-Zeitabschnitt-Pool" /></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Zeitabschnitt-Pool / item

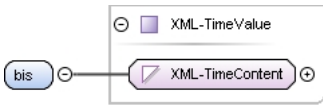
| | |
|-------------|--------------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach erstem Element} |

| | |
|-----------------|--|
| Diagram |  |
| Type | XML-Zeitabschnitt-Item |
| Properties | <div>content: complex</div> <div>maxOccurs: unbounded</div> |
| Model | von , bis |
| Children | bis, von |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <von>{1,1}</von> <bis>{1,1}</bis> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Zeitabschnitt-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zeitabschnitt-Item / von

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-TimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:time XML-TimeContent XML-TimeValue |
| Properties | content: complex |
| Source | <pre><xs:element name="von" type="XML-TimeValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zeitabschnitt-Item / bis

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-TimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:time XML-TimeContent XML-TimeValue |
| Properties | content: complex |
| Source | <pre><xs:element name="bis" type="XML-TimeValue" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / zeitraumbedingung-pool

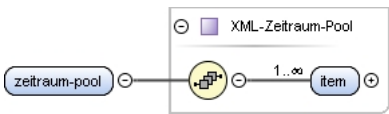
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | | | | |
| Type | XML-Zeitraumbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Zeitraumbedingung-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><zeitraumbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </zeitraumbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="zeitraumbedingung-pool" type="XML-Zeitraumbedingung-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

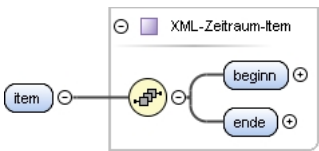
Element XML-Zeitraumbedingung-Pool / item

| | | | |
|-----------------|---|-----------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Annotations | {Implies key Attribut} | | |
| Diagram | <pre>classDiagram class XML_Zeitraumbedingung_Item { name XML_Name_Item "1..1" zeitraum_pool XML_Zeitraumbedingung_Item "1..1" } class XML_Name_Item { extension base } XML_Zeitraumbedingung_Item "0..1" -- "1..1" XML_Name_Item : name XML_Zeitraumbedingung_Item "0..1" -- "1..1" XML_Zeitraumbedingung_Item : zeitraum_pool</pre> | | |
| Type | XML-Zeitraumbedingung-Item | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Zeitraumbedingung-Item | | |
| Properties | content: | complex | |
| | minOccurs: | 0 | |
| | maxOccurs: | unbounded | |
| Model | name , zeitraum-pool | | |
| Children | name, zeitraum-pool | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <zeitraum-pool>{1,1}</zeitraum-pool> </item></pre> | | |
| Source | <pre><xs:element name="item" type="XML-Zeitraumbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema PKM.xsd | | |

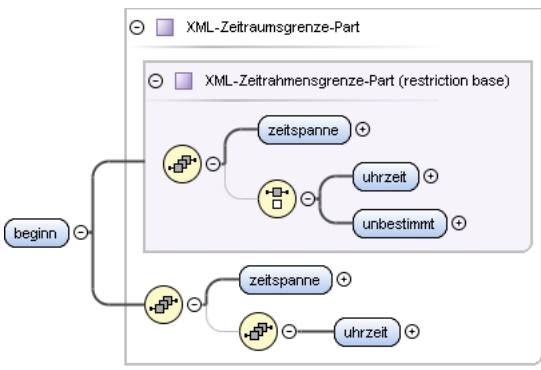
Element XML-Zeitraumbedingung-Item / zeitraum-pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a sequence of elements: 'zeitraum-pool' (blue rounded rectangle), a connector (yellow circle with a plus sign), and 'item' (blue rounded rectangle). The 'item' element has a cardinality of '1..∞'. A legend box labeled 'XML-Zeitraum-Pool' contains a purple square icon. |
| Type | XML-Zeitraum-Pool |
| Properties | content: complex |
| Model | item+ |
| Children | item |
| Instance | <pre><zeitraum-pool xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </zeitraum-pool></pre> |
| Source | <pre><xs:element name="zeitraum-pool" type="XML-Zeitraum-Pool" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zeitraum-Pool / item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a sequence of elements: 'item' (blue rounded rectangle), a connector (yellow circle with a plus sign), and a choice between 'beginn' and 'ende' (both blue rounded rectangles). A legend box labeled 'XML-Zeitraum-Item' contains a purple square icon. |
| Type | XML-Zeitraum-Item |
| Properties | content: complex maxOccurs: unbounded |
| Model | beginn , ende |
| Children | beginn, ende |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <beginn>{1,1}</beginn> <ende>{1,1}</ende> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Zeitraum-Item" maxOccurs="unbounded" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zeitraum-Item / beginn

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a sequence of elements: 'beginn' (blue rounded rectangle), a connector (yellow circle with a plus sign), and a choice between two complex structures. The first structure is 'XML-Zeitraumsgrenze-Part' (purple rounded rectangle) containing 'XML-Zeitraumsgrenze-Part (restriction base)' (purple rounded rectangle), which contains 'zeitspanne' (blue rounded rectangle) and a choice between 'uhrzeit' and 'unbestimmt' (both blue rounded rectangles). The second structure is a simplified version of the first. A legend box labeled 'XML-Zeitraumsgrenze-Part' contains a purple square icon. |
| Type | XML-Zeitraumsgrenze-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zeitraumsgrenze-Part XML-Zeitraumsgrenze-Part |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | zeitspanne , uhrzeit |
| Children | uhrzeit, zeitspanne |
| Instance | <pre><beginn xmlns="http://vdv/ka/pkm/2"> <zeitspanne>{1,1}</zeitspanne> <uhrzeit>{1,1}</uhrzeit> </beginn></pre> |
| Source | <code><xs:element name="beginn" type="XML-Zeitraumsgrenze-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Zeitraum-Item / ende

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Zeitraumsgrenze-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zeitrahmengrenze-Part XML-Zeitraumsgrenze-Part |
| Properties | content: complex |
| Model | zeitspanne , uhrzeit |
| Children | uhrzeit, zeitspanne |
| Instance | <pre><ende xmlns="http://vdv/ka/pkm/2"> <zeitspanne>{1,1}</zeitspanne> <uhrzeit>{1,1}</uhrzeit> </ende></pre> |
| Source | <code><xs:element name="ende" type="XML-Zeitraumsgrenze-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / tarifpunktbedingung-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Tarifpunktbedingung-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Tarifpunktbedingung-Pool |
| Properties | content: complex |
| minOccurs: | 0 |

| Model | item* | | | |
|-----------------|---|---------|----------|--|
| Children | item | | | |
| Instance | <pre><tarifpunktbedingung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunktbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunktbedingung-pool" type="XML-Tarifpunktbedingung-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Tarifpunktbedingung-Pool / item


| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Tarifpunktbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-ItemXML-Tarifpunktbedingung-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , von , nach , ueber | | | | | | |
| Children | nach, name, ueber, von | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <von>{1,1}</von> <nach>{1,1}</nach> <ueber>{1,1}</ueber> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Tarifpunktbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Tarifpunktbedingung-Item / von

| | | | |
|------------|---|---------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | <p>The diagram illustrates a structural relationship. On the left, a blue rounded rectangle labeled 'von' has a small circle with a minus sign on its right side. A line connects this circle to a yellow circle with a grid pattern, representing a complex type. Above this yellow circle is a purple square labeled 'XML-Ref01'. To the right of the yellow circle is another small circle with a minus sign, which is connected by a line to a blue rounded rectangle labeled 'ref' with a small circle with a plus sign on its right side.</p> | | |
| Type | XML-Ref01 | | |
| Properties | content: | complex | |
| Model | ref{0,1} | | |
| Children | ref | | |

| | |
|-----------------|---|
| Instance | <pre><von xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </von></pre> |
| Source | <pre><xs:element name="von" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

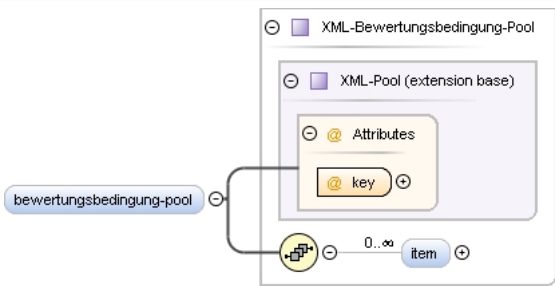
Element XML-Tarifpunktbedingung-Item / nach

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><nach xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </nach></pre> |
| Source | <pre><xs:element name="nach" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifpunktbedingung-Item / ueber

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ueber xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </ueber></pre> |
| Source | <pre><xs:element name="ueber" type="XML-Ref01" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / bewertungsbedingung-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Bewertungsbedingung-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Bewertungsbedingung-Pool |

| | | | | |
|-----------------|---|---------|----------|--|
| Properties | content: complex | | | |
| | minOccurs: 0 | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bewertungsbedingung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bewertungsbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bewertungsbedingung-pool" type="XML-Bewertungsbedingung-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bewertungsbedingung-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | <pre>graph LR item((item)) --- name((name)) item --- bewertungstyp((bewertungstyp)) bewertungstyp --- werte((werte)) subgraph XML_Bewertungsbedingung_Item [XML-Bewertungsbedingung-Item] direction TB XML_Name_Item[XML-Name-Item (extension base)] name bewertungstyp werte end</pre> | | | | | | |
| Type | XML-Bewertungsbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-ItemXML-Bewertungsbedingung-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , bewertungstyp , werte | | | | | | |
| Children | bewertungstyp, name, werte | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <bewertungstyp>{1,1}</bewertungstyp> <werte>{1,1}</werte> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bewertungsbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Bewertungsbedingung-Item / bewertungstyp

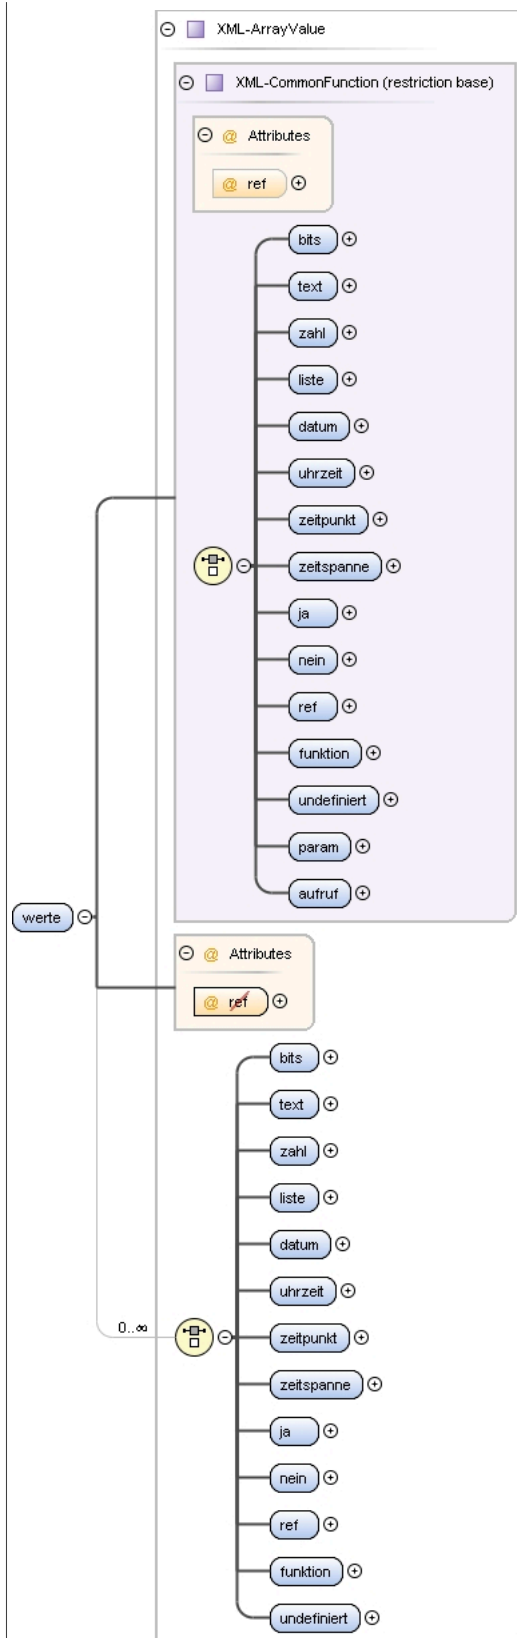
| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |

| | |
|-----------------|---|
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><bewertungstyp xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </bewertungstyp></pre> |
| Source | <pre><xs:element name="bewertungstyp" type="XML-Ref11" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Bewertungsbedingung-Item / werte

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

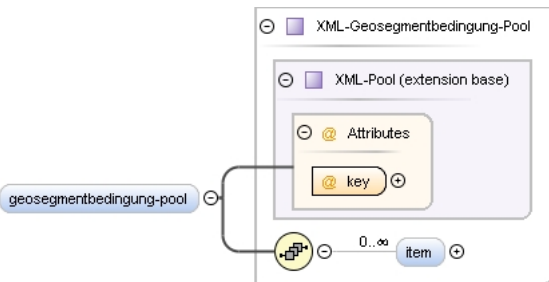
Diagram



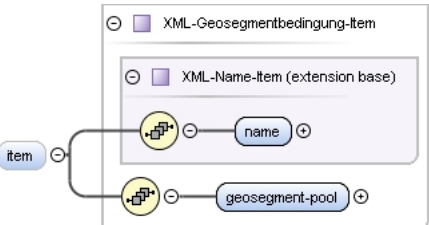
| | |
|----------------|--|
| Type | XML-ArrayValue |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><werte xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <ref>{1,1}</ref> <funktion ref="">{1,1}</funktion> <undefiniert>{1,1}</undefiniert> </werte></pre> |
| Source | <code><xs:element name="werte" type="XML-ArrayValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / geosegmentbedingung-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | XML-Geosegmentbedingung-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Geosegmentbedingung-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><geosegmentbedingung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </geosegmentbedingung-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="geosegmentbedingung-pool" type="XML-Geosegmentbedingung-Pool" minOccurs="0" /></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Geosegmentbedingung-Pool / item

| | | | | |
|-------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Implies key Attribut} | | | |
| Diagram |  | | | |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Type | XML-Geosegmentbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Geosegmentbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , geosegment-pool | | | | | | |
| Children | geosegment-pool, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <geosegment-pool>{1,1}</geosegment-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Geosegmentbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Geosegmentbedingung-Item / geosegment-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Geosegment-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Wochentag-Pool XML-Geosegment-Pool |
| Properties | content: complex |
| Model | nr* |
| Children | nr |
| Instance | <pre><geosegment-pool xmlns="http://vdv/ka/pkm/2"> <nr>{0,unbounded}</nr> </geosegment-pool></pre> |
| Source | <pre><xs:element name="geosegment-pool" type="XML-Geosegment-Pool" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Geosegment-Pool / nr

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach Inhalt} |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |

| | | |
|-----------------|--|-----------|
| Properties | content: | complex |
| | minOccurs: | 0 |
| | maxOccurs: | unbounded |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Element XML-Tarifmodul / verkehrsmittellinienbedingung-pool

| | | | | | | | | | | | | |
|-----------------|---|---------|----------|--|----------|---------|--|--|------------|---|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
| Diagram | | | | | | | | | | | | |
| Type | XML-Verkehrsmittellinienbedingung-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Verkehrsmittellinienbedingung-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td colspan="3">complex</td></tr><tr><td>minOccurs:</td><td colspan="3">0</td></tr></table> | | | | content: | complex | | | minOccurs: | 0 | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><verkehrsmittellinienbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </verkehrsmittellinienbedingung-pool></pre> | | | | | | | | | | | |
| Attributes | QName | Type | Use | | | | | | | | | |
| | key | XML-Ref | required | | | | | | | | | |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung-pool" type="XML-Verkehrsmittellinienbedingung-Pool" minOccurs="0" /></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Verkehrsmittellinienbedingung-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

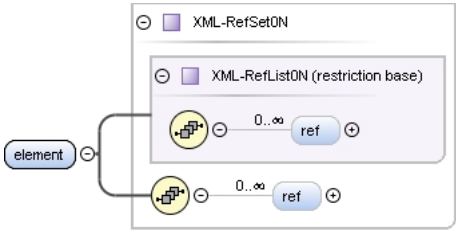
| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Verkehrsmittellinienbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-NameGruppe-Item XML-Verkehrsmittellinienbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , element | | | | | | |
| Children | element, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <element>{1,1}</element> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Verkehrsmittellinienbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Verkehrsmittellinienbedingung-Item / name

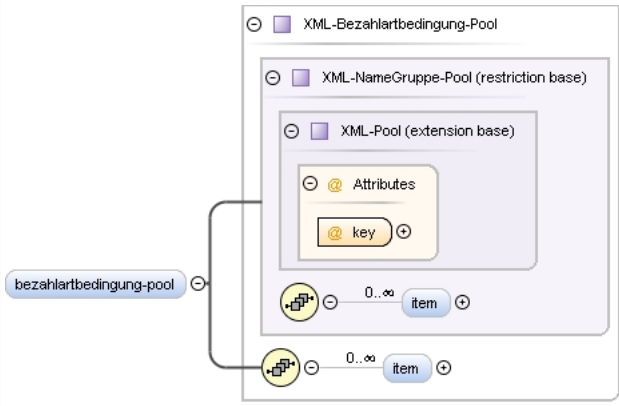
| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Verkehrsmittellinienbedingung-Item / element

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><element xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </element></pre> |
| Source | <pre><xs:element name="element" type="XML-RefSet0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / bezahlartbedingung-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Bezahlartbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Bezahlartbedingung-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bezahlartbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bezahlartbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bezahlartbedingung-pool" type="XML-Bezahlartbedingung-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bezahlartbedingung-Pool / item

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Bezahlartbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-NameGruppe-Item XML-Bezahlartbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , element | | | | | | |
| Children | element, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <element>{1,1}</element> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bezahlartbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Bezahlartbedingung-Item / name

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Bezahlartbedingung-Item / element

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><element xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </element></pre> |
| Source | <pre><xs:element name="element" type="XML-RefSet0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / zahlungsintervallbedingung-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Zahlungsintervallbedingung-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Zahlungsintervallbedingung-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><zahlungsintervallbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </zahlungsintervallbedingung-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="zahlungsintervallbedingung-pool" type="XML-Zahlungsintervallbedingung-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Zahlungsintervallbedingung-Pool / item

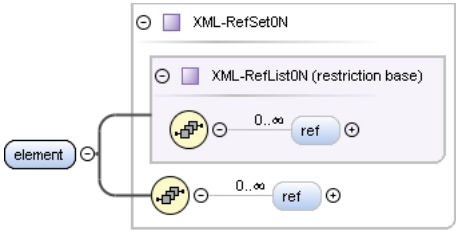
| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Zahlungsintervallbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-NameGruppe-Item XML-Zahlungsintervallbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , element | | | | | | |
| Children | element, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <element>{1,1}</element> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Zahlungsintervallbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Zahlungsintervallbedingung-Item / name

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Zahlungsintervallbedingung-Item / element

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><element xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </element></pre> |
| Source | <pre><xs:element name="element" type="XML-RefSet0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / mitnahmebedingung-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Mitnahmebedingung-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Mitnahmebedingung-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><mitnahmebedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </mitnahmebedingung-pool></pre> | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="mitnahmebedingung-pool" type="XML-Mitnahmebedingung-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Mitnahmebedingung-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Mitnahmebedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Mitnahmebedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , anzahl-matrix | | | | | | |
| Children | anzahl-matrix, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <anzahl-matrix>{1,1}</anzahl-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Mitnahmebedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Mitnahmebedingung-Item / anzahl-matrix

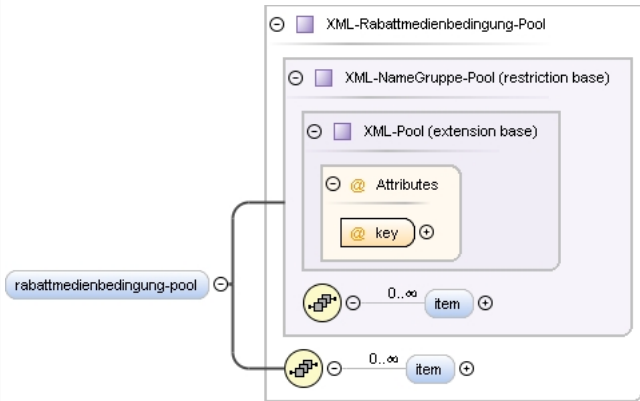
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Mitnahmeanzahl-Matrix |
| Properties | content: complex |
| Model | anzahl+ |
| Children | anzahl |
| Instance | <pre><anzahl-matrix xmlns="http://vdv/ka/pkm/2"> <anzahl ref="#">{1,unbounded}</anzahl> </anzahl-matrix></pre> |
| Source | <pre><xs:element name="anzahl-matrix" type="XML-Mitnahmeanzahl-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Mitnahmeanzahl-Matrix / anzahl

| | |
|-------------|---------------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach erstem Attribut} |
| Diagram | |

| | | | | |
|-----------------|---|-----------|----------|--|
| Type | XML-Mitnahmeanzahl-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue XML-Mitnahmeanzahl-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="anzahl" type="XML-Mitnahmeanzahl-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Tarifmodul / rabattmedienbedingung-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | XML-Rabattmedienbedingung-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Rabattmedienbedingung-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><rabattmedienbedingung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </rabattmedienbedingung-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="rabattmedienbedingung-pool" type="XML-Rabattmedienbedingung-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Rabattmedienbedingung-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

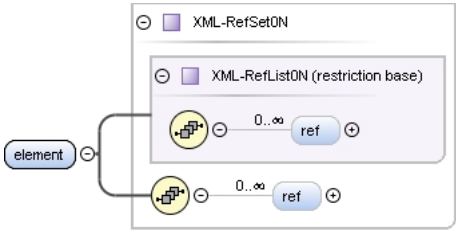
| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-Rabattmedienbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-NameGruppe-Item XML-Rabattmedienbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , element | | | | | | |
| Children | element, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <element>{1,1}</element> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Rabattmedienbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Rabattmedienbedingung-Item / name

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Rabattmedienbedingung-Item / element

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><element xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </element></pre> |
| Source | <pre><xs:element name="element" type="XML-RefSet0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / modulkontextbedingung-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Modulkontextbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Modulkontextbedingung-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><modulkontextbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </modulkontextbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="modulkontextbedingung-pool" type="XML-Modulkontextbedingung-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Modulkontextbedingung-Pool / item

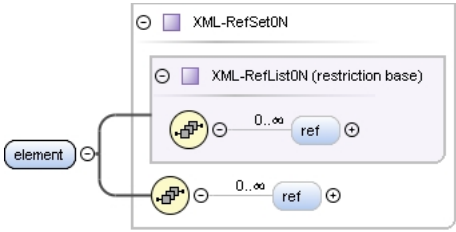
| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Modulkontextbedingung-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-NameGruppe-Item XML-Modulkontextbedingung-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , element | | | | | | |
| Children | element, name | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <element>{1,1}</element> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Modulkontextbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Modulkontextbedingung-Item / name

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <pre><xs:element name="name" type="XML-StringValue"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Modulkontextbedingung-Item / element

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><element xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </element></pre> |
| Source | <pre><xs:element name="element" type="XML-RefSet0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / bifainterpretation-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-BIFAInterpretation-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-BIFAInterpretation-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><bifainterpretation-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bifainterpretation-pool></pre> | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="bifainterpretation-pool" type="XML-BIFAInterpretation-Pool" minOccurs="0"/></pre> | | | | | | | | | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-BIFAInterpretation-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Diagram | | | | | | | |
| Type | XML-BIFAInterpretation-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-BIFAInterpretation-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , abfahrtszeit , ankunftszeit , vontarifpunkt , nachtarifpunkt , uebertarifpunkte , ueberwegevariante , verkehrsmittellinienbezug , produktgrenzpunktdaten-table , produktgrenzpunktausnahme-table | | | | | | |
| Children | abfahrtszeit, ankunftszeit, nachtarifpunkt, name, produktgrenzpunktausnahme-table, produktgrenzpunktdaten-table, uebertarifpunkte, ueberwegevariante, verkehrsmittellinienbezug, vontarifpunkt | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <abfahrtszeit>{1,1}</abfahrtszeit> <ankunftszeit>{1,1}</ankunftszeit> <vontarifpunkt>{1,1}</vontarifpunkt> <nachtarifpunkt>{1,1}</nachtarifpunkt> <uebertarifpunkte>{1,1}</uebertarifpunkte> <ueberwegevariante>{1,1}</ueberwegevariante> <verkehrsmittellinienbezug>{1,1}</verkehrsmittellinienbezug> <produktgrenzpunktdaten-table>{1,1}</produktgrenzpunktdaten-table> <produktgrenzpunktausnahme-table>{1,1}</produktgrenzpunktausnahme-table> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-BIFAInterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-BIFAInterpretation-Item / abfahrtszeit


| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |

| | |
|-----------------|---|
| Instance | <pre><abfahrtszeit xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </abfahrtszeit></pre> |
| Source | <pre><xs:element name="abfahrtszeit" type="XML-Ref01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-BIFAInterpretation-Item / ankunftszeit

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ankunftszeit xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </ankunftszeit></pre> |
| Source | <pre><xs:element name="ankunftszeit" type="XML-Ref01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-BIFAInterpretation-Item / vontarifpunkt

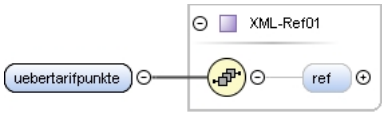
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><vontarifpunkt xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </vontarifpunkt></pre> |
| Source | <pre><xs:element name="vontarifpunkt" type="XML-Ref01"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-BIFAInterpretation-Item / nachtarifpunkt

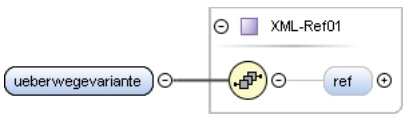
| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><nachtarifpunkt xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </nachtarifpunkt></pre> |

| | |
|-----------------|---|
| Source | <code><xs:element name="nachtarifpunkt" type="XML-Ref01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

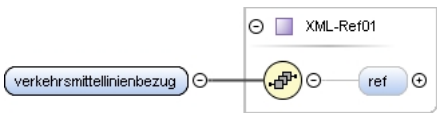
Element XML-BIFAInterpretation-Item / uebertarifpunkte

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><uebertarifpunkte xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </uebertarifpunkte></pre> |
| Source | <code><xs:element name="uebertarifpunkte" type="XML-Ref01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-BIFAInterpretation-Item / ueberwegevariante

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><ueberwegevariante xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </ueberwegevariante></pre> |
| Source | <code><xs:element name="ueberwegevariante" type="XML-Ref01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-BIFAInterpretation-Item / verkehrsmittellinienbezug

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <pre><verkehrsmittellinienbezug xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </verkehrsmittellinienbezug></pre> |
| Source | <code><xs:element name="verkehrsmittellinienbezug" type="XML-Ref01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-BIFAInterpretation-Item / produktgrenzpunktdaten-table

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Produktgrenzpunktdaten-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktgrenzpunkt-Table XML-Produktgrenzpunktdaten-Table |
| Properties | content: complex |
| Model | vorherproduktgruppe , vorhertagesbedingung , vorhertageszeitbedingung , vorhertarifpunktbedingung , vorherbewertungsbedingung , vorherverkehrsmittellinienbedingung , nachherproduktgruppe , nachhertagesbedingung , nachhertageszeitbedingung , nachhertarifpunktbedingung , nachherbewertungsbedingung , nachherverkehrsmittellinienbedingung , spezialbedingung |
| Children | nachherbewertungsbedingung, nachherproduktgruppe, nachhertagesbedingung, nachhertageszeitbedingung, nachhertarifpunktbedingung, nachherverkehrsmittellinienbedingung, spezialbedingung, vorherbewertungsbedingung, vorherproduktgruppe, vorhertagesbedingung, vorhertageszeitbedingung, vorhertarifpunktbedingung, vorherverkehrsmittellinienbedingung |
| Instance | <produktgrenzpunktdaten-table xmlns="http://vdv/ka/pkm/2"> |

| | |
|-----------------|--|
| | <pre> <vorherproduktgruppe>{1,1}</vorherproduktgruppe> <vorhertagesbedingung>{1,1}</vorhertagesbedingung> <vorhertageszeitbedingung>{1,1}</vorhertageszeitbedingung> <vorhertarifpunktbedingung>{1,1}</vorhertarifpunktbedingung> <vorherbewertungsbedingung>{1,1}</vorherbewertungsbedingung> <vorherverkehrsmittellinienbedingung>{1,1}</vorherverkehrsmittellinienbedingung> <nachherproduktgruppe>{1,1}</nachherproduktgruppe> <nachhertagesbedingung>{1,1}</nachhertagesbedingung> <nachhertageszeitbedingung>{1,1}</nachhertageszeitbedingung> <nachhertarifpunktbedingung>{1,1}</nachhertarifpunktbedingung> <nachherbewertungsbedingung>{1,1}</nachherbewertungsbedingung> <nachherverkehrsmittellinienbedingung>{1,1}</nachherverkehrsmittellinienbedingung> <spezialbedingung>{1,1}</spezialbedingung> </produktgrenzpunkt-daten-table> </pre> |
| Source | <code><xs:element name="produktgrenzpunkt-daten-table" type="XML-Produktgrenzpunkt-daten-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / vorherproduktgruppe

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <vorherproduktgruppe xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorherproduktgruppe> </pre> |
| Source | <code><xs:element name="vorherproduktgruppe" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / vorhertagesbedingung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <vorhertagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorhertagesbedingung> </pre> |
| Source | <code><xs:element name="vorhertagesbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / vorhertageszeitbedingung


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorhertageszeitbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorhertageszeitbedingung></pre> |
| Source | <pre><xs:element name="vorhertageszeitbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Produktgrenzpunkt-Table / vorhertarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorhertarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorhertarifpunktbedingung></pre> |
| Source | <pre><xs:element name="vorhertarifpunktbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / vorherbewertungsbedingung

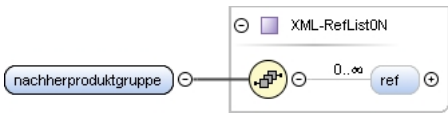
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorherbewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorherbewertungsbedingung></pre> |
| Source | <pre><xs:element name="vorherbewertungsbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / vorherverkehrsmittellinienbedingung

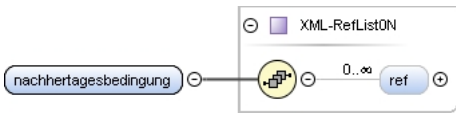
| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |

| | |
|-----------------|--|
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorherverkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorherverkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="vorherverkehrsmittellinienbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

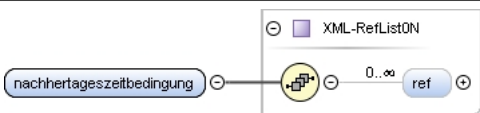
Element XML-Produktgrenzpunkt-Table / nachherproduktgruppe

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachherproduktgruppe xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachherproduktgruppe></pre> |
| Source | <pre><xs:element name="nachherproduktgruppe" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / nachhertagesbedingung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachhertagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachhertagesbedingung></pre> |
| Source | <pre><xs:element name="nachhertagesbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / nachhertageszeitbedingung


| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | ref* |
| Children | ref |
| Instance | <pre><nachhertageszeitbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachhertageszeitbedingung></pre> |
| Source | <pre><xs:element name="nachhertageszeitbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Produktgrenzpunkt-Table / nachhertarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachhertarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachhertarifpunktbedingung></pre> |
| Source | <pre><xs:element name="nachhertarifpunktbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / nachherbewertungsbedingung


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachherbewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachherbewertungsbedingung></pre> |
| Source | <pre><xs:element name="nachherbewertungsbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / nachherverkehrsmittellinienbedingung

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |

| | |
|-----------------|--|
| Instance | <code><nachhverkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachhverkehrsmittellinienbedingung></code> |
| Source | <code><xs:element name="nachhverkehrsmittellinienbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></code> |
| Source | <code><xs:element name="spezialbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / ausnahme


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex minOccurs: 0 |
| Model | ref* |
| Children | ref |
| Instance | <code><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></code> |
| Source | <code><xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunkt-Table / vorherproduktgruppe


| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><vorherproduktgruppe xmlns="http://vdv/ka/pkm/2"></code> |

| | |
|-----------------|---|
| | <code><ref>{0,unbounded}</ref></code> <code></vorherproduktgruppe></code> |
| Source | <code><xs:element name="vorherproduktgruppe" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Produktgrenzpunktdaten-Table / vorhertagesbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><vorhertagesbedingung xmlns="http://vdv/ka/pkm/2"></code> <code><ref>{0,unbounded}</ref></code> <code></vorhertagesbedingung></code> |
| Source | <code><xs:element name="vorhertagesbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktdaten-Table / vorhertageszeitbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><vorhertageszeitbedingung xmlns="http://vdv/ka/pkm/2"></code> <code><ref>{0,unbounded}</ref></code> <code></vorhertageszeitbedingung></code> |
| Source | <code><xs:element name="vorhertageszeitbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktdaten-Table / vorhertarifpunktbedingung

| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><vorhertarifpunktbedingung xmlns="http://vdv/ka/pkm/2"></code> <code><ref>{0,unbounded}</ref></code> <code></vorhertarifpunktbedingung></code> |

| | |
|-----------------|---|
| Source | <code><xs:element name="vorhertarifpunktbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktdaten-Table / vorherbewertungsbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorherbewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorherbewertungsbedingung></pre> |
| Source | <code><xs:element name="vorherbewertungsbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktdaten-Table / vorherverkehrsmittellinienbedingung


| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorherverkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorherverkehrsmittellinienbedingung></pre> |
| Source | <code><xs:element name="vorherverkehrsmittellinienbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktdaten-Table / nachherproduktgruppe


| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachherproduktgruppe xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachherproduktgruppe></pre> |
| Source | <code><xs:element name="nachherproduktgruppe" type="XML-RefList0N" /></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|


Element XML-Produktgrenzpunktdaten-Table / nachhertagesbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachhertagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachhertagesbedingung></pre> |
| Source | <pre><xs:element name="nachhertagesbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

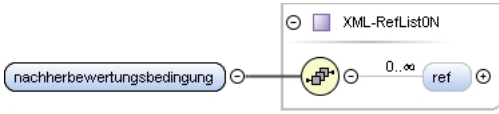
Element XML-Produktgrenzpunktdaten-Table / nachhertageszeitbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachhertageszeitbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachhertageszeitbedingung></pre> |
| Source | <pre><xs:element name="nachhertageszeitbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Produktgrenzpunktdaten-Table / nachhertarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachhertarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachhertarifpunktbedingung></pre> |
| Source | <pre><xs:element name="nachhertarifpunktbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

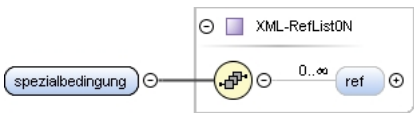
Element XML-Produktgrenzpunktdaten-Table / nachherbewertungsbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachherbewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachherbewertungsbedingung></pre> |
| Source | <pre><xs:element name="nachherbewertungsbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktdaten-Table / nacherverkehrsmittellinienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nacherverkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nacherverkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="nacherverkehrsmittellinienbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

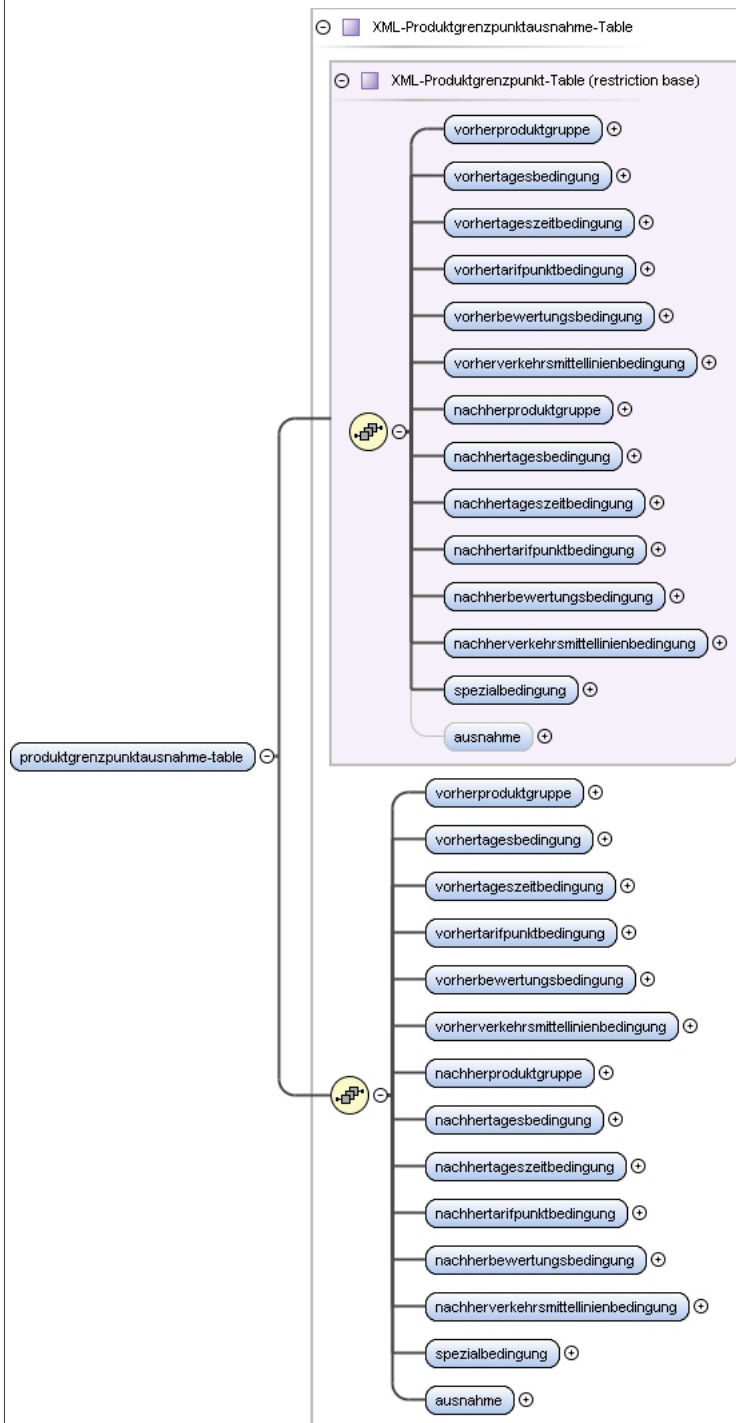
Element XML-Produktgrenzpunktdaten-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-BIFAInterpretation-Item / produktgrenzpunktausnahme-table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|---|
| Type | XML-Produktgrenzpunktausnahme-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktgrenzpunkt-Table XML-Produktgrenzpunktausnahme-Table |
| Properties | content: complex |
| Model | vorherproduktgruppe , vorhertagesbedingung , vorhertageszeitbedingung , vorhertarifpunktbedingung , vorherbewertungsbedingung , vorherverkehrsmittellinienbedingung , nachherproduktgruppe , nachhertagesbedingung , nachhertageszeitbedingung , nachhertarifpunktbedingung , nachherbewertungsbedingung , nachherverkehrsmittellinienbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, nachherbewertungsbedingung, nachherproduktgruppe, nachhertagesbedingung, nachhertageszeitbedingung, nachhertarifpunktbedingung, nachherverkehrsmittellinienbedingung, spezialbedingung, vorherbewertungsbedingung, vorherproduktgruppe, vorhertagesbedingung, vorhertageszeitbedingung, vorhertarifpunktbedingung, vorherverkehrsmittellinienbedingung |
| Instance | <pre><produktgrenzpunktausnahme-table xmlns="http://vdv/ka/pkm/2"> <vorherproduktgruppe>{1,1}</vorherproduktgruppe></pre> |

| | |
|-----------------|--|
| | <pre> <vorhertagesbedingung>{1,1}</vorhertagesbedingung> <vorhertageszeitbedingung>{1,1}</vorhertageszeitbedingung> <vorhertarifpunktbedingung>{1,1}</vorhertarifpunktbedingung> <vorherbewertungsbedingung>{1,1}</vorherbewertungsbedingung> <vorherverkehrsmittellinienbedingung>{1,1}</vorherverkehrsmittellinienbedingung> <nachherproduktgruppe>{1,1}</nachherproduktgruppe> <nachhertagesbedingung>{1,1}</nachhertagesbedingung> <nachhertageszeitbedingung>{1,1}</nachhertageszeitbedingung> <nachhertarifpunktbedingung>{1,1}</nachhertarifpunktbedingung> <nachherbewertungsbedingung>{1,1}</nachherbewertungsbedingung> <nachherverkehrsmittellinienbedingung>{1,1}</nachherverkehrsmittellinienbedingung> <spezialbedingung>{1,1}</spezialbedingung> <ausnahme>{1,1}</ausnahme> </produktgrenzpunktausnahme-table> </pre> |
| Source | <code><xs:element name="produktgrenzpunktausnahme-table" type="XML-Produktgrenzpunktausnahme-Table" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / vorherproduktgruppe

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <vorherproduktgruppe xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorherproduktgruppe> </pre> |
| Source | <code><xs:element name="vorherproduktgruppe" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / vorhertagesbedingung

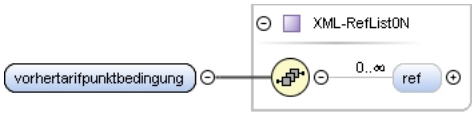
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <vorhertagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorhertagesbedingung> </pre> |
| Source | <code><xs:element name="vorhertagesbedingung" type="XML-RefList0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / vorhertageszeitbedingung

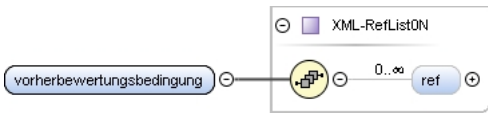
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorhertageszeitbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorhertageszeitbedingung></pre> |
| Source | <pre><xs:element name="vorhertageszeitbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

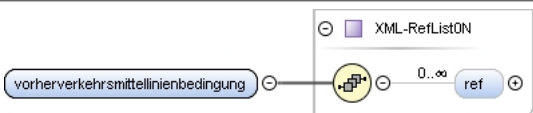
Element XML-Produktgrenzpunktausnahme-Table / vorhertarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorhertarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorhertarifpunktbedingung></pre> |
| Source | <pre><xs:element name="vorhertarifpunktbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / vorherbewertungsbedingung

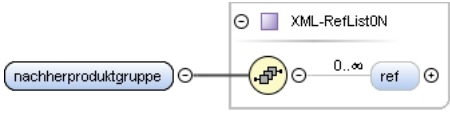
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><vorherbewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorherbewertungsbedingung></pre> |
| Source | <pre><xs:element name="vorherbewertungsbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / vorherverkehrsmittellinienbedingung

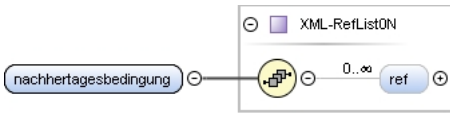
| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |

| | |
|-----------------|--|
| Children | ref |
| Instance | <pre><vorherverkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </vorherverkehrsmittellinienbedingung></pre> |
| Source | <pre><xs:element name="vorherverkehrsmittellinienbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / nachherproduktgruppe

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows an element named 'nachherproduktgruppe' connected to a yellow circle representing a list. This circle is connected to a blue circle labeled 'ref'. A box labeled 'XML-RefList0N' is shown above the 'ref' circle. The cardinality '0..∞' is indicated between the list circle and the 'ref' circle. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachherproduktgruppe xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachherproduktgruppe></pre> |
| Source | <pre><xs:element name="nachherproduktgruppe" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / nachhertagesbedingung

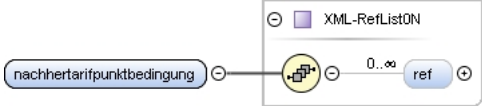
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows an element named 'nachhertagesbedingung' connected to a yellow circle representing a list. This circle is connected to a blue circle labeled 'ref'. A box labeled 'XML-RefList0N' is shown above the 'ref' circle. The cardinality '0..∞' is indicated between the list circle and the 'ref' circle. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachhertagesbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachhertagesbedingung></pre> |
| Source | <pre><xs:element name="nachhertagesbedingung" type="XML-RefList0N" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / nachhertageszeitbedingung

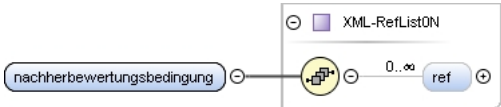
| | |
|------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows an element named 'nachhertageszeitbedingung' connected to a yellow circle representing a list. This circle is connected to a blue circle labeled 'ref'. A box labeled 'XML-RefList0N' is shown above the 'ref' circle. The cardinality '0..∞' is indicated between the list circle and the 'ref' circle. |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachhertageszeitbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachhertageszeitbedingung></pre> |

| | |
|-----------------|---|
| Source | <code><xs:element name="nachhertageszeitbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

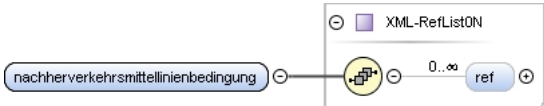
Element XML-Produktgrenzpunktausnahme-Table / nachhertarifpunktbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachhertarifpunktbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachhertarifpunktbedingung></pre> |
| Source | <code><xs:element name="nachhertarifpunktbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / nachherbewertungsbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachherbewertungsbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachherbewertungsbedingung></pre> |
| Source | <code><xs:element name="nachherbewertungsbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / nachherverkehrsmittellinienbedingung

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><nachherverkehrsmittellinienbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </nachherverkehrsmittellinienbedingung></pre> |
| Source | <code><xs:element name="nachherverkehrsmittellinienbedingung" type="XML-RefList0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / spezialbedingung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><spezialbedingung xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </spezialbedingung></pre> |
| Source | <pre><xs:element name="spezialbedingung" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgrenzpunktausnahme-Table / ausnahme

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre><ausnahme xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ausnahme></pre> |
| Source | <pre><xs:element name="ausnahme" type="XML-RefList0N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / nummerninterpretation-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Nummerninterpretation-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Nummerninterpretation-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><nummerninterpretation-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item></pre> |

| | | | | |
|-----------------|---|---------|----------|--|
| | </nummerninterpretation-pool> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="nummerninterpretation-pool" type="XML-Nummerninterpretation-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Nummerninterpretation-Pool / item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut, Sortiert nach erstem Element} |
| Diagram | |
| Type | XML-Nummerninterpretation-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Nummerninterpretation-Item |
| Properties | content: complex |
| | minOccurs: 0 |
| | maxOccurs: unbounded |
| Model | nr, name, nummertext-pool |
| Children | name, nr, nummertext-pool |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <nummertext-pool key="">{1,1}</nummertext-pool> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Nummerninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nummerninterpretation-Item / nummertext-pool

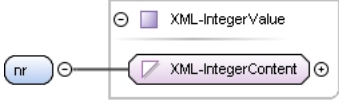
| | |
|-----------|----------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Nummerntext-Pool |

| | | | | |
|-----------------|---|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Nummerntext-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><nummerntext-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </nummerntext-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="nummerntext-pool" type="XML-Nummerntext-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |


Element XML-Nummerntext-Pool / item

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implicit key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Nummerntext-Item. It is a restriction base of XML-Ausgangstext-Item, which is an extension base of XML-NrName-Item. The diagram shows the 'item' element containing 'nr', 'name', and 'text-matrix' elements, with their respective cardinalities and relationships.</p> | | | | | | |
| Type | XML-Nummerntext-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Ausgangstext-Item<ul style="list-style-type: none">XML-Nummerntext-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name, text-matrix | | | | | | |
| Children | name, nr, text-matrix | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <text-matrix>{1,1}</text-matrix> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Nummerntext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicit key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |


Element XML-Nummerntext-Item / nr

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nummerntext-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Nummerntext-Item / text-matrix

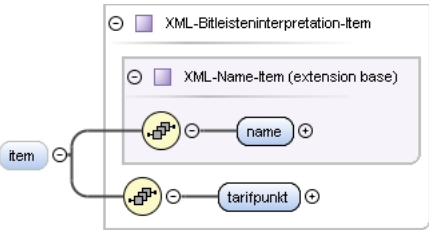
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <code><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref=" " >{0, unbounded}</text> </text-matrix></code> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / bitleisteninterpretation-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-Bitleisteninterpretation-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Bitleisteninterpretation-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bitleisteninterpretation-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bitleisteninterpretation-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bitleisteninterpretation-pool" type="XML-Bitleisteninterpretation-Pool" minOccurs="0" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Bitleisteninterpretation-Pool / item

| | | | | | | | |
|----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut} | | | | | | |
| Diagram |  | | | | | | |
| Type | XML-Bitleisteninterpretation-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Bitleisteninterpretation-Item | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , tarifpunkt | | | | | | |
| Children | name, tarifpunkt | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <tarifpunkt>{1,1}</tarifpunkt> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Bitleisteninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

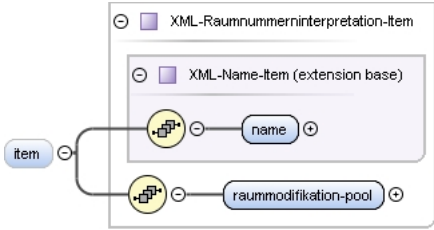
Element XML-Bitleisteninterpretation-Item / tarifpunkt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefList1N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefList1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <pre><tarifpunkt xmlns="http://vdv/ka/pkm/2"> <ref>{1,unbounded}</ref> </tarifpunkt></pre> |
| Source | <pre><xs:element name="tarifpunkt" type="XML-RefList1N"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / raumnummerninterpretation-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Raumnummerninterpretation-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Raumnummerninterpretation-Pool | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><raumnummerninterpretation-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </raumnummerninterpretation-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="raumnummerninterpretation-pool" type="XML-Raumnummerninterpretation-Pool" minOccurs="0"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Raumnummerninterpretation-Pool / item

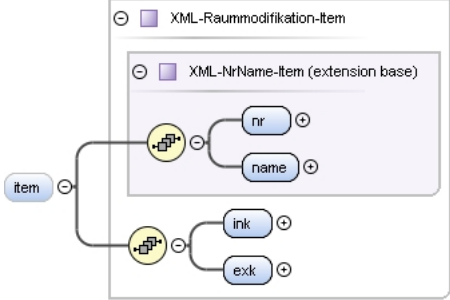
| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implies key Attribut} | | | | | | |
| Diagram |  The diagram shows a container for 'XML-Raumnummerninterpretation-Item'. Inside, there is an 'XML-Name-Item (extension base)' which contains a 'name' element. Below this, there is a 'raummodifikation-pool' element. A line connects the 'item' label to the 'raummodifikation-pool' element. | | | | | | |
| Type | XML-Raumnummerninterpretation-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Raumnummerninterpretation-Item | | | | | | |
| Properties | <table> <tr><td>content:</td><td>complex</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | name , raummodifikation-pool | | | | | | |
| Children | name, raummodifikation-pool | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <name>{1,1}</name> <raummodifikation-pool key="">{1,1}</raummodifikation-pool> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Raumnummerninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Raumnummerninterpretation-Item / raummodifikation-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|----------------|---|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Raummodifikation-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Raummodifikation-Pool | | | | | | | | | | | |
| Properties | content: | complex | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><raummodifikation-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </raummodifikation-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="raummodifikation-pool" type="XML-Raummodifikation-Pool" /></pre> | | | | | | | | | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-Raummodifikation-Pool / item

| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram |  | | | | | | |
| Type | XML-Raummodifikation-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Raummodifikation-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr , name , ink , exk | | | | | | |
| Children | exk, ink, name, nr | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <ink>{1,1}</ink> <exk>{1,1}</exk> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Raummodifikation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Raummodifikation-Item / ink

| | | | |
|----------------|--|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  | | |
| Type | XML-RefSet0N | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | ref* | | |
| Children | ref | | |
| Instance | <pre><ink xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </ink></pre> | | |

| | |
|-----------------|---|
| Source | <code><xs:element name="ink" type="XML-RefSet0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Raummodifikation-Item / exk

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <code><exk xmlns="http://vdv/ka/pkm/2"> <ref>{ 0, unbounded}</ref> </exk></code> |
| Source | <code><xs:element name="exk" type="XML-RefSet0N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / schluessel-pool

| | | | | |
|----------------|--|-------------|------------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Schluessel-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Schluessel-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><schluessel-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </schluessel-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |

| | |
|-----------------|---|
| Source | <code><xs:element name="schluessel-pool" type="XML-Schluessel-Pool"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Schluessel-Pool / item

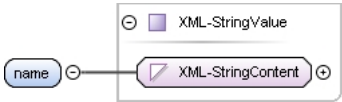
| | | | | | | | |
|-----------------|--|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Annotations | {Implizites key Attribut, Sortiert nach erstem Element} | | | | | | |
| Diagram | | | | | | | |
| Type | XML-Schluessel-Item | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Schluessel-Item | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Model | nr, name | | | | | | |
| Children | name, nr | | | | | | |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> </item></pre> | | | | | | |
| Source | <pre><xs:element name="item" type="XML-Schluessel-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-Schluessel-Item / nr

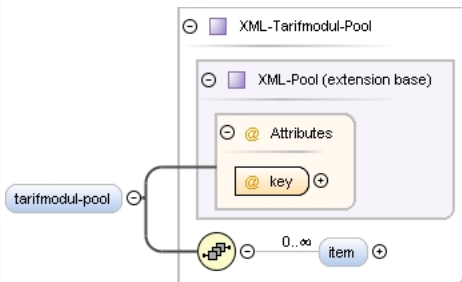
| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Schluessel-Item / name

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

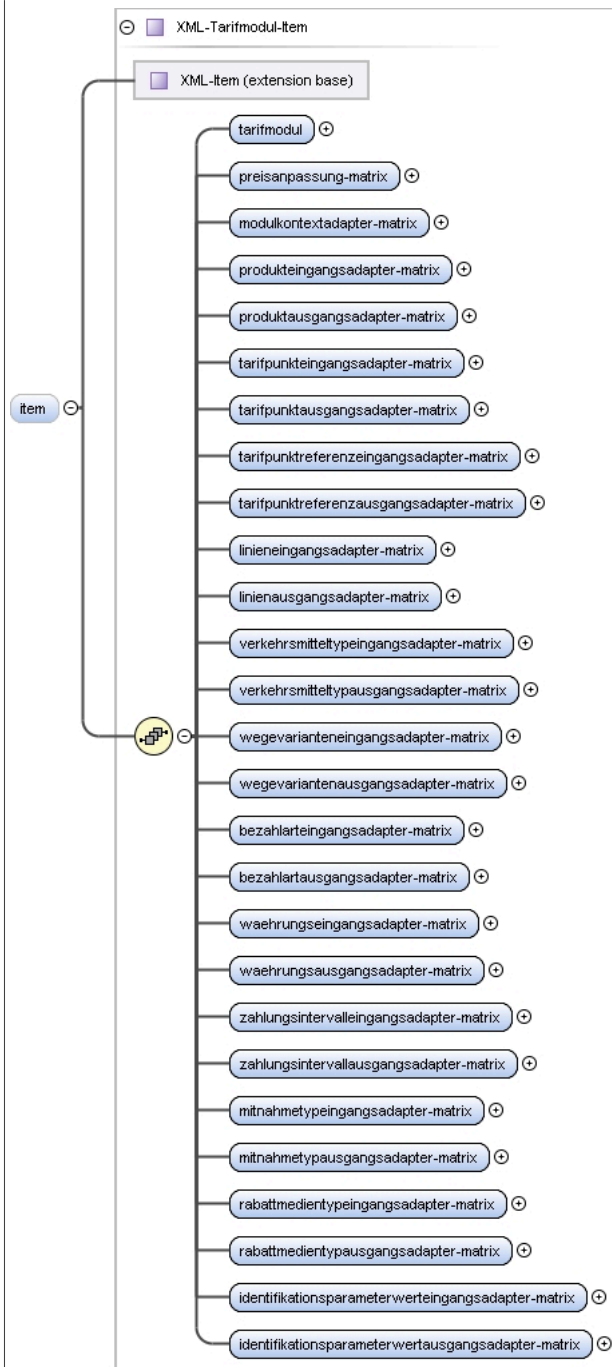
Element XML-Tarifmodul / tarifmodul-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | XML-Tarifmodul-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tarifmodul-Pool | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr></table> | | | | content: | complex | minOccurs: | 0 | | | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><tarifmodul-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifmodul-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="tarifmodul-pool" type="XML-Tarifmodul-Pool" minOccurs="0" /></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Tarifmodul-Pool / item

| | |
|-------------|------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Implies key Attribut} |

Diagram



Type XML-Tarifmodul-Item

- Type hierarchy
- XML-Item
 - XML-Tarifmodul-Item

Properties

| | |
|------------|-----------|
| content: | complex |
| minOccurs: | 0 |
| maxOccurs: | unbounded |

Model

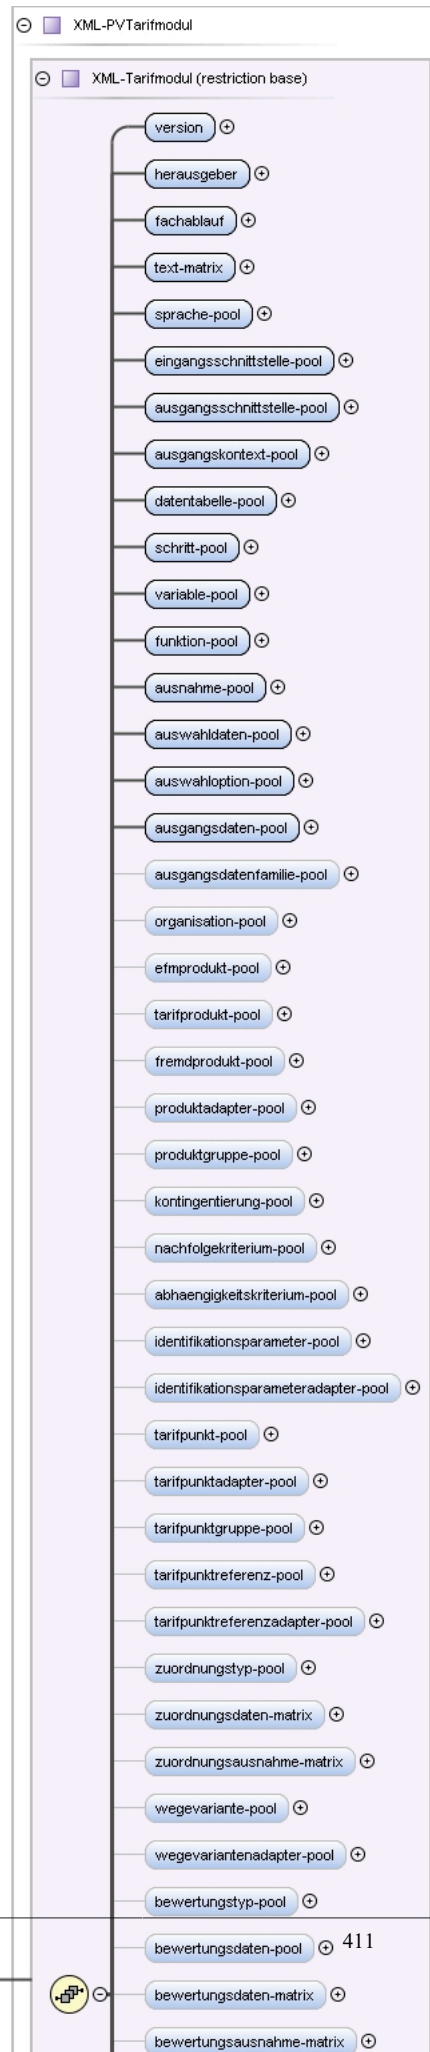
tarifmodul , preisanpassung-matrix , modulkontextadapter-matrix , produkteingangsadapter-matrix , produktausgangsadapter-matrix , tarifpunkteingangsadapter-matrix , tarifpunktausgangsadapter-matrix , tarifpunktreferenzeingangsadapter-matrix , tarifpunktreferenzausgangsadapter-matrix , linieneingangsadapter-matrix , linienausgangsadapter-matrix , verkehrsmitteltypingangsadapter-matrix , verkehrsmitteltypausgangsadapter-matrix , wegevarianteneingangsadapter-matrix , wegevariantenausgangsadapter-matrix , bezahlarteingangsadapter-matrix , bezahlartausgangsadapter-matrix , waehrungseingangsadapter-matrix , waehrungsausgangsadapter-matrix , zahlungsintervalleingangsadapter-matrix , zahlungsintervallausgangsadapter-matrix , mitnahmetypingangsadapter-matrix , mitnahmetypausgangsadapter-matrix , rabattmedientypingangsadapter-matrix , rabattmedientypausgangsadapter-matrix , identifikationsparameterwerteingangsadapter-matrix , identifikationsparameterwertausgangsadapter-matrix

| | |
|-----------------|--|
| | pausgangsadapter-matrix , identifikationsparameterwerteingangsadapter-matrix , identifikationsparameterwertausgangsadapter-matrix |
| Children | bezahllartausgangsadapter-matrix, bezahlarteingangsadapter-matrix, identifikationsparameterwertausgangsadapter-matrix, identifikationsparameterwerteingangsadapter-matrix, linienausgangsadapter-matrix, linieneingangsadapter-matrix, mitnahmetypausgangsadapter-matrix, mitnahmetypeingangsadapter-matrix, modulkontextadapter-matrix, preisanpassung-matrix, produktausgangsadapter-matrix, produkteingangsadapter-matrix, rabattmedientypausgangsadapter-matrix, rabattmedientypeingangsadapter-matrix, tarifmodul, tarifpunktausgangsadapter-matrix, tarifpunkteingangsadapter-matrix, tarifpunktreferenzausgangsadapter-matrix, tarifpunktreferenzeingangsadapter-matrix, verkehrsmitteltypausgangsadapter-matrix, verkehrsmitteltypeingangsadapter-matrix, waehrungsausgangsadapter-matrix, waehrungseingangsadapter-matrix, wegevariantenausgangsadapter-matrix, wegevarianteneingangsadapter-matrix, zahlungsintervallausgangsadapter-matrix, zahlungsintervalleingangsadapter-matrix |
| Instance | <pre> <item xmlns="http://vdv/ka/pkm/2"> <tarifmodul>{1,1}</tarifmodul> <preisanpassung-matrix>{1,1}</preisanpassung-matrix> <modulkontextadapter-matrix>{1,1}</modulkontextadapter-matrix> <produkteingangsadapter-matrix>{1,1}</produkteingangsadapter-matrix> <produktausgangsadapter-matrix>{1,1}</produktausgangsadapter-matrix> <tarifpunkteingangsadapter-matrix>{1,1}</tarifpunkteingangsadapter-matrix> <tarifpunktausgangsadapter-matrix>{1,1}</tarifpunktausgangsadapter-matrix> <tarifpunktreferenzeingangsadapter-matrix>{1,1}</tarifpunktreferenzeingangsadapter-matrix> <tarifpunktreferenzausgangsadapter-matrix>{1,1}</tarifpunktreferenzausgangsadapter-matrix> <linieneingangsadapter-matrix>{1,1}</linieneingangsadapter-matrix> <linienausgangsadapter-matrix>{1,1}</linienausgangsadapter-matrix> <verkehrsmitteltypeingangsadapter-matrix>{1,1}</verkehrsmitteltypeingangsadapter-matrix> <verkehrsmitteltypausgangsadapter-matrix>{1,1}</verkehrsmitteltypausgangsadapter-matrix> <wegevarianteneingangsadapter-matrix>{1,1}</wegevarianteneingangsadapter-matrix> <wegevariantenausgangsadapter-matrix>{1,1}</wegevariantenausgangsadapter-matrix> <bezahllarteingangsadapter-matrix>{1,1}</bezahllarteingangsadapter-matrix> <bezahllartausgangsadapter-matrix>{1,1}</bezahllartausgangsadapter-matrix> <waehrungseingangsadapter-matrix>{1,1}</waehrungseingangsadapter-matrix> <waehrungsausgangsadapter-matrix>{1,1}</waehrungsausgangsadapter-matrix> <zahlungsintervalleingangsadapter-matrix>{1,1}</zahlungsintervalleingangsadapter-matrix> <zahlungsintervallausgangsadapter-matrix>{1,1}</zahlungsintervallausgangsadapter-matrix> <mitnahmetypeingangsadapter-matrix>{1,1}</mitnahmetypeingangsadapter-matrix> <mitnahmetypausgangsadapter-matrix>{1,1}</mitnahmetypausgangsadapter-matrix> <rabattmedientypeingangsadapter-matrix>{1,1}</rabattmedientypeingangsadapter-matrix> <rabattmedientypausgangsadapter-matrix>{1,1}</rabattmedientypausgangsadapter-matrix> <identifikationsparameterwerteingangsadapter-matrix>{1,1}</ identifikationsparameterwerteingangsadapter-matrix> <identifikationsparameterwertausgangsadapter-matrix>{1,1}</ identifikationsparameterwertausgangsadapter-matrix> </item> </pre> |
| Source | <pre> <xs:element name="item" type="XML-Tarifmodul-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / tarifmodul

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-PVTarifmodul |
| Type hierarchy | <ul style="list-style-type: none"> XML-Tarifmodul XML-PVTarifmodul |
| Properties | content: complex |
| Model | version , herausgeber , fachablauf , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , datentabelle-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , ausgangsdatenfamilie-pool , organisation-pool , efmprodukt-pool , tarifprodukt-pool , fremdprodukt-pool , produktgruppe-pool , kontingentierung-pool , nachfolgekriterium-pool , abhaengigkeitskriterium-pool , identifikationsparameter-pool , tarifpunkt-pool , tarifpunktgruppe-pool , tarifpunktreferenz-pool , zuordnungstyp-pool , zuordnungsdaten-matrix , zuordnungsausnahme-matrix , wegevariante-pool , bewertungstyp-pool , bewertungsdaten-pool , bewertungsdaten-matrix , bewertungsausnahme-matrix , linie-pool , verkehrsmitteltyp-pool , verkehrsmittellinienbezug-pool , bezahlart-pool , wahrung-pool , zahlungsintervall-pool , mitnahmetyp-pool , rabattmedientyp-pool , modulkontext-pool , spezialbedingung-pool , tagesbedingung-pool , tageszeitbedingung-pool , zeitraumbedingung-pool , tarifpunktbedingung-pool , bewertungsbedingung-pool , geosegmentbedingung-pool , verkehrsmittellinienbedingung-pool , bezahlartbedingung-pool , zahlungsintervallbedingung-pool , mitnahmebedingung-pool , rabattmedienbedingung-pool , modulkontextbedingung-pool , bifainterpretation-pool , nummerninterpretation-pool , bitleisteninterpretation-pool , raumnummerninterpretation-pool , schlussel-pool , kommentar-pool , signatur , annotation |
| Children | abhaengigkeitskriterium-pool , annotation , ausgangsdaten-pool , ausgangsdatenfamilie-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bewertungsausnahme-matrix , bewertungsbedingung-pool , bewertungsdaten-matrix , bewertungsdaten-pool , bewertungstyp-pool , bezahlart-pool , bezahlartbedingung-pool , bifainterpretation-pool , bitleisteninterpretation-pool , datentabelle-pool , efmprodukt-pool , eingangsschnittstelle-pool , fachablauf , fremdprodukt-pool , funktion-pool , geosegmentbedingung-pool , herausgeber , identifikationsparameter-pool , kommentar-pool , kontingentierung-pool , linie-pool , mitnahmebedingung-pool , mitnahmetyp-pool , modulkontext-pool , modulkontextbedingung-pool , nachfolgekriterium-pool , nummerninterpretation-pool , organisation-pool , produktgruppe-pool , rabattmedienbedingung-pool , rabattmedientyp-pool , raumnummerninterpretation-pool , schlussel-pool , schritt-pool , signatur , spezialbedingung-pool , sprache-pool , tagesbedingung-pool , tageszeitbedingung-pool , tarifprodukt-pool , tarifpunkt-pool , tarifpunktbedingung-pool , tarifpunktgruppe-pool , tarifpunktreferenz-pool , text-matrix , variable-pool , verkehrsmittellinienbedingung-pool , verkehrsmittellinienbezug-pool , verkehrsmitteltyp-pool , version , wahrung-pool , wegevariante-pool , zahlungsintervall-pool , zahlungsintervallbedingung-pool , zeitraumbedingung-pool , zuordnungsausnahme-matrix , zuordnungsdaten-matrix , zuordnungstyp-pool |
| Instance | <pre> <tarifmodul xmlns="http://vdv/ka/pkm/2"> <version>{1,1}</version> <herausgeber>{1,1}</herausgeber> <fachablauf>{1,1}</fachablauf> <text-matrix>{1,1}</text-matrix> <sprache-pool key="">{1,1}</sprache-pool> <eingangsschnittstelle-pool key="">{1,1}</eingangsschnittstelle-pool> <ausgangsschnittstelle-pool key="">{1,1}</ausgangsschnittstelle-pool> <ausgangskontext-pool key="">{1,1}</ausgangskontext-pool> <datentabelle-pool key="">{1,1}</datentabelle-pool> <schritt-pool key="">{1,1}</schritt-pool> <variable-pool key="">{1,1}</variable-pool> <funktion-pool key="">{1,1}</funktion-pool> <ausnahme-pool key="">{1,1}</ausnahme-pool> <auswahldaten-pool key="">{1,1}</auswahldaten-pool> <auswahloption-pool key="">{1,1}</auswahloption-pool> <ausgangsdaten-pool key="">{1,1}</ausgangsdaten-pool> <ausgangsdatenfamilie-pool key="">{1,1}</ausgangsdatenfamilie-pool> <organisation-pool>{1,1}</organisation-pool> <efmprodukt-pool key="">{1,1}</efmprodukt-pool> <tarifprodukt-pool key="">{1,1}</tarifprodukt-pool> <fremdprodukt-pool key="">{1,1}</fremdprodukt-pool> <produktgruppe-pool key="">{1,1}</produktgruppe-pool> <kontingentierung-pool key="">{1,1}</kontingentierung-pool> <nachfolgekriterium-pool key="">{1,1}</nachfolgekriterium-pool> <abhaengigkeitskriterium-pool key="">{1,1}</abhaengigkeitskriterium-pool> <identifikationsparameter-pool key="">{1,1}</identifikationsparameter-pool> <tarifpunkt-pool key="">{1,1}</tarifpunkt-pool> <tarifpunktgruppe-pool key="">{1,1}</tarifpunktgruppe-pool> <tarifpunktreferenz-pool key="">{1,1}</tarifpunktreferenz-pool> <zuordnungstyp-pool key="">{1,1}</zuordnungstyp-pool> <zuordnungsdaten-matrix>{1,1}</zuordnungsdaten-matrix> <zuordnungsausnahme-matrix>{1,1}</zuordnungsausnahme-matrix> <wegevariante-pool key="">{1,1}</wegevariante-pool> <bewertungstyp-pool key="">{1,1}</bewertungstyp-pool> <bewertungsdaten-pool key="">{1,1}</bewertungsdaten-pool> <bewertungsdaten-matrix>{1,1}</bewertungsdaten-matrix> <bewertungsausnahme-matrix>{1,1}</bewertungsausnahme-matrix> <linie-pool key="">{1,1}</linie-pool> <verkehrsmitteltyp-pool key="">{1,1}</verkehrsmitteltyp-pool> <verkehrsmittellinienbezug-pool key="">{1,1}</verkehrsmittellinienbezug-pool> <bezahlart-pool key="">{1,1}</bezahlart-pool> <wahrung-pool key="">{1,1}</wahrung-pool> <zahlungsintervall-pool key="">{1,1}</zahlungsintervall-pool> <mitnahmetyp-pool key="">{1,1}</mitnahmetyp-pool> </pre> |

| | |
|-----------------|---|
| | <pre> <rabattmedientyp-pool key="">{1,1}</rabattmedientyp-pool> <modulkontext-pool key="">{1,1}</modulkontext-pool> <spezialbedingung-pool key="">{1,1}</spezialbedingung-pool> <tagesbedingung-pool key="">{1,1}</tagesbedingung-pool> <tageszeitbedingung-pool key="">{1,1}</tageszeitbedingung-pool> <zeitraumbedingung-pool key="">{1,1}</zeitraumbedingung-pool> <tarifpunktbedingung-pool key="">{1,1}</tarifpunktbedingung-pool> <bewertungsbedingung-pool key="">{1,1}</bewertungsbedingung-pool> <geosegmentbedingung-pool key="">{1,1}</geosegmentbedingung-pool> <verkehrsmittellinienbedingung-pool key="">{1,1}</verkehrsmittellinienbedingung-pool> <bezahlartbedingung-pool key="">{1,1}</bezahlartbedingung-pool> <zahlungsintervallbedingung-pool key="">{1,1}</zahlungsintervallbedingung-pool> <mitnahmebedingung-pool key="">{1,1}</mitnahmebedingung-pool> <rabattmedienbedingung-pool key="">{1,1}</rabattmedienbedingung-pool> <modulkontextbedingung-pool key="">{1,1}</modulkontextbedingung-pool> <bifainterpretation-pool key="">{1,1}</bifainterpretation-pool> <nummerninterpretation-pool key="">{1,1}</nummerninterpretation-pool> <bitleisteninterpretation-pool key="">{1,1}</bitleisteninterpretation-pool> <raumnummerninterpretation-pool key="">{1,1}</raumnummerninterpretation-pool> <schluessel-pool key="">{1,1}</schluessel-pool> <kommentar-pool>{1,1}</kommentar-pool> <signatur>{1,1}</signatur> <annotation>{1,1}</annotation> </tarifmodul> </pre> |
| Source | <code><xs:element name="tarifmodul" type="XML-PVTarifmodul" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / kommentar-pool

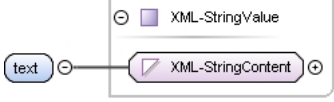
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Kommentar-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre> <kommentar-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </kommentar-pool> </pre> |
| Source | <code><xs:element name="kommentar-pool" type="XML-Kommentar-Pool" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kommentar-Pool / item

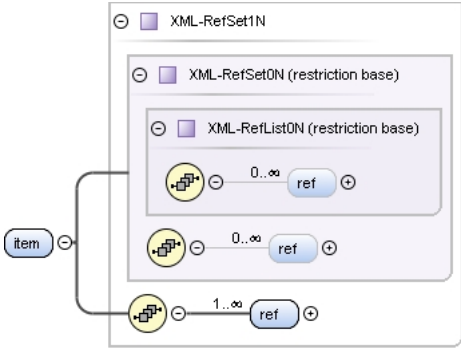
| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Kommentar-Item |
| Properties | content: complex minOccurs: 0 maxOccurs: unbounded |
| Model | text, item |
| Children | item, text |
| Instance | <pre> <item xmlns="http://vdv/ka/pkm/2"> <text>{1,1}</text> <item>{1,1}</item> </item> </pre> |

| | |
|-----------------|---|
| Source | <code><xs:element name="item" type="XML-Kommentar-Item" minOccurs="0" maxOccurs="unbounded" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

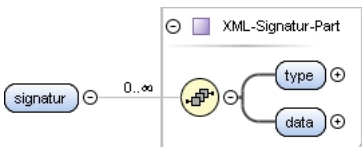
Element XML-Kommentar-Item / text

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="text" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Kommentar-Item / item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-RefSet1N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N XML-RefSet1N |
| Properties | content: complex |
| Model | ref+ |
| Children | ref |
| Instance | <code><item xmlns="http://vdv/ka/pkm/2"> <ref>{1,unbounded}</ref> </item></code> |
| Source | <code><xs:element name="item" type="XML-RefSet1N" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / signatur

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|---|
| Type | XML-Signatur-Part |
| Properties | content: complex |
| Model | type, data |
| Children | data, type |
| Instance | <pre><signatur xmlns="http://vdv/ka/pkm/2"> <type>{1,1}</type> <data>{1,1}</data> </signatur></pre> |
| Source | <code><xs:element name="signatur" type="XML-Signatur-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Signatur-Part / type

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="type" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Signatur-Part / data

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-BinaryValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:hexBinary XML-BinaryContent XML-BinaryValue |
| Properties | content: complex |
| Source | <code><xs:element name="data" type="XML-BinaryValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul / annotation

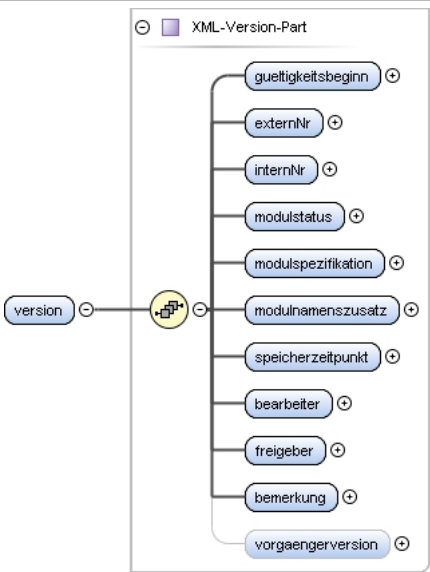
| | |
|------------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Annotation-Part |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | data* |
| Children | data |
| Instance | <pre><annotation xmlns="http://vdv/ka/pkm/2"> <data>{0,unbounded}</data> </annotation></pre> |
| Source | <pre><xs:element name="annotation" type="XML-Annotation-Part" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Annotation-Part / data

| | | | | | | | |
|-----------------|---|----------|---------|------------|---|------------|-----------|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Diagram |  | | | | | | |
| Type | XML-BinaryValue | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:hexBinary XML-BinaryContent XML-BinaryValue | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded |
| content: | complex | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | unbounded | | | | | | |
| Source | <pre><xs:element name="data" type="XML-BinaryValue" minOccurs="0" maxOccurs="unbounded" /></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |

Element XML-PVTarifmodul / version

| | | | |
|------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  | | |
| Type | XML-Version-Part | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Model | gueltigkeitsbeginn , externNr , internNr , modulstatus , modulspezifikation , modulnamenszusatz , speicherzeitpunkt , bearbeiter , freigeber , bemerkung , vorgaengerversion{0,1} | | |
| Children | bearbeiter, bemerkung, externNr, freigeber, gueltigkeitsbeginn, internNr, modulnamenszusatz, modulspezifikation, modulstatus, speicherzeitpunkt, vorgaengerversion | | |
| Instance | <pre><version xmlns="http://vdv/ka/pkm/2"></pre> | | |

| | |
|-----------------|--|
| | <pre> <gueltigkeitsbeginn>{1,1}</gueltigkeitsbeginn> <externNr>{1,1}</externNr> <internNr>{1,1}</internNr> <modulstatus>{1,1}</modulstatus> <modulspezifikation>{1,1}</modulspezifikation> <modulnamenszusatz>{1,1}</modulnamenszusatz> <speicherzeitpunkt>{1,1}</speicherzeitpunkt> <bearbeiter>{1,1}</bearbeiter> <freigeber>{1,1}</freigeber> <bemerkung>{1,1}</bemerkung> <vorgaengerversion>{0,1}</vorgaengerversion> </version> </pre> |
| Source | <code><xs:element name="version" type="XML-Version-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

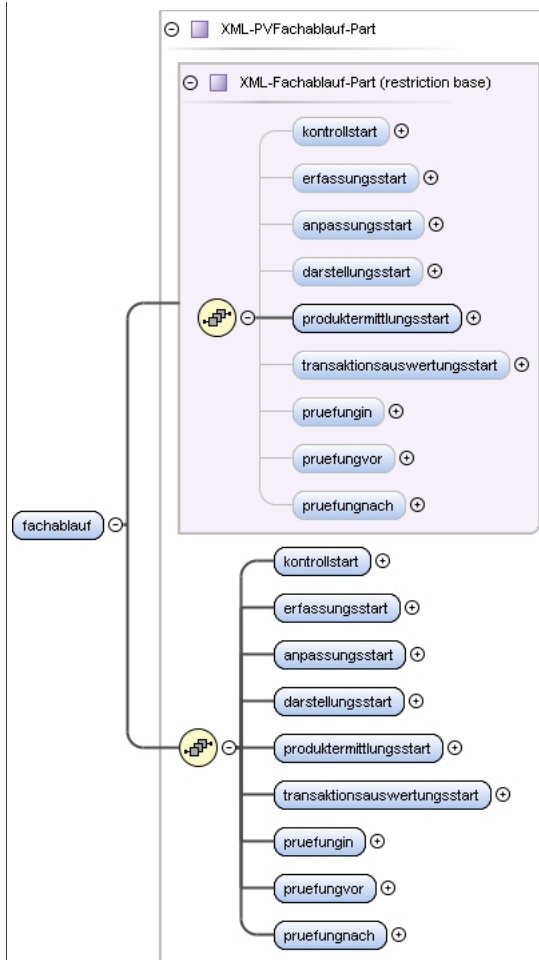
Element XML-PVTarifmodul / herausgeber

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Organisation-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Organisation-Part |
| Properties | content: complex |
| Model | nr , name |
| Children | name, nr |
| Instance | <pre> <herausgeber xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> </herausgeber> </pre> |
| Source | <code><xs:element name="herausgeber" type="XML-Organisation-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVTarifmodul / fachablauf

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|-----------------|--|
| Type | XML-PVFachablauf-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Fachablauf-Part XML-PVFachablauf-Part |
| Properties | content: complex |
| Model | kontrollstart , erfassungsstart , anpassungsstart , darstellungsstart , produktermittlungsstart , transaktionsauswertungsstart , pruefungin , pruefungvor , pruefungnach |
| Children | anpassungsstart , darstellungsstart , erfassungsstart , kontrollstart , produktermittlungsstart , pruefungin , pruefungnach , pruefungvor , transaktionsauswertungsstart |
| Instance | <pre> <fachablauf xmlns="http://vdv/ka/pkm/2"> <kontrollstart>{1,1}</kontrollstart> <erfassungsstart>{1,1}</erfassungsstart> <anpassungsstart>{1,1}</anpassungsstart> <darstellungsstart>{1,1}</darstellungsstart> <produktermittlungsstart>{1,1}</produktermittlungsstart> <transaktionsauswertungsstart>{1,1}</transaktionsauswertungsstart> <pruefungin>{1,1}</pruefungin> <pruefungvor>{1,1}</pruefungvor> <pruefungnach>{1,1}</pruefungnach> </fachablauf> </pre> |
| Source | <xs:element name="fachablauf" type="XML-PVFachablauf-Part"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVFachablauf-Part / kontrollstart

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><kontrollstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </kontrollstart></pre> |
| Source | <code><xs:element name="kontrollstart" type="XML-Ref11" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVFachablauf-Part / erfassungsstart

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><erfassungsstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </erfassungsstart></pre> |
| Source | <code><xs:element name="erfassungsstart" type="XML-Ref11" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVFachablauf-Part / anpassungsstart

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref11 |

| | |
|-----------------|---|
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><anpassungsstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </anpassungsstart></pre> |
| Source | <pre><xs:element name="anpassungsstart" type="XML-Ref11" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVfachablauf-Part / darstellungsstart

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><darstellungsstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </darstellungsstart></pre> |
| Source | <pre><xs:element name="darstellungsstart" type="XML-Ref11" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVfachablauf-Part / produktermittlungsstart

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><produktermittlungsstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </produktermittlungsstart></pre> |

| | |
|-----------------|---|
| Source | <code><xs:element name="produktermittlungsstart" type="XML-Ref11" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVfachablauf-Part / transaktionsauswertungsstart

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <code><transaktionsauswertungsstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </transaktionsauswertungsstart></code> |
| Source | <code><xs:element name="transaktionsauswertungsstart" type="XML-Ref11" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVfachablauf-Part / pruefungin


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref01 |
| Properties | content: complex |
| Model | ref{0,1} |
| Children | ref |
| Instance | <code><pruefungin xmlns="http://vdv/ka/pkm/2"> <ref>{0,1}</ref> </pruefungin></code> |
| Source | <code><xs:element name="pruefungin" type="XML-Ref01" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVfachablauf-Part / pruefungvor


| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:duration XML-DurationContent XML-DurationValue |

| | |
|-----------------|---|
| Properties | content: complex |
| Source | <code><xs:element name="pruefungvor" type="XML-DurationValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

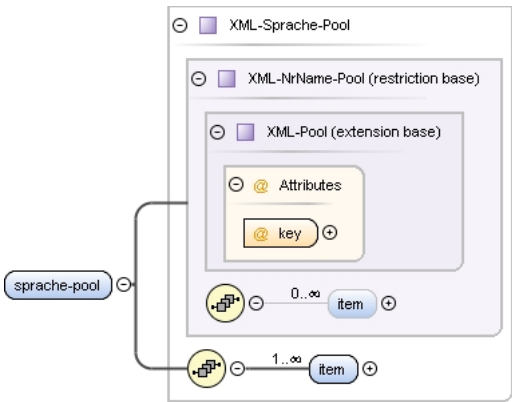
Element XML-PVFachablauf-Part / pruefungnach

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:duration XML-DurationContent XML-DurationValue |
| Properties | content: complex |
| Source | <code><xs:element name="pruefungnach" type="XML-DurationValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVTarifmodul / text-matrix

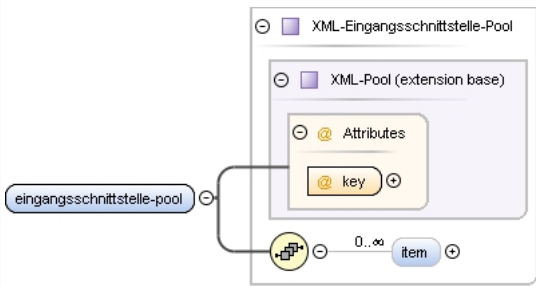
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="#">{0,unbounded}</text> </text-matrix></pre> |
| Source | <code><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVTarifmodul / sprache-pool

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Sprache-Pool |

| | | | | |
|-----------------|---|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Sprache-Pool | | | |
| Properties | content: complex | | | |
| Model | item+ | | | |
| Children | item | | | |
| Instance | <pre><sprache-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </sprache-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="sprache-pool" type="XML-Sprache-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / eingangsschnittstelle-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Eingangsschnittstelle-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eingangsschnittstelle-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><eingangsschnittstelle-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </eingangsschnittstelle-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="eingangsschnittstelle-pool" type="XML-Eingangsschnittstelle-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / ausgangsschnittstelle-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

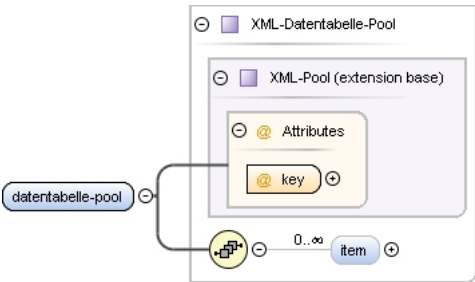
| Diagram | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|
| Type | XML-Ausgangsschnittstelle-Pool | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eingangsschnittstelle-Pool<ul style="list-style-type: none">XML-Ausgangsschnittstelle-Pool | | | | | | | | |
| Properties | content: complex | | | | | | | | |
| Model | item* | | | | | | | | |
| Children | item | | | | | | | | |
| Instance | <pre><ausgangsschnittstelle-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausgangsschnittstelle-pool></pre> | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| key | XML-Ref | required | | | | | | | |
| Source | <pre><xs:element name="ausgangsschnittstelle-pool" type="XML-Ausgangsschnittstelle-Pool"/></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | |

Element XML-PVTarifmodul / ausgangskontext-pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Ausgangskontext-Pool. It is a restriction base for XML-Pool. XML-Pool contains an attribute 'key' and a sequence of 'item' elements. The 'ausgangskontext-pool' element is shown in the schema namespace.</p> | | | |
| Type | XML-Ausgangskontext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangskontext-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausgangskontext-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausgangskontext-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="ausgangskontext-pool" type="XML-Ausgangskontext-Pool"/> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-PVTarifmodul / datentabelle-pool

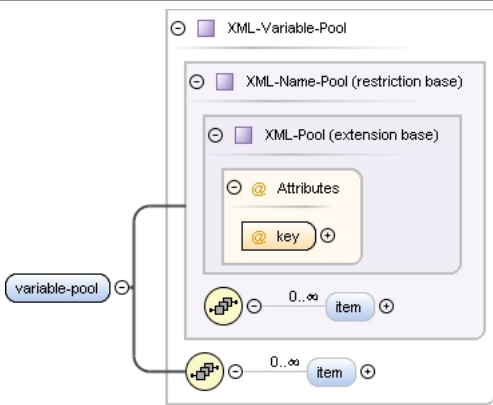
| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Datentabelle-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Datentabelle-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><datentabelle-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </datentabelle-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="datentabelle-pool" type="XML-Datentabelle-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / schritt-pool

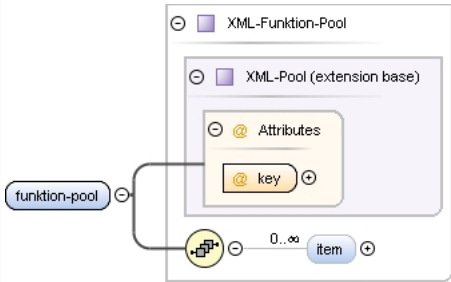
| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Schritt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Schritt-Pool | | | |
| Properties | content: | complex | | |
| Model | item+ | | | |
| Children | item | | | |
| Instance | <pre><schritt-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </schritt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="schritt-pool" type="XML-Schritt-Pool"/> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-PVTarifmodul / variable-pool

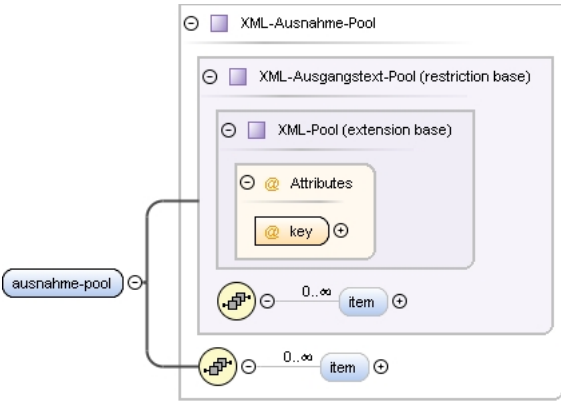
| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Variable-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool<ul style="list-style-type: none">XML-Variable-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><variable-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </variable-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="variable-pool" type="XML-Variable-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / funktion-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  <p>The diagram illustrates the structure of the XML-Funktion-Pool element. It is a container element (blue rounded rectangle) that contains an XML-Pool (extension base) (purple rounded rectangle). The XML-Pool contains an Attributes container (yellow rounded rectangle) with a key attribute (yellow rounded rectangle). The XML-Funktion-Pool also contains a sequence of 0..∞ items (yellow rounded rectangle) labeled 'item' (blue rounded rectangle).</p> |
| Type | XML-Funktion-Pool |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Funktion-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <funktion-pool key=" " xmlns="http://vdv/ka/pkm/2"> |

| | | | | |
|-----------------|---|-------------|------------|--|
| | <code><item>{0,unbounded}</item></code> <code></funktion-pool></code> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <code><xs:element name="funktion-pool" type="XML-Funktion-Pool"/></code> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / ausnahme-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Ausnahme-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Ausnahme-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausnahme-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausnahme-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausnahme-pool" type="XML-Ausnahme-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / auswahldaten-pool

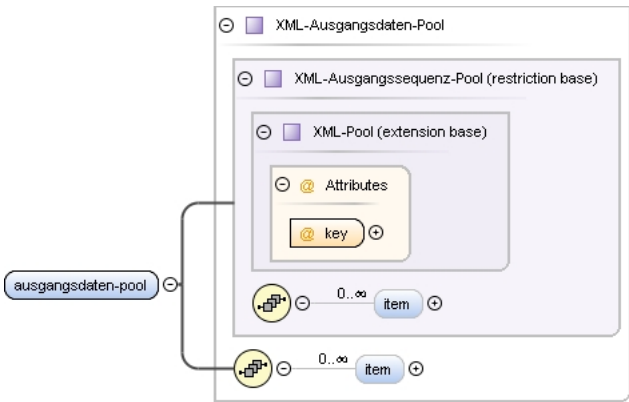
| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Auswahldaten-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangssequenz-Pool<ul style="list-style-type: none">XML-Auswahldaten-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><auswahldaten-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </auswahldaten-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="auswahldaten-pool" type="XML-Auswahldaten-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / auswahloption-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the hierarchical structure of the XML-Auswahloption-Pool. It is a restriction base of XML-Ausgangsdaten-Pool, which is a restriction base of XML-Ausgangssequenz-Pool, which is an extension base of XML-Pool. XML-Pool contains an Attributes container with a key attribute and three item elements (0..∞). XML-Auswahloption-Pool is connected to the key attribute.</p> | | | |
| Type | XML-Auswahloption-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangssequenz-Pool<ul style="list-style-type: none">XML-Ausgangsdaten-Pool<ul style="list-style-type: none">XML-Auswahloption-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><auswahloption-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </auswahloption-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="auswahloption-pool" type="XML-Auswahloption-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / ausgangsdaten-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Ausgangsdaten-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangssequenz-Pool<ul style="list-style-type: none">XML-Ausgangsdaten-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausgangsdaten-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausgangsdaten-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausgangsdaten-pool" type="XML-Ausgangsdaten-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / ausgangsdatenfamilie-pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-Ausgangsdatenfamilie-Pool. It is a nested structure: XML-Ausgangsdatenfamilie-Pool contains XML-Name-Pool (restriction base), which contains XML-Pool (extension base). XML-Pool contains an Attributes container with a key attribute. Below the Attributes container are two 'item' elements, each with a cardinality of 0..∞. The element is labeled 'ausgangsdatenfamilie-pool'.</p> |
| Type | XML-Ausgangsdatenfamilie-Pool |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool<ul style="list-style-type: none">XML-Ausgangsdatenfamilie-Pool |
| Properties | content: complex |
| Model | item* |

| | | | | |
|-----------------|--|---------|----------|--|
| Children | item | | | |
| Instance | <pre><ausgangsdatenfamilie-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausgangsdatenfamilie-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausgangsdatenfamilie-pool" type="XML-Ausgangsdatenfamilie-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / organisation-pool

| | | | |
|-----------------|---|---------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | <pre>graph LR OP[organisation-pool] -- "1..∞" --> I[item]</pre> | | |
| Type | XML-Organisation-Pool | | |
| Properties | content: | complex | |
| Model | item+ | | |
| Children | item | | |
| Instance | <pre><organisation-pool xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </organisation-pool></pre> | | |
| Source | <pre><xs:element name="organisation-pool" type="XML-Organisation-Pool"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-PVTarifmodul / efmprodukt-pool

| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-EFMProdukt-Pool. It shows a container 'efmprodukt-pool' containing a sequence of 'item' elements. The cardinality is 0..∞. The diagram also shows the internal structure of the 'item' elements, including 'Attributes' and 'key'.</p> | | | |
| Type | XML-EFMProdukt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eigenprodukt-Pool<ul style="list-style-type: none">XML-EFMProdukt-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><efmprodukt-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </efmprodukt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |

| | |
|-----------------|---|
| Source | <code><xs:element name="efmprodukt-pool" type="XML-EFMProdukt-Pool" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVTarifmodul / tarifprodukt-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | <pre>graph TD subgraph XML_Tarifprodukt_Pool [XML-Tarifprodukt-Pool] direction TB subgraph XML_Eigenprodukt_Pool [XML-Eigenprodukt-Pool (restriction base)] direction TB subgraph XML_Pool [XML-Pool (extension base)] direction TB Attributes["@Attributes"] key["@key"] end item1["0..∞ item"] end item2["0..∞ item"] end tarifprodukt_pool["tarifprodukt-pool"] --- item1 tarifprodukt_pool --- item2</pre> | | | | | | | | | | | |
| Type | XML-Tarifprodukt-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eigenprodukt-Pool<ul style="list-style-type: none">XML-Tarifprodukt-Pool | | | | | | | | | | | |
| Properties | content: | complex | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><tarifprodukt-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifprodukt-pool></pre> | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="tarifprodukt-pool" type="XML-Tarifprodukt-Pool" /></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-PVTarifmodul / fremdprodukt-pool

| | | | |
|----------------|---|---------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Fremdprodukt-Pool. It shows a hierarchy where XML-Fremdprodukt-Pool is a restriction base for XML-Pool. XML-Pool contains an @key attribute and a 0..∞ item. The diagram also shows the element 'fremdprodukt-pool' with a key attribute and a 0..∞ item.</p> | | |
| Type | XML-Fremdprodukt-Pool | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Fremdprodukt-Pool | | |
| Properties | content: | complex | |
| Model | item* | | |
| Children | item | | |
| Instance | <pre><fremdprodukt-pool key=" " xmlns="http://vdv/ka/pkm/2"></pre> | | |

| | | | | |
|-----------------|---|-------------|------------|--|
| | <code><item>{0,unbounded}</item></code> <code></fremdprodukt-pool></code> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <code><xs:element name="fremdprodukt-pool" type="XML-Fremdprodukt-Pool" /></code> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVtarifmodul / produktgruppe-pool

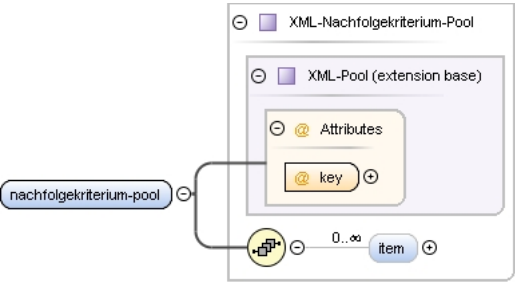
| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Produktgruppe-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Produktgruppe-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><produktgruppe-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </produktgruppe-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="produktgruppe-pool" type="XML-Produktgruppe-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVtarifmodul / kontingentierung-pool

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Kontingentierung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Kontingentierung-Pool | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><kontingentierung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </kontingentierung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="kontingentierung-pool" type="XML-Kontingentierung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / nachfolgekriterium-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Nachfolgekriterium-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Nachfolgekriterium-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><nachfolgekriterium-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </nachfolgekriterium-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="nachfolgekriterium-pool" type="XML-Nachfolgekriterium-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / abhaengigkeitskriterium-pool

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Abhaengigkeitskriterium-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Abhaengigkeitskriterium-Pool | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><abhaengigkeitskriterium-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </abhaengigkeitskriterium-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="abhaengigkeitskriterium-pool" type="XML-Abhaengigkeitskriterium-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / identifikationsparameter-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Identifikationsparameter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Identifikationsparameter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><identifikationsparameter-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </identifikationsparameter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="identifikationsparameter-pool" type="XML-Identifikationsparameter-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / tarifpunkt-pool

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |

| | | | | |
|-----------------|--|---------|----------|--|
| Type | XML-Tarifpunkt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaecheelement-Pool<ul style="list-style-type: none">XML-Tarifpunkt-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunkt-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunkt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunkt-pool" type="XML-Tarifpunkt-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / tarifpunktgruppe-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the UML structure of the XML-Tarifpunktgruppe-Pool type. It is a restriction base of XML-NameGruppe-Pool, which is an extension base of XML-Pool. XML-Pool contains an Attributes container with a key attribute. XML-Tarifpunktgruppe-Pool contains two item elements, each with a cardinality of 0..∞. A reference is shown from the key attribute to the first item element.</p> | | | |
| Type | XML-Tarifpunktgruppe-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Tarifpunktgruppe-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktgruppe-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunktgruppe-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunktgruppe-pool" type="XML-Tarifpunktgruppe-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / tarifpunktreferenz-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | <pre>graph TD Root((XML-Tarifpunktreferenz-Pool)) --> Base1[XML-Flaechenelement-Pool (restriction base)] Base1 --> Base2[XML-Pool (extension base)] Base2 --> Attr[Attributes] Base2 --> Item1[0..∞ item] Base2 --> Item2[0..∞ item] Attr --> Key[key]</pre> | | | |
| Type | XML-Tarifpunktreferenz-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaechenelement-Pool<ul style="list-style-type: none">XML-Tarifpunktreferenz-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktreferenz-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunktreferenz-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunktreferenz-pool" type="XML-Tarifpunktreferenz-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / zuordnungstyp-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-Zuordnungstyp-Pool. It is a UML class diagram showing the following hierarchy:</p> <ul style="list-style-type: none">XML-Zuordnungstyp-Pool (Root)<ul style="list-style-type: none">XML-Name-Pool (restriction base)<ul style="list-style-type: none">XML-Pool (extension base)<ul style="list-style-type: none">Attributes (Container)<ul style="list-style-type: none">key (Attribute)0..∞ item (Multiplicity and Name)0..∞ item (Multiplicity and Name) <p>The root element is labeled zuordnungstyp-pool.</p> |
| Type | XML-Zuordnungstyp-Pool |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool<ul style="list-style-type: none">XML-Zuordnungstyp-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <code><zuordnungstyp-pool key=" " xmlns="http://vdv/ka/pkm/2"></code> |

| | <code><item>{0,unbounded}</item></code> <code></zuordnungstyp-pool></code> | | | |
|-----------------|---|---------|----------|--|
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <code><xs:element name="zuordnungstyp-pool" type="XML-Zuordnungstyp-Pool"/></code> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / zuordnungsdaten-matrix

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-Zuordnungsdaten-Matrix. It is a container element named 'zuordnungsdaten-matrix' that contains two child elements, each labeled 'XML-Zuordnung-Matrix (restriction base)'. Each of these child elements contains a 'typ' element with a cardinality of '0..∞'.</p> |
| Type | XML-Zuordnungsdaten-Matrix |
| Type hierarchy | <ul style="list-style-type: none">XML-Zuordnung-MatrixXML-Zuordnungsdaten-Matrix |
| Properties | content: complex |
| Model | typ* |
| Children | typ |
| Instance | <pre><zuordnungsdaten-matrix xmlns="http://vdv/ka/pkm/2"> <typ ref="">{0,unbounded}</typ> </zuordnungsdaten-matrix></pre> |
| Source | <pre><xs:element name="zuordnungsdaten-matrix" type="XML-Zuordnungsdaten-Matrix" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVTarifmodul / zuordnungsausnahme-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <pre>graph LR subgraph Container [zuordnungsausnahme-matrix] direction TB subgraph Matrix1 [XML-Zuordnungsausnahme-Matrix] direction TB RB1((XML-Zuordnungsausnahme-Matrix (restriction base))) RB1 --- C1((0..∞)) C1 --- T1((typ)) end subgraph Matrix2 [XML-Zuordnungsausnahme-Matrix] direction TB RB2((XML-Zuordnungsausnahme-Matrix (restriction base))) RB2 --- C2((0..∞)) C2 --- T2((typ)) end end</pre> |
| Type | XML-Zuordnungsausnahme-Matrix |
| Type hierarchy | <ul style="list-style-type: none">XML-Zuordnung-Matrix<ul style="list-style-type: none">XML-Zuordnungsausnahme-Matrix |
| Properties | content: complex |
| Model | typ* |
| Children | typ |
| Instance | <pre><zuordnungsausnahme-matrix xmlns="http://vdv/ka/pkm/2"> <typ ref="">{0,unbounded}</typ> </zuordnungsausnahme-matrix></pre> |
| Source | <pre><xs:element name="zuordnungsausnahme-matrix" type="XML-Zuordnungsausnahme-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVTarifmodul / wegevariante-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Wegevariante-Pool. It is a complex type that contains a restriction base (XML-Flaecheelement-Pool) and an extension base (XML-Pool). The XML-Pool contains a sequence of 0..∞ 'item' elements. The XML-Flaecheelement-Pool contains an Attributes group with a key attribute. The diagram also shows the 'wegevariante-pool' element in the namespace.</p> | | | |
| Type | XML-Wegevariante-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaecheelement-Pool<ul style="list-style-type: none">XML-Wegevariante-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><wegevariante-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </wegevariante-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="wegevariante-pool" type="XML-Wegevariante-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / bewertungstyp-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-Bewertungstyp-Pool. It is a nested hierarchy: XML-Bewertungstyp-Pool (root) contains XML-Name-Pool (restriction base), which contains XML-Pool (extension base). XML-Pool contains an Attributes group with a key attribute. XML-Pool also contains a sequence of 0..∞ 'item' elements. The diagram also shows the 'bewertungstyp-pool' element in the namespace.</p> |
| Type | XML-Bewertungstyp-Pool |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool<ul style="list-style-type: none">XML-Bewertungstyp-Pool |
| Properties | content: complex |
| Model | item* |

| | | | | |
|-----------------|---|---------|----------|--|
| Children | item | | | |
| Instance | <pre><bewertungstyp-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bewertungstyp-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bewertungstyp-pool" type="XML-Bewertungstyp-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / bewertungsdaten-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Bewertungsdaten-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Bewertungsdaten-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bewertungsdaten-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bewertungsdaten-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bewertungsdaten-pool" type="XML-Bewertungsdaten-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / bewertungsdaten-matrix

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <pre>graph LR subgraph XML_Bewertungsdaten_Matrix [XML-Bewertungsdaten-Matrix] subgraph XML_Bewertung_Matrix_restriction_base [XML-Bewertung-Matrix (restriction base)] typ1((typ)) typ2((typ)) end end XML_Bewertungsdaten_Matrix --- typ1 XML_Bewertungsdaten_Matrix --- typ2</pre> |
| Type | XML-Bewertungsdaten-Matrix |
| Type hierarchy | <ul style="list-style-type: none">XML-Bewertung-Matrix<ul style="list-style-type: none">XML-Bewertungsdaten-Matrix |
| Properties | content: complex |
| Model | typ* |
| Children | typ |
| Instance | <code><bewertungsdaten-matrix xmlns="http://vdv/ka/pkm/2"></code> |

| | |
|-----------------|---|
| | <code><typ ref="">{0,unbounded}</typ></code> <code></bewertungsdaten-matrix></code> |
| Source | <code><xs:element name="bewertungsdaten-matrix" type="XML-Bewertungsdaten-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVTarifmodul / bewertungsausnahme-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Bewertungsausnahme-Matrix |
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertung-Matrix XML-Bewertungsausnahme-Matrix |
| Properties | content: complex |
| Model | typ* |
| Children | typ |
| Instance | <code><bewertungsausnahme-matrix xmlns="http://vdv/ka/pkm/2"></code> <code><typ ref="">{0,unbounded}</typ></code> <code></bewertungsausnahme-matrix></code> |
| Source | <code><xs:element name="bewertungsausnahme-matrix" type="XML-Bewertungsausnahme-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVTarifmodul / linie-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | |
|-----------------|---|----------|------|-----|-----|---------|----------|--|--|--|
| Diagram | | | | | | | | | | |
| Type | XML-Linie-Pool | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Linie-Pool | | | | | | | | | |
| Properties | content: | complex | | | | | | | | |
| Model | item* | | | | | | | | | |
| Children | item | | | | | | | | | |
| Instance | <pre><linie-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </linie-pool></pre> | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td></tr></tbody></table> | QName | Type | Use | key | XML-Ref | required | | | |
| QName | Type | Use | | | | | | | | |
| key | XML-Ref | required | | | | | | | | |
| Source | <pre><xs:element name="linie-pool" type="XML-Linie-Pool"/></pre> | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | |

Element XML-PVTarifmodul / verkehrsmitteltyp-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Verkehrsmitteltyp-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Linie-Pool<ul style="list-style-type: none">XML-Verkehrsmitteltyp-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><verkehrsmitteltyp-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </verkehrsmitteltyp-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="verkehrsmitteltyp-pool" type="XML-Verkehrsmitteltyp-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / verkehrsmittellinienbezug-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-Verkehrsmittellinienbezug-Pool element. It is a complex type with a restriction base of XML-Name-Pool and an extension base of XML-Pool. The XML-Pool contains a key attribute. The diagram also shows two 'item' elements with cardinality 0..∞. A line connects the 'verkehrsmittellinienbezug-pool' label to the XML-Verkehrsmittellinienbezug-Pool box.</p> |
| Type | XML-Verkehrsmittellinienbezug-Pool |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool<ul style="list-style-type: none">XML-Verkehrsmittellinienbezug-Pool |
| Properties | content: complex |
| Model | item* |

| | | | | |
|-----------------|--|---------|----------|--|
| Children | item | | | |
| Instance | <pre><verkehrsmittellinienbezug-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </verkehrsmittellinienbezug-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="verkehrsmittellinienbezug-pool" type="XML-Verkehrsmittellinienbezug-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / bezahlart-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Bezahlart-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Bezahlart-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bezahlart-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bezahlart-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bezahlart-pool" type="XML-Bezahlart-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / waehrung-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-Waehrung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangstext-Pool XML-Waehrung-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><waehrung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </waehrung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="waehrung-pool" type="XML-Waehrung-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / zahlungsintervall-pool

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Zahlungsintervall-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangstext-Pool XML-Zahlungsintervall-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><zahlungsintervall-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item></pre> | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| | </zahlungsintervall-pool> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="zahlungsintervall-pool" type="XML-Zahlungsintervall-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / mitnahmetyp-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Mitnahmetyp-Pool. It is a complex type that contains a sequence of 0..∞ items. The items are of type XML-Ausgangstext-Pool, which is a restriction base. XML-Ausgangstext-Pool contains a sequence of 0..∞ items of type XML-Pool, which is an extension base. XML-Pool contains a key attribute and a sequence of 0..∞ items. The diagram also shows a mitnahmetyp-pool element with a key attribute and a sequence of 0..∞ items.</p> | | | |
| Type | XML-Mitnahmetyp-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Mitnahmetyp-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><mitnahmetyp-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </mitnahmetyp-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="mitnahmetyp-pool" type="XML-Mitnahmetyp-Pool" /> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / rabattmedientyp-pool

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |

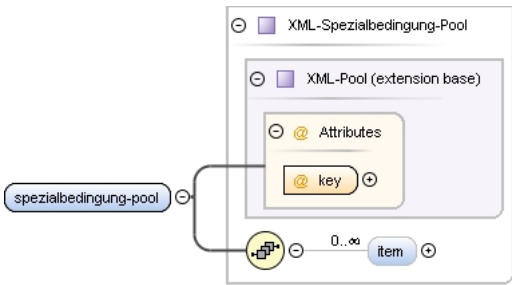
| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Rabattmedientyp-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Rabattmedientyp-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><rabattmedientyp-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </rabattmedientyp-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="rabattmedientyp-pool" type="XML-Rabattmedientyp-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / modulkontext-pool

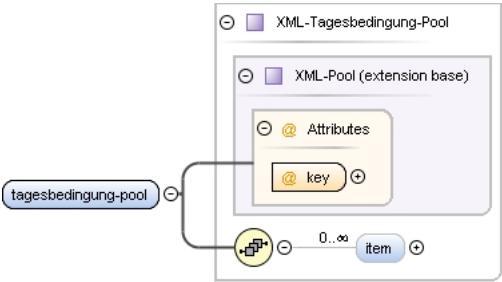
| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Modulkontext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Modulkontext-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><modulkontext-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </modulkontext-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="modulkontext-pool" type="XML-Modulkontext-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / spezialbedingung-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram |  | | | |
| Type | XML-Spezialbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Spezialbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><spezialbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </spezialbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="spezialbedingung-pool" type="XML-Spezialbedingung-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVtarifmodul / tagesbedingung-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | XML-Tagesbedingung-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tagesbedingung-Pool | | | | | | | | | | | |
| Properties | content: | complex | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Instance | <pre><tagesbedingung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tagesbedingung-pool></pre> | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="tagesbedingung-pool" type="XML-Tagesbedingung-Pool" /></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-PVtarifmodul / tageszeitbedingung-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | | | | |
| Type | XML-Tageszeitbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tageszeitbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tageszeitbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tageszeitbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tageszeitbedingung-pool" type="XML-Tageszeitbedingung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / zeitraumbedingung-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Zeitraumbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Zeitraumbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><zeitraumbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </zeitraumbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="zeitraumbedingung-pool" type="XML-Zeitraumbedingung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / tarifpunktbedingung-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | <pre>classDiagram class XML_Tarifpunktbedingung_Pool { +XML_Pool extension base +Attributes +key +item 0..∞ } class XML_Pool { <<extension base>> } XML_Tarifpunktbedingung_Pool -- > XML_Pool XML_Tarifpunktbedingung_Pool --> XML_Pool : 0..∞ XML_Tarifpunktbedingung_Pool --> XML_Pool : item</pre> | | | |
| Type | XML-Tarifpunktbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tarifpunktbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktbedingung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunktbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunktbedingung-pool" type="XML-Tarifpunktbedingung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PV**Tarifmodul** / **bewertungsbedingung-pool**

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Bewertungsbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Bewertungsbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bewertungsbedingung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bewertungsbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bewertungsbedingung-pool" type="XML-Bewertungsbedingung-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PV**Tarifmodul** / **geosegmentbedingung-pool**

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-Geosegmentbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Geosegmentbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><geosegmentbedingung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </geosegmentbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="geosegmentbedingung-pool" type="XML-Geosegmentbedingung-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / verkehrsmittellinienbedingung-pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Verkehrsmittellinienbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Verkehrsmittellinienbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><verkehrsmittellinienbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </verkehrsmittellinienbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="verkehrsmittellinienbedingung-pool" type="XML-Verkehrsmittellinienbedingung-Pool" /></pre> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-PVTarifmodul / bezahlartbedingung-pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|
| Diagram | | | | | | | | | |
| Type | XML-Bezahlartbedingung-Pool | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Bezahlartbedingung-Pool | | | | | | | | |
| Properties | content: complex | | | | | | | | |
| Model | item* | | | | | | | | |
| Children | item | | | | | | | | |
| Instance | <pre><bezahlartbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bezahlartbedingung-pool></pre> | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| key | XML-Ref | required | | | | | | | |
| Source | <pre><xs:element name="bezahlartbedingung-pool" type="XML-Bezahlartbedingung-Pool"/></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | |

Element XML-PVTarifmodul / zahlungsintervallbedingung-pool

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Zahlungsintervallbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-NameGruppe-Pool XML-Zahlungsintervallbedingung-Pool | | | |

| | | | | |
|-----------------|--|---------|----------|--|
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><zahlungsintervallbedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </zahlungsintervallbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="zahlungsintervallbedingung-pool" type="XML-Zahlungsintervallbedingung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / mitnahmebedingung-pool

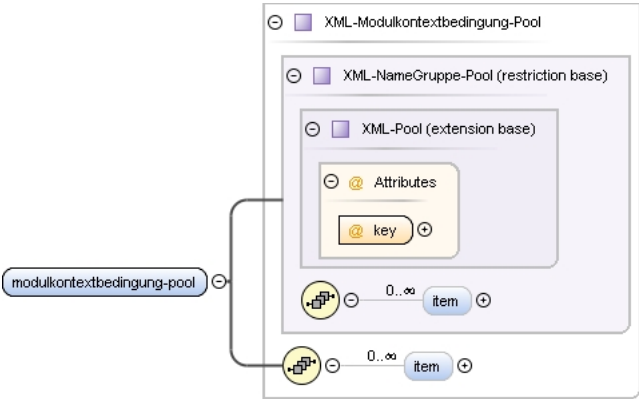
| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Mitnahmebedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Mitnahmebedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><mitnahmebedingung-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </mitnahmebedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="mitnahmebedingung-pool" type="XML-Mitnahmebedingung-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / rabattmedienbedingung-pool

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Rabattmedienbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Rabattmedienbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><rabattmedienbedingung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </rabattmedienbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="rabattmedienbedingung-pool" type="XML-Rabattmedienbedingung-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / modulkontextbedingung-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Modulkontextbedingung-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Modulkontextbedingung-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><modulkontextbedingung-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </modulkontextbedingung-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="modulkontextbedingung-pool" type="XML-Modulkontextbedingung-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / bifainterpretation-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-BIFAInterpretation-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-BIFAInterpretation-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bifainterpretation-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bifainterpretation-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bifainterpretation-pool" type="XML-BIFAInterpretation-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / nummerninterpretation-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Nummerninterpretation-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Nummerninterpretation-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><nummerninterpretation-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </nummerninterpretation-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="nummerninterpretation-pool" type="XML-Nummerninterpretation-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / bitleisteninterpretation-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-Bitleisteninterpretation-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Bitleisteninterpretation-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><bitleisteninterpretation-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </bitleisteninterpretation-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="bitleisteninterpretation-pool" type="XML-Bitleisteninterpretation-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / raumnummerninterpretation-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Raumnummerninterpretation-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Raumnummerninterpretation-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><raumnummerninterpretation-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </raumnummerninterpretation-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="raumnummerninterpretation-pool" type="XML-Raumnummerninterpretation-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / schluessel-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | <p>The diagram illustrates the structure of the XML-Schluessel-Pool. It is a restriction base containing an XML-NrName-Pool (extension base). This pool contains an XML-Pool (extension base). The XML-Pool contains an @key attribute and a sequence of 0..∞ 'item' elements. The 'schluessel-pool' element is linked to this structure.</p> | | | |
| Type | XML-Schluessel-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Schluessel-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><schluessel-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </schluessel-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="schluessel-pool" type="XML-Schluessel-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-PVTarifmodul / kommentar-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Kommentar-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><kommentar-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </kommentar-pool></pre> |
| Source | <pre><xs:element name="kommentar-pool" type="XML-Kommentar-Pool" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVTarifmodul / signatur

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Signatur-Part | | | |

| | |
|-----------------|---|
| Properties | content: complex |
| Model | type , data |
| Children | data, type |
| Instance | <pre><signatur xmlns="http://vdv/ka/pkm/2"> <type>{1,1}</type> <data>{1,1}</data> </signatur></pre> |
| Source | <pre><xs:element name="signatur" type="XML-Signatur-Part"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-PVTarifmodul / annotation

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Annotation-Part |
| Properties | content: complex |
| Model | data* |
| Children | data |
| Instance | <pre><annotation xmlns="http://vdv/ka/pkm/2"> <data>{0,unbounded}</data> </annotation></pre> |
| Source | <pre><xs:element name="annotation" type="XML-Annotation-Part"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / preisanpassung-matrix


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Preisanpassung-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><preisanpassung-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </preisanpassung-matrix></pre> |
| Source | <pre><xs:element name="preisanpassung-matrix" type="XML-Preisanpassung-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Preisanpassung-Matrix / a


| | |
|-------------|---------------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach erstem Attribut} |
| Diagram | |

| | | | | |
|-----------------|--|---------|-----------|--|
| Type | XML-Preisanpassung-Entry | | | |
| Properties | content: | | complex | |
| | minOccurs: | | 0 | |
| | maxOccurs: | | unbounded | |
| Model | betrag+ | | | |
| Children | betrag | | | |
| Instance | <pre> <betrags>{1,unbounded}</betrags> </pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:element name="a" type="XML-Preisanpassung-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Preisanpassung-Entry / betrag

| | | | |
|-----------------|---|-----------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  | | |
| Type | XML-IntegerValue | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:long<ul style="list-style-type: none">• XML-IntegerContent<ul style="list-style-type: none">• XML-IntegerValue | | |
| Properties | content: | complex | |
| | maxOccurs: | unbounded | |
| Source | <xs:element name="betrag" type="XML-IntegerValue" maxOccurs="unbounded" /> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Tarifmodul-Item / modulkontextadapter-matrix

| | | | |
|-----------------|---|---------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  | | |
| Type | XML-Eingangsadapter-Matrix | | |
| Properties | content: | complex | |
| Model | e* | | |
| Children | e | | |
| Instance | <pre><modulkontextadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref=" " >{0,unbounded}</e> </modulkontextadapter-matrix></pre> | | |
| Source | <pre><xs:element name="modulkontextadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Eingangsadapter-Matrix / e

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
|-----------|---------------------|--|--|--|

| Annotations | {Sortiert nach erstem Attribut} | | | | | | | | | | | |
|-----------------|---|----------|------|-----|----------|---------|------------|----------|------------|-----------|--|--|
| Diagram | | | | | | | | | | | | |
| Type | XML-Eingangsadapter-Entry | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:int<ul style="list-style-type: none">• XML-Ref<ul style="list-style-type: none">• XML-Eingangsadapter-Entry | | | | | | | | | | | |
| Properties | <table><tr><td>content:</td><td>complex</td></tr><tr><td>minOccurs:</td><td>0</td></tr><tr><td>maxOccurs:</td><td>unbounded</td></tr></table> | | | | content: | complex | minOccurs: | 0 | maxOccurs: | unbounded | | |
| content: | complex | | | | | | | | | | | |
| minOccurs: | 0 | | | | | | | | | | | |
| maxOccurs: | unbounded | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:element name="e" type="XML-Eingangsadapter-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Element XML-Tarifmodul-Item / produkteingangsadapter-matrix

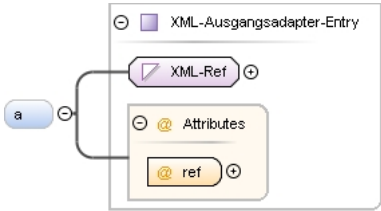
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><produkteingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="" {0,unbounded}</e> </produkteingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="produkteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / produktausgangsadapter-matrix


| | |
|------------|----------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |

| | |
|-----------------|---|
| Instance | <pre><produktausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </produktausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="produktausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Ausgangsadapter-Matrix / a

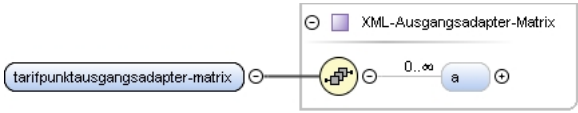
| | | | |
|-----------------|---|-----------|----------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |
| Diagram |  | | |
| Type | XML-Ausgangsadapter-Entry | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Ausgangsadapter-Entry | | |
| Properties | content: | complex | |
| | minOccurs: | 0 | |
| | maxOccurs: | unbounded | |
| Attributes | QName | Type | Use |
| | ref | XML-Ref | required |
| Source | <pre><xs:element name="a" type="XML-Ausgangsadapter-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Tarifmodul-Item / tarifpunkteingangsadapter-matrix

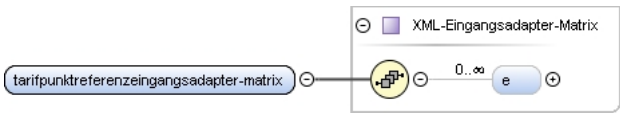
| | | | |
|-----------------|---|---------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  | | |
| Type | XML-Eingangsadapter-Matrix | | |
| Properties | content: | complex | |
| Model | e* | | |
| Children | e | | |
| Instance | <pre><tarifpunkteingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="">{0,unbounded}</e> </tarifpunkteingangsadapter-matrix></pre> | | |
| Source | <pre><xs:element name="tarifpunkteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Tarifmodul-Item / tarifpunktausgangsadapter-matrix

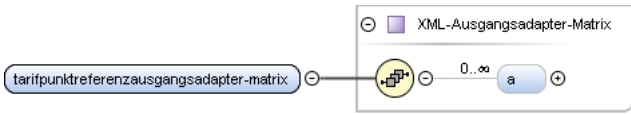
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><tarifpunktausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </tarifpunktausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="tarifpunktausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

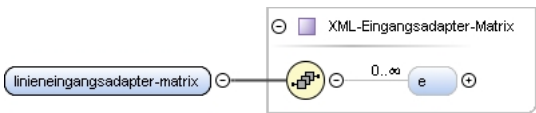
Element XML-Tarifmodul-Item / tarifpunktreferenzeingangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><tarifpunktreferenzeingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="">{0,unbounded}</e> </tarifpunktreferenzeingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="tarifpunktreferenzeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / tarifpunktreferenzausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><tarifpunktreferenzausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </tarifpunktreferenzausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="tarifpunktreferenzausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / linieneingangsadapter-matrix

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|---|
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><linieneingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="">{0,unbounded}</e> </linieneingangsadapter-matrix></pre> |
| Source | <code><xs:element name="linieneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / linienausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><linienausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </linienausgangsadapter-matrix></pre> |
| Source | <code><xs:element name="linienausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / verkehrsmitteltypeingangsadapter-matrix

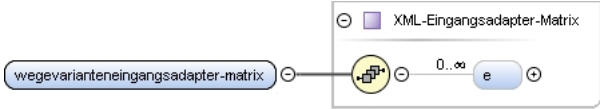
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><verkehrsmitteltypeingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="">{0,unbounded}</e> </verkehrsmitteltypeingangsadapter-matrix></pre> |
| Source | <code><xs:element name="verkehrsmitteltypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / verkehrsmitteltypausgangsadapter-matrix


| | |
|------------|----------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |

| | |
|-----------------|---|
| Model | a* |
| Children | a |
| Instance | <pre><verkehrsmitteltypausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </verkehrsmitteltypausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="verkehrsmitteltypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

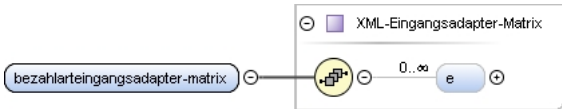
Element XML-Tarifmodul-Item / wegevarianteneingangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><wegevarianteneingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="">{0,unbounded}</e> </wegevarianteneingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="wegevarianteneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / wegevariantenausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><wegevariantenausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </wegevariantenausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="wegevariantenausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / bezahlarteingangsadapter-matrix

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |

| | |
|-----------------|---|
| Instance | <pre><bezahlarteingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="">{0,unbounded}</e> </bezahlarteingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="bezahlarteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / bezahlartausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><bezahlartausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </bezahlartausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="bezahlartausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / waehrungseingangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><waehrungseingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="">{0,unbounded}</e> </waehrungseingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="waehrungseingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / waehrungsausgangsadapter-matrix

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><waehrungsausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </waehrungsausgangsadapter-matrix></pre> |

| | |
|-----------------|---|
| Source | <code><xs:element name="waehrungsausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / zahlungsintervalleingangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><zahlungsintervalleingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="">{0,unbounded}</e> </zahlungsintervalleingangsadapter-matrix></pre> |
| Source | <code><xs:element name="zahlungsintervalleingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

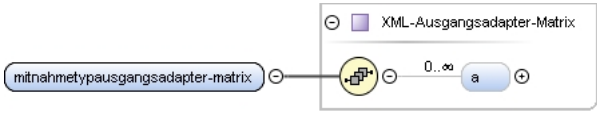
Element XML-Tarifmodul-Item / zahlungsintervallausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><zahlungsintervallausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </zahlungsintervallausgangsadapter-matrix></pre> |
| Source | <code><xs:element name="zahlungsintervallausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

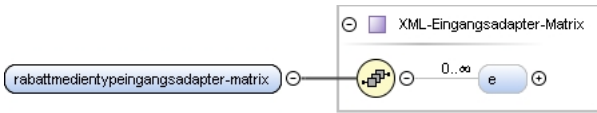
Element XML-Tarifmodul-Item / mitnahmetypeingangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><mitnahmetypeingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="">{0,unbounded}</e> </mitnahmetypeingangsadapter-matrix></pre> |
| Source | <code><xs:element name="mitnahmetypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

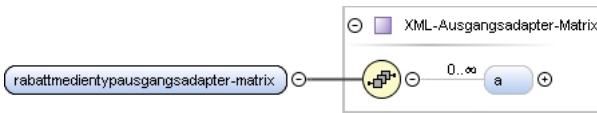
Element XML-Tarifmodul-Item / mitnahmetypausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><mitnahmetypausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </mitnahmetypausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="mitnahmetypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / rabattmedientypeingangsadapter-matrix

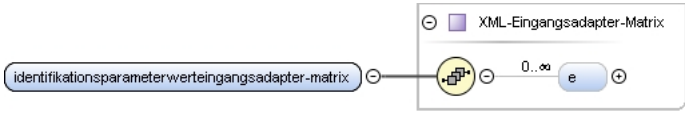
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><rabattmedientypeingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="">{0,unbounded}</e> </rabattmedientypeingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="rabattmedientypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / rabattmedientypausgangsadapter-matrix

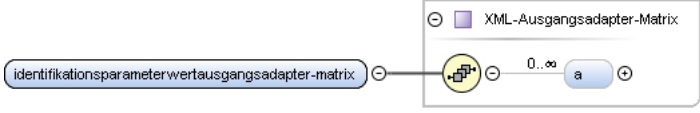
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><rabattmedientypausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </rabattmedientypausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="rabattmedientypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / identifikationsparameterwerteingangsadapter-matrix

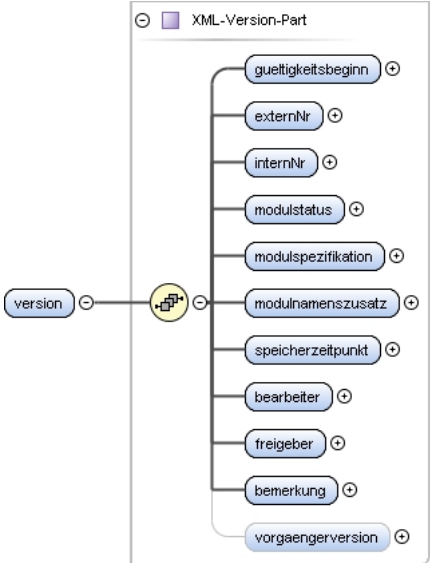
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | XML-Eingangsadapter-Matrix |
| Properties | content: complex |
| Model | e* |
| Children | e |
| Instance | <pre><identifikationsparameterwerteingangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> <e ref="">{0,unbounded}</e> </identifikationsparameterwerteingangsadapter-matrix></pre> |
| Source | <pre><xs:element name="identifikationsparameterwerteingangsadapter-matrix" type="XML-Eingangsadapter- Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Tarifmodul-Item / identifikationsparameterwertausgangsadapter-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Ausgangsadapter-Matrix |
| Properties | content: complex |
| Model | a* |
| Children | a |
| Instance | <pre><identifikationsparameterwertausgangsadapter-matrix xmlns="http://vdv/ka/pkm/2"> {0,unbounded} </identifikationsparameterwertausgangsadapter-matrix></pre> |
| Source | <pre><xs:element name="identifikationsparameterwertausgangsadapter-matrix" type="XML-Ausgangsadapter- Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-RNTarifmodul / version

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|--|
| Type | XML-Version-Part |
| Properties | content: complex |
| Model | gueltigkeitsbeginn , externNr , internNr , modulstatus , modulspezifikation , modulnamenszusatz , speicherzeitpunkt , bearbeiter , freigeber , bemerkung , vorgaengerversion {0,1} |
| Children | bearbeiter, bemerkung, externNr, freigeber, gueltigkeitsbeginn, internNr, modulnamenszusatz, modulspezifikation, modulstatus, speicherzeitpunkt, vorgaengerversion |
| Instance | <pre><version xmlns="http://vdv/ka/pkm/2"> <gueltigkeitsbeginn>{1,1}</gueltigkeitsbeginn> <externNr>{1,1}</externNr> <internNr>{1,1}</internNr> <modulstatus>{1,1}</modulstatus> <modulspezifikation>{1,1}</modulspezifikation> <modulnamenszusatz>{1,1}</modulnamenszusatz> <speicherzeitpunkt>{1,1}</speicherzeitpunkt> <bearbeiter>{1,1}</bearbeiter> <freigeber>{1,1}</freigeber> <bemerkung>{1,1}</bemerkung> <vorgaengerversion>{0,1}</vorgaengerversion> </version></pre> |
| Source | <xs:element name="version" type="XML-Version-Part" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-RNTarifmodul / herausgeber

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Organisation-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Organisation-Part |
| Properties | content: complex |
| Model | nr , name |
| Children | name, nr |
| Instance | <pre><herausgeber xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> </herausgeber></pre> |
| Source | <xs:element name="herausgeber" type="XML-Organisation-Part" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-RNTarifmodul / fachablauf


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | XML-RNFachablauf-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Fachablauf-Part XML-RNFachablauf-Part |
| Properties | content: complex |
| Model | produktermittlungsstart |
| Children | produktermittlungsstart |
| Instance | <pre><fachablauf xmlns="http://vdv/ka/pkm/2"> <produktermittlungsstart>{1,1}</produktermittlungsstart> </fachablauf></pre> |
| Source | <code><xs:element name="fachablauf" type="XML-RNFachablauf-Part"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

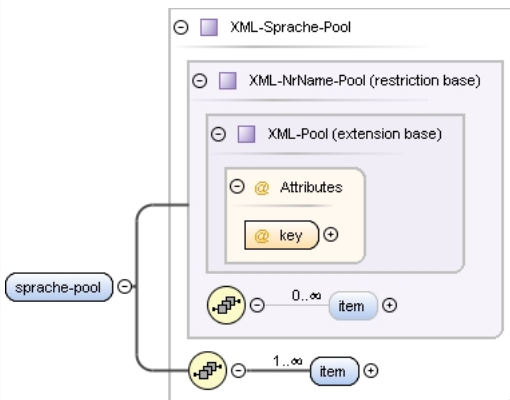
Element XML-RNFachablauf-Part / produktermittlungsstart

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Ref11 |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Properties | content: complex |
| Model | ref |
| Children | ref |
| Instance | <pre><produktermittlungsstart xmlns="http://vdv/ka/pkm/2"> <ref>{1,1}</ref> </produktermittlungsstart></pre> |
| Source | <code><xs:element name="produktermittlungsstart" type="XML-Ref11"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-RNTarifmodul / text-matrix

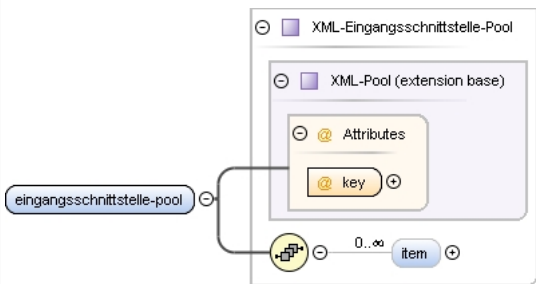
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows the 'text-matrix' element containing an 'XML-Ausgangstext-Matrix' container. This container holds a 'text' element with a cardinality of 0..∞. |
| Type | XML-Ausgangstext-Matrix |
| Properties | content: complex |
| Model | text* |
| Children | text |
| Instance | <pre><text-matrix xmlns="http://vdv/ka/pkm/2"> <text ref="" {0, unbounded}</text> </text-matrix></pre> |
| Source | <pre><xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-RNTarifmodul / sprache-pool

| | | | | |
|-----------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  <p>The diagram illustrates the structure of the XML-Sprache-Pool element. It is a container element (indicated by a circle with a minus sign) that contains a complex content (indicated by a circle with a plus sign). The content is composed of an XML-NrName-Pool (restriction base) and an XML-Pool (extension base). The XML-NrName-Pool contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-Sprache-Pool element contains an XML-Pool (extension base) and an XML-NrName-Pool (restriction base). The XML-Pool (extension base) contains an XML-Sprache-Pool element, which is a complex content element. The XML-NrName-Pool (restriction base) contains an XML-Sprache-Pool element</p> | | | |

Element XML-RNTarifmodul / eingangsschnittstelle-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram |  | | | |
| Type | XML-Eingangsschnittstelle-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eingangsschnittstelle-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><eingangsschnittstelle-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </eingangsschnittstelle-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="eingangsschnittstelle-pool" type="XML-Eingangsschnittstelle-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / ausgangsschnittstelle-pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Ausgangsschnittstelle-Pool. It is a container that holds two main components: XML-Eingangsschnittstelle-Pool (restriction base) and XML-Pool (extension base). The XML-Eingangsschnittstelle-Pool contains an Attributes section with a key attribute. The XML-Pool contains a sequence of item elements, each with a multiplicity of 0..∞. A label 'ausgangsschnittstelle-pool' points to the container.</p> | | | |
| Type | XML-Ausgangsschnittstelle-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eingangsschnittstelle-Pool<ul style="list-style-type: none">XML-Ausgangsschnittstelle-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausgangsschnittstelle-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausgangsschnittstelle-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausgangsschnittstelle-pool" type="XML-Ausgangsschnittstelle-Pool" /></pre> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-RNTarifmodul / ausgangskontext-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Ausgangskontext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangskontext-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausgangskontext-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausgangskontext-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausgangskontext-pool" type="XML-Ausgangskontext-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / datentabelle-pool

| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Datentabelle-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Datentabelle-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><datentabelle-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </datentabelle-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="datentabelle-pool" type="XML-Datentabelle-Pool"/></pre> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-RNTarifmodul / schritt-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Schritt-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Schritt-Pool | | | |
| Properties | content: complex | | | |
| Model | item+ | | | |
| Children | item | | | |
| Instance | <pre><schritt-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </schritt-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="schritt-pool" type="XML-Schritt-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / variable-pool

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Variable-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Name-Pool XML-Variable-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Instance | <pre><variable-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </variable-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="variable-pool" type="XML-Variable-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / funktion-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Funktion-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Funktion-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><funktion-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </funktion-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="funktion-pool" type="XML-Funktion-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / ausnahme-pool

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Ausnahme-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| | <ul style="list-style-type: none">XML-Ausgangstext-PoolXML-Ausnahme-Pool | | | |
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausnahme-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausnahme-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausnahme-pool" type="XML-Ausnahme-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / auswahldaten-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Auswahldaten-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangssequenz-Pool<ul style="list-style-type: none">XML-Auswahldaten-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><auswahldaten-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </auswahldaten-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="auswahldaten-pool" type="XML-Auswahldaten-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / auswahloption-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

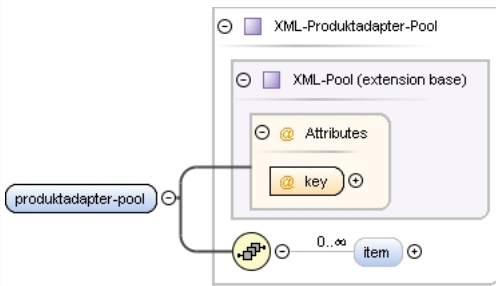
| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | | | | |
| Type | XML-Auswahloption-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangssequenz-Pool<ul style="list-style-type: none">XML-Ausgangsdaten-Pool<ul style="list-style-type: none">XML-Auswahloption-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><auswahloption-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </auswahloption-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="auswahloption-pool" type="XML-Auswahloption-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / ausgangsdaten-pool

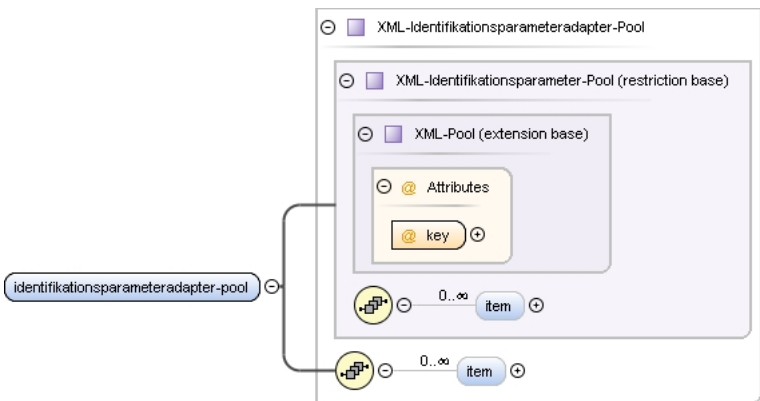
| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Ausgangsdaten-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Ausgangssequenz-Pool <ul style="list-style-type: none"> XML-Ausgangsdaten-Pool | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><ausgangsdaten-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </ausgangsdaten-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="ausgangsdaten-pool" type="XML-Ausgangsdaten-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / produktadapter-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | XML-Produktadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Produktadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><produktadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </produktadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="produktadapter-pool" type="XML-Produktadapter-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / identifikationsparameteradapter-pool

| | | | | |
|-----------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  <p>The diagram shows the structure of the XML-Identifikationsparameteradapter-Pool element. It is a container for an XML-Identifikationsparameter-Pool (restriction base). The XML-Identifikationsparameter-Pool contains an XML-Pool (extension base). The XML-Pool contains an Attributes container with a key attribute. The XML-Identifikationsparameteradapter-Pool also contains a key attribute and a sequence of item elements (0..∞).</p> | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | XML-Identifikationsparameteradapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Identifikationsparameter-Pool<ul style="list-style-type: none">XML-Identifikationsparameteradapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><identifikationsparameteradapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </identifikationsparameteradapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="identifikationsparameteradapter-pool" type="XML-Identifikationsparameteradapter-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / tarifpunktadapter-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the UML structure of the XML-Tarifpunktadapter-Pool. It is a complex type with a restriction base XML-Flaecheelement-Pool and an extension base XML-Pool. The XML-Pool base has an attribute key and a cardinality of 0..∞. The XML-Flaecheelement-Pool base has a cardinality of 0..∞. The XML-Tarifpunktadapter-Pool has a cardinality of 0..∞ and is connected to the XML-Flaecheelement-Pool base.</p> | | | |
| Type | XML-Tarifpunktadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaecheelement-Pool<ul style="list-style-type: none">XML-Tarifpunktadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunktadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunktadapter-pool" type="XML-Tarifpunktadapter-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / tarifpunktreferenzadapter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | XML-Tarifpunktreferenzadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaecheelement-Pool<ul style="list-style-type: none">XML-Tarifpunktadapter-Pool<ul style="list-style-type: none">XML-Tarifpunktreferenzadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifpunktreferenzadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifpunktreferenzadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifpunktreferenzadapter-pool" type="XML-Tarifpunktreferenzadapter-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / wegevariantenadapter-pool

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Wegevariantenadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Flaecheelement-Pool XML-Wegevariantenadapter-Pool | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><wegevariantenadapter-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </wegevariantenadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="wegevariantenadapter-pool" type="XML-Wegevariantenadapter-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / linienadapter-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Linienadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Linienadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><linienadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </linienadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="linienadapter-pool" type="XML-Linienadapter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / verkehrsmitteltypadapter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram | <pre>classDiagram class XMLVerkehrsmitteltypadapterPool { XMLAusgangstextPool XML-Ausgangstext-Pool (restriction base) XMLPool XML-Pool (extension base) } class XMLAusgangstextPool { XMLPool XML-Pool (extension base) } class XMLPool { Attributes key item 0..∞ } class Attributes { key } XMLVerkehrsmitteltypadapterPool -- XMLAusgangstextPool XMLAusgangstextPool -- XMLPool XMLPool -- Attributes XMLPool -- item</pre> | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|
| Type | XML-Verkehrsmitteltypadapter-Pool | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Verkehrsmitteltypadapter-Pool | | | | | | | | |
| Properties | content: complex | | | | | | | | |
| Model | item* | | | | | | | | |
| Children | item | | | | | | | | |
| Instance | <pre><verkehrsmitteltypadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </verkehrsmitteltypadapter-pool></pre> | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| key | XML-Ref | required | | | | | | | |
| Source | <pre><xs:element name="verkehrsmitteltypadapter-pool" type="XML-Verkehrsmitteltypadapter-Pool"/></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | |

Element XML-RNTarifmodul / bezahlartadapter-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-Bezahlartadapter-Pool. It is a complex type that contains an XML-Ausgangstext-Pool (restriction base). This base type contains an XML-Pool (extension base). The XML-Pool contains an Attributes group with a key attribute and a sequence of 0..∞ 'item' elements. The root element is connected to the 'item' sequence.</p> |
| Type | XML-Bezahlartadapter-Pool |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Bezahlartadapter-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><bezahlartadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item></pre> |

| | | | | |
|-----------------|---|---------|----------|--|
| | </bezahlartadapter-pool> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="bezahlartadapter-pool" type="XML-Bezahlartadapter-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / waehrungsadapter-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Waehrungsadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Waehrungsadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><waehrungsadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </waehrungsadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="waehrungsadapter-pool" type="XML-Waehrungsadapter-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / zahlungsintervalladapter-pool

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |

| | | | | |
|-----------------|--|---------|----------|--|
| Type | XML-Zahlungsintervalladapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Zahlungsintervalladapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><zahlungsintervalladapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </zahlungsintervalladapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="zahlungsintervalladapter-pool" type="XML-Zahlungsintervalladapter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / mitnahmetypadapter-pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Mitnahmetypadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Mitnahmetypadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><mitnahmetypadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </mitnahmetypadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="mitnahmetypadapter-pool" type="XML-Mitnahmetypadapter-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / rabattmedientypadapter-pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|--|---------|----------|--|
| Diagram | <pre>classDiagram class XML_Rabattmedientypadapter_Pool { XML_Ausgangstext_Pool XML-Ausgangstext-Pool (restriction base) XML_Pool XML-Pool (extension base) Attributes item 0..∞ item 0..∞ } class XML_Ausgangstext_Pool { XML_Pool XML-Pool (extension base) Attributes item 0..∞ } class XML_Pool { Attributes item 0..∞ } class Attributes { key } class item { } XML_Rabattmedientypadapter_Pool -- XML_Ausgangstext_Pool XML_Ausgangstext_Pool -- XML_Pool XML_Pool -- Attributes Attributes -- key item -- 0..∞ item -- 0..∞</pre> | | | |
| Type | XML-Rabattmedientypadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Rabattmedientypadapter-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><rabattmedientypadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </rabattmedientypadapter-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="rabattmedientypadapter-pool" type="XML-Rabattmedientypadapter-Pool" /></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / modulkontextadapter-pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-Modulkontextadapter-Pool. It is a container that holds an XML-NrName-Pool (restriction base). This pool contains an XML-Pool (extension base). The XML-Pool contains an Attributes container with a key attribute. Below the Attributes are two 'item' elements, each with a cardinality of 0..∞. A line connects the 'modulkontextadapter-pool' element in the diagram to the root of the hierarchy.</p> |
| Type | XML-Modulkontextadapter-Pool |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Modulkontextadapter-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><modulkontextadapter-pool key=" " xmlns="http://vdv/ka/pkm/2"> <item>{0..unbounded}</item> </modulkontextadapter-pool></pre> |

| | | | | |
|-----------------|---|-------------|------------|--|
| | </modulkontextadapter-pool> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="modulkontextadapter-pool" type="XML-Modulkontextadapter-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / nummerninterpretation-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Nummerninterpretation-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Nummerninterpretation-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><nummerninterpretation-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </nummerninterpretation-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <xs:element name="nummerninterpretation-pool" type="XML-Nummerninterpretation-Pool"/> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / schluessel-pool

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Schluessel-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-NrName-Pool XML-Schluessel-Pool | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Properties | content: complex | | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><schluessel-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </schluessel-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="schluessel-pool" type="XML-Schluessel-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / tarifmodul-pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | XML-Tarifmodul-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tarifmodul-Pool | | | |
| Properties | content: | complex | | |
| Model | item* | | | |
| Children | item | | | |
| Instance | <pre><tarifmodul-pool key="" xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </tarifmodul-pool></pre> | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:element name="tarifmodul-pool" type="XML-Tarifmodul-Pool"/></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-RNTarifmodul / kommentar-pool

| | | | |
|------------|--|---------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-Kommentar-Pool | | |
| Properties | content: | complex | |
| Model | item* | | |
| Children | item | | |
| Instance | <pre><kommentar-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </kommentar-pool></pre> | | |
| Source | <pre><xs:element name="kommentar-pool" type="XML-Kommentar-Pool"/></pre> | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Element XML-RNTarifmodul / signatur

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Signatur-Part |
| Properties | content: complex |
| Model | type , data |
| Children | data, type |
| Instance | <pre><signatur xmlns="http://vdv/ka/pkm/2"> <type>{1,1}</type> <data>{1,1}</data> </signatur></pre> |
| Source | <code><xs:element name="signatur" type="XML-Signatur-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

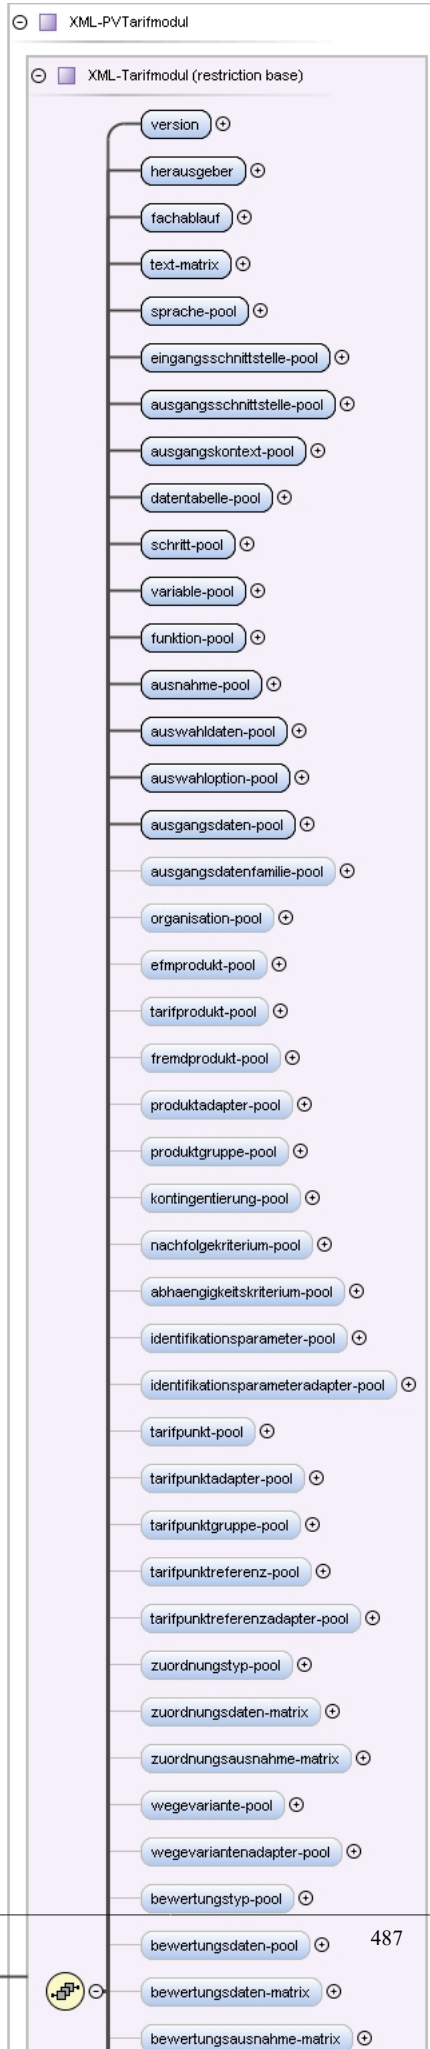
Element XML-RNTarifmodul / annotation

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Annotation-Part |
| Properties | content: complex |
| Model | data* |
| Children | data |
| Instance | <pre><annotation xmlns="http://vdv/ka/pkm/2"> <data>{0,unbounded}</data> </annotation></pre> |
| Source | <code><xs:element name="annotation" type="XML-Annotation-Part" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element pvtm

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | XML-PVTarifmodul |
| Type hierarchy | <ul style="list-style-type: none"> XML-Tarifmodul XML-PVTarifmodul |
| Properties | content: complex |
| Model | version , herausgeber , fachablauf , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , datentabelle-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , ausgangsdatenfamilie-pool , organisation-pool , efmprodukt-pool , tarifprodukt-pool , fremdprodukt-pool , produktgruppe-pool , kontingentierung-pool , nachfolgekriterium-pool , abhaengigkeitskriterium-pool , identifikationsparameter-pool , tarifpunkt-pool , tarifpunktgruppe-pool , tarifpunktreferenz-pool , zuordnungstyp-pool , zuordnungsdaten-matrix , zuordnungsausnahme-matrix , wegevariante-pool , bewertungstyp-pool , bewertungsdaten-pool , bewertungsdaten-matrix , bewertungsausnahme-matrix , linie-pool , verkehrsmitteltyp-pool , verkehrsmittellinienbezug-pool , bezahlart-pool , wahrung-pool , zahlungsintervall-pool , mitnahmetyp-pool , rabattmedientyp-pool , modulkontext-pool , spezialbedingung-pool , tagesbedingung-pool , tageszeitbedingung-pool , zeitraumbedingung-pool , tarifpunktbedingung-pool , bewertungsbedingung-pool , geosegmentbedingung-pool , verkehrsmittellinienbedingung-pool , bezahlartbedingung-pool , zahlungsintervallbedingung-pool , mitnahmebedingung-pool , rabattmedienbedingung-pool , modulkontextbedingung-pool , bifainterpretation-pool , nummerninterpretation-pool , bitleisteninterpretation-pool , raumnummerninterpretation-pool , schlussel-pool , kommentar-pool , signatur , annotation |
| Children | abhaengigkeitskriterium-pool , annotation , ausgangsdaten-pool , ausgangsdatenfamilie-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bewertungsausnahme-matrix , bewertungsbedingung-pool , bewertungsdaten-matrix , bewertungsdaten-pool , bewertungstyp-pool , bezahlart-pool , bezahlartbedingung-pool , bifainterpretation-pool , bitleisteninterpretation-pool , datentabelle-pool , efmprodukt-pool , eingangsschnittstelle-pool , fachablauf , fremdprodukt-pool , funktion-pool , geosegmentbedingung-pool , herausgeber , identifikationsparameter-pool , kommentar-pool , kontingentierung-pool , linie-pool , mitnahmebedingung-pool , mitnahmetyp-pool , modulkontext-pool , modulkontextbedingung-pool , nachfolgekriterium-pool , nummerninterpretation-pool , organisation-pool , produktgruppe-pool , rabattmedienbedingung-pool , rabattmedientyp-pool , raumnummerninterpretation-pool , schlussel-pool , schritt-pool , signatur , spezialbedingung-pool , sprache-pool , tagesbedingung-pool , tageszeitbedingung-pool , tarifprodukt-pool , tarifpunkt-pool , tarifpunktbedingung-pool , tarifpunktgruppe-pool , tarifpunktreferenz-pool , text-matrix , variable-pool , verkehrsmittellinienbedingung-pool , verkehrsmittellinienbezug-pool , verkehrsmitteltyp-pool , version , wahrung-pool , wegevariante-pool , zahlungsintervall-pool , zahlungsintervallbedingung-pool , zeitraumbedingung-pool , zuordnungsausnahme-matrix , zuordnungsdaten-matrix , zuordnungstyp-pool |
| Instance | <pre> <pvtm xmlns="http://vdv/ka/pkm/2"> <version>{1,1}</version> <herausgeber>{1,1}</herausgeber> <fachablauf>{1,1}</fachablauf> <text-matrix>{1,1}</text-matrix> <sprache-pool key="">{1,1}</sprache-pool> <eingangsschnittstelle-pool key="">{1,1}</eingangsschnittstelle-pool> <ausgangsschnittstelle-pool key="">{1,1}</ausgangsschnittstelle-pool> <ausgangskontext-pool key="">{1,1}</ausgangskontext-pool> <datentabelle-pool key="">{1,1}</datentabelle-pool> <schritt-pool key="">{1,1}</schritt-pool> <variable-pool key="">{1,1}</variable-pool> <funktion-pool key="">{1,1}</funktion-pool> <ausnahme-pool key="">{1,1}</ausnahme-pool> <auswahldaten-pool key="">{1,1}</auswahldaten-pool> <auswahloption-pool key="">{1,1}</auswahloption-pool> <ausgangsdaten-pool key="">{1,1}</ausgangsdaten-pool> <ausgangsdatenfamilie-pool key="">{1,1}</ausgangsdatenfamilie-pool> <organisation-pool>{1,1}</organisation-pool> <efmprodukt-pool key="">{1,1}</efmprodukt-pool> <tarifprodukt-pool key="">{1,1}</tarifprodukt-pool> <fremdprodukt-pool key="">{1,1}</fremdprodukt-pool> <produktgruppe-pool key="">{1,1}</produktgruppe-pool> <kontingentierung-pool key="">{1,1}</kontingentierung-pool> <nachfolgekriterium-pool key="">{1,1}</nachfolgekriterium-pool> <abhaengigkeitskriterium-pool key="">{1,1}</abhaengigkeitskriterium-pool> <identifikationsparameter-pool key="">{1,1}</identifikationsparameter-pool> <tarifpunkt-pool key="">{1,1}</tarifpunkt-pool> <tarifpunktgruppe-pool key="">{1,1}</tarifpunktgruppe-pool> <tarifpunktreferenz-pool key="">{1,1}</tarifpunktreferenz-pool> <zuordnungstyp-pool key="">{1,1}</zuordnungstyp-pool> <zuordnungsdaten-matrix>{1,1}</zuordnungsdaten-matrix> <zuordnungsausnahme-matrix>{1,1}</zuordnungsausnahme-matrix> <wegevariante-pool key="">{1,1}</wegevariante-pool> <bewertungstyp-pool key="">{1,1}</bewertungstyp-pool> <bewertungsdaten-pool key="">{1,1}</bewertungsdaten-pool> <bewertungsdaten-matrix>{1,1}</bewertungsdaten-matrix> <bewertungsausnahme-matrix>{1,1}</bewertungsausnahme-matrix> <linie-pool key="">{1,1}</linie-pool> <verkehrsmitteltyp-pool key="">{1,1}</verkehrsmitteltyp-pool> <verkehrsmittellinienbezug-pool key="">{1,1}</verkehrsmittellinienbezug-pool> <bezahlart-pool key="">{1,1}</bezahlart-pool> <wahrung-pool key="">{1,1}</wahrung-pool> <zahlungsintervall-pool key="">{1,1}</zahlungsintervall-pool> <mitnahmetyp-pool key="">{1,1}</mitnahmetyp-pool> </pre> |

| | |
|-----------------|---|
| | <pre> <rabattmedientyp-pool key="">{1,1}</rabattmedientyp-pool> <modulkontext-pool key="">{1,1}</modulkontext-pool> <spezialbedingung-pool key="">{1,1}</spezialbedingung-pool> <tagesbedingung-pool key="">{1,1}</tagesbedingung-pool> <tageszeitbedingung-pool key="">{1,1}</tageszeitbedingung-pool> <zeitraumbedingung-pool key="">{1,1}</zeitraumbedingung-pool> <tarifpunktbedingung-pool key="">{1,1}</tarifpunktbedingung-pool> <bewertungsbedingung-pool key="">{1,1}</bewertungsbedingung-pool> <geosegmentbedingung-pool key="">{1,1}</geosegmentbedingung-pool> <verkehrsmittellinienbedingung-pool key="">{1,1}</verkehrsmittellinienbedingung-pool> <bezahlartbedingung-pool key="">{1,1}</bezahlartbedingung-pool> <zahlungsintervallbedingung-pool key="">{1,1}</zahlungsintervallbedingung-pool> <mitnahmebedingung-pool key="">{1,1}</mitnahmebedingung-pool> <rabattmedienbedingung-pool key="">{1,1}</rabattmedienbedingung-pool> <modulkontextbedingung-pool key="">{1,1}</modulkontextbedingung-pool> <bifainterpretation-pool key="">{1,1}</bifainterpretation-pool> <nummerninterpretation-pool key="">{1,1}</nummerninterpretation-pool> <bitleisteninterpretation-pool key="">{1,1}</bitleisteninterpretation-pool> <raumnummerninterpretation-pool key="">{1,1}</raumnummerninterpretation-pool> <schluessel-pool key="">{1,1}</schluessel-pool> <kommentar-pool>{1,1}</kommentar-pool> <signatur>{1,1}</signatur> <annotation>{1,1}</annotation> </pvtm> </pre> |
| Source | <code><xs:element name="pvtm" type="XML-PVTarifmodul" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgruppe-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Produktgruppe-Item / element

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N |
| Properties | content: complex |
| Model | ref* |
| Children | ref |
| Instance | <pre> <element xmlns="http://vdv/ka/pkm/2"> <ref>{0,unbounded}</ref> </element> </pre> |

| | |
|-----------------|---|
| Source | <code><xs:element name="element" type="XML-RefSet0N"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element pkm-testanfrage


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Testanfrage |
| Type hierarchy | <ul style="list-style-type: none"> XML-Testdaten <ul style="list-style-type: none"> XML-Testanfrage |
| Properties | content: complex |
| Model | zeitpunkt , bemerkung , testfall-pool , testmodul-pool |
| Children | bemerkung, testfall-pool, testmodul-pool, zeitpunkt |
| Instance | <pre><pkm-testanfrage xmlns="http://vdv/ka/pkm/2"> <zeitpunkt>{1,1}</zeitpunkt> <bemerkung>{1,1}</bemerkung> <testfall-pool>{1,1}</testfall-pool> <testmodul-pool>{1,1}</testmodul-pool> </pkm-testanfrage></pre> |
| Source | <code><xs:element name="pkm-testanfrage" type="XML-Testanfrage"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten / zeitpunkt


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:dateTime <ul style="list-style-type: none"> XML-DatetimeContent <ul style="list-style-type: none"> XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitpunkt" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten / bemerkung

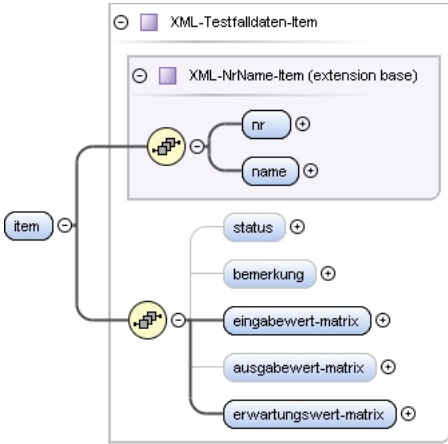
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  The diagram shows a box labeled 'XML-StringContent' with a purple icon. Inside the box is a rounded rectangle labeled 'bemerkung' with a blue icon. A line connects 'bemerkung' to the box, and another line connects the box to a purple icon labeled 'XML-StringValue'. |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="bemerkung" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten / testfall-pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a box labeled 'XML-Testfalldaten-Pool' with a purple icon. Inside the box is a rounded rectangle labeled 'testfall-pool' with a blue icon. A line connects 'testfall-pool' to the box, and another line connects the box to a yellow circle icon labeled 'item' with a blue icon. A line also connects the box to a yellow circle icon labeled '1..∞'. |
| Type | XML-Testfalldaten-Pool |
| Properties | content: complex |
| Model | item+ |
| Children | item |
| Instance | <code><testfall-pool xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </testfall-pool></code> |
| Source | <code><xs:element name="testfall-pool" type="XML-Testfalldaten-Pool"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfalldaten-Pool / item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach erstem Element} |
| Diagram |  The diagram shows a box labeled 'XML-Testfalldaten-Item' with a purple icon. Inside the box is a rounded rectangle labeled 'item' with a blue icon. A line connects 'item' to the box, and another line connects the box to a yellow circle icon labeled 'XML-NrName-Item (extension base)' with a purple icon. Inside this box are two rounded rectangles: 'nr' with a blue icon and 'name' with a blue icon. A line also connects the box to a yellow circle icon labeled '1..∞'. Below this, there are four rounded rectangles: 'status' with a blue icon, 'bemerkung' with a blue icon, 'eingabewert-matrix' with a blue icon, 'ausgabewert-matrix' with a blue icon, and 'erwartungswert-matrix' with a blue icon. A line connects the box to a yellow circle icon labeled '1..∞'. |
| Type | XML-Testfalldaten-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Testfalldaten-Item |
| Properties | content: complex maxOccurs: unbounded |
| Model | nr, name, status{0,1}, bemerkung{0,1}, eingabewert-matrix, ausgabewert-matrix{0,1}, erwartungswert-matrix |

| | |
|-----------------|--|
| Children | ausgabewert-matrix, bemerkung, eingabewert-matrix, erwartungswert-matrix, name, nr, status |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <status>{0,1}</status> <bemerkung>{0,1}</bemerkung> <eingabewert-matrix>{1,1}</eingabewert-matrix> <ausgabewert-matrix>{0,1}</ausgabewert-matrix> <erwartungswert-matrix>{1,1}</erwartungswert-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Testfalldaten-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfalldaten-Item / status

| | | | | | |
|-----------------|---|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Type | XML-IntegerValue | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Source | <pre><xs:element name="status" type="XML-IntegerValue" minOccurs="0"/></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Testfalldaten-Item / bemerkung

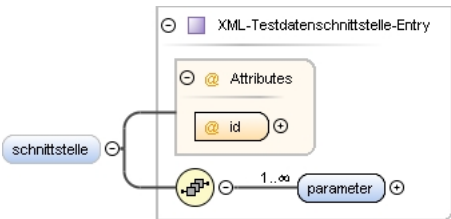
| | | | | | |
|-----------------|---|----------|---------|------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Type | XML-StringValue | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> </table> | content: | complex | minOccurs: | 0 |
| content: | complex | | | | |
| minOccurs: | 0 | | | | |
| Source | <pre><xs:element name="bemerkung" type="XML-StringValue" minOccurs="0"/></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Testfalldaten-Item / eingabewert-matrix

| | |
|-----------|----------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Testdaten-Matrix |

| | |
|-----------------|--|
| Properties | content: complex |
| Model | schnittstelle* |
| Children | schnittstelle |
| Instance | <pre><eingabewert-matrix xmlns="http://vdv/ka/pkm/2"> <schnittstelle id="">{0,unbounded}</schnittstelle> </eingabewert-matrix></pre> |
| Source | <pre><xs:element name="eingabewert-matrix" type="XML-Testdaten-Matrix"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten-Matrix / schnittstelle

| | | | | |
|-----------------|--|------------------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut} | | | |
| Diagram |  | | | |
| Type | XML-Testdatenschnittstelle-Entry | | | |
| Properties | content: | complex | | |
| | minOccurs: | 0 | | |
| | maxOccurs: | unbounded | | |
| Model | parameter+ | | | |
| Children | parameter | | | |
| Instance | <pre><schnittstelle id="" xmlns="http://vdv/ka/pkm/2"> <parameter nr="">{1,unbounded}</parameter> </schnittstelle></pre> | | | |
| Attributes | QName | Type | Use | |
| | id | xs:unsignedShort | required | |
| Source | <pre><xs:element name="schnittstelle" type="XML-Testdatenschnittstelle-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Testdatenschnittstelle-Entry / parameter

| | | | |
|-------------|---|-----------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Annotations | {Sortiert nach erstem Attribut} | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Testdatenparameter-Entry. It features a main container box labeled 'XML-Testdatenparameter-Entry'. Inside this box, there is an 'Attributes' section containing a single attribute named 'nr'. Below the attributes, there is a sequence of elements: a 'parameter' element (represented by a blue rounded rectangle) is connected to a complex element (represented by a yellow circle with a grid pattern), which is then connected to an 'ablauf' element (represented by a blue rounded rectangle). The 'ablauf' element has a cardinality of '1..∞'.</p> | | |
| Type | XML-Testdatenparameter-Entry | | |
| Properties | content: | complex | |
| | maxOccurs: | unbounded | |
| Model | ablauf+ | | |

| | | | | |
|-----------------|--|------------------|------------|--|
| Children | ablauf | | | |
| Instance | <pre><parameter nr=" " xmlns="http://vdv/ka/pkm/2"> <ablauf ref=" ">{1,unbounded}</ablauf> </parameter></pre> | | | |
| Attributes | QName | Type | Use | |
| | nr | xs:unsignedShort | required | |
| Source | <pre><xs:element name="parameter" type="XML-Testdatenparameter-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

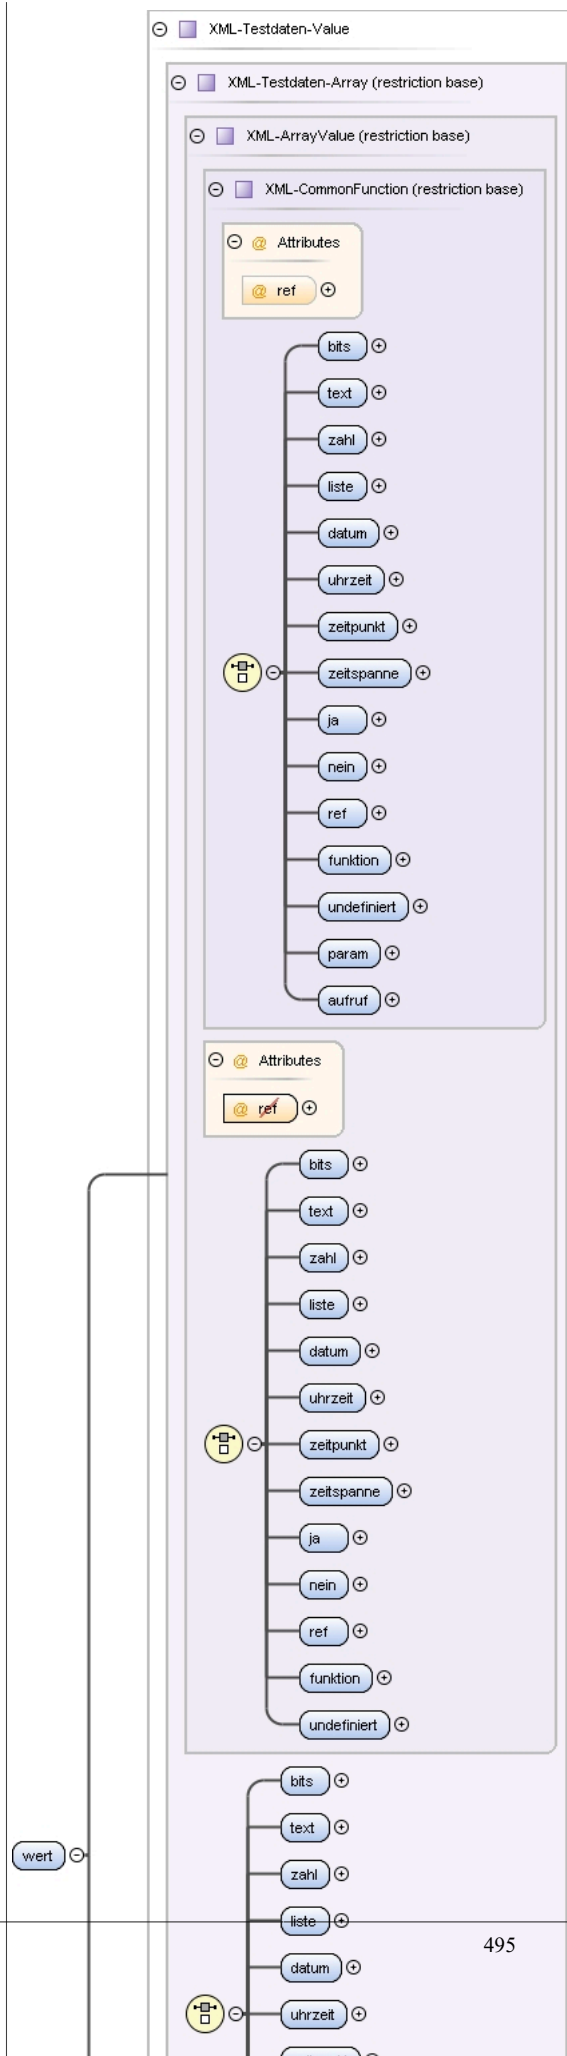
Element XML-Testdatenparameter-Entry / ablauf

| | | | | |
|-----------------|--|--------------------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Annotations | {Sortiert nach erstem Attribut (lexikographisch)} | | | |
| Diagram | | | | |
| Type | XML-Testdatenablauf-Entry | | | |
| Properties | content: | complex | | |
| | maxOccurs: | unbounded | | |
| Model | wert+ | | | |
| Children | wert | | | |
| Instance | <pre><ablauf ref=" " xmlns="http://vdv/ka/pkm/2"> <wert>{1,unbounded}</wert> </ablauf></pre> | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Testablauf-Ref | required | |
| Source | <pre><xs:element name="ablauf" type="XML-Testdatenablauf-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut (lexikographisch)}</xs:documentation> </xs:annotation> </xs:element></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Element XML-Testdatenablauf-Entry / wert

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | | | | | |
|-----------------|--|----------|---------|------------|-----------|
| Type | XML-Testdaten-Value | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue XML-Testdaten-Array XML-Testdaten-Value | | | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> <tr> <td>maxOccurs:</td><td>unbounded</td></tr> </table> | content: | complex | maxOccurs: | unbounded |
| content: | complex | | | | |
| maxOccurs: | unbounded | | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein undefiniert | | | | |
| Children | bits, datum, ja, liste, nein, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | | |
| Instance | <pre><wert xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <undefiniert>{1,1}</undefiniert> </wert></pre> | | | | |
| Source | <code><xs:element name="wert" type="XML-Testdaten-Value" maxOccurs="unbounded"/></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Element XML-Testdaten-Array / bits

| | | | |
|-----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-BinaryValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:hexBinary XML-BinaryContent XML-BinaryValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <code><xs:element name="bits" type="XML-BinaryValue"/></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Element XML-Testdaten-Array / text

| | | | |
|----------------|---|----------|---------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | XML-StringValue | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | | |
| Properties | <table> <tr> <td>content:</td><td>complex</td></tr> </table> | content: | complex |
| content: | complex | | |
| Source | <code><xs:element name="text" type="XML-StringValue"/></code> | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

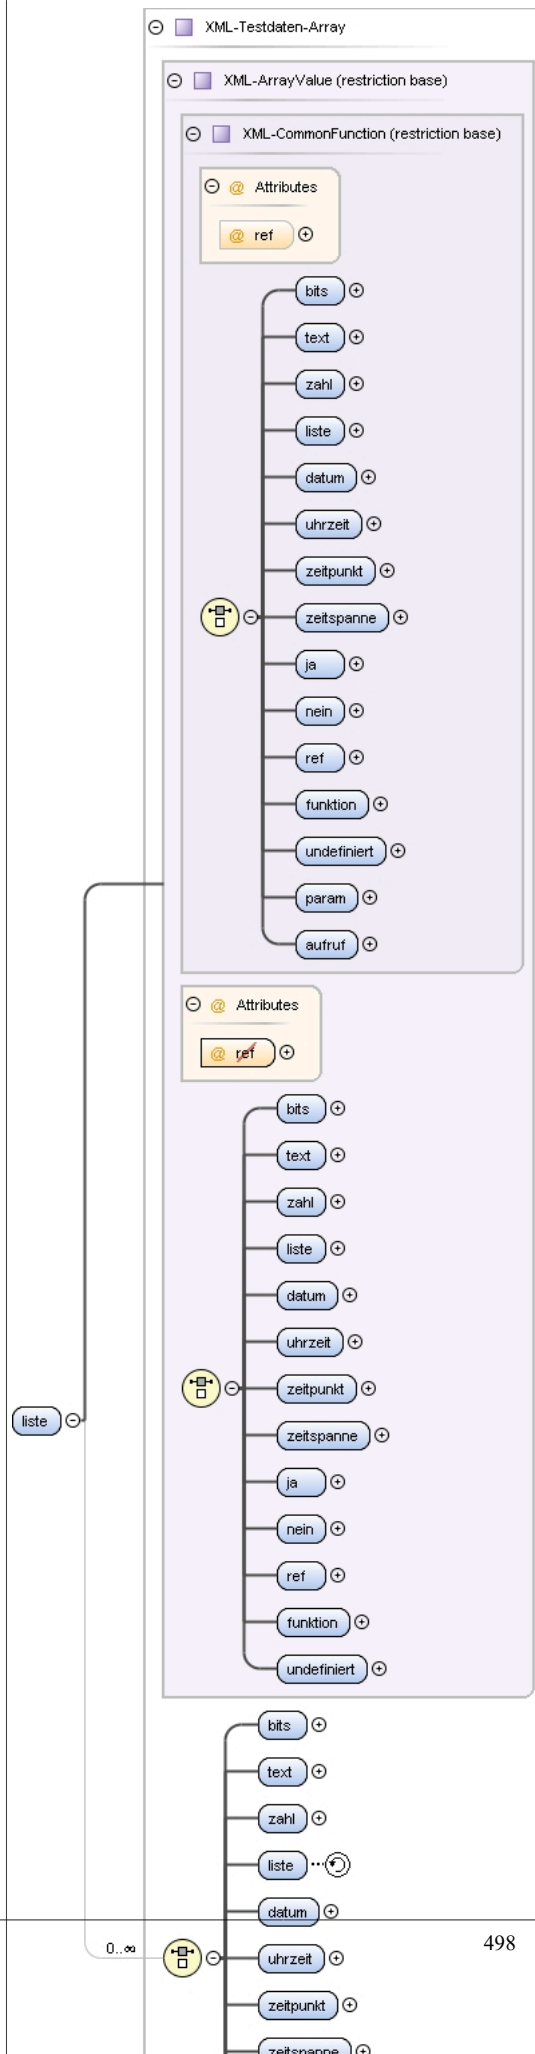
Element XML-Testdaten-Array / zahl

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram shows a blue oval labeled 'zahl' connected by a line to a purple box. Inside the box, there is a purple square labeled 'XML-IntegerValue' and a purple rounded rectangle labeled 'XML-IntegerContent'.</p> |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:long • XML-IntegerContent • XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="zahl" type="XML-IntegerValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten-Array / liste

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|-----------------|--|
| Type | XML-Testdaten-Array |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue XML-Testdaten-Array |
| Properties | content: complex |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein undefiniert |
| Children | bits, datum, ja, liste, nein, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><liste xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <undefiniert>{1,1}</undefiniert> </liste></pre> |
| Source | <code><xs:element name="liste" type="XML-Testdaten-Array"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten-Array / datum

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DateValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:date XML-DateContent XML-DateValue |
| Properties | content: complex |
| Source | <code><xs:element name="datum" type="XML-DateValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten-Array / uhrzeit

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-TimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:time XML-TimeContent XML-TimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten-Array / zeitpunkt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:dateTime • XML-DatetimeContent • XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitpunkt" type="XML-DatetimeValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten-Array / zeitspanne

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:duration • XML-DurationContent • XML-DurationValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitspanne" type="XML-DurationValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Testdaten-Array / ja

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-TrueValue |
| Properties | content: complex |
| Source | <code><xs:element name="ja" type="XML-TrueValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Testdaten-Array / nein

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-FalseValue |
| Properties | content: complex |
| Source | <code><xs:element name="nein" type="XML-FalseValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Testdaten-Array / undefiniert

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  A diagram showing a blue oval labeled 'undefiniert' connected by a line to a purple rectangle labeled 'XML-VoidValue'. |
| Type | XML-VoidValue |
| Properties | content: complex |
| Source | <code><xs:element name="undefiniert" type="XML-VoidValue"/></code> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

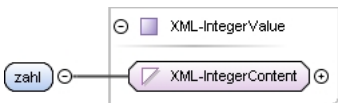
Element XML-Testdaten-Value / bits

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  A diagram showing a blue oval labeled 'bits' connected by a line to a purple rectangle labeled 'XML-BinaryValue'. The 'XML-BinaryValue' rectangle is also connected by a line to a purple rectangle labeled 'XML-BinaryContent'. |
| Type | XML-BinaryValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:hexBinary • XML-BinaryContent • XML-BinaryValue |
| Properties | content: complex |
| Source | <code><xs:element name="bits" type="XML-BinaryValue"/></code> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten-Value / text

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  A diagram showing a blue oval labeled 'text' connected by a line to a purple rectangle labeled 'XML-StringValue'. The 'XML-StringValue' rectangle is also connected by a line to a purple rectangle labeled 'XML-StringContent'. |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:string • XML-StringContent • XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="text" type="XML-StringValue"/></code> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten-Value / zahl

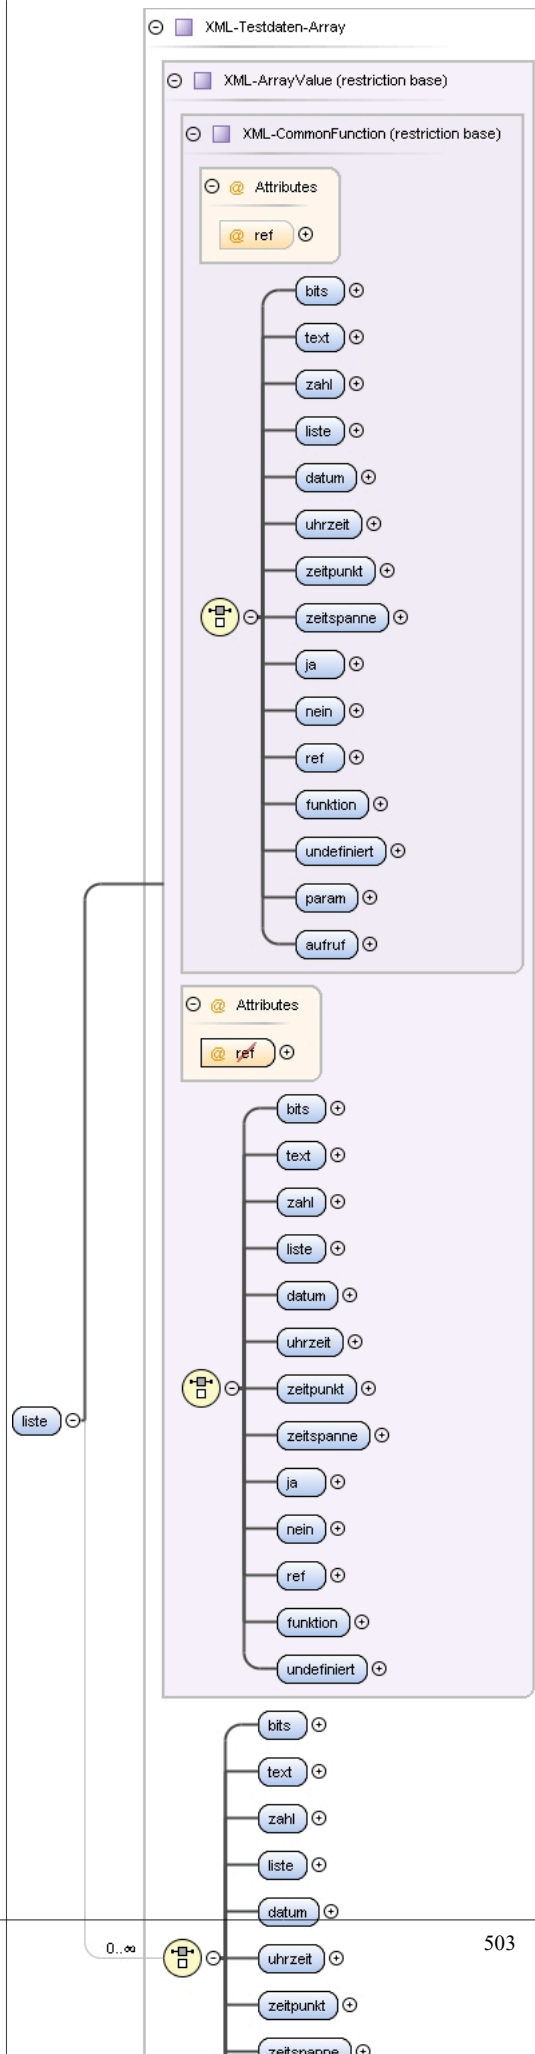
| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  A diagram showing a blue oval labeled 'zahl' connected by a line to a purple rectangle labeled 'XML-IntegerValue'. The 'XML-IntegerValue' rectangle is also connected by a line to a purple rectangle labeled 'XML-IntegerContent'. |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:long |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> • XML-IntegerContent • XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="zahl" type="XML-IntegerValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten-Value / liste

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|-----------------|--|
| Type | XML-Testdaten-Array |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue XML-Testdaten-Array |
| Properties | content: complex |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein undefiniert |
| Children | bits, datum, ja, liste, nein, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Instance | <pre><liste xmlns="http://vdv/ka/pkm/2"> <bits>{1,1}</bits> <text>{1,1}</text> <zahl>{1,1}</zahl> <liste>{1,1}</liste> <datum>{1,1}</datum> <uhrzeit>{1,1}</uhrzeit> <zeitpunkt>{1,1}</zeitpunkt> <zeitspanne>{1,1}</zeitspanne> <ja>{1,1}</ja> <nein>{1,1}</nein> <undefiniert>{1,1}</undefiniert> </liste></pre> |
| Source | <code><xs:element name="liste" type="XML-Testdaten-Array"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten-Value / datum

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DateValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:date XML-DateContent XML-DateValue |
| Properties | content: complex |
| Source | <code><xs:element name="datum" type="XML-DateValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Testdaten-Value / uhrzeit

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-TimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:time XML-TimeContent XML-TimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="uhrzeit" type="XML-TimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Testdaten-Value / zeitpunkt

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:dateTime • XML-DatetimeContent • XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitpunkt" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Testdaten-Value / zeitspanne

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-DurationValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:duration • XML-DurationContent • XML-DurationValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitspanne" type="XML-DurationValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Testdaten-Value / ja

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-TrueValue |
| Properties | content: complex |
| Source | <code><xs:element name="ja" type="XML-TrueValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Testdaten-Value / nein

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-FalseValue |
| Properties | content: complex |
| Source | <code><xs:element name="nein" type="XML-FalseValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Element XML-Testdaten-Value / undefiniert

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-VoidValue |
| Properties | content: complex |
| Source | <code><xs:element name="undefiniert" type="XML-VoidValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

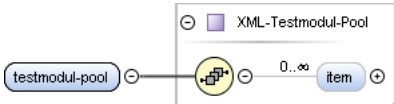
Element XML-Testfalldaten-Item / ausgabewert-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Testdaten-Matrix |
| Properties | content: complex minOccurs: 0 |
| Model | schnittstelle* |
| Children | schnittstelle |
| Instance | <code><ausgabewert-matrix xmlns="http://vdv/ka/pkm/2"> <schnittstelle id=" ">{0,unbounded}</schnittstelle> </ausgabewert-matrix></code> |
| Source | <code><xs:element name="ausgabewert-matrix" type="XML-Testdaten-Matrix" minOccurs="0" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfalldaten-Item / erwartungswert-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Testdaten-Matrix |
| Properties | content: complex |
| Model | schnittstelle* |
| Children | schnittstelle |
| Instance | <code><erwartungswert-matrix xmlns="http://vdv/ka/pkm/2"> <schnittstelle id=" ">{0,unbounded}</schnittstelle> </erwartungswert-matrix></code> |
| Source | <code><xs:element name="erwartungswert-matrix" type="XML-Testdaten-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testdaten / testmodul-pool

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |

| | |
|-----------------|---|
| Type | XML-Testmodul-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><testmodul-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </testmodul-pool></pre> |
| Source | <code><xs:element name="testmodul-pool" type="XML-Testmodul-Pool"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

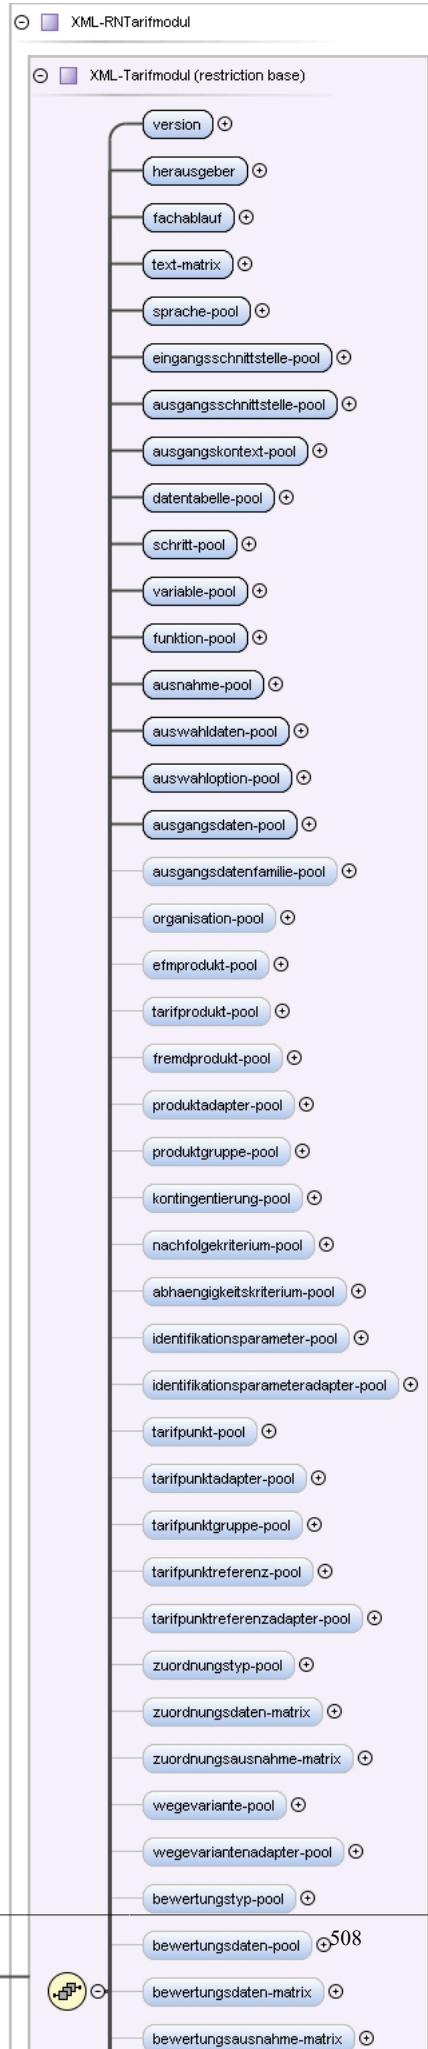
Element XML-Testmodul-Pool / item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach erstem Element} |
| Diagram | |
| Type | XML-Testmodul-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Testmodul-Item |
| Properties | content: complex minOccurs: 0 maxOccurs: unbounded |
| Model | nr , name , moduldaten {0,1} |
| Children | moduldaten, name, nr |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <moduldaten>{0,1}</moduldaten> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Testmodul-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testmodul-Item / moduldaten

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|-----------------|--|
| Type | XML-RNTarifmodul |
| Type hierarchy | <ul style="list-style-type: none"> XML-Tarifmodul XML-RNTarifmodul |
| Properties | content: complex minOccurs: 0 |
| Model | version , herausgeber , fachablauf , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , datentabelle-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , produktadapter-pool , identifikationsparameteradapter-pool , tarifpunktadapter-pool , tarifpunktreferenzadapter-pool , wegevariantenadapter-pool , linienadapter-pool , verkehrsmitteltypadapter-pool , bezahlartadapter-pool , waehrungsadapter-pool , zahlungsintervalladapter-pool , mitnahmetypadapter-pool , rabattmedientypadapter-pool , modulkontextadapter-pool , nummerninterpretation-pool , schluessel-pool , tarifmodul-pool , kommentar-pool , signatur , annotation |
| Children | annotation , ausgangsdaten-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bezahlartadapter-pool , datentabelle-pool , eingangsschnittstelle-pool , fachablauf , funktion-pool , herausgeber , identifikationsparameteradapter-pool , kommentar-pool , linienadapter-pool , mitnahmetypadapter-pool , modulkontextadapter-pool , nummerninterpretation-pool , produktadapter-pool , rabattmedientypadapter-pool , schluessel-pool , schritt-pool , signatur , sprache-pool , tarifmodul-pool , tarifpunktadapter-pool , tarifpunktreferenzadapter-pool , text-matrix , variable-pool , verkehrsmitteltypadapter-pool , version , waehrungsadapter-pool , wegevariantenadapter-pool , zahlungsintervalladapter-pool |
| Instance | <pre> <moduldaten xmlns="http://vdv/ka/pkm/2"> <version>{1,1}</version> <herausgeber>{1,1}</herausgeber> <fachablauf>{1,1}</fachablauf> <text-matrix>{1,1}</text-matrix> <sprache-pool key=" ">{1,1}</sprache-pool> <eingangsschnittstelle-pool key=" ">{1,1}</eingangsschnittstelle-pool> <ausgangsschnittstelle-pool key=" ">{1,1}</ausgangsschnittstelle-pool> <ausgangskontext-pool key=" ">{1,1}</ausgangskontext-pool> <datentabelle-pool key=" ">{1,1}</datentabelle-pool> <schritt-pool key=" ">{1,1}</schritt-pool> <variable-pool key=" ">{1,1}</variable-pool> <funktion-pool key=" ">{1,1}</funktion-pool> <ausnahme-pool key=" ">{1,1}</ausnahme-pool> <auswahldaten-pool key=" ">{1,1}</auswahldaten-pool> <auswahloption-pool key=" ">{1,1}</auswahloption-pool> <ausgangsdaten-pool key=" ">{1,1}</ausgangsdaten-pool> <produktadapter-pool key=" ">{1,1}</produktadapter-pool> <identifikationsparameteradapter-pool key=" ">{1,1}</identifikationsparameteradapter-pool> <tarifpunktadapter-pool key=" ">{1,1}</tarifpunktadapter-pool> <tarifpunktreferenzadapter-pool key=" ">{1,1}</tarifpunktreferenzadapter-pool> <wegevariantenadapter-pool key=" ">{1,1}</wegevariantenadapter-pool> <linienadapter-pool key=" ">{1,1}</linienadapter-pool> <verkehrsmitteltypadapter-pool key=" ">{1,1}</verkehrsmitteltypadapter-pool> <bezahlartadapter-pool key=" ">{1,1}</bezahlartadapter-pool> <waehrungsadapter-pool key=" ">{1,1}</waehrungsadapter-pool> <zahlungsintervalladapter-pool key=" ">{1,1}</zahlungsintervalladapter-pool> <mitnahmetypadapter-pool key=" ">{1,1}</mitnahmetypadapter-pool> <rabattmedientypadapter-pool key=" ">{1,1}</rabattmedientypadapter-pool> <modulkontextadapter-pool key=" ">{1,1}</modulkontextadapter-pool> <nummerninterpretation-pool key=" ">{1,1}</nummerninterpretation-pool> <schluessel-pool key=" ">{1,1}</schluessel-pool> <tarifmodul-pool key=" ">{1,1}</tarifmodul-pool> <kommentar-pool>{1,1}</kommentar-pool> <signatur>{1,1}</signatur> <annotation>{1,1}</annotation> </moduldaten> </pre> |
| Source | <xs:element name="moduldaten" type="XML-RNTarifmodul" minOccurs="0"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testanfrage / zeitpunkt

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:dateTime XML-DatetimeContent |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitpunkt" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testanfrage / bemerkung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="bemerkung" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testanfrage / testfall-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Testfall-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Testfalldaten-Pool XML-Testfall-Pool |
| Properties | content: complex |
| Model | item+ |
| Children | item |
| Instance | <pre><testfall-pool xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </testfall-pool></pre> |
| Source | <code><xs:element name="testfall-pool" type="XML-Testfall-Pool"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfall-Pool / item

| | |
|-------------|--------------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach erstem Element} |

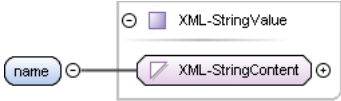
| | |
|-----------------|---|
| Diagram | |
| Type | XML-Testfallanfrage-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Testfalldaten-Item XML-Testfallanfrage-Item |
| Properties | content: complex maxOccurs: unbounded |
| Model | nr , name , eingabewert-matrix , erwartungswert-matrix |
| Children | eingabewert-matrix, erwartungswert-matrix, name, nr |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <eingabewert-matrix>{1,1}</eingabewert-matrix> <erwartungswert-matrix>{1,1}</erwartungswert-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Testfallanfrage-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfallanfrage-Item / nr

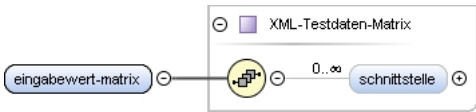
| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue |
| Properties | content: complex |
| Source | <pre><xs:element name="nr" type="XML-IntegerValue"/></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

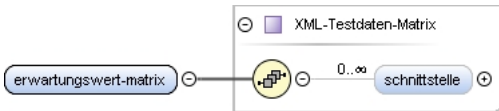
Element XML-Testfallanfrage-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfallanfrage-Item / eingabewert-matrix

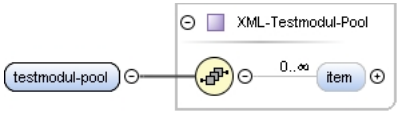
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Testdaten-Matrix |
| Properties | content: complex |
| Model | schnittstelle* |
| Children | schnittstelle |
| Instance | <pre><eingabewert-matrix xmlns="http://vdv/ka/pkm/2"> <schnittstelle id="">{0,unbounded}</schnittstelle> </eingabewert-matrix></pre> |
| Source | <code><xs:element name="eingabewert-matrix" type="XML-Testdaten-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfallanfrage-Item / erwartungswert-matrix

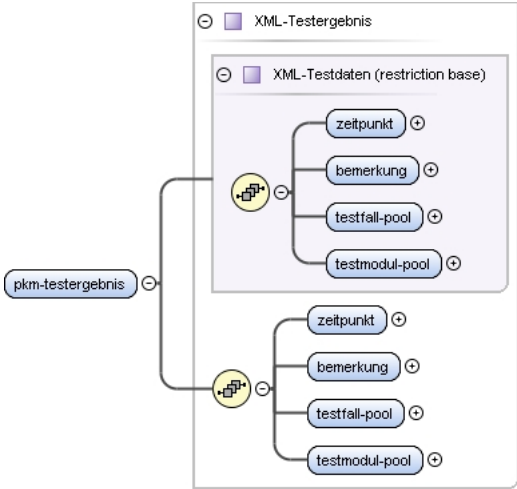
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Testdaten-Matrix |
| Properties | content: complex |
| Model | schnittstelle* |
| Children | schnittstelle |
| Instance | <pre><erwartungswert-matrix xmlns="http://vdv/ka/pkm/2"> <schnittstelle id="">{0,unbounded}</schnittstelle> </erwartungswert-matrix></pre> |
| Source | <code><xs:element name="erwartungswert-matrix" type="XML-Testdaten-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testanfrage / testmodul-pool

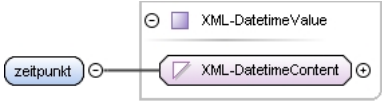
| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram |  The diagram shows the 'testmodul-pool' element connected to a container box labeled 'XML-Testmodul-Pool'. Inside this box, there is a multiplicity indicator '0..∞' connected to the 'item' element. |
| Type | XML-Testmodul-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><testmodul-pool xmlns="http://vdv/ka/pkm/2"> <item>{0,unbounded}</item> </testmodul-pool></pre> |
| Source | <pre><xs:element name="testmodul-pool" type="XML-Testmodul-Pool"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element pkm-testergebnis

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows the 'pkm-testergebnis' element connected to a container box labeled 'XML-Testergebnis'. Inside this box, there is a sub-container labeled 'XML-Testdaten (restriction base)'. This sub-container contains four elements: 'zeitpunkt', 'bemerkung', 'testfall-pool', and 'testmodul-pool'. Each of these elements is connected to a multiplicity indicator '1'. |
| Type | XML-Testergebnis |
| Type hierarchy | <ul style="list-style-type: none"> XML-Testdaten XML-Testergebnis |
| Properties | content: complex |
| Model | zeitpunkt , bemerkung , testfall-pool , testmodul-pool |
| Children | bemerkung, testfall-pool, testmodul-pool, zeitpunkt |
| Instance | <pre><pkm-testergebnis xmlns="http://vdv/ka/pkm/2"> <zeitpunkt>{1,1}</zeitpunkt> <bemerkung>{1,1}</bemerkung> <testfall-pool>{1,1}</testfall-pool> <testmodul-pool>{1,1}</testmodul-pool> </pkm-testergebnis></pre> |
| Source | <pre><xs:element name="pkm-testergebnis" type="XML-Testergebnis"/></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testergebnis / zeitpunkt

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows the 'zeitpunkt' element connected to a container box labeled 'XML-DatetimeValue'. Inside this box, there is an element labeled 'XML-DatetimeContent'. |

| | |
|-----------------|---|
| Type | XML-DatetimeValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:dateTime XML-DatetimeContent XML-DatetimeValue |
| Properties | content: complex |
| Source | <code><xs:element name="zeitpunkt" type="XML-DatetimeValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testergebnis / bemerkung

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="bemerkung" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testergebnis / testfall-pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Testfallergebnis-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Testfalldaten-Pool XML-Testfallergebnis-Pool |
| Properties | content: complex |
| Model | item+ |
| Children | item |
| Instance | <code><testfall-pool xmlns="http://vdv/ka/pkm/2"> <item>{1,unbounded}</item> </testfall-pool></code> |
| Source | <code><xs:element name="testfall-pool" type="XML-Testfallergebnis-Pool"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfallergebnis-Pool / item

| | |
|-------------|--------------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | {Sortiert nach erstem Element} |

| | |
|-----------------|--|
| Diagram | |
| Type | XML-Testfallergebnis-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Testfalldaten-Item XML-Testfallergebnis-Item |
| Properties | content: complex maxOccurs: unbounded |
| Model | nr , name , status , bemerkung , eingabewert-matrix , ausgabewert-matrix , erwartungswert-matrix |
| Children | ausgabewert-matrix, bemerkung, eingabewert-matrix, erwartungswert-matrix, name, nr, status |
| Instance | <pre><item xmlns="http://vdv/ka/pkm/2"> <nr>{1,1}</nr> <name>{1,1}</name> <status>{1,1}</status> <bemerkung>{1,1}</bemerkung> <eingabewert-matrix>{1,1}</eingabewert-matrix> <ausgabewert-matrix>{1,1}</ausgabewert-matrix> <erwartungswert-matrix>{1,1}</erwartungswert-matrix> </item></pre> |
| Source | <pre><xs:element name="item" type="XML-Testfallergebnis-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfallergebnis-Item / nr

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |

| | |
|-----------------|---|
| Type hierarchy | <ul style="list-style-type: none"> xs:long <ul style="list-style-type: none"> XML-IntegerContent <ul style="list-style-type: none"> XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="nr" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfallergebnis-Item / name

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string <ul style="list-style-type: none"> XML-StringContent <ul style="list-style-type: none"> XML-StringValue |
| Properties | content: complex |
| Source | <code><xs:element name="name" type="XML-StringValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfallergebnis-Item / status

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-IntegerValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:long <ul style="list-style-type: none"> XML-IntegerContent <ul style="list-style-type: none"> XML-IntegerValue |
| Properties | content: complex |
| Source | <code><xs:element name="status" type="XML-IntegerValue"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfallergebnis-Item / bemerkung

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> xs:string <ul style="list-style-type: none"> XML-StringContent <ul style="list-style-type: none"> XML-StringValue |

| | |
|-----------------|---|
| Properties | content: complex |
| Source | <code><xs:element name="bemerkung" type="XML-StringValue" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfallergebnis-Item / eingabewert-matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Testdaten-Matrix |
| Properties | content: complex |
| Model | schnittstelle* |
| Children | schnittstelle |
| Instance | <pre><eingabewert-matrix xmlns="http://vdv/ka/pkm/2"> <schnittstelle id=" ">{0,unbounded}</schnittstelle> </eingabewert-matrix></pre> |
| Source | <code><xs:element name="eingabewert-matrix" type="XML-Testdaten-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfallergebnis-Item / ausgabewert-matrix


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Testdaten-Matrix |
| Properties | content: complex |
| Model | schnittstelle* |
| Children | schnittstelle |
| Instance | <pre><ausgabewert-matrix xmlns="http://vdv/ka/pkm/2"> <schnittstelle id=" ">{0,unbounded}</schnittstelle> </ausgabewert-matrix></pre> |
| Source | <code><xs:element name="ausgabewert-matrix" type="XML-Testdaten-Matrix"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testfallergebnis-Item / erwartungswert-matrix

| | |
|------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | XML-Testdaten-Matrix |
| Properties | content: complex |
| Model | schnittstelle* |
| Children | schnittstelle |
| Instance | <pre><erwartungswert-matrix xmlns="http://vdv/ka/pkm/2"> <schnittstelle id=" ">{0,unbounded}</schnittstelle> </erwartungswert-matrix></pre> |


| | |
|-----------------|---|
| Source | <code><xs:element name="erwartungswert-matrix" type="XML-Testdaten-Matrix" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Element XML-Testergebnis / testmodul-pool


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | XML-Testmodul-Pool |
| Properties | content: complex |
| Model | item* |
| Children | item |
| Instance | <pre><testmodul-pool xmlns="http://vdv/ka/pkm/2"> <item>{0, unbounded}</item> </testmodul-pool></pre> |
| Source | <code><xs:element name="testmodul-pool" type="XML-Testmodul-Pool" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Simple Type(s)

Simple Type pkm:Modulversion_NUMMER


| | | | | | |
|-----------------|--|--------------|------------|--------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Annotations | Die Modulversion_NUMMER identifiziert einen Ergebnisstand innerhalb eines Entwicklungszyklus. Eine gueltige Modulversion_NUMMER ist groeßer als 0. | | | | |
| Diagram |  | | | | |
| Type | tns:ReferenceNumberFour | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour pkm:Modulversion_NUMMER | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 4294967295 | minInclusive | 0 |
| maxInclusive | 4294967295 | | | | |
| minInclusive | 0 | | | | |
| Used by | Element pkm:TX_MODUL/modulversion | | | | |
| Source | <pre><xs:simpleType name="Modulversion_NUMMER"> <xs:annotation> <xs:documentation>Die Modulversion_NUMMER identifiziert einen Ergebnisstand innerhalb eines Entwicklungszyklus. Eine gueltige Modulversion_NUMMER ist groeßer als 0.</xs:documentation> </xs:annotation> <xs:restriction base="ct:ReferenceNumberFour" /> </xs:simpleType></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd | | | | |

Simple Type pkm:Modulstatus_CODE


| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | Der Modulstatus_CODE gibt den Bearbeitungsstatus eines Produkt- oder Kontrollmoduls an. |
| Diagram |  |
| Type | restriction of tns:ReferenceNumberOne |

| | | | | | | | | | | | | | | | | |
|-----------------|--|--------------|--------------------------|--|--------------|---|--|-------------|---|-------------|-------------|---|---------|-------------|---|-------------|
| Type hierarchy | <ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:ReferenceNumberOne<ul style="list-style-type: none">pkm:Modulstatus_CODE | | | | | | | | | | | | | | | |
| Facets | <table><tr><td>maxInclusive</td><td>255</td><td></td></tr><tr><td>minInclusive</td><td>0</td><td></td></tr><tr><td>enumeration</td><td>0</td><td>Undefiniert</td></tr><tr><td>enumeration</td><td>1</td><td>Entwurf</td></tr><tr><td>enumeration</td><td>2</td><td>Freigegeben</td></tr></table> | maxInclusive | 255 | | minInclusive | 0 | | enumeration | 0 | Undefiniert | enumeration | 1 | Entwurf | enumeration | 2 | Freigegeben |
| maxInclusive | 255 | | | | | | | | | | | | | | | |
| minInclusive | 0 | | | | | | | | | | | | | | | |
| enumeration | 0 | Undefiniert | | | | | | | | | | | | | | |
| enumeration | 1 | Entwurf | | | | | | | | | | | | | | |
| enumeration | 2 | Freigegeben | | | | | | | | | | | | | | |
| Used by | <table><tr><td>Element</td><td>pkm:TX_MODUL/modulstatus</td></tr></table> | Element | pkm:TX_MODUL/modulstatus | | | | | | | | | | | | | |
| Element | pkm:TX_MODUL/modulstatus | | | | | | | | | | | | | | | |
| Source | <pre><xs:simpleType name="Modulstatus_CODE"> <xs:annotation> <xs:documentation>Der Modulstatus_CODE gibt den Bearbeitungsstatus eines Produkt- oder Kontrollmoduls an.</xs:documentation> </xs:annotation> <xs:restriction base="ct:ReferenceNumberOne"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Undefiniert</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Entwurf</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Freigegeben</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre> | | | | | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd | | | | | | | | | | | | | | | |

Simple Type XML-DatetimeContent


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | restriction of xs:dateTime |
| Facets | pattern [^\ .] + |
| Used by | Complex Type XML-DatetimeValue |
| Source | <pre><xs:simpleType name="XML-DatetimeContent"> <xs:restriction base="xs:dateTime"> <xs:pattern value="^[^\ .] +"/> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Simple Type XML-IntegerContent


| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | xs:long |
| Used by | Complex Type XML-IntegerValue |
| Source | <pre><xs:simpleType name="XML-IntegerContent"> <xs:restriction base="xs:long" /> </xs:simpleType></pre> |

| | |
|-----------------|---|
| | <code></xs:simpleType></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Simple Type XML-StringContent

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | xs:string |
| Used by | Complex Type XML-StringValue |
| Source | <pre><xs:simpleType name="XML-StringContent"> <xs:restriction base="xs:string"/> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Simple Type XML-Ref

| | | | | | | | |
|-----------------|--|----------|---|------------|---|---------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | | | |
| Diagram |  | | | | | | |
| Type | restriction of xs:int | | | | | | |
| Facets | minInclusive 1 | | | | | | |
| Used by | <table border="1"> <tr> <td>Elements</td><td>XML-Ausgangssequenz-Entry/ref, XML-Ref01/ref, XML-Ref11/ref, XML-RefList0N/ref, XML-RefList1N/ref, XML-RefSet0N/ref, XML-RefSet1N/ref</td></tr> <tr> <td>Attributes</td><td>XML-ArrayValue/@ref, XML-Ausgangsadapter-Entry/@ref, XML-Ausgangsdaten-Entry/@ref, XML-Ausgangssequenz-Entry/@ref, XML-Ausgangstext-Entry/@ref, XML-Bewertungsbezug-Entry/@ref, XML-Bewertungsnach-Entry/@ref, XML-Bewertungstyp-Entry/@ref, XML-Bewertungsueber-Entry/@ref, XML-Bewertungsvon-Entry/@ref, XML-CommonFunction/@ref, XML-CompositeFunction/@ref, XML-Eingangsadapter-Entry/@ref, XML-Mitnahmeanzahl-Entry/@ref, XML-Pool/@key, XML-Preis Anpassung-Entry/@ref, XML-Zuordnungsausnahmezu-Entry/@ref, XML-Zuordnungsbezug-Entry/@ref, XML-Zuordnungsdaten zu-Entry/@ref, XML-Zuordnungstyp-Entry/@ref, XML-Zuordnungsvon-Entry/@ref, XML-Zuordnungszu-Entry/@ref</td></tr> <tr> <td>Complex Types</td><td>XML-Ausgangsadapter-Entry, XML-Ausgangsdaten-Entry, XML-Bewertungsueber-Entry, XML-Eingangsadapter-Entry, XML-ObjectValue, XML-TarifpunktfolgenexklusionValue, XML-TarifpunktfolgeninklusionValue, XML-Zuordnungszu-Entry</td></tr> </table> | Elements | XML-Ausgangssequenz-Entry/ref, XML-Ref01/ref, XML-Ref11/ref, XML-RefList0N/ref, XML-RefList1N/ref, XML-RefSet0N/ref, XML-RefSet1N/ref | Attributes | XML-ArrayValue/@ref, XML-Ausgangsadapter-Entry/@ref, XML-Ausgangsdaten-Entry/@ref, XML-Ausgangssequenz-Entry/@ref, XML-Ausgangstext-Entry/@ref, XML-Bewertungsbezug-Entry/@ref, XML-Bewertungsnach-Entry/@ref, XML-Bewertungstyp-Entry/@ref, XML-Bewertungsueber-Entry/@ref, XML-Bewertungsvon-Entry/@ref, XML-CommonFunction/@ref, XML-CompositeFunction/@ref, XML-Eingangsadapter-Entry/@ref, XML-Mitnahmeanzahl-Entry/@ref, XML-Pool/@key, XML-Preis Anpassung-Entry/@ref, XML-Zuordnungsausnahmezu-Entry/@ref, XML-Zuordnungsbezug-Entry/@ref, XML-Zuordnungsdaten zu-Entry/@ref, XML-Zuordnungstyp-Entry/@ref, XML-Zuordnungsvon-Entry/@ref, XML-Zuordnungszu-Entry/@ref | Complex Types | XML-Ausgangsadapter-Entry, XML-Ausgangsdaten-Entry, XML-Bewertungsueber-Entry, XML-Eingangsadapter-Entry, XML-ObjectValue, XML-TarifpunktfolgenexklusionValue, XML-TarifpunktfolgeninklusionValue, XML-Zuordnungszu-Entry |
| Elements | XML-Ausgangssequenz-Entry/ref, XML-Ref01/ref, XML-Ref11/ref, XML-RefList0N/ref, XML-RefList1N/ref, XML-RefSet0N/ref, XML-RefSet1N/ref | | | | | | |
| Attributes | XML-ArrayValue/@ref, XML-Ausgangsadapter-Entry/@ref, XML-Ausgangsdaten-Entry/@ref, XML-Ausgangssequenz-Entry/@ref, XML-Ausgangstext-Entry/@ref, XML-Bewertungsbezug-Entry/@ref, XML-Bewertungsnach-Entry/@ref, XML-Bewertungstyp-Entry/@ref, XML-Bewertungsueber-Entry/@ref, XML-Bewertungsvon-Entry/@ref, XML-CommonFunction/@ref, XML-CompositeFunction/@ref, XML-Eingangsadapter-Entry/@ref, XML-Mitnahmeanzahl-Entry/@ref, XML-Pool/@key, XML-Preis Anpassung-Entry/@ref, XML-Zuordnungsausnahmezu-Entry/@ref, XML-Zuordnungsbezug-Entry/@ref, XML-Zuordnungsdaten zu-Entry/@ref, XML-Zuordnungstyp-Entry/@ref, XML-Zuordnungsvon-Entry/@ref, XML-Zuordnungszu-Entry/@ref | | | | | | |
| Complex Types | XML-Ausgangsadapter-Entry, XML-Ausgangsdaten-Entry, XML-Bewertungsueber-Entry, XML-Eingangsadapter-Entry, XML-ObjectValue, XML-TarifpunktfolgenexklusionValue, XML-TarifpunktfolgeninklusionValue, XML-Zuordnungszu-Entry | | | | | | |
| Source | <pre><xs:simpleType name="XML-Ref"> <xs:restriction base="xs:int"> <xs:minInclusive value="1"/> </xs:restriction> </xs:simpleType></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | |


Simple Type XML-DurationContent

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | restriction of xs:duration |
| Facets | pattern [^\\.]+ |
| Used by | Complex Type XML-DurationValue |
| Source | <pre><xs:simpleType name="XML-DurationContent"> <xs:restriction base="xs:duration"> <xs:pattern value="[^\\.]+"/> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Simple Type XML-BinaryContent

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | xs:hexBinary |
| Used by | Complex Type XML-BinaryValue |
| Source | <pre><xs:simpleType name="XML-BinaryContent"> <xs:restriction base="xs:hexBinary"/> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Simple Type XML-DateContent

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | restriction of xs:date |
| Facets | pattern [^Z:] * |
| Used by | Complex Type XML-DateValue |
| Source | <pre><xs:simpleType name="XML-DateContent"> <xs:restriction base="xs:date"> <xs:pattern value="[^Z:] *"/> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Simple Type XML-TimeContent


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | restriction of xs:time |
| Facets | pattern [^\ .] + |
| Used by | Complex Type XML-TimeValue |
| Source | <pre><xs:simpleType name="XML-TimeContent"> <xs:restriction base="xs:time"> <xs:pattern value="[^\ .] +"/> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Simple Type XML-BooleanContent


| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | restriction of xs:boolean |
| Facets | pattern [^01] + |
| Used by | Complex Type XML-BooleanValue |
| Source | <pre><xs:simpleType name="XML-BooleanContent"> <xs:restriction base="xs:boolean"> <xs:pattern value="[^01] +"/> </xs:restriction> </xs:simpleType></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|


Simple Type XML-PolygonContent

| | | | |
|-----------------|--|---------|-------------------------------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  | | |
| Type | restriction of XML-IntegerArrayContent | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long <ul style="list-style-type: none"> XML-IntegerContent <ul style="list-style-type: none"> XML-IntegerArrayContent <ul style="list-style-type: none"> XML-PolygonContent | | |
| Facets | <table border="1"> <tr> <td>pattern</td> <td>((\d+\s+\d+\s+)*(\d+\s+\d+))?</td> </tr> </table> | pattern | ((\d+\s+\d+\s+)*(\d+\s+\d+))? |
| pattern | ((\d+\s+\d+\s+)*(\d+\s+\d+))? | | |
| Used by | Complex Type XML-Geobezug-Part | | |
| Source | <pre><xs:simpleType name="XML-PolygonContent"> <xs:restriction base="XML-IntegerArrayContent"> <xs:pattern value="((\d+\s+\d+\s+)*(\d+\s+\d+))?" /> </xs:restriction> </xs:simpleType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Simple Type XML-IntegerArrayContent

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | list of XML-IntegerContent |
| Used by | Simple Type XML-PolygonContent |
| Source | <pre><xs:simpleType name="XML-IntegerArrayContent"> <xs:list itemType="XML-IntegerContent" /> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Simple Type XML-Testablauf-Ref

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | list of xs:byte |
| Used by | Attribute XML-Testdatenablauf-Entry/@ref |
| Source | <pre><xs:simpleType name="XML-Testablauf-Ref"> <xs:list itemType="xs:byte" /> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type(s)

Complex Type pkm:TX_MODUL

| | |
|-------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | Ein TX_MODUL gilt für alle Transaktionsdatensätze zur Verteilung von Produkt- und Kontrollmodulen. Dieser Datensatz enthaelt Auszuege aus den Modul- und Versionsdaten eines Moduls. |

| | |
|-----------------|---|
| Diagram | |
| Properties | abstract: true |
| Used by | Complex Types pkm:TX_MODULE_Bereitstellung, pkm:TX_MODULE_Daten, pkm:TX_MODULE_Lieferung |
| Model | modultueftigkeitsbeginn , modultueftigkeitsversion , modultueftigkeitsstatus , schnittstellenversion , modulnamenszusatz , bemerkung |
| Children | bemerkung, modultueftigkeitsbeginn, modulnamenszusatz, modultueftigkeitsstatus, modultueftigkeitsversion, schnittstellenversion |
| Source | <pre> <xs:complexType name="TX_MODULE" abstract="true"> <xs:annotation> <xs:documentation>Ein TX_MODULE gilt für alle Transaktionsdatensätze zur Verteilung von Produkt- und Kontrollmodulen. Dieser Datensatz enthält Auszüge aus den Modul- und Versionsdaten eines Moduls.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="modultueftigkeitsbeginn" type="ct:DateTimeCompact" /> <xs:element name="modultueftigkeitsversion" type="tns:Modultueftigkeits_VERSION" /> <xs:element name="modultueftigkeitsstatus" type="tns:Modultueftigkeits_STATUS_CODE" /> <xs:element name="schnittstellenversion" type="ion:PrintableString" /> <xs:element name="modulnamenszusatz" type="ion:PrintableString" /> <xs:element name="bemerkung" type="ion:PrintableString" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Complex Type pkm:TX_MODULE_Daten

| | |
|-------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | Ein TX_MODULE_Daten ist die Ausprägung eines TX_MODULE, der genau dann verwendet wird, wenn der Transaktionsdatensatz zur Verteilung von Produkt- bzw. Kontrollmodul ein entsprechendes Modul enthält. |
| Diagram | |

| | |
|----------------------|--|
| Type | extension of pkm:TX_MODUL |
| Type hierarchy | <ul style="list-style-type: none"> • pkm:TX_MODUL • pkm:TX_MODUL_Daten |
| Used by | Element pkm:TXVPVTM_Type/modulinformationDaten |
| Model | modulgueltigkeitsbeginn , modulversion , modulstatus , schnittstellenversion , modulnamenszusatz , bemerkung , pvtarifmodul |
| Children | bemerkung, modulgueltigkeitsbeginn, modulnamenszusatz, modulstatus, modulversion, pvtarifmodul, schnittstellenversion |
| Source | <pre> <xs:complexType name="TX_MODUL_Daten"> <xs:annotation> <xs:documentation>Ein TX_MODUL_Daten ist die Auspraegung eines TX_MODUL, der genau dann verwendet wird, wenn der Transaktionsdatensatz zur Verteilung von Produkt- bzw. Kontrollmodul ein entsprechendes Modul enthaelt.</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_MODUL"> <xs:sequence> <xs:element name="pvtarifmodul" type="xs:base64Binary" xmime:expectedContentTypes="application/gzip"> <xs:annotation> <xs:documentation>Dieses Element enthaelt die PKM Beschreibung in XML, deren Format in pkm:XML-PVTarifmodul bzw. http://vdv/ka/pkm/2:XML-PVTarifmodul definiert wird. Die Daten liegen im XML Format vor, die im gzip Format (RFC1952) komprimiert und anschliessend Base64 codiert sind. Um die PKM Beschreibungsdaten zu erhalten, muss eine Dekodierung von Base64 nach Binary stattfinden. Dieses Binaerformat ist dann gezippt und kann nach Umwandeln in eine Datei mit einer Standard- Software auf Windows oder Unix entpackt werden. Das Einbetten der XML-Struktur in gezippten Base64 bietet zum einen den Vorteil der Komprimierung von ca. 10:1. Zum anderen ist ein weiterer Vorteil, dass die XSD-Validierung nicht bei Annahme der Nachricht stattfindet sondern zu einem spaeteren Zeitpunkt durchgefuehrt werden kann. Damit kann die Annahme eines PKM-Moduls synchron erfolgen.</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/2/XML-Schema_PKM_TX.xsd |

Complex Type pkm:TX_MODUL_Bereitstellung

| | |
|-------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | Ein TX_MODUL_Bereitstellung ist die Auspraegung eines TX_MODUL, wenn der Transaktionsdatensatz zur Verteilung von Produkt- bzw. Kontrollmodul kein Modul, sondern nur Informationen zum Download des entsprechenden Moduls enthaelt. |
| Diagram | <pre> classDiagram class tns_TX_MODUL["tns:TX_MODUL (extension base)"] { Abstract true } class TX_MODUL_Bereitstellung { Base Type tns:TX_MODUL } class modulgueltigkeitsbeginn { Type ct:DateTimeCompact } class modulversion { Type tns:Modulversion_NUMMER } class modulstatus { Type tns:Modulstatus_CODE } class schnittstellenversion { Type ion:PrintableString } class modulnamenszusatz { Type ion:PrintableString } class bemerkung { Type ion:PrintableString } class url { Type ion:PrintableString } class bereitstellungsdatum { Type ct:DateCompact } tns_TX_MODUL --> TX_MODUL_Bereitstellung tns_TX_MODUL --> modulgueltigkeitsbeginn tns_TX_MODUL --> modulversion tns_TX_MODUL --> modulstatus tns_TX_MODUL --> schnittstellenversion tns_TX_MODUL --> modulnamenszusatz tns_TX_MODUL --> bemerkung tns_TX_MODUL --> url tns_TX_MODUL --> bereitstellungsdatum </pre> |

| | |
|-----------------|--|
| Type | extension of pkm:TX_MODUL |
| Type hierarchy | <ul style="list-style-type: none"> pkm:TX_MODUL pkm:TX_MODUL_Bereitstellung |
| Used by | Element pkm:TXVPVTM_Type/modulinformationBereitstellung |
| Model | modulgueltigkeitsbeginn , modulversion , modulstatus , schnittstellenversion , modulnamenszusatz , bemerkung , url , bereitstellungsdatum |
| Children | bemerkung, bereitstellungsdatum, modulgueltigkeitsbeginn, modulnamenszusatz, modulstatus, modulversion, schnittstellenversion, url |
| Source | <pre><xs:complexType name="TX_MODUL_Bereitstellung"> <xs:annotation> <xs:documentation>Ein TX_MODUL_Bereitstellung ist die Auspraegung eines TX_MODUL, wenn der Transaktionsdatensatz zur Verteilung von Produkt- bzw. Kontrollmodul kein Modul, sondern nur Informationen zum Download des entsprechenden Moduls enthaelt.</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_MODUL"> <xs:sequence> <xs:element name="url" type="ion:PrintableString"/> <xs:element name="bereitstellungsdatum" type="ct:DateCompact"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Complex Type pkm:TX_MODUL_Lieferung

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | Ein TX_MODUL_Lieferung ist die Auspraegung eines TX_MODUL, wenn der Transaktionsdatensatz zur Verteilung von Produkt- bzw. Kontrollmodul kein Modul, sondern Angaben zur anderweitigen Lieferung des entsprechenden Moduls enthaelt. |
| Diagram | <pre> classDiagram class tns_TX_MODUL["tns:TX_MODUL (extension base)"] { <<abstract>> modulgueltigkeitsbeginn : ct.DateTimeCompact modulversion : tns:Modulversion_NUMMER modulstatus : tns:Modulstatus_CODE schnittstellenversion : ion:PrintableString modulnamenszusatz : ion:PrintableString bemerkung : ion:PrintableString } class TX_MODUL_Lieferung { Base Type: tns:TX_MODUL lieferart : ion:PrintableString senddatum : ct.DateCompact } tns_TX_MODUL < -- TX_MODUL_Lieferung </pre> |
| Type | extension of pkm:TX_MODUL |
| Type hierarchy | <ul style="list-style-type: none"> pkm:TX_MODUL pkm:TX_MODUL_Lieferung |
| Used by | Element pkm:TXVPVTM_Type/modulinformationLieferung |
| Model | modulgueltigkeitsbeginn , modulversion , modulstatus , schnittstellenversion , modulnamenszusatz , bemerkung , lieferart , senddatum |
| Children | bemerkung, lieferart, modulgueltigkeitsbeginn, modulnamenszusatz, modulstatus, modulversion, schnittstellenversion, senddatum |

| | |
|-----------------|---|
| Source | <pre> <xs:complexType name="TX_MODUL_Lieferung"> <xs:annotation> <xs:documentation>Ein TX_MODUL_Lieferung ist die Auspraegung eines TX_MODUL, wenn der Transaktionsdatensatz zur Verteilung von Produkt- bzw. Kontrollmodul kein Modul, sondern Angaben zur anderweitigen Lieferung des entsprechenden Moduls enthaelt.</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_MODUL"> <xs:sequence> <xs:element name="lieferart" type="ion:PrintableString"/> <xs:element name="sendedatum" type="ct:DateCompact"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Complex Type pkm:TXVPVTM_Type

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Annotations | <p>Verteilung von PV-Tarifmodulen, auf deren Basis die Preisberechnung fuer die ausgegebenen Berechtigungen erfolgt.</p> <p>Mit TXVPVTM werden Tarifmodule vom PV u.a. an das Produktclearing uebermittelt.</p> <p>Die Struktur enthaelt ergaenzende allgemeine Informationen zum Modul.</p> <p>Das Modul selbst kann entweder die eigentlichen Daten des Tarifmoduls enthalten oder nur Informationen zur Bereitstellung oder einer erfolgten Lieferung.</p> |
| Diagram | <pre> classDiagram class TXVPVTM_Type { Base Type: ion:TX_BASE_Type } class txbase { Type: tns:TX_BASE_Type } class modulinformationDaten { Type: tns:TX_MODUL_Daten } class modulinformationBereitstellung { Type: tns:TX_MODUL_Bereitstellung } class modulinformationLieferung { Type: tns:TX_MODUL_Lieferung } TXVPVTM_Type -- > ion:TX_BASE_Type TXVPVTM_Type -- txbase TXVPVTM_Type -- modulinformationDaten TXVPVTM_Type -- modulinformationBereitstellung TXVPVTM_Type -- modulinformationLieferung </pre> |
| Type | extension of tns:TX_BASE_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type pkm:TXVPVTM_Type |
| Used by | Element pkm:TXVPVTM |
| Model | txbase , (modulinformationDaten modulinformationBereitstellung modulinformationLieferung) |
| Children | modulinformationBereitstellung, modulinformationDaten, modulinformationLieferung, txbase |
| Source | <pre> <xs:complexType name="TXVPVTM_Type"> <xs:annotation> <xs:documentation>Verteilung von PV-Tarifmodulen, auf deren Basis die Preisberechnung fuer die ausgegebenen Berechtigungen erfolgt. Mit TXVPVTM werden Tarifmodule vom PV u.a. an das Produktclearing uebermittelt. Die Struktur enthaelt ergaenzende allgemeine Informationen zum Modul. Das Modul selbst kann entweder die eigentlichen Daten des Tarifmoduls enthalten oder nur Informationen zur Bereitstellung oder einer erfolgten Lieferung.</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="ion:TX_BASE_Type"> <xs:choice> <xs:element name="modulinformationDaten" type="tns:TX_MODUL_Daten"/> <xs:element name="modulinformationBereitstellung" type="tns:TX_MODUL_Bereitstellung"/> <xs:element name="modulinformationLieferung" type="tns:TX_MODUL_Lieferung"/> </xs:choice> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Complex Type XML-RNTarifmodul

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram

XML-Tarifmodul (restriction base)



| | |
|-----------------|---|
| Type | restriction of XML-Tarifmodul |
| Type hierarchy | <ul style="list-style-type: none"> XML-Tarifmodul XML-RNTarifmodul |
| Used by | Elements XML-Testmodul-Item/moduldaten, rntm |
| Model | version , herausgeber , fachablauf , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , datentabelle-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , produktadapter-pool , identifikationsparameteradapter-pool , tarifpunktadapter-pool , tarifpunktreferenzadapter-pool , wegevariantenadapter-pool , linienadapter-pool , verkehrsmitteltypadapter-pool , bezahlartadapter-pool , wahrungsadapter-pool , zahlungsintervalladapter-pool , mitnahmetypadapter-pool , rabattmedientypadapter-pool , modulkontextadapter-pool , nummerninterpretation-pool , schluessel-pool , tarifmodul-pool , kommentar-pool , signatur , annotation |
| Children | annotation, ausgangsdaten-pool, ausgangskontext-pool, ausgangsschnittstelle-pool, ausnahme-pool, auswahldaten-pool, auswahloption-pool, bezahlartadapter-pool, datentabelle-pool, eingangsschnittstelle-pool, fachablauf, funktion-pool, herausgeber, identifikationsparameteradapter-pool, kommentar-pool, linienadapter-pool, mitnahmetypadapter-pool, modulkontextadapter-pool, nummerninterpretation-pool, produktadapter-pool, rabattmedientypadapter-pool, schluessel-pool, schritt-pool, signatur, sprache-pool, tarifmodul-pool, tarifpunktadapter-pool, tarifpunktreferenzadapter-pool, text-matrix, variable-pool, verkehrsmitteltypadapter-pool, version, wahrungsadapter-pool, wegevariantenadapter-pool, zahlungsintervalladapter-pool |
| Source | <pre> <xs:complexType name="XML-RNTarifmodul"> <xs:complexContent> <xs:restriction base="XML-Tarifmodul"> <xs:sequence> <xs:element name="version" type="XML-Version-Part"/> <xs:element name="herausgeber" type="XML-Organisation-Part"/> <xs:element name="fachablauf" type="XML-RNFachablauf-Part"/> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> <xs:element name="sprache-pool" type="XML-Sprache-Pool"/> <xs:element name="eingangsschnittstelle-pool" type="XML-Eingangsschnittstelle-Pool"/> <xs:element name="ausgangsschnittstelle-pool" type="XML-Ausgangsschnittstelle-Pool"/> <xs:element name="ausgangskontext-pool" type="XML-Ausgangskontext-Pool"/> <xs:element name="datentabelle-pool" type="XML-Datentabelle-Pool"/> <xs:element name="schritt-pool" type="XML-Schritt-Pool"/> <xs:element name="variable-pool" type="XML-Variable-Pool"/> <xs:element name="funktion-pool" type="XML-Funktion-Pool"/> <xs:element name="ausnahme-pool" type="XML-Ausnahme-Pool"/> <xs:element name="auswahldaten-pool" type="XML-Auswahldaten-Pool"/> <xs:element name="auswahloption-pool" type="XML-Auswahloption-Pool"/> <xs:element name="ausgangsdaten-pool" type="XML-Ausgangsdaten-Pool"/> <xs:element name="produktadapter-pool" type="XML-Produktadapter-Pool"/> <xs:element name="identifikationsparameteradapter-pool" type="XML- Identifikationsparameteradapter-Pool"/> <xs:element name="tarifpunktadapter-pool" type="XML-Tarifpunktadapter-Pool"/> <xs:element name="tarifpunktreferenzadapter-pool" type="XML-Tarifpunktreferenzadapter-Pool"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tarifmodul

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| Used by | Complex Types XML-PVTTarifmodul, XML-RNTarifmodul |
|----------|--|
| Model | version, herausgeber, fachablauf, text-matrix, sprache-pool, eingangsschnittstelle-pool, ausgangsschnittstelle-pool, ausgangskontext-pool, datentabelle-pool, schritt-pool, variable-pool, funktion-pool, ausnahme-pool, auswahldaten-pool, auswahloption-pool, ausgangsdaten-pool, ausgangsdatenfamilie-pool{0,1}, organisation-pool{0,1}, efmprodukt-pool{0,1}, tarifprodukt-pool{0,1}, fremdprodukt-pool{0,1}, produktadapter-pool{0,1}, produktgruppe-pool{0,1}, kontingentierung-pool{0,1}, nachfolgekriterium-pool{0,1}, abhaengigkeitskriterium-pool{0,1}, identifikationsparameter-pool{0,1}, identifikationsparameteradapter-pool{0,1}, tarifpunkt-pool{0,1}, tarifpunktadapter-pool{0,1}, tarifpunktgruppe-pool{0,1}, tarifpunktreferenz-pool{0,1}, tarifpunktreferenzadapter-pool{0,1}, zuordnungstyp-pool{0,1}, zuordnungsdaten-matrix{0,1}, zuordnungsausnahme-matrix{0,1}, wegevariante-pool{0,1}, wegevariantenadapter-pool{0,1}, bewertungstyp-pool{0,1}, bewertungsdaten-pool{0,1}, bewertungsdaten-matrix{0,1}, bewertungsausnahme-matrix{0,1}, linie-pool{0,1}, linienadapter-pool{0,1}, verkehrsmitteltyp-pool{0,1}, verkehrsmittelpooladapter-pool{0,1}, verkehrsmittellinienbezug-pool{0,1}, bezahlart-pool{0,1}, bezahlartadapter-pool{0,1}, wachrung-pool{0,1}, wachrungsadapter-pool{0,1}, zahlungsintervall-pool{0,1}, zahlungsintervalladapter-pool{0,1}, mitnahmetyp-pool{0,1}, mitnahmetypadapter-pool{0,1}, rabattmedientyp-pool{0,1}, rabattmedientypadapter-pool{0,1}, modulkontext-pool{0,1}, modulkontextadapter-pool{0,1}, spezialbedingung-pool{0,1}, tagesbedingung-pool{0,1}, tageszeitbedingung-pool{0,1}, zeitraumbedingung-pool{0,1}, tarifpunktbedingung-pool{0,1}, bewertungsbedingung-pool{0,1}, geosegmentbedingung-pool{0,1}, verkehrsmittellinienbedingung-pool{0,1}, bezahlartbedingung-pool{0,1}, zahlungsintervallbedingung-pool{0,1}, mitnahmebedingung-pool{0,1}, rabattmedienbedingung-pool{0,1}, modulkontextbedingung-pool{0,1}, bifainterpretation-pool{0,1}, nummerninterpretation-pool, bitleisteninterpretation-pool{0,1}, raumnummerninterpretation-pool{0,1}, schlussel-pool, tarifmodul-pool{0,1}, kommentar-pool, signatur, annotation |
| Children | abhaengigkeitskriterium-pool, annotation, ausgangsdaten-pool, ausgangsdatenfamilie-pool, ausgangskontext-pool, ausgangsschnittstelle-pool, ausnahme-pool, auswahldaten-pool, auswahloption-pool, bewertungsausnahme-matrix, bewertungsbedingung-pool, bewertungsdaten-matrix, bewertungsdaten-pool, bewertungstyp-pool, bezahlart-pool, bezahlartadapter-pool, bezahlartbedingung-pool, bifainterpretation-pool, bitleisteninterpretation-pool, datentabelle-pool, efmprodukt-pool, eingangsschnittstelle-pool, fachablauf, fremdprodukt-pool, funktion-pool, geosegmentbedingung-pool, herausgeber, identifikationsparameter-pool, identifikationsparameteradapter-pool, kommentar-pool, kontingentierung-pool, linie-pool, linienadapter-pool, mitnahmebedingung-pool, mitnahmetyp-pool, mitnahmetypadapter-pool, modulkontext-pool, modulkontextadapter-pool, modulkontextbedingung-pool, nachfolgekriterium-pool, nummerninterpretation-pool, organisation-pool, produktadapter-pool, produktgruppe-pool, rabattmedienbedingung-pool, rabattmedientyp-pool, rabattmedientypadapter-pool, raumnummerninterpretation-pool, schlussel-pool, schritt-pool, signatur, spezialbedingung-pool, sprache-pool, tagesbedingung-pool, tageszeitbedingung-pool, tarifmodul-pool, tarifprodukt-pool, tarifpunkt-pool, tarifpunktadapter-pool, tarifpunktbedingung-pool, tarifpunktgruppe-pool, tarifpunktreferenz-pool, tarifpunktreferenzadapter-pool, text-matrix, variable-pool, verkehrsmittellinienbedingung-pool, verkehrsmittellinienbezug-pool, verkehrsmitteltyp-pool, verkehrsmittelpooladapter-pool, version, wachrung-pool, wachrungsadapter-pool, wegevariante-pool, wegevariantenadapter-pool, zahlungsintervall-pool, zahlungsintervalladapter-pool, zahlungsintervallbedingung-pool, zeitraumbedingung-pool, zuordnungsausnahme-matrix, zuordnungsdaten-matrix, zuordnungstyp-pool |
| Source | <pre> <xs:complexType name="XML-Tarifmodul"> <xs:sequence> <xs:element name="version" type="XML-Version-Part" /> <xs:element name="herausgeber" type="XML-Organisation-Part" /> <xs:element name="fachablauf" type="XML-Fachablauf-Part" /> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /> <xs:element name="sprache-pool" type="XML-Sprache-Pool" /> <xs:element name="eingangsschnittstelle-pool" type="XML-Eingangsschnittstelle-Pool" /> <xs:element name="ausgangsschnittstelle-pool" type="XML-Ausgangsschnittstelle-Pool" /> <xs:element name="ausgangskontext-pool" type="XML-Ausgangskontext-Pool" /> <xs:element name="datentabelle-pool" type="XML-Datentabelle-Pool" /> <xs:element name="schritt-pool" type="XML-Schritt-Pool" /> <xs:element name="variable-pool" type="XML-Variable-Pool" /> <xs:element name="funktion-pool" type="XML-Funktion-Pool" /> <xs:element name="ausnahme-pool" type="XML-Ausnahme-Pool" /> <xs:element name="auswahldaten-pool" type="XML-Auswahldaten-Pool" /> <xs:element name="auswahloption-pool" type="XML-Auswahloption-Pool" /> <xs:element name="ausgangsdaten-pool" type="XML-Ausgangsdaten-Pool" /> <xs:element name="ausgangsdatenfamilie-pool" type="XML-Ausgangsdatenfamilie-Pool" minOccurs="0" /> > <xs:element name="organisation-pool" type="XML-Organisation-Pool" minOccurs="0" /> <xs:element name="efmprodukt-pool" type="XML-EFMProdukt-Pool" minOccurs="0" /> <xs:element name="tarifprodukt-pool" type="XML-Tarifprodukt-Pool" minOccurs="0" /> <xs:element name="fremdprodukt-pool" type="XML-Fremdprodukt-Pool" minOccurs="0" /> <xs:element name="produktadapter-pool" type="XML-Produktadapter-Pool" minOccurs="0" /> <xs:element name="produktgruppe-pool" type="XML-Produktgruppe-Pool" minOccurs="0" /> <xs:element name="kontingentierung-pool" type="XML-Kontingentierung-Pool" minOccurs="0" /> <xs:element name="nachfolgekriterium-pool" type="XML-Nachfolgekriterium-Pool" minOccurs="0" /> <xs:element name="abhaengigkeitskriterium-pool" type="XML-Abhaengigkeitskriterium-Pool" minOccurs="0" /> <xs:element name="identifikationsparameter-pool" type="XML-Identifikationsparameter-Pool" minOccurs="0" /> <xs:element name="identifikationsparameteradapter-pool" type="XML-Identifikationsparameteradapter-Pool" minOccurs="0" /> <xs:element name="tarifpunkt-pool" type="XML-Tarifpunkt-Pool" minOccurs="0" /> <xs:element name="tarifpunktadapter-pool" type="XML-Tarifpunktadapter-Pool" minOccurs="0" /> <xs:element name="tarifpunktgruppe-pool" type="XML-Tarifpunktgruppe-Pool" minOccurs="0" /> <xs:element name="tarifpunktreferenz-pool" type="XML-Tarifpunktreferenz-Pool" minOccurs="0" /> <xs:element name="tarifpunktreferenzadapter-pool" type="XML-Tarifpunktreferenzadapter-Pool" minOccurs="0" /> <xs:element name="zuordnungstyp-pool" type="XML-Zuordnungstyp-Pool" minOccurs="0" /> </pre> |

| | |
|----------------------|---|
| | <pre> <xs:element name="zuordnungsdaten-matrix" type="XML-Zuordnungsdaten-Matrix" minOccurs="0"/> <xs:element name="zuordnungsausnahme-matrix" type="XML-Zuordnungsausnahme-Matrix" minOccurs="0"/> > <xs:element name="wegevariante-pool" type="XML-Wegevariante-Pool" minOccurs="0"/> <xs:element name="wegevariantenadapter-pool" type="XML-Wegevariantenadapter-Pool" minOccurs="0"/> > <xs:element name="bewertungstyp-pool" type="XML-Bewertungstyp-Pool" minOccurs="0"/> <xs:element name="bewertungsdaten-pool" type="XML-Bewertungsdaten-Pool" minOccurs="0"/> <xs:element name="bewertungsdaten-matrix" type="XML-Bewertungsdaten-Matrix" minOccurs="0"/> <xs:element name="bewertungsausnahme-matrix" type="XML-Bewertungsausnahme-Matrix" minOccurs="0"/> > <xs:element name="linie-pool" type="XML-Linie-Pool" minOccurs="0"/> <xs:element name="linienadapter-pool" type="XML-Linienadapter-Pool" minOccurs="0"/> <xs:element name="verkehrsmitteltyp-pool" type="XML-Verkehrsmitteltyp-Pool" minOccurs="0"/> <xs:element name="verkehrsmitteltypadapter-pool" type="XML-Verkehrsmitteltypadapter-Pool" minOccurs="0"/> <xs:element name="verkehrsmittellinienbezug-pool" type="XML-Verkehrsmittellinienbezug-Pool" minOccurs="0"/> <xs:element name="bezahlart-pool" type="XML-Bezahlart-Pool" minOccurs="0"/> <xs:element name="bezahlartadapter-pool" type="XML-Bezahlartadapter-Pool" minOccurs="0"/> <xs:element name="waehrung-pool" type="XML-Waehrung-Pool" minOccurs="0"/> <xs:element name="waehrungsadapter-pool" type="XML-Waehrungsadapter-Pool" minOccurs="0"/> <xs:element name="zahlungsintervall-pool" type="XML-Zahlungsintervall-Pool" minOccurs="0"/> <xs:element name="zahlungsintervalladapter-pool" type="XML-Zahlungsintervalladapter-Pool" minOccurs="0"/> <xs:element name="mitnahmetyp-pool" type="XML-Mitnahmetyp-Pool" minOccurs="0"/> <xs:element name="mitnahmetypadapter-pool" type="XML-Mitnahmetypadapter-Pool" minOccurs="0"/> <xs:element name="rabattmedientyp-pool" type="XML-Rabattmedientyp-Pool" minOccurs="0"/> <xs:element name="rabattmedientypadapter-pool" type="XML-Rabattmedientypadapter-Pool" minOccurs="0"/> <xs:element name="modulkontext-pool" type="XML-Modulkontext-Pool" minOccurs="0"/> <xs:element name="modulkontextadapter-pool" type="XML-Modulkontextadapter-Pool" minOccurs="0"/> <xs:element name="spezialbedingung-pool" type="XML-Spezialbedingung-Pool" minOccurs="0"/> <xs:element name="tagesbedingung-pool" type="XML-Tagesbedingung-Pool" minOccurs="0"/> <xs:element name="tageszeitbedingung-pool" type="XML-Tageszeitbedingung-Pool" minOccurs="0"/> <xs:element name="zeitraumbedingung-pool" type="XML-Zeitraumbedingung-Pool" minOccurs="0"/> <xs:element name="tarifpunktbedingung-pool" type="XML-Tarifpunktbedingung-Pool" minOccurs="0"/> <xs:element name="bewertungsbedingung-pool" type="XML-Bewertungsbedingung-Pool" minOccurs="0"/> <xs:element name="geosegmentbedingung-pool" type="XML-Geosegmentbedingung-Pool" minOccurs="0"/> <xs:element name="verkehrsmittellinienbedingung-pool" type="XML-Verkehrsmittellinienbedingung- Pool" minOccurs="0"/> <xs:element name="bezahlartbedingung-pool" type="XML-Bezahlartbedingung-Pool" minOccurs="0"/> <xs:element name="zahlungsintervallbedingung-pool" type="XML-Zahlungsintervallbedingung-Pool" minOccurs="0"/> <xs:element name="mitnahmebedingung-pool" type="XML-Mitnahmebedingung-Pool" minOccurs="0"/> <xs:element name="rabattmedienbedingung-pool" type="XML-Rabattmedienbedingung-Pool" minOccurs="0"/> <xs:element name="modulkontextbedingung-pool" type="XML-Modulkontextbedingung-Pool" minOccurs="0"/> <xs:element name="bifainterpretation-pool" type="XML-BIFAInterpretation-Pool" minOccurs="0"/> <xs:element name="nummerninterpretation-pool" type="XML-Nummerninterpretation-Pool"/> <xs:element name="bitleisteninterpretation-pool" type="XML-Bitleisteninterpretation-Pool" minOccurs="0"/> <xs:element name="raumnummerninterpretation-pool" type="XML-Raumnummerninterpretation-Pool" minOccurs="0"/> <xs:element name="schluessel-pool" type="XML-Schluessel-Pool"/> <xs:element name="tarifmodul-pool" type="XML-Tarifmodul-Pool" minOccurs="0"/> <xs:element name="kommentar-pool" type="XML-Kommentar-Pool"/> <xs:element name="signatur" type="XML-Signatur-Part"/> <xs:element name="annotation" type="XML-Annotation-Part"/> </xs:sequence> </xs:complexType> </pre> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Version-Part

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | |
|-----------------|---|---|
| Diagram | | |
| Used by | Elements | XML-PVTTarifmodul/version, XML-RNTarifmodul/version, XML-Tarifmodul/version, XML-Version-Part/vorgaengerversion |
| Model | gueltigkeitsbeginn , externNr , internNr , modulstatus , modulspezifikation , modulnamenszusatz , speicherzeitpunkt , bearbeiter , freigeber , bemerkung , vorgaengerversion {0,1} | |
| Children | bearbeiter, bemerkung, externNr, freigeber, gueltigkeitsbeginn, internNr, modulnamenszusatz, modulspezifikation, modulstatus, speicherzeitpunkt, vorgaengerversion | |
| Source | <pre> <xs:complexType name="XML-Version-Part"> <xs:sequence> <xs:element name="gueltigkeitsbeginn" type="XML-DatetimeValue"/> <xs:element name="externNr" type="XML-IntegerValue"/> <xs:element name="internNr" type="XML-IntegerValue"/> <xs:element name="modulstatus" type="XML-IntegerValue"/> <xs:element name="modulspezifikation" type="XML-StringValue"/> <xs:element name="modulnamenszusatz" type="XML-StringValue"/> <xs:element name="speicherzeitpunkt" type="XML-DatetimeValue"/> <xs:element name="bearbeiter" type="XML-StringValue"/> <xs:element name="freigeber" type="XML-StringValue"/> <xs:element name="bemerkung" type="XML-StringValue"/> <xs:element name="vorgaengerversion" type="XML-Version-Part" minOccurs="0"/> </xs:sequence> </xs:complexType> </pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Complex Type XML-DatetimeValue

| | | |
|-----------------|---|--|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram | | |
| Type | extension of XML-DatetimeContent | |
| Type hierarchy | <ul style="list-style-type: none"> xs:dateTime <ul style="list-style-type: none"> XML-DatetimeContent <ul style="list-style-type: none"> XML-DatetimeValue | |
| Used by | Elements | XML-ArrayValue/zeitpunkt, XML-CommonFunction/zeitpunkt, XML-CompositeFunction/zeitpunkt, XML-FunctionValue/zeitpunkt, XML-Kriterienzeitraum-Part/beginn, XML-Kriterienzeitraum-Part/ende, XML-Testanfrage/zeitpunkt, XML-Testdaten-Array/zeitpunkt, XML-Testdaten-Value/zeitpunkt, XML-Testdaten/zeitpunkt, XML-Testergebnis/zeitpunkt, XML-ValueFunction/zeitpunkt, XML-Version-Part/gueltigkeitsbeginn, XML-Version-Part/speicherzeitpunkt |
| Source | <pre> <xs:complexType name="XML-DatetimeValue"> <xs:simpleContent> <xs:extension base="XML-DatetimeContent"/> </xs:simpleContent> </xs:complexType> </pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Complex Type XML-IntegerValue

| | | |
|-----------------|---|--|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram | | |
| Type | extension of XML-IntegerContent | |
| Type hierarchy | <ul style="list-style-type: none"> xs:long XML-IntegerContent XML-IntegerValue | |
| Used by | Elements | XML-ArrayValue/zahl, XML-Ausgangsparameter-Item/nr, XML-Ausgangsschnittstelle-Item/nr, XML-Ausnahme-Item/nr, XML-Bezahlart-Item/nr, XML-Bezahlartadapter-Item/nr, XML-CommonFunction/zahl, XML-CompositeFunction/zahl, XML-EFMProdukt-Item/nr, XML-Eingangsparameter-Item/nr, XML-Ergaenzungsanforderung-Pool/nr, XML-FunctionValue/zahl, XML-Funktion-Item/nr, XML-Geosegment-Pool/nr, XML-Identifikationsparameteradapter-Item/nr, XML-Identifikationsparameterwert-Item/nr, XML-Identifikationsparameterwertadapter-Item/nr, XML-Linienadapter-Item/nr, XML-Mitnahmetyp-Item/nr, XML-Mitnahmetypadapter-Item/nr, XML-Modulkontext-Item/nr, XML-Modulkontextadapter-Item/nr, XML-NrName-Item/nr, XML-Nummerntext-Item/nr, XML-Organisation-Part/nr, XML-Preis Anpassung-Entry/betrag, XML-Preisdaten-Item/mwstsatz, XML-Preisdaten-Item/wert, XML-Rabattmedientyp-Item/nr, XML-Rabattmedientypadapter-Item/nr, XML-Schlüssel-Item/nr, XML-Sprache-Item/nr, XML-Tarifprodukt-Item/nr, XML-Tarifpunkt-Item/nr, XML-Tarifpunktadapter-Item/nr, XML-Tarifpunktreferenz-Item/nr, XML-Tarifpunktreferenzadapter-Item/nr, XML-Testdaten-Array/zahl, XML-Testdaten-Value/zahl, XML-Testfallanfrage-Item/nr, XML-Testfalldaten-Item/status, XML-Testfallergebnis-Item/nr, XML-Testfallergebnis-Item/status, XML-ValueFunction/zahl, XML-Verkehrsmitteltyp-Item/nr, XML-Verkehrsmitteltypadapter-Item/nr, XML-Version-Part/extern-Nr, XML-Version-Part/internNr, XML-Version-Part/modulstatus, XML-Wach rung-Item/nr, XML-Wachrungsadapter-Item/nr, XML-Wegevariante-Item/nr, XML-Wegevariantenadapter-Item/nr, XML-Wochentag-Pool/nr, XML-Zahlungsintervall-Item/nr, XML-Zahlungsintervalladapter-Item/nr |
| | Complex Type | XML-Mitnahmeanzahl-Entry |
| Source | <pre><xs:complexType name="XML-IntegerValue"> <xs:simpleContent> <xs:extension base="XML-IntegerContent" /> </xs:simpleContent> </xs:complexType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Complex Type XML-StringValue

| | | |
|----------------|---|--|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram | | |
| Type | extension of XML-StringContent | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string XML-StringContent XML-StringValue | |
| Used by | Elements | XML-ArrayValue/text, XML-Ausgangsdaten-Item/name, XML-Ausgangsdatenfamilie-Item/name, XML-Ausgangsparameter-Item/name, XML-Ausgangsschnittstelle-Item/name, XML-Ausgangssequenz-Entry/text, XML-Ausnahme-Item/name, XML-Auswahldaten-Item/name, XML-Auswahloption-Item/name, XML-Bewertungstyp-Item/name, XML-Bezahlart-Item/name, XML-Bezahlartadapter-Item/name, XML-Bezahlartbedingung-Item/name, XML-CommonFunction/text, XML-CompositeFunction/text, XML-EFMProdukt-Item/name, XML-Eigenprodukt-Item/extNr, XML-Eingangsparameter-Item/name, XML-Flaecheelement-Item/ortsbezug, XML-Flaecheelement-Item/typ, XML-Fremdprodukt-Item/tarifstand, XML-FunctionValue/text, XML-Identifikationsparameteradapter-Item/name, XML-Identifikationsparameterwert-Item/name, XML-Identifikationsparameterwertadapter-Item/name, XML-Kommentar-Item/text, XML-Kontingentsdaten-Item/url, XML-Linienadapter-Item/name, XML-Mitnahmetyp-Item/name, XML-Mitnahmetypadapter-Item/name, XML-Modulkontext-Item/name, XML-Modulkontextadapter-Item/name, XML-Modulkontextbedingung-Item/name, XML-Name-Item/name, XML-NrName-Item/name, XML-Nummerntext-Item/name, XML-Organisation-Part/name, XML-Produktadapter-Item/kvpProduktNr, XML-Produktgruppe-Item/name, XML-Rabattmedienbedingung-Item/name, XML-Rabattmedientyp-Item/name, XML-Rabattmedientypadapter-Item/name, XML-Schlüssel-Item/name, XML-Signatur-Part/type, XML-Sprache-Item/name, XML-Tarifprodukt-Item/extNr, XML-Tarifprodukt-Item/name, XML-Tarifpunkt-Item/name, XML-Tarifpunkt-Item/ortsbezug, XML-Tarifpunkt-Item/typ, XML-Tarifpunktadapter-Item/name, XML-Tar- |

| | |
|-----------------|--|
| | <p>ifpunktadapter-Item/typ, XML-Tarifpunktgruppe-Item/name, XML-Tarifpunktreferenz-Item/name, XML-Tarifpunktreferenz-Item/ortsbezug, XML-Tarifpunktreferenzadapter-Item/typ, XML-Tarifpunktreferenzadapter-Item/name, XML-Tarifpunktreferenzadapter-Item/typ, XML-Testanfrage/bemerkung, XML-Testdaten-Array/text, XML-Testdaten-Value/text, XML-Testdaten/bemerkung, XML-Testergebnis/bemerkung, XML-Testfallanfrage-Item/name, XML-Testfalldaten-Item/bemerkung, XML-Testfallergebnis-Item/bemerkung, XML-Testfallergebnis-Item/name, XML-ValueFunction/text, XML-Variable-Item/name, XML-Verkehrsmittellinienbedingung-Item/name, XML-Verkehrsmittellinienbezug-Item/name, XML-Verkehrsmitteltyp-Item/name, XML-Verkehrsmitteltypadapter-Item/name, XML-Version-Part/bearbeiter, XML-Version-Part/bemerkung, XML-Version-Part/freigeber, XML-Version-Part/modulnamenszusatz, XML-Version-Part/modulspezifikation, XML-Wachrung-Item/name, XML-Wachrungsadapter-Item/name, XML-Wegevariante-Item/name, XML-Wegevariante-nadapter-Item/name, XML-Zahlungsintervall-Item/name, XML-Zahlungsintervalladapter-Item/name, XML-Zahlungsintervallbedingung-Item/name, XML-Zuordnungstyp-Item/name</p> |
| | <p>Complex Type XML-Ausgangstext-Entry</p> |
| Source | <pre><xs:complexType name="XML-StringValue"> <xs:simpleContent> <xs:extension base="XML-StringContent" /> </xs:simpleContent> </xs:complexType></pre> |
| Schema location | <p>file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd</p> |

Complex Type XML-Organisation-Part

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-NrName-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Organisation-Part |
| Used by | <p>Elements XML-Fremdprodukt-Item/pv, XML-PVTarifmodul/herausgeber, XML-RNTarifmodul/herausgeber, XML-Tarifmodul/herausgeber</p> <p>Complex Type XML-Organisation-Item</p> |
| Model | nr , name |
| Children | name, nr |
| Source | <pre><xs:complexType name="XML-Organisation-Part"> <xs:complexContent> <xs:restriction base="XML-NrName-Item"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue" /> <xs:element name="name" type="XML-StringValue" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | <p>file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd</p> |

Complex Type XML-NrName-Item

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | <p>Complex Types XML-Ausgangstext-Item, XML-Datentabelle-Item, XML-Eingangsparameter-Item, XML-Eingangsschnittstelle-Item, XML-Identifikationsparameter-Item, XML-Modulkontext-Item, XML-Modulkon-</p> |

| | |
|-----------------|--|
| | textadapter-Item, XML-Nummerninterpretation-Item, XML-Organisation-Part, XML-Raummodifikation-Item, XML-Schluesel-Item, XML-Sprache-Item, XML-Testfalldaten-Item, XML-Testmodul-Item |
| | Element XML-NrName-Pool/item |
| Model | nr , name |
| Children | name, nr |
| Source | <pre><xs:complexType name="XML-NrName-Item"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Fachablauf-Part

| | | | | | |
|-----------------|--|---------|---------------------------|---------------|--|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Used by | <table> <tr> <td>Element</td><td>XML-Tarifmodul/fachablauf</td></tr> <tr> <td>Complex Types</td><td>XML-PVFachablauf-Part, XML-RNFachablauf-Part</td></tr> </table> | Element | XML-Tarifmodul/fachablauf | Complex Types | XML-PVFachablauf-Part, XML-RNFachablauf-Part |
| Element | XML-Tarifmodul/fachablauf | | | | |
| Complex Types | XML-PVFachablauf-Part, XML-RNFachablauf-Part | | | | |
| Model | kontrollstart{0,1} , erfassungsstart{0,1} , anpassungsstart{0,1} , darstellungsstart{0,1} , produktermittlungsstart , transaktionsauswertungsstart{0,1} , pruefungin{0,1} , pruefungvor{0,1} , pruefungnach{0,1} | | | | |
| Children | anpassungsstart, darstellungsstart, erfassungsstart, kontrollstart, produktermittlungsstart, pruefungin, pruefungnach, pruefungvor, transaktionsauswertungsstart | | | | |
| Source | <pre><xs:complexType name="XML-Fachablauf-Part"> <xs:sequence> <xs:element name="kontrollstart" type="XML-Ref11" minOccurs="0"/> <xs:element name="erfassungsstart" type="XML-Ref11" minOccurs="0"/> <xs:element name="anpassungsstart" type="XML-Ref11" minOccurs="0"/> <xs:element name="darstellungsstart" type="XML-Ref11" minOccurs="0"/> <xs:element name="produktermittlungsstart" type="XML-Ref11"/> <xs:element name="transaktionsauswertungsstart" type="XML-Ref11" minOccurs="0"/> <xs:element name="pruefungin" type="XML-Ref01" minOccurs="0"/> <xs:element name="pruefungvor" type="XML-DurationValue" minOccurs="0"/> <xs:element name="pruefungnach" type="XML-DurationValue" minOccurs="0"/> </xs:sequence> </xs:complexType></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Ref11

| | |
|-----------|--------------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Ref01 |

| | |
|-----------------|--|
| Type hierarchy | <ul style="list-style-type: none"> XML-Ref01 XML-Ref11 |
| Used by | <p>Elements</p> <p>XML-Ausgangsschritt-Part/ausgangsdaten, XML-Auswahlschritt-Part/auswahldaten, XML-Berechnungsschritt-Part/funktion, XML-Bewertungsbedingung-Item/bewertungstyp, XML-Entscheidungsschritt-Part/funktion, XML-Entscheidungsschritt-Part/janachfolger, XML-Entscheidungsschritt-Part/neinnachfolger, XML-Fachablauf-Part/anpassungsstart, XML-Fachablauf-Part/darstellungsstart, XML-Fachablauf-Part/erfassungsstart, XML-Fachablauf-Part/kontrollstart, XML-Fachablauf-Part/produkttermittlungsstart, XML-Fachablauf-Part/transaktionsauswertungsstart, XML-PV-Fachablauf-Part/anpassungsstart, XML-PV-Fachablauf-Part/darstellungsstart, XML-PV-Fachablauf-Part/erfassungsstart, XML-PV-Fachablauf-Part/kontrollstart, XML-PV-Fachablauf-Part/produkttermittlungsstart, XML-PV-Fachablauf-Part/transaktionsauswertungsstart, XML-RN-Fachablauf-Part/produkttermittlungsstart, XML-Spezialbedingung-Item/funktion</p> |
| Model | ref |
| Children | ref |
| Source | <pre><xs:complexType name="XML-Ref11"> <xs:complexContent> <xs:restriction base="XML-Ref01"> <xs:sequence> <xs:element name="ref" type="XML-Ref" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ref01

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <pre>graph LR XML-Ref01[XML-Ref01] --> ref XML-Ref11[XML-Ref11]</pre> |
| Used by | <p>Complex Type</p> <p>XML-Ref11</p> <p>Elements</p> <p>XML-Abhaengigkeitskriterium-Item/funktion, XML-Ausgangsschritt-Part/ausnahme, XML-Ausgangsschritt-Part/nachfolger, XML-Ausgangssequenz-Item/defaultoption, XML-Auswahldaten-Item/defaultoption, XML-Auswahlschritt-Part/ausnahme, XML-BIFAInterpretation-Item/abfahrtszeit, XML-BIFAInterpretation-Item/ankunftszeit, XML-BIFAInterpretation-Item/nachtarifpunkt, XML-BIFAInterpretation-Item/uebertarifpunkte, XML-BIFAInterpretation-Item/ueberwegevariante, XML-BIFAInterpretation-Item/verkehrsmittellinienbezug, XML-BIFAInterpretation-Item/vontarifpunkt, XML-Berechnungsschritt-Part/ausnahme, XML-Berechnungsschritt-Part/nachfolger, XML-Eigenprodukt-Item/efmprodukt, XML-Eigenprodukt-Item/kontingentierung, XML-Entscheidungsschritt-Part/ausnahme, XML-Fachablauf-Part/pruefungin, XML-Linie-Item/bezug, XML-Nachfolgekriterium-Item/funktion, XML-PV-Fachablauf-Part/pruefungin, XML-PV-Schluessel-Part/mkauth, XML-PV-Schluessel-Part/mkpvp, XML-PV-Schluessel-Part/mktr, XML-Parallelisierungsschritt-Part/nachfolger, XML-Produkt-daten-Part/funktion, XML-RN-Schluessel-Part/mkkvp, XML-Schluessel-Part/mkauth, XML-Schlues-sel-Part/mkkvp, XML-Schluessel-Part/mkpvp, XML-Schluessel-Part/mktr, XML-Tarifprodukt-Item/efm-produkt, XML-Tarifprodukt-Item/kontingentierung, XML-Tarifpunktbedingung-Item/nach, XML-Tarif-punktbedingung-Item/ueber, XML-Tarifpunktbedingung-Item/von, XML-Verkehrsmitteltyp-Item/bezug</p> |
| Model | ref{0,1} |
| Children | ref |
| Source | <pre><xs:complexType name="XML-Ref01"> <xs:sequence> <xs:element name="ref" type="XML-Ref" minOccurs="0" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-DurationValue

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <pre>graph LR XML-DurationValue[XML-DurationValue] -- extension XML-DurationContent[XML-DurationContent]</pre> |
| Type | extension of XML-DurationContent |

| | |
|-----------------|---|
| Type hierarchy | <ul style="list-style-type: none"> • xs:duration • XML-DurationContent • XML-DurationValue |
| Used by | <p>Elements</p> <p>XML-ArrayValue/zeitspanne, XML-CommonFunction/zeitspanne, XML-CompositeFunction/zeitspanne, XML-Fachablauf-Part/pruefungnach, XML-Fachablauf-Part/pruefungvor, XML-FunctionValue/zeitspanne, XML-PVFachablauf-Part/pruefungnach, XML-PVFachablauf-Part/pruefungvor, XML-Testdaten-Array/zeitspanne, XML-Testdaten-Value/zeitspanne, XML-Ungultigkeitszeitpunktsdaten-Item/zeitspanne, XML-ValueFunction/zeitspanne, XML-Zeitraumsgrenze-Part/zeitspanne, XML-Zeitraumsgrenze-Part/zeitspanne</p> |
| Source | <pre><xs:complexType name="XML-DurationValue"> <xs:simpleContent> <xs:extension base="XML-DurationContent" /> </xs:simpleContent> </xs:complexType></pre> |
| Schema location | <p>file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd</p> |

Complex Type XML-Ausgangstext-Matrix

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | <p>Elements</p> <p>XML-Ausgangstext-Item/text-matrix, XML-Ausnahme-Item/text-matrix, XML-Bewertungsdaten-Item/text-matrix, XML-Bezahlart-Item/text-matrix, XML-Bezahlartadapter-Item/text-matrix, XML-EFM-Produkt-Item/text-matrix, XML-Identifikationsparameterwert-Item/text-matrix, XML-Identifikationsparameterwertadapter-Item/text-matrix, XML-Linienadapter-Item/text-matrix, XML-Mitnahmetyp-Item/text-matrix, XML-Mitnahmetypadapter-Item/text-matrix, XML-Nummerntext-Item/text-matrix, XML-PVTarifmodul/text-matrix, XML-RNTarifmodul/text-matrix, XML-Rabattmedientyp-Item/text-matrix, XML-Rabattmedientypadapter-Item/text-matrix, XML-Tarifmodul/text-matrix, XML-Tarifprodukt-Item/text-matrix, XML-Tarifpunkt-Item/text-matrix, XML-Tarifpunktadapter-Item/text-matrix, XML-Tarifpunktreferenz-Item/text-matrix, XML-Tarifpunktreferenzadapter-Item/text-matrix, XML-Verkehrsmitteltyp-Item/text-matrix, XML-Verkehrsmitteltypadapter-Item/text-matrix, XML-Wachrung-Item/text-matrix, XML-Wachrungsadapter-Item/text-matrix, XML-Wegevariante-Item/text-matrix, XML-Wegevariantenadapter-Item/text-matrix, XML-Zahlungsintervall-Item/text-matrix, XML-Zahlungsintervalladapter-Item/text-matrix</p> |
| Model | text* |
| Children | text |
| Source | <pre><xs:complexType name="XML-Ausgangstext-Matrix"> <xs:sequence> <xs:element name="text" type="XML-Ausgangstext-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> |
| Schema location | <p>file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd</p> |

Complex Type XML-Ausgangstext-Entry

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-StringValue |
| Type hierarchy | <ul style="list-style-type: none"> • xs:string |

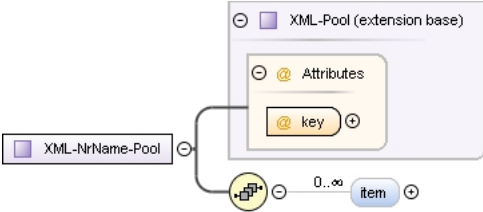
| | | | | |
|-----------------|--|-------------|------------|--|
| | <ul style="list-style-type: none"> XML-StringContent XML-StringValue XML-Ausgangstext-Entry | | | |
| Used by | Element XML-Ausgangstext-Matrix/text | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Ausgangstext-Entry"> <xs:complexContent> <xs:extension base="XML-StringValue"> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Sprache-Pool

| | | | | |
|-----------------|--|-------------|------------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-NrName-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-NrName-Pool XML-Sprache-Pool | | | |
| Used by | Elements XML-PVTarifmodul/sprache-pool, XML-RNTarifmodul/sprache-pool, XML-Tarifmodul/sprache-pool | | | |
| Model | item+ | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Sprache-Pool"> <xs:complexContent> <xs:restriction base="XML-NrName-Pool"> <xs:sequence> <xs:element name="item" type="XML-Sprache-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-NrName-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram |  | | | | | | | | | | | |
|-----------------|--|--|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool | | | | | | | | | | | |
| Used by | Complex Types | XML-Eingangsparameter-Pool, XML-Modulkontext-Pool, XML-Modulkontextadapter-Pool, XML-Schluessel-Pool, XML-Sprache-Pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-NrName-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-NrName-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Pool

| | | | | |
|-----------------|---|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Used by | Complex Types | XML-Abhaengigkeitskriterium-Pool, XML-Ausgangskontext-Pool, XML-Ausgangssequenz-Pool, XML-Ausgangstext-Pool, XML-BIFAInterpretation-Pool, XML-Bewertungsbedingung-Pool, XML-Bewertungsdaten-Pool, XML-Bitleisteninterpretation-Pool, XML-Datentabelle-Pool, XML-Eigenprodukt-Pool, XML-Eingangsschnittstelle-Pool, XML-Flaecheelement-Pool, XML-Fremdprodukt-Pool, XML-Funktion-Pool, XML-Geosegmentbedingung-Pool, XML-Identifikationsparameter-Pool, XML-Kontingentierung-Pool, XML-Linie-Pool, XML-Mitnahmebedingung-Pool, XML-Nachfolgekriterium-Pool, XML-Name-Pool, XML-NameGruppe-Pool, XML-NrName-Pool, XML-Nummerninterpretation-Pool, XML-Produktadapter-Pool, XML-Raummodifikation-Pool, XML-Raumnummerninterpretation-Pool, XML-Schritt-Pool, XML-Spezialbedingung-Pool, XML-Tagesbedingung-Pool, XML-Tageszeitbedingung-Pool, XML-Tarifmodul-Pool, XML-Tarifpunktbedingung-Pool, XML-Zeitraumbedingung-Pool | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Pool"> <xs:attribute name="key" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Sprache-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | restriction of XML-NrName-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Sprache-Item |
| Used by | Element XML-Sprache-Pool/item |
| Model | nr , name |
| Children | name, nr |
| Source | <pre> <xs:complexType name="XML-Sprache-Item"> <xs:complexContent> <xs:restriction base="XML-NrName-Item"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Eingangsschnittstelle-Pool

| | | | | |
|----------------|--|---|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eingangsschnittstelle-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/eingangsschnittstelle-pool, XML-RNTarifmodul/eingangsschnittstelle-pool, XML-Tarifmodul/eingangsschnittstelle-pool | | |
| | Complex Type | XML-Ausgangsschnittstelle-Pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Eingangsschnittstelle-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Eingangsschnittstelle-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent></pre> | | | |

| | |
|-----------------|---|
| | <code></xs:complexType></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Eingangsschnittstelle-Item

| | | | | | |
|-----------------|--|---------|-------------------------------------|--------------|--------------------------------|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Type | extension of XML-NrName-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Eingangsschnittstelle-Item | | | | |
| Used by | <table> <tr> <td>Element</td><td>XML-Eingangsschnittstelle-Pool/item</td></tr> <tr> <td>Complex Type</td><td>XML-Ausgangsschnittstelle-Item</td></tr> </table> | Element | XML-Eingangsschnittstelle-Pool/item | Complex Type | XML-Ausgangsschnittstelle-Item |
| Element | XML-Eingangsschnittstelle-Pool/item | | | | |
| Complex Type | XML-Ausgangsschnittstelle-Item | | | | |
| Model | nr , name , parameter-pool | | | | |
| Children | name, nr, parameter-pool | | | | |
| Source | <pre> <xs:complexType name="XML-Eingangsschnittstelle-Item"> <xs:complexContent> <xs:extension base="XML-NrName-Item"> <xs:sequence> <xs:element name="parameter-pool" type="XML-Eingangsparameter-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Eingangsparameter-Pool

| | | | | |
|----------------|---|---|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the structure of the XML-Eingangsparameter-Pool. It is a restriction of the XML-NrName-Pool (restriction base). The structure is as follows:</p> <ul style="list-style-type: none">XML-Eingangsparameter-Pool (restriction base: XML-NrName-Pool)<ul style="list-style-type: none">XML-Pool (extension base: XML-NrName-Pool)<ul style="list-style-type: none">Attributes (optional)<ul style="list-style-type: none">key (optional)item (optional, cardinality 0..∞)item (optional, cardinality 1..∞) | | | |
| Type | restriction of XML-NrName-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Eingangsparameter-Pool | | | |
| Used by | Element | XML-Eingangsschnittstelle-Item/parameter-pool | | |
| | Complex Type | XML-Ausgangsparameter-Pool | | |
| Model | item+ | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |

| | |
|-----------------|--|
| Source | <pre> <xs:complexType name="XML-Eingangssparameter-Pool"> <xs:complexContent> <xs:restriction base="XML-NrName-Pool"> <xs:sequence> <xs:element name="item" type="XML-Eingangssparameter-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Eingangssparameter-Item

| | | | | | |
|-----------------|---|---------|----------------------------------|--------------|-----------------------------|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Type | restriction of XML-NrName-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Eingangssparameter-Item | | | | |
| Used by | <table> <tr> <td>Element</td><td>XML-Eingangssparameter-Pool/item</td></tr> <tr> <td>Complex Type</td><td>XML-Ausgangssparameter-Item</td></tr> </table> | Element | XML-Eingangssparameter-Pool/item | Complex Type | XML-Ausgangssparameter-Item |
| Element | XML-Eingangssparameter-Pool/item | | | | |
| Complex Type | XML-Ausgangssparameter-Item | | | | |
| Model | nr , name | | | | |
| Children | name, nr | | | | |
| Source | <pre> <xs:complexType name="XML-Eingangssparameter-Item"> <xs:complexContent> <xs:restriction base="XML-NrName-Item"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Ausgangsschnittstelle-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | | | | |
|-----------------|--|---|----------|--|
| Type | restriction of XML-Eingangsschnittstelle-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eingangsschnittstelle-Pool<ul style="list-style-type: none">XML-Ausgangsschnittstelle-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/ausgangsschnittstelle-pool, XML-RNTarifmodul/ausgangsschnittstelle-pool, XML-Tarifmodul/ausgangsschnittstelle-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Ausgangsschnittstelle-Pool"> <xs:complexContent> <xs:restriction base="XML-Eingangsschnittstelle-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangsschnittstelle-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangsschnittstelle-Item

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Eingangsschnittstelle-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Eingangsschnittstelle-Item<ul style="list-style-type: none">XML-Ausgangsschnittstelle-Item |
| Used by | Element XML-Ausgangsschnittstelle-Pool/item |
| Model | nr , name , parameter-pool |
| Children | name, nr, parameter-pool |
| Source | <pre><xs:complexType name="XML-Ausgangsschnittstelle-Item"> <xs:complexContent> <xs:restriction base="XML-Eingangsschnittstelle-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue" /> <xs:element name="name" type="XML-StringValue" /> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |

| | |
|-----------------|---|
| | <pre> <xs:sequence> <xs:element name="parameter-pool" type="XML-Ausgangsparameter-Pool" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangsparameter-Pool

| | | | | |
|-----------------|--|---|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the restriction hierarchy for the XML-Ausgangsparameter-Pool. It is a restriction of the XML-Eingangsparameter-Pool. The hierarchy includes the XML-NrName-Pool (restriction base) and the XML-Pool (extension base). The XML-Pool contains an Attributes group with a key attribute and two item elements with cardinalities 0..∞ and 1..∞.</p> | | | |
| Type | restriction of XML-Eingangsparameter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Eingangsparameter-Pool<ul style="list-style-type: none">XML-Ausgangsparameter-Pool | | | |
| Used by | Element | XML-Ausgangsschnittstelle-Item/parameter-pool | | |
| Model | item+ | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Ausgangsparameter-Pool"> <xs:complexContent> <xs:restriction base="XML-Eingangsparameter-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangsparameter-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangsparameter-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | restriction of XML-Eingangsparameter-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Eingangsparameter-Item XML-Ausgangsparameter-Item |
| Used by | Element XML-Ausgangsparameter-Pool/item |
| Model | nr , name |
| Children | name, nr |
| Source | <pre> <xs:complexType name="XML-Ausgangsparameter-Item"> <xs:complexContent> <xs:restriction base="XML-Eingangsparameter-Item"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangskontext-Pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangskontext-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/ausgangskontext-pool, XML-RNTarifmodul/ausgangskontext-pool, XML-Tarifmodul/ausgangskontext-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Ausgangskontext-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangskontext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> </pre> | | | |

| | |
|-----------------|---|
| | <pre> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangskontext-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Ausgangskontext-Item |
| Used by | Element XML-Ausgangskontext-Pool/item |
| Model | name , sprache , parameter |
| Children | name, parameter, sprache |
| Source | <pre> <xs:complexType name="XML-Ausgangskontext-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="sprache" type="XML-RefSet1N"/> <xs:element name="parameter" type="XML-RefSet1N"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Name-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | <p>Complex Types</p> <p>XML-Abhaengigkeitskriterium-Item, XML-Ausgangsdatenfamilie-Item, XML-Ausgangskontext-Item, XML-Ausgangssequenz-Item, XML-BIFAInterpretation-Item, XML-Bewertungsbedingung-Item, XML-Bewertungsdaten-Item, XML-Bewertungstyp-Item, XML-Bitleisteninterpretation-Item, XML-Funktion-Item, XML-Geosegmentbedingung-Item, XML-Kontingientierung-Item, XML-Mitnahmebedingung-Item, XML-Nachfolgekriterium-Item, XML-NameGruppe-Item, XML-Raumnummerninterpretation-Item, XML-Schritt-Item, XML-Spezialbedingung-Item, XML-Tagesbedingung-Item, XML-Tageszeitbedingung-Item, XML-Tarifpunktbedingung-Item, XML-Variable-Item, XML-Verkehrsmittellinienbezug-Item, XML-Zeitraumbedingung-Item, XML-Zuordnungstyp-Item</p> <p>Element</p> <p>XML-Name-Pool/item</p> |
| Model | name |
| Children | name |
| Source | <pre> <xs:complexType name="XML-Name-Item"> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-RefSet1N

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-RefSet0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N XML-RefSet1N |
| Used by | Elements XML-Ausgangskontext-Item/parameter, XML-Ausgangskontext-Item/sprache, XML-Flaecheelement-Item/tarifpunkt, XML-Kommentar-Item/item, XML-Tarifpunktreferenz-Item/tarifpunkt |
| Model | ref+ |
| Children | ref |
| Source | <pre> <xs:complexType name="XML-RefSet1N"> <xs:complexContent> <xs:restriction base="XML-RefSet0N"> <xs:sequence> <xs:element name="ref" type="XML-Ref" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-RefSet0N

| Namespace | http://vdv/ka/pkm/2 | | | | |
|----------------|--|--------------|--------------|----------|--|
| Diagram | | | | | |
| Type | restriction of XML-RefList0N | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefSet0N | | | | |
| Used by | <table> <tr> <th>Complex Type</th><th>XML-RefSet1N</th></tr> <tr> <td>Elements</td><td>XML-Bezahlartbedingung-Item/element, XML-Eigenprodukt-Item/identifikation, XML-Modulkontextbedingung-Item/element, XML-NameGruppe-Item/element, XML-Produktadapter-Item/anpassungskontext, XML-Produktadapter-Item/darstellungskontext, XML-Produktadapter-Item/erfassungskontext, XML-Produktadapter-Item/kontrollkontext, XML-Produktadapter-Item/produkttermittlungskontext, XML-Produktadapter-Item/transaktionsauswertungskontext, XML-Produktdaten-Part/modulkontext, XML-Produktgruppe-Item/element, XML-Rabattmedienbedingung-Item/element, XML-Raummodifikation-Item/exk, XML-Raummodifikation-Item/ink, XML-Tarifprodukt-Item/identifikation, XML-Tarifpunktgruppe-Item/element, XML-Verkehrsmittellinienbedingung-Item/element, XML-Zahlungsintervallbedingung-Item/element</td></tr> </table> | Complex Type | XML-RefSet1N | Elements | XML-Bezahlartbedingung-Item/element, XML-Eigenprodukt-Item/identifikation, XML-Modulkontextbedingung-Item/element, XML-NameGruppe-Item/element, XML-Produktadapter-Item/anpassungskontext, XML-Produktadapter-Item/darstellungskontext, XML-Produktadapter-Item/erfassungskontext, XML-Produktadapter-Item/kontrollkontext, XML-Produktadapter-Item/produkttermittlungskontext, XML-Produktadapter-Item/transaktionsauswertungskontext, XML-Produktdaten-Part/modulkontext, XML-Produktgruppe-Item/element, XML-Rabattmedienbedingung-Item/element, XML-Raummodifikation-Item/exk, XML-Raummodifikation-Item/ink, XML-Tarifprodukt-Item/identifikation, XML-Tarifpunktgruppe-Item/element, XML-Verkehrsmittellinienbedingung-Item/element, XML-Zahlungsintervallbedingung-Item/element |
| Complex Type | XML-RefSet1N | | | | |
| Elements | XML-Bezahlartbedingung-Item/element, XML-Eigenprodukt-Item/identifikation, XML-Modulkontextbedingung-Item/element, XML-NameGruppe-Item/element, XML-Produktadapter-Item/anpassungskontext, XML-Produktadapter-Item/darstellungskontext, XML-Produktadapter-Item/erfassungskontext, XML-Produktadapter-Item/kontrollkontext, XML-Produktadapter-Item/produkttermittlungskontext, XML-Produktadapter-Item/transaktionsauswertungskontext, XML-Produktdaten-Part/modulkontext, XML-Produktgruppe-Item/element, XML-Rabattmedienbedingung-Item/element, XML-Raummodifikation-Item/exk, XML-Raummodifikation-Item/ink, XML-Tarifprodukt-Item/identifikation, XML-Tarifpunktgruppe-Item/element, XML-Verkehrsmittellinienbedingung-Item/element, XML-Zahlungsintervallbedingung-Item/element | | | | |
| Model | ref* | | | | |
| Children | ref | | | | |

| | |
|-----------------|---|
| Source | <pre> <xs:complexType name="XML-RefSet0N"> <xs:complexContent> <xs:restriction base="XML-RefList0N"> <xs:sequence> <xs:element name="ref" type="XML-Ref" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-RefList0N

| | | |
|-----------|---------------------|---|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram | | |
| Used by | Complex Types | XML-RefList1N, XML-RefSet0N |
| | Elements | <p>XML-Abhaengigkeit-Table/ausnahme, XML-Abhaengigkeit-Table/kriterium, XML-Abhaengigkeit-Table/vorausgesetzt, XML-Abhaengigkeitsausnahme-Table/ausnahme, XML-Abhaengigkeitsausnahme-Table/kriterium, XML-Abhaengigkeitsausnahme-Table/vorausgesetzt, XML-Gueltigkeitszeitrahmen-Table/ausnahme, XML-Gueltigkeitszeitrahmen-Table/bewertungsbedingung, XML-Gueltigkeitszeitrahmen-Table/spezialbedingung, XML-Gueltigkeitszeitrahmen-Table/tagesbedingung, XML-Gueltigkeitszeitrahmen-Table/tageszeitbedingung, XML-Gueltigkeitszeitrahmen-Table/tarifpunktbedingung, XML-Gueltigkeitszeitrahmen-Table/verkehrsmittellinienbedingung, XML-Gueltigkeitszeitrahmensausnahme-Table/ausnahme, XML-Gueltigkeitszeitrahmensausnahme-Table/bewertungsbedingung, XML-Gueltigkeitszeitrahmensausnahme-Table/spezialbedingung, XML-Gueltigkeitszeitrahmensausnahme-Table/tagesbedingung, XML-Gueltigkeitszeitrahmensausnahme-Table/tageszeitbedingung, XML-Gueltigkeitszeitrahmensausnahme-Table/tarifpunktbedingung, XML-Gueltigkeitszeitrahmensausnahme-Table/verkehrsmittellinienbedingung, XML-Gueltigkeitszeitrahmensdaten-Table/spezialbedingung, XML-Gueltigkeitszeitrahmensdaten-Table/tagesbedingung, XML-Gueltigkeitszeitrahmensdaten-Table/tageszeitbedingung, XML-Gueltigkeitszeitrahmensdaten-Table/tarifpunktbedingung, XML-Gueltigkeitszeitrahmensdaten-Table/verkehrsmittellinienbedingung, XML-Kontingent-Table/ausnahme, XML-Kontingent-Table/spezialbedingung, XML-Kontingent-Table/tagesbedingung, XML-Kontingent-Table/tarifpunktbedingung, XML-Kontingent-Table/verkehrsmittellinienbedingung, XML-Kontingentausnahme-Table/ausnahme, XML-Kontingentausnahme-Table/spezialbedingung, XML-Kontingentausnahme-Table/tagesbedingung, XML-Kontingentausnahme-Table/tarifpunktbedingung, XML-Kontingentausnahme-Table/verkehrsmittellinienbedingung, XML-Kontingentdaten-Table/spezialbedingung, XML-Kontingentdaten-Table/tagesbedingung, XML-Kontingentdaten-Table/tageszeitbedingung, XML-Kontingentdaten-Table/verkehrsmittellinienbedingung, XML-Nachfolge-Table/ausnahme, XML-Nachfolge-Table/kriterium, XML-Nachfolge-Table/nachfolger, XML-Nachfolge-Table/vorgaenger, XML-Nachfolgeausnahme-Table/ausnahme, XML-Nachfolgeausnahme-Table/kriterium, XML-Nachfolgeausnahme-Table/vorgaenger, XML-Nachfolgedaten-Table/kriterium, XML-Nachfolgedaten-Table/nachfolger, XML-Nachfolgedaten-Table/vorgaenger, XML-Parallelisierungsschritt-Part/parallel, XML-Preis-Table/ausnahme, XML-Preis-Table/bewertungsbedingung, XML-Preis-Table/bezahlartbedingung, XML-Preis-Table/mitnahmebedingung, XML-Preis-Table/modulkontextbedingung, XML-Preis-Table/rabattmedienbedingung, XML-Preis-Table/spezialbedingung, XML-Preis-Table/tagesbedingung, XML-Preis-Table/tageszeitbedingung, XML-Preis-Table/tarifpunktbedingung, XML-Preis-Table/verkehrsmittellinienbedingung, XML-Preis-Table/waehrung, XML-Preis-Table/zahlungsintervallbedingung, XML-Preis-Table/zeitraumbedingung, XML-Preisausnahme-Table/ausnahme, XML-Preisausnahme-Table/bewertungsbedingung, XML-Preisausnahme-Table/bezahlartbedingung, XML-Preisausnahme-Table/mitnahmebedingung, XML-Preisausnahme-Table/modulkontextbedingung, XML-Preisausnahme-Table/rabattmedienbedingung, XML-Preisausnahme-Table/spezialbedingung, XML-Preisausnahme-Table/tagesbedingung, XML-Preisausnahme-Table/tageszeitbedingung, XML-Preisausnahme-Table/tarifpunktbedingung, XML-Preisausnahme-Table/verkehrsmittellinienbedingung, XML-Preisausnahme-Table/waehrung, XML-Preisausnahme-Table/zahlungsintervallbedingung, XML-Preisausnahme-Table/zeitraumbedingung, XML-Preisdaten-Table/bewertungsbedingung, XML-Preisdaten-Table/bezahlartbedingung, XML-Preisdaten-Table/mitnahmebedingung, XML-Preisdaten-Table/modulkontextbedingung, XML-Preisdaten-Table/rabattmedienbedingung, XML-Preisdaten-Table/spezialbedingung, XML-Preisdaten-Table/tagesbedingung, XML-Preisdaten-Table/tageszeitbedingung, XML-Preisdaten-Table/tarifpunktbedingung, XML-Preisdaten-Table/verkehrsmittellinienbedingung, XML-Preisdaten-Table/waehrung, XML-Preisdaten-Table/zahlungsintervallbedingung, XML-Preisdaten-Table/zeitraumbedingung, XML-Produktgrenzpunkt-Table/ausnahme, XML-Produktgrenzpunkt-Table/nachherbewertungsbedingung, XML-Produktgrenzpunkt-Table/nachherproduktgruppe, XML-Produktgrenzpunkt-Table/nachhertagesbedingung, XML-Produktgrenzpunkt-Table/nach-</p> |

| | |
|-----------------|---|
| | <p>hertageszeitbedingung, XML-Produktgrenzpunkt-Table/nachhertarifpunktbedingung, XML-Produktgrenzpunkt-Table/nachherverkehrsmittellinienbedingung, XML-Produktgrenzpunkt-Table/spezialbedingung, XML-Produktgrenzpunkt-Table/vorherbewertungsbedingung, XML-Produktgrenzpunkt-Table/vorherproduktgruppe, XML-Produktgrenzpunkt-Table/vorhertagesbedingung, XML-Produktgrenzpunkt-Table/vorhertageszeitbedingung, XML-Produktgrenzpunkt-Table/vorhertarifpunktbedingung, XML-Produktgrenzpunkt-Table/vorherverkehrsmittellinienbedingung, XML-Produktgrenzpunktausnahme-Table/ausnahme, XML-Produktgrenzpunktausnahme-Table/nachherbewertungsbedingung, XML-Produktgrenzpunktausnahme-Table/nachherproduktgruppe, XML-Produktgrenzpunktausnahme-Table/nachhertagesbedingung, XML-Produktgrenzpunktausnahme-Table/nachhertarifpunktbedingung, XML-Produktgrenzpunktausnahme-Table/nachherverkehrsmittellinienbedingung, XML-Produktgrenzpunktausnahme-Table/spezialbedingung, XML-Produktgrenzpunktausnahme-Table/vorherbewertungsbedingung, XML-Produktgrenzpunktausnahme-Table/vorherproduktgruppe, XML-Produktgrenzpunktausnahme-Table/vorhertagesbedingung, XML-Produktgrenzpunktausnahme-Table/vorhertarifpunktbedingung, XML-Produktgrenzpunktausnahme-Table/vorherverkehrsmittellinienbedingung, XML-Produktgrenzpunktdate-Table/nachherbewertungsbedingung, XML-Produktgrenzpunktdate-Table/nachherproduktgruppe, XML-Produktgrenzpunktdate-Table/nachhertagesbedingung, XML-Produktgrenzpunktdate-Table/nachhertageszeitbedingung, XML-Produktgrenzpunktdate-Table/nachhertarifpunktbedingung, XML-Produktgrenzpunktdate-Table/nachherverkehrsmittellinienbedingung, XML-Produktgrenzpunktdate-Table/spezialbedingung, XML-Produktgrenzpunktdate-Table/vorherbewertungsbedingung, XML-Produktgrenzpunktdate-Table/vorherproduktgruppe, XML-Produktgrenzpunktdate-Table/vorhertagesbedingung, XML-Produktgrenzpunktdate-Table/vorhertageszeitbedingung, XML-Produktgrenzpunktdate-Table/vorhertarifpunktbedingung, XML-Produktgrenzpunktdate-Table/vorherverkehrsmittellinienbedingung, XML-Rueckzahlung-Table/ausnahme, XML-Rueckzahlung-Table/bewertungsbedingung, XML-Rueckzahlung-Table/mitnahmebedingung, XML-Rueckzahlung-Table/modulkontextbedingung, XML-Rueckzahlung-Table/rabattmedienbedingung, XML-Rueckzahlung-Table/spezialbedingung, XML-Rueckzahlung-Table/tagesbedingung, XML-Rueckzahlung-Table/tarifpunktbedingung, XML-Rueckzahlung-Table/verkehrsmittellinienbedingung, XML-Rueckzahlung-Table/wachrung, XML-Rueckzahlung-Table/zeitraumbedingung, XML-Rueckzahlungsausnahme-Table/ausnahme, XML-Rueckzahlungsausnahme-Table/bewertungsbedingung, XML-Rueckzahlungsausnahme-Table/mitnahmebedingung, XML-Rueckzahlungsausnahme-Table/modulkontextbedingung, XML-Rueckzahlungsausnahme-Table/rabattmedienbedingung, XML-Rueckzahlungsausnahme-Table/spezialbedingung, XML-Rueckzahlungsausnahme-Table/tagesbedingung, XML-Rueckzahlungsausnahme-Table/tarifpunktbedingung, XML-Rueckzahlungsausnahme-Table/verkehrsmittellinienbedingung, XML-Rueckzahlungsausnahme-Table/wachrung, XML-Rueckzahlungsausnahme-Table/zeitraumbedingung, XML-Rueckzahlungsdaten-Table/bewertungsbedingung, XML-Rueckzahlungsdaten-Table/mitnahmebedingung, XML-Rueckzahlungsdaten-Table/modulkontextbedingung, XML-Rueckzahlungsdaten-Table/rabattmedienbedingung, XML-Rueckzahlungsdaten-Table/spezialbedingung, XML-Rueckzahlungsdaten-Table/tagesbedingung, XML-Rueckzahlungsdaten-Table/tarifpunktbedingung, XML-Rueckzahlungsdaten-Table/verkehrsmittellinienbedingung, XML-Rueckzahlungsdaten-Table/waehrung, XML-Rueckzahlungsdaten-Table/zeitraumbedingung, XML-Ungueltigkeitszeitpunkt-Table/ausnahme, XML-Ungueltigkeitszeitpunkt-Table/modulkontextbedingung, XML-Ungueltigkeitszeitpunkt-Table/spezialbedingung, XML-Ungueltigkeitszeitpunkt-Table/tagesbedingung, XML-Ungueltigkeitszeitpunkt-Table/zeitraumbedingung, XML-Ungueltigkeitszeitpunktsausnahme-Table/ausnahme, XML-Ungueltigkeitszeitpunktsausnahme-Table/modulkontextbedingung, XML-Ungueltigkeitszeitpunktsausnahme-Table/spezialbedingung, XML-Ungueltigkeitszeitpunktsausnahme-Table/tagesbedingung, XML-Ungueltigkeitszeitpunktsausnahme-Table/zeitraumbedingung, XML-Ungueltigkeitszeitpunktsdaten-Table/spezialbedingung, XML-Ungueltigkeitszeitpunktsdaten-Table/tagesbedingung, XML-Ungueltigkeitszeitpunktsdaten-Table/zeitraumbedingung</p> |
| Model | ref* |
| Children | ref |
| Source | <pre><xs:complexType name="XML-RefList0N"> <xs:sequence> <xs:element name="ref" type="XML-Ref" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Datentabelle-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|--|--|----------|--|
| Diagram | <pre>graph LR XML-Datentabelle-Pool -- extension base --> XML-Pool XML-Datentabelle-Pool -- sequence --> item[0..∞ item]</pre> | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Datentabelle-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/datentabelle-pool, XML-RNTarifmodul/datentabelle-pool, XML-Tarifmodul/datentabelle-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Datentabelle-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Datentabelle-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Datentabelle-Item

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-Datentabelle-Item complex type. It is an extension of the XML-NrName-Item (extension base). The structure consists of a sequence of elements: 'nr' and 'name' (attributes of the first item), followed by 'datensatzkey' and 'datensatzvalue' (elements of the sequence). The cardinality is 0..∞.</p> |
| Type | extension of XML-NrName-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Datentabelle-Item |
| Used by | Element XML-Datentabelle-Pool/item |
| Model | nr , name , datensatzkey , datensatzvalue |
| Children | datensatzkey, datensatzvalue, name, nr |
| Source | <pre><xs:complexType name="XML-Datentabelle-Item"> <xs:complexContent> <xs:extension base="XML-NrName-Item"> <xs:sequence> <xs:element name="datensatzkey" type="XML-ArrayValue"/> <xs:element name="datensatzvalue" type="XML-ArrayValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-ArrayValue

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-ArrayValue complex type. It is defined as a restriction of the XML-CommonFunction type. The XML-ArrayValue type has an attribute ref that references the XML-CommonFunction type. The XML-CommonFunction type, which serves as the restriction base, also has an attribute ref that references itself. The content of the XML-CommonFunction type is a sequence of the following data types: bits, text, zahl, liste, datum, uhrzeit, zeitpunkt, zeitspanne, ja, nein, ref, funktion, undefiniert, param, and aufruf. The cardinality of the content is 0..∞.</p> |
| Type | restriction of XML-CommonFunction |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> XML-ArrayValue |
| Used by | <p>Elements XML-ArrayValue/liste, XML-Bewertungsbedingung-Item/werte, XML-CommonFunction/liste, XML-CompositeFunction/liste, XML-Datentabelle-Item/datensatzkey, XML-Datentabelle-Item/datensatzvalue, XML-FunctionValue/liste, XML-ValueFunction/liste</p> <p>Complex Types XML-Testdaten-Array, XML-ValueFunction</p> |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Source | <pre> <xs:complexType name="XML-ArrayValue"> <xs:complexContent> <xs:restriction base="XML-CommonFunction"> <xs:choice minOccurs="0" maxOccurs="unbounded"> <xs:element name="bits" type="XML-BinaryValue"/> <xs:element name="text" type="XML-StringValue"/> <xs:element name="zahl" type="XML-IntegerValue"/> <xs:element name="liste" type="XML-ArrayValue"/> <xs:element name="datum" type="XML-DateValue"/> <xs:element name="uhrzeit" type="XML-TimeValue"/> <xs:element name="zeitpunkt" type="XML-DatetimeValue"/> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:element name="ja" type="XML-TrueValue"/> <xs:element name="nein" type="XML-FalseValue"/> <xs:element name="ref" type="XML-ObjectValue"/> <xs:element name="funktion" type="XML-FunctionValue"/> <xs:element name="undefiniert" type="XML-VoidValue"/> </xs:choice> <xs:attribute name="ref" type="XML-Ref" use="prohibited"/> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-CommonFunction

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | <p>Complex Types XML-ArrayValue, XML-CompositeFunction</p> |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf |

| | | | | |
|-----------------|--|-------------|------------|--|
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | optional | |
| Source | <pre> <xs:complexType name="XML-CommonFunction"> <xs:choice minOccurs="0" maxOccurs="unbounded"> <xs:element name="bits" type="XML-BinaryValue"/> <xs:element name="text" type="XML-StringValue"/> <xs:element name="zahl" type="XML-IntegerValue"/> <xs:element name="liste" type="XML-ArrayValue"/> <xs:element name="datum" type="XML-DateValue"/> <xs:element name="uhrzeit" type="XML-TimeValue"/> <xs:element name="zeitpunkt" type="XML-DatetimeValue"/> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:element name="ja" type="XML-TrueValue"/> <xs:element name="nein" type="XML-FalseValue"/> <xs:element name="ref" type="XML-ObjectValue"/> <xs:element name="funktion" type="XML-FunctionValue"/> <xs:element name="undefiniert" type="XML-VoidValue"/> <xs:element name="param" type="XML-ParamFunction"/> <xs:element name="aufruf" type="XML-CompositeFunction"/> </xs:choice> <xs:attribute name="ref" type="XML-Ref" use="optional"/> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-BinaryValue


| | | | |
|-----------------|--|---|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | extension of XML-BinaryContent | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:hexBinary<ul style="list-style-type: none">• XML-BinaryContent<ul style="list-style-type: none">• XML-BinaryValue | | |
| Used by | Elements | XML-Annotation-Part/data, XML-ArrayValue/bits, XML-CommonFunction/bits, XML-Composite-Function/bits, XML-FunctionValue/bits, XML-Signatur-Part/data, XML-Testdaten-Array/bits, XML-Testdaten-Value/bits, XML-ValueFunction/bits | |
| Source | <pre><xs:complexType name="XML-BinaryValue"> <xs:simpleContent> <xs:extension base="XML-BinaryContent" /> </xs:simpleContent> </xs:complexType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Complex Type XML-DateValue


| | | | |
|----------------|---|---|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | extension of XML-DateContent | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:date<ul style="list-style-type: none">• XML-DateContent<ul style="list-style-type: none">• XML-DateValue | | |
| Used by | Elements | XML-ArrayValue/datum, XML-CommonFunction/datum, XML-CompositeFunction/datum, XML-FunctionValue/datum, XML-Kalendertag-Pool/datum, XML-Produktdaten-Part/unterstuetzt, XML-Testdaten-Array/datum, XML-Testdaten-Value/datum, XML-ValueFunction/datum | |
| Source | <pre><xs:complexType name="XML-DateValue"> <xs:simpleContent> <xs:extension base="XML-DateContent" /> </xs:simpleContent> </xs:complexType></pre> | | |

| | |
|-----------------|---|
| | <code></xs:complexType></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |


Complex Type XML-TimeValue

| | | |
|-----------------|---|--|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram |  | |
| Type | extension of XML-TimeContent | |
| Type hierarchy | <ul style="list-style-type: none"> xs:time XML-TimeContent XML-TimeValue | |
| Used by | Elements | XML-ArrayValue/uhrzeit, XML-CommonFunction/uhrzeit, XML-CompositeFunction/uhrzeit, XML-FunctionValue/uhrzeit, XML-Testdaten-Array/uhrzeit, XML-Testdaten-Value/uhrzeit, XML-Ungultigkeitszeitpunktsdaten-Item/uhrzeit, XML-ValueFunction/uhrzeit, XML-Zeitabschnitt-Item/bis, XML-Zeitabschnitt-Item/von, XML-Zeitrahmengrenze-Part/uhrzeit, XML-Zeitrahmengrenze-Part/uhrzeit |
| Source | <pre><xs:complexType name="XML-TimeValue"> <xs:simpleContent> <xs:extension base="XML-TimeContent" /> </xs:simpleContent> </xs:complexType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |


Complex Type XML-TrueValue

| | | |
|-----------------|---|--|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram |  | |
| Used by | Elements | XML-ArrayValue/ja, XML-CommonFunction/ja, XML-CompositeFunction/ja, XML-FunctionValue/ja, XML-Testdaten-Array/ja, XML-Testdaten-Value/ja, XML-ValueFunction/ja |
| Source | <pre><xs:complexType name="XML-TrueValue" /></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Complex Type XML-FalseValue

| | | |
|-----------------|---|--|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram |  | |
| Used by | Elements | XML-ArrayValue/nein, XML-CommonFunction/nein, XML-CompositeFunction/nein, XML-FunctionValue/nein, XML-Testdaten-Array/nein, XML-Testdaten-Value/nein, XML-ValueFunction/nein |
| Source | <pre><xs:complexType name="XML-FalseValue" /></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Complex Type XML-ObjectValue

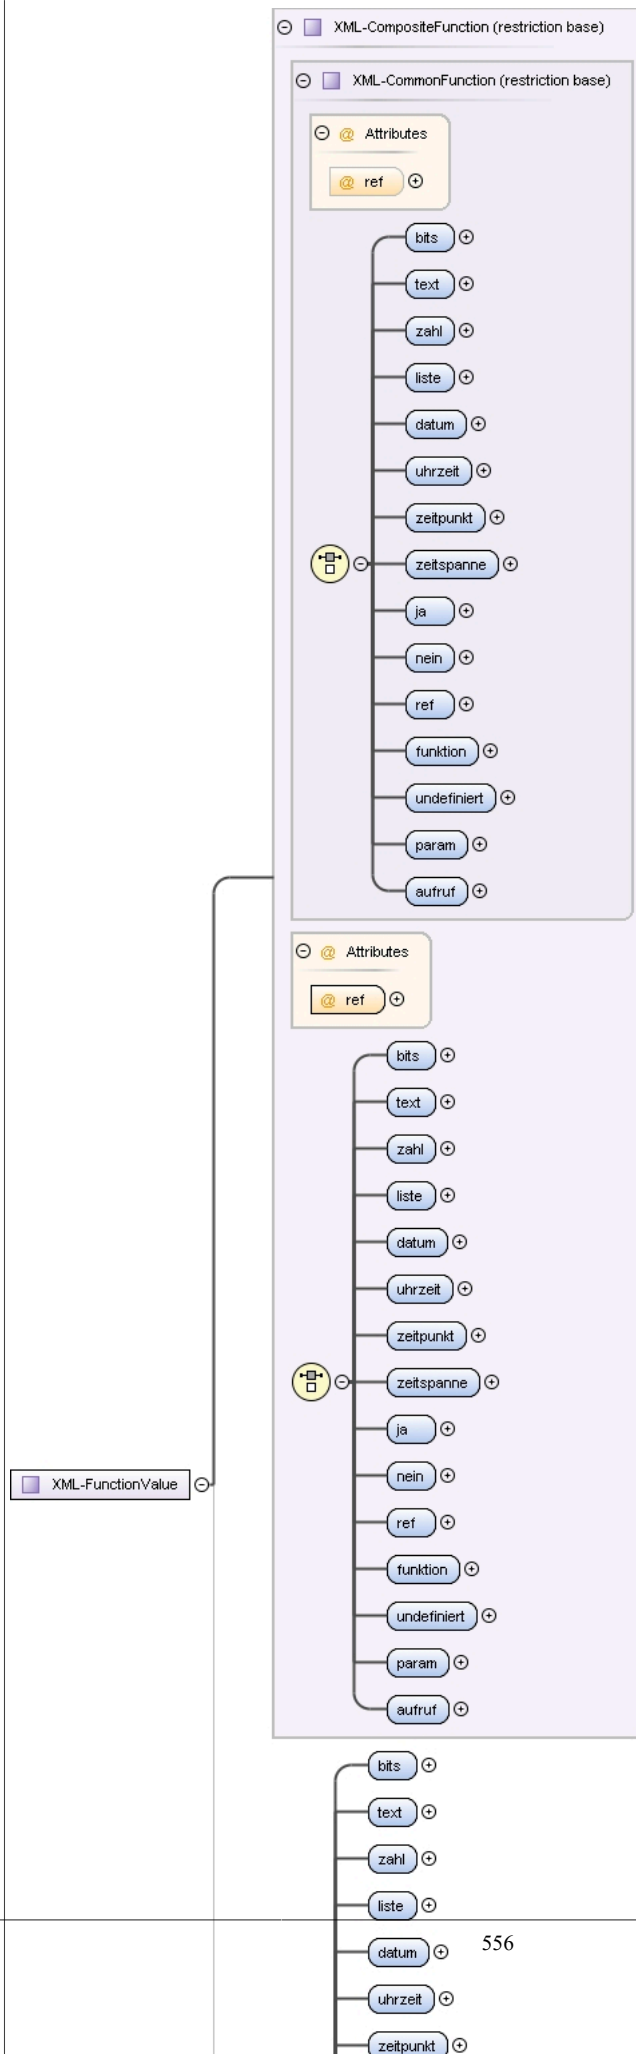
| | | |
|----------------|---|--|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram |  | |
| Type | extension of XML-Ref | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref | |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> XML-ObjectValue |
| Used by | Elements XML-ArrayValue/ref, XML-CommonFunction/ref, XML-CompositeFunction/ref, XML-FunctionValue/ref, XML-ValueFunction/ref |
| Source | <pre><xs:complexType name="XML-ObjectValue"> <xs:simpleContent> <xs:extension base="XML-Ref" /> </xs:simpleContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-FunctionValue

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram

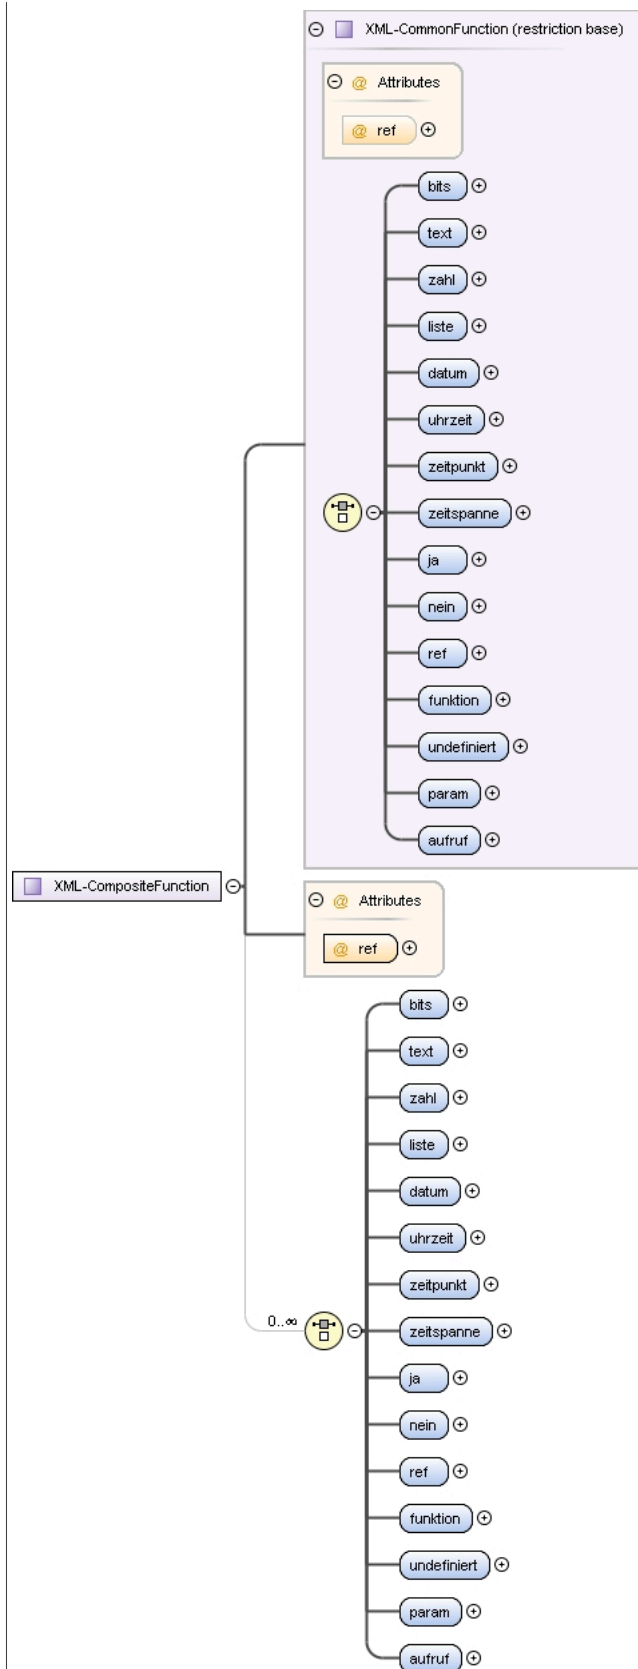


| | | | | |
|-----------------|---|---------|----------|--|
| Type | restriction of XML-CompositeFunction | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-CompositeFunction XML-FunctionValue | | | |
| Used by | Elements XML-ArrayValue/funktion, XML-CommonFunction/funktion, XML-CompositeFunction/funktion, XML-FunctionValue/funktion, XML-ValueFunction/funktion | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-FunctionValue"> <xs:complexContent> <xs:restriction base="XML-CompositeFunction"> <xs:choice minOccurs="0" maxOccurs="unbounded"> <xs:element name="bits" type="XML-BinaryValue"/> <xs:element name="text" type="XML-StringValue"/> <xs:element name="zahl" type="XML-IntegerValue"/> <xs:element name="liste" type="XML-ArrayValue"/> <xs:element name="datum" type="XML-DateValue"/> <xs:element name="uhrzeit" type="XML-TimeValue"/> <xs:element name="zeitpunkt" type="XML-DatetimeValue"/> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:element name="ja" type="XML-TrueValue"/> <xs:element name="nein" type="XML-FalseValue"/> <xs:element name="ref" type="XML-ObjectValue"/> <xs:element name="funktion" type="XML-FunctionValue"/> <xs:element name="undefiniert" type="XML-VoidValue"/> <xs:element name="param" type="XML-ParamFunction"/> <xs:element name="aufruf" type="XML-CompositeFunction"/> </xs:choice> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-CompositeFunction

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



Type restriction of XML-CommonFunction


Type hierarchy

- XML-CommonFunction
- XML-CompositeFunction

Used by Complex Type XML-FunctionValue

| | | | | |
|-----------------|---|---------|----------|--|
| | ElementsXML-CommonFunction/aufruf, XML-CompositeFunction/aufruf, XML-FunctionValue/aufruf, XML-Funktion-Item/aufruf | | | |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert param aufruf | | | |
| Children | aufruf, bits, datum, funktion, ja, liste, nein, param, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-CompositeFunction"> <xs:complexContent> <xs:restriction base="XML-CommonFunction"> <xs:choice minOccurs="0" maxOccurs="unbounded"> <xs:element name="bits" type="XML-BinaryValue"/> <xs:element name="text" type="XML-StringValue"/> <xs:element name="zahl" type="XML-IntegerValue"/> <xs:element name="liste" type="XML-ArrayValue"/> <xs:element name="datum" type="XML-DateValue"/> <xs:element name="uhrzeit" type="XML-TimeValue"/> <xs:element name="zeitpunkt" type="XML-DatetimeValue"/> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:element name="ja" type="XML-TrueValue"/> <xs:element name="nein" type="XML-FalseValue"/> <xs:element name="ref" type="XML-ObjectValue"/> <xs:element name="funktion" type="XML-FunctionValue"/> <xs:element name="undefiniert" type="XML-VoidValue"/> <xs:element name="param" type="XML-ParamFunction"/> <xs:element name="aufruf" type="XML-CompositeFunction"/> </xs:choice> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-VoidValue

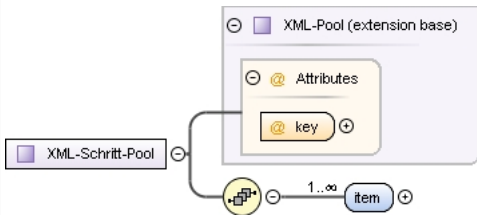
| | | | |
|-----------------|---|---|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | <div> XML-VoidValue</div> | | |
| Used by | Elements | XML-ArrayValue/undefiniert, XML-CommonFunction/undefiniert, XML-CompositeFunction/undefiniert, XML-FunctionValue/undefiniert, XML-Testdaten-Array/undefiniert, XML-Testdaten-Value/undefiniert, XML-ValueFunction/undefiniert, XML-Zeitrahmengrenze-Part/unbestimmt | |
| Source | <xs:complexType name="XML-VoidValue" /> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Complex Type XML-ParamFunction

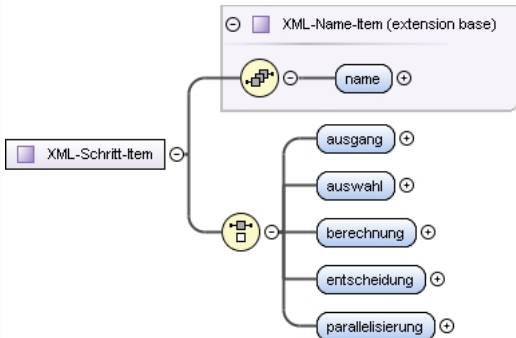
| | | | |
|-----------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | extension of xs:unsignedShort | | |
| Used by | Elements | XML-CommonFunction/param, XML-CompositeFunction/param, XML-FunctionValue/param | |
| Source | <pre><xs:complexType name="XML-ParamFunction"> <xs:simpleContent> <xs:extension base="xs:unsignedShort" /> </xs:simpleContent> </xs:complexType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Complex Type XML-Schritt-Pool

| | | | |
|-----------|---------------------|--|--|
| Namespace | http://vdv/ka/pkm/2 | | |
|-----------|---------------------|--|--|

| Diagram |  | | | | | | | | | | | |
|-----------------|---|---|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Schritt-Pool | | | | | | | | | | | |
| Used by | Elements | XML-PVTarifmodul/schritt-pool, XML-RNTarifmodul/schritt-pool, XML-Tarifmodul/schritt-pool | | | | | | | | | | |
| Model | item+ | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Schritt-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Schritt-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Schritt-Item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Schritt-Item |
| Used by | Element XML-Schritt-Pool/item |
| Model | name , (ausgang auswahl berechnung entscheidung parallelisierung) |
| Children | ausgang, auswahl, berechnung, entscheidung, name, parallelisierung |
| Source | <pre><xs:complexType name="XML-Schritt-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:choice> <xs:element name="ausgang" type="XML-Ausgangsschritt-Part"/> <xs:element name="auswahl" type="XML-Auswahlschritt-Part"/> <xs:element name="berechnung" type="XML-Berechnungsschritt-Part"/> <xs:element name="entscheidung" type="XML-Entscheidungsschritt-Part"/> <xs:element name="parallelisierung" type="XML-Parallelisierungsschritt-Part"/> </xs:choice> </xs:extension> </xs:complexContent> </xs:complexType></pre> |

| | |
|-----------------|---|
| | <pre> </xs:choice> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangsschritt-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Schritt-Item/ausgang |
| Model | ausgangsdaten , ausnahme , nachfolger |
| Children | ausgangsdaten, ausnahme, nachfolger |
| Source | <pre> <xs:complexType name="XML-Ausgangsschritt-Part"> <xs:sequence> <xs:element name="ausgangsdaten" type="XML-Ref11"/> <xs:element name="ausnahme" type="XML-Ref01"/> <xs:element name="nachfolger" type="XML-Ref01"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Auswahlschritt-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Schritt-Item/auswahl |
| Model | auswahldaten , ausnahme , nachfolger |
| Children | ausnahme, auswahldaten, nachfolger |
| Source | <pre> <xs:complexType name="XML-Auswahlschritt-Part"> <xs:sequence> <xs:element name="auswahldaten" type="XML-Ref11"/> <xs:element name="ausnahme" type="XML-Ref01"/> <xs:element name="nachfolger" type="XML-RefList1N"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-RefList1N

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-RefList0N |
| Type hierarchy | <ul style="list-style-type: none"> XML-RefList0N XML-RefList1N |

| | |
|-----------------|---|
| Used by | Elements XML-Ausgangssequenz-Item/auswahloption, XML-Auswahldaten-Item/auswahloption, XML-Auswahlschritt-Part/nachfolger, XML-Bitleisteninterpretation-Item/tarifpunkt |
| Model | ref+ |
| Children | ref |
| Source | <pre> <xs:complexType name="XML-RefList1N"> <xs:complexContent> <xs:restriction base="XML-RefList0N"> <xs:sequence> <xs:element name="ref" type="XML-Ref" maxOccurs="unbounded" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Berechnungsschritt-Part


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Schritt-Item/berechnung |
| Model | funktion , ausnahme , nachfolger |
| Children | ausnahme, funktion, nachfolger |
| Source | <pre> <xs:complexType name="XML-Berechnungsschritt-Part"> <xs:sequence> <xs:element name="funktion" type="XML-Ref11" /> <xs:element name="ausnahme" type="XML-Ref01" /> <xs:element name="nachfolger" type="XML-Ref01" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Entscheidungsschritt-Part

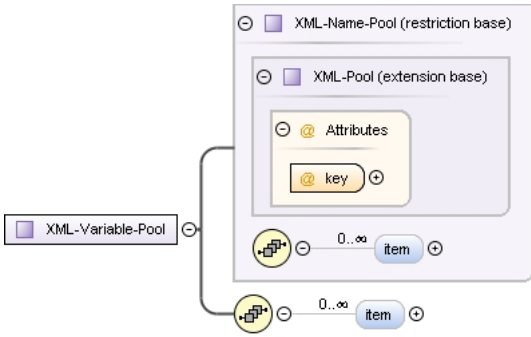
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Schritt-Item/entscheidung |
| Model | funktion , ausnahme , janachfolger , neinnachfolger |
| Children | ausnahme, funktion, janachfolger, neinnachfolger |
| Source | <pre> <xs:complexType name="XML-Entscheidungsschritt-Part"> <xs:sequence> <xs:element name="funktion" type="XML-Ref11" /> <xs:element name="ausnahme" type="XML-Ref01" /> <xs:element name="janachfolger" type="XML-Ref11" /> <xs:element name="neinnachfolger" type="XML-Ref11" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Parallelisierungsschritt-Part

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

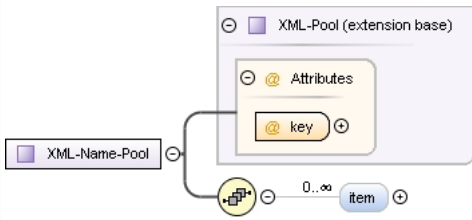
| | |
|-----------------|---|
| Diagram |  |
| Used by | Element XML-Schritt-Item/parallelisierung |
| Model | parallel , nachfolger |
| Children | nachfolger, parallel |
| Source | <pre> <xs:complexType name="XML-Parallelisierungsschritt-Part"> <xs:sequence> <xs:element name="parallel" type="XML-RefList0N"/> <xs:element name="nachfolger" type="XML-Ref01"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Variable-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | restriction of XML-Name-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Name-Pool <ul style="list-style-type: none"> XML-Variable-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/variable-pool, XML-RNTarifmodul/variable-pool, XML-Tarifmodul/variable-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Variable-Pool"> <xs:complexContent> <xs:restriction base="XML-Name-Pool"> <xs:sequence> <xs:element name="item" type="XML-Variable-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Name-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram |  | | | | | | | | | | | |
|-----------------|---|--|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool | | | | | | | | | | | |
| Used by | Complex Types | XML-Ausgangsdatenfamilie-Pool, XML-Bewertungstyp-Pool, XML-Variable-Pool, XML-Verkehrsmittellinienbezug-Pool, XML-Zuordnungstyp-Pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Name-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Name-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Variable-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Variable-Item |
| Used by | Element XML-Variable-Pool/item |
| Model | name |
| Children | name |
| Source | <pre><xs:complexType name="XML-Variable-Item"> <xs:complexContent> <xs:restriction base="XML-Name-Item"> <xs:sequence> <xs:element name="name" type="XML-StringValue" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Funktion-Pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|--|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Funktion-Pool | | | | | | | | | | | |
| Used by | Elements | XML-PVTarifmodul/funktion-pool, XML-RNTarifmodul/funktion-pool, XML-Tarifmodul/funktion-pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Funktion-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Funktion-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Funktion-Item

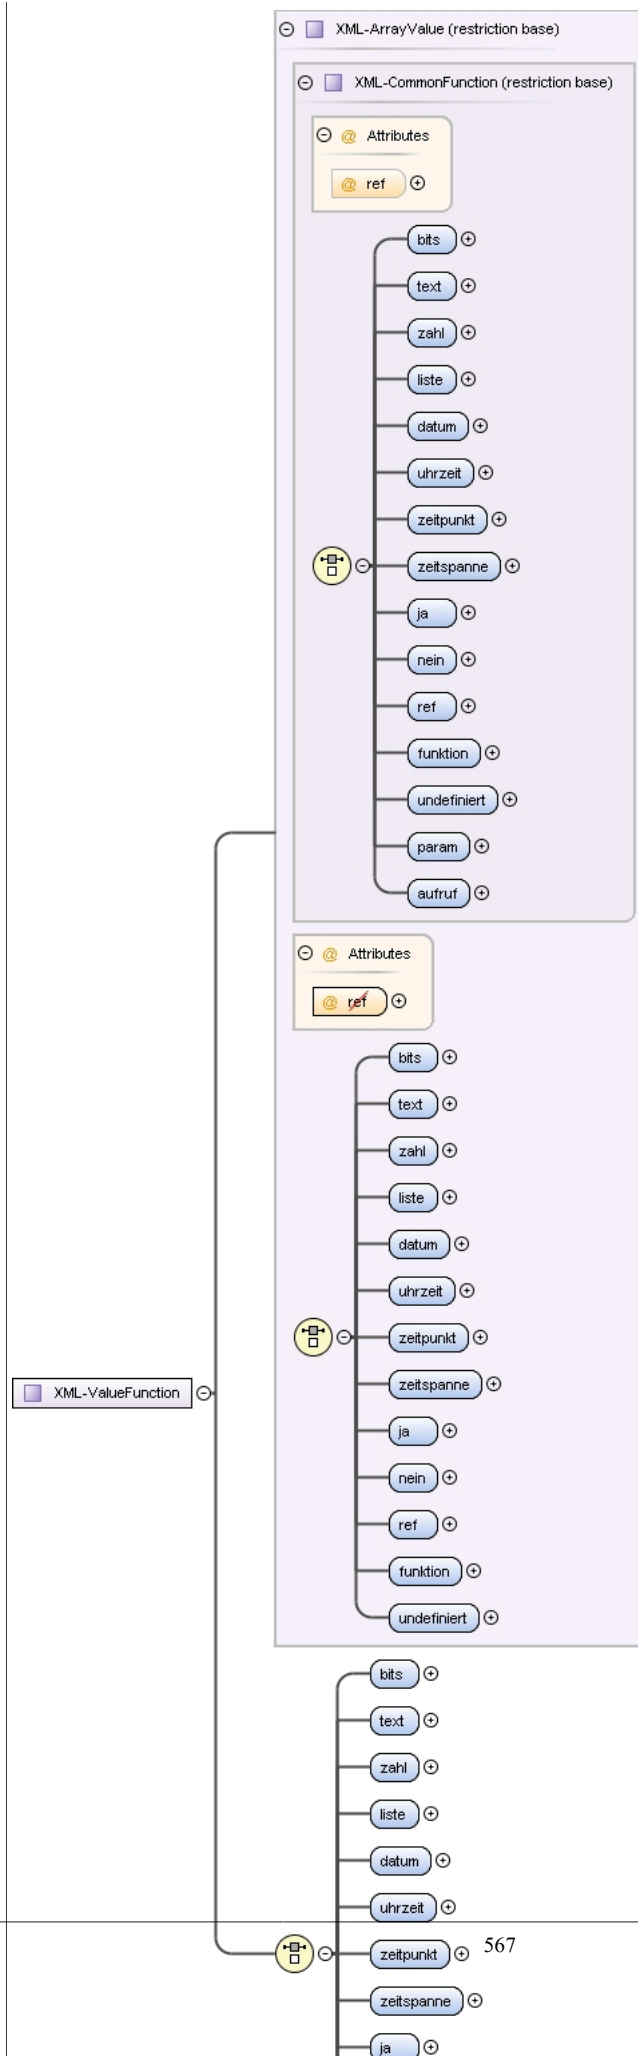
| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the relationship between two XML Schema types. A box labeled 'XML-Funktion-Item' is connected to a larger box labeled 'XML-Name-Item (extension base)'. Inside the 'XML-Name-Item' box, there is a circle with a plus sign and a small square icon, connected to an oval labeled 'name'. Below the 'XML-Funktion-Item' box, there is a circle with a plus sign and a small square icon, connected to three ovals labeled 'nr', 'wert', and 'aufruf'.</p> |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Funktion-Item |
| Used by | Element XML-Funktion-Pool/item |
| Model | name , (nr wert aufruf) |
| Children | aufruf, name, nr, wert |
| Source | <pre><xs:complexType name="XML-Funktion-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:choice> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="wert" type="XML-ValueFunction"/> </xs:choice> </xs:extension> </xs:complexContent> </xs:complexType></pre> |

| | |
|-----------------|---|
| | <pre><xs:element name="aufruf" type="XML-CompositeFunction"/> </xs:choice> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-ValueFunction

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|-----------------|---|
| Type | restriction of XML-ArrayValue |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue XML-ValueFunction |
| Used by | Elements XML-Bewertungsdaten-Item/wert, XML-Funktion-Item/wert |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein ref funktion undefiniert |
| Children | bits, datum, funktion, ja, liste, nein, ref, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Source | <pre> <xs:complexType name="XML-ValueFunction"> <xs:complexContent> <xs:restriction base="XML-ArrayValue"> <xs:choice> <xs:element name="bits" type="XML-BinaryValue"/> <xs:element name="text" type="XML-StringValue"/> <xs:element name="zahl" type="XML-IntegerValue"/> <xs:element name="liste" type="XML-ArrayValue"/> <xs:element name="datum" type="XML-DateValue"/> <xs:element name="uhrzeit" type="XML-TimeValue"/> <xs:element name="zeitpunkt" type="XML-DatetimeValue"/> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:element name="ja" type="XML-TrueValue"/> <xs:element name="nein" type="XML-FalseValue"/> <xs:element name="ref" type="XML-ObjectValue"/> <xs:element name="funktion" type="XML-FunctionValue"/> <xs:element name="undefiniert" type="XML-VoidValue"/> </xs:choice> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ausnahme-Pool

| | | | | |
|----------------|--|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Ausgangstext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Ausnahme-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/ausnahme-pool, XML-RNTarifmodul/ausnahme-pool, XML-Tarifmodul/ausnahme-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Ausnahme-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausnahme-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation></pre> | | | |

| | |
|-----------------|---|
| | <pre> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangstext-Pool

| | | | | |
|-----------------|--|---|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool | | | |
| Used by | Complex Types | XML-Ausnahme-Pool, XML-Bezahlart-Pool, XML-Bezahlartadapter-Pool, XML-Identifikationsparameterwert-Pool, XML-Linienadapter-Pool, XML-Mitnahmetyp-Pool, XML-Mitnahmetypadapter-Pool, XML-Nummerntext-Pool, XML-Rabattmedientyp-Pool, XML-Rabattmedientypadapter-Pool, XML-Verkehrsmitteltypadapter-Pool, XML-Wachrung-Pool, XML-Wachrungsadapter-Pool, XML-Zahlungsintervall-Pool, XML-Zahlungsintervalladapter-Pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Ausgangstext-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangstext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangstext-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-NrName-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item <ul style="list-style-type: none"> XML-Ausgangstext-Item | | | |

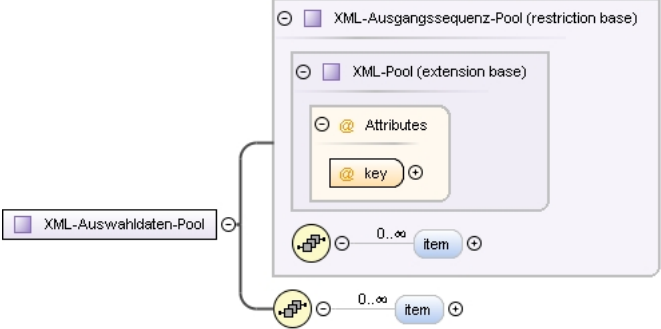
| | | |
|-----------------|--|---|
| Used by | Element | XML-Ausgangstext-Pool/item |
| | Complex Types | XML-Ausnahme-Item, XML-Bezahlart-Item, XML-Bezahlartadapter-Item, XML-Eigenprodukt-Item, XML-Flaecheelement-Item, XML-Fremdprodukt-Item, XML-Identifikationsparameterwert-Item, XML-Linie-Item, XML-Linienadapter-Item, XML-Mitnahmetyp-Item, XML-Mitnahmetypadapter-Item, XML-Nummerntext-Item, XML-Produktadapter-Item, XML-Rabattmedientyp-Item, XML-Rabattmedientypadapter-Item, XML-Verkehrsmitteltypadapter-Item, XML-Waehrung-Item, XML-Waehrungsadapter-Item, XML-Zahlungsintervall-Item, XML-Zahlungsintervalladapter-Item |
| Model | nr , name , text-matrix | |
| Children | name, nr, text-matrix | |
| Source | <pre><xs:complexType name="XML-Ausgangstext-Item"> <xs:complexContent> <xs:extension base="XML-NrName-Item"> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Complex Type XML-Ausnahme-Item

| | | |
|-----------------|---|------------------------|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram | | |
| Type | restriction of XML-Ausgangstext-Item | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Ausnahme-Item | |
| Used by | Element | XML-Ausnahme-Pool/item |
| Model | nr , name , text-matrix | |
| Children | name, nr, text-matrix | |
| Source | <pre><xs:complexType name="XML-Ausnahme-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Complex Type XML-Auswahldaten-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram |  | | | | | | | | | | | |
|-----------------|---|--|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | restriction of XML-Ausgangssequenz-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangssequenz-Pool<ul style="list-style-type: none">XML-Auswahldaten-Pool | | | | | | | | | | | |
| Used by | Elements | XML-PVTarifmodul/auswahldaten-pool, XML-RNTarifmodul/auswahldaten-pool, XML-Tarifmodul/auswahldaten-pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Auswahldaten-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangssequenz-Pool"> <xs:sequence> <xs:element name="item" type="XML-Auswahldaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Ausgangssequenz-Pool

| | | | | |
|----------------|--|---|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangssequenz-Pool | | | |
| Used by | Complex Types | XML-Ausgangsdaten-Pool, XML-Auswahldaten-Pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Ausgangssequenz-Pool"> <xs:complexContent></pre> | | | |

| | |
|-----------------|--|
| | <pre> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangssequenz-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangssequenz-Item

| | | | | | |
|-----------------|---|---------|-------------------------------|---------------|---|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Type | extension of XML-Name-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Ausgangssequenz-Item | | | | |
| Used by | <table border="1"> <tr> <td>Element</td> <td>XML-Ausgangssequenz-Pool/item</td> </tr> <tr> <td>Complex Types</td> <td>XML-Ausgangsdaten-Item, XML-Auswahldaten-Item</td> </tr> </table> | Element | XML-Ausgangssequenz-Pool/item | Complex Types | XML-Ausgangsdaten-Item, XML-Auswahldaten-Item |
| Element | XML-Ausgangssequenz-Pool/item | | | | |
| Complex Types | XML-Ausgangsdaten-Item, XML-Auswahldaten-Item | | | | |
| Model | name , sequenz-matrix , defaultoption{0,1} , auswahloption{0,1} | | | | |
| Children | auswahloption, defaultoption, name, sequenz-matrix | | | | |
| Source | <pre> <xs:complexType name="XML-Ausgangssequenz-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="sequenz-matrix" type="XML-Ausgangssequenz-Matrix"/> <xs:element name="defaultoption" type="XML-Ref01" minOccurs="0"/> <xs:element name="auswahloption" type="XML-RefList1N" minOccurs="0"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Ausgangssequenz-Matrix

| | | | |
|-----------|---|----------|---|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Used by | <table border="1"> <tr> <td>Elements</td> <td>XML-Ausgangsdaten-Item/sequenz-matrix, XML-Ausgangssequenz-Item/sequenz-matrix, XML-Auswahldaten-Item/sequenz-matrix, XML-Auswahloption-Item/sequenz-matrix</td> </tr> </table> | Elements | XML-Ausgangsdaten-Item/sequenz-matrix, XML-Ausgangssequenz-Item/sequenz-matrix, XML-Auswahldaten-Item/sequenz-matrix, XML-Auswahloption-Item/sequenz-matrix |
| Elements | XML-Ausgangsdaten-Item/sequenz-matrix, XML-Ausgangssequenz-Item/sequenz-matrix, XML-Auswahldaten-Item/sequenz-matrix, XML-Auswahloption-Item/sequenz-matrix | | |
| Model | sequenz* | | |
| Children | sequenz | | |
| Source | <pre> <xs:complexType name="XML-Ausgangssequenz-Matrix"> <xs:sequence> <xs:element name="sequenz" type="XML-Ausgangssequenz-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Ausgangssequenz-Entry

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | |
|-----------------|---|------------------------------------|------|-----|--|-----|---------|----------|--|
| Diagram | <p>The diagram illustrates the structure of the XML-Ausgangssequenz-Entry complex type. It features a central box labeled 'XML-Ausgangssequenz-Entry' with a purple square icon. This box is connected to a choice box (yellow circle with a plus sign) via a line labeled '1..∞'. The choice box branches into two paths: one leading to a 'ref' box (blue oval with a plus sign) and another leading to a 'text' box (blue oval with a plus sign). Additionally, the main box is connected to an 'Attributes' box (yellow rectangle with a plus sign) via a line labeled '1'. The 'Attributes' box contains a 'ref' box (yellow oval with a plus sign) and a 'text' box (yellow oval with a plus sign).</p> | | | | | | | | |
| Used by | Element | XML-Ausgangssequenz-Matrix/sequenz | | | | | | | |
| Model | ref text | | | | | | | | |
| Children | ref, text | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | |
| QName | Type | Use | | | | | | | |
| ref | XML-Ref | required | | | | | | | |
| Source | <pre><xs:complexType name="XML-Ausgangssequenz-Entry"> <xs:choice maxOccurs="unbounded"> <xs:element name="ref" type="XML-Ref" /> <xs:element name="text" type="XML-StringValue" /> </xs:choice> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:complexType></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | |

Complex Type XML-Auswahldaten-Item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the relationship between XML-Ausgangssequenz-Item and XML-Auswahldaten-Item. XML-Ausgangssequenz-Item is a restriction base containing XML-Name-Item (extension base) and a choice of sequenz-matrix, defaultoption, and auswahloption. XML-Auswahldaten-Item is a restriction of XML-Ausgangssequenz-Item, containing a choice of name, sequenz-matrix, defaultoption, and auswahloption.</p> |
| Type | restriction of XML-Ausgangssequenz-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Ausgangssequenz-Item<ul style="list-style-type: none">XML-Auswahldaten-Item |
| Used by | Element XML-Auswahldaten-Pool/item |
| Model | name , sequenz-matrix , defaultoption , auswahloption |
| Children | auswahloption, defaultoption, name, sequenz-matrix |
| Source | <pre><xs:complexType name="XML-Auswahldaten-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangssequenz-Item"> <xs:sequence></pre> |

| | |
|-----------------|--|
| | <pre> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="sequenz-matrix" type="XML-Ausgangssequenz-Matrix"/> <xs:element name="defaultoption" type="XML-Ref01"/> <xs:element name="auswahloption" type="XML-RefList1N"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Auswahloption-Pool

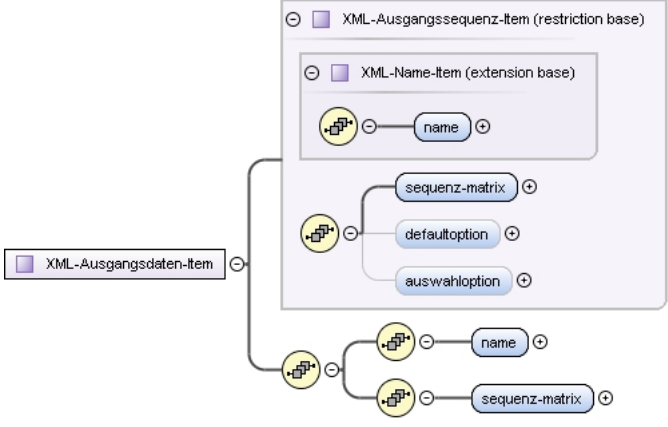
| | | | | |
|-----------------|--|---|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <pre>graph TD A[XML-Auswahloption-Pool] -- restriction --> B[XML-Ausgangsdaten-Pool] B -- restriction --> C[XML-Ausgangssequenz-Pool] C -- extension --> D[XML-Pool] D -- contains --> E[Attributes] E -- contains --> F[key] D -- contains --> G["0..∞ item"] C -- contains --> H["0..∞ item"] B -- contains --> I["0..∞ item"]</pre> | | | |
| Type | restriction of XML-Ausgangsdaten-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangssequenz-Pool<ul style="list-style-type: none">XML-Ausgangsdaten-Pool<ul style="list-style-type: none">XML-Auswahloption-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/auswahloption-pool, XML-RNTarifmodul/auswahloption-pool, XML-Tarifmodul/auswahloption-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Auswahloption-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangsdaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-Auswahloption-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangsdaten-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram | | | | | | | | | | | | |
|-----------------|---|---|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | restriction of XML-Ausgangssequenz-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangssequenz-Pool<ul style="list-style-type: none">XML-Ausgangsdaten-Pool | | | | | | | | | | | |
| Used by | Complex Type | XML-Auswahloption-Pool | | | | | | | | | | |
| | Elements | XML-PVTarifmodul/ausgangsdaten-pool, XML-RNTarifmodul/ausgangsdaten-pool, XML-Tarifmodul/ausgangsdaten-pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Ausgangsdaten-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangssequenz-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangsdaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Ausgangsdaten-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | restriction of XML-Ausgangssequenz-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Ausgangssequenz-Item | | | |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> XML-Ausgangsdaten-Item |
| Used by | Element XML-Ausgangsdaten-Pool/item |
| | Complex Type XML-Auswahloption-Item |
| Model | name , sequenz-matrix |
| Children | name, sequenz-matrix |
| Source | <pre> <xs:complexType name="XML-Ausgangsdaten-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangssequenz-Item"> <xs:sequence> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="sequenz-matrix" type="XML-Ausgangssequenz-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Auswahloption-Item

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the complex type hierarchy for XML-Auswahloption-Item. It shows that XML-Auswahloption-Item is a restriction of XML-Ausgangsdaten-Item. XML-Ausgangsdaten-Item is a restriction of XML-Ausgangssequenz-Item. XML-Ausgangssequenz-Item is an extension of XML-Name-Item. The diagram shows the inheritance hierarchy and the elements (name, sequenz-matrix) that are inherited or restricted.</p> |
| Type | restriction of XML-Ausgangsdaten-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Ausgangssequenz-Item <ul style="list-style-type: none"> XML-Ausgangsdaten-Item <ul style="list-style-type: none"> XML-Auswahloption-Item |
| Used by | Element XML-Auswahloption-Pool/item |
| Model | name , sequenz-matrix |
| Children | name, sequenz-matrix |
| Source | <pre> <xs:complexType name="XML-Auswahloption-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangsdaten-Item"> <xs:sequence> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> </pre> |

| | |
|-----------------|--|
| | <pre> <xs:element name="sequenz-matrix" type="XML-Ausgangssequenz-Matrix" /> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ausgangsdatenfamilie-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Name-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Name-Pool <ul style="list-style-type: none"> XML-Ausgangsdatenfamilie-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/ausgangsdatenfamilie-pool, XML-Tarifmodul/ausgangsdatenfamilie-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Ausgangsdatenfamilie-Pool"> <xs:complexContent> <xs:restriction base="XML-Name-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ausgangsdatenfamilie-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangsdatenfamilie-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Ausgangsdatenfamilie-Item | | | |

| | |
|-----------------|--|
| Used by | Element XML-Ausgangsdatenfamilie-Pool/item |
| Model | name |
| Children | name |
| Source | <pre><xs:complexType name="XML-Ausgangsdatenfamilie-Item"> <xs:complexContent> <xs:restriction base="XML-Name-Item"> <xs:sequence> <xs:element name="name" type="XML-StringValue" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Organisation-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-PVTarifmodul/organisation-pool, XML-Tarifmodul/organisation-pool |
| Model | item+ |
| Children | item |
| Source | <pre><xs:complexType name="XML-Organisation-Pool"> <xs:sequence> <xs:element name="item" type="XML-Organisation-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Organisation-Item

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Organisation-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Organisation-Part XML-Organisation-Item |
| Used by | Element XML-Organisation-Pool/item |
| Model | nr , name , anforderung |
| Children | anforderung, name, nr |
| Source | <pre><xs:complexType name="XML-Organisation-Item"> <xs:complexContent> <xs:extension base="XML-Organisation-Part"></pre> |

| | |
|-----------------|---|
| | <pre> <xs:sequence> <xs:element name="anforderung" type="XML-Ergaenzungsanforderung-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ergaenzungsanforderung-Pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Wochentag-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Wochentag-Pool XML-Ergaenzungsanforderung-Pool |
| Used by | Element XML-Organisation-Item/anforderung |
| Model | nr+ |
| Children | nr |
| Source | <pre> <xs:complexType name="XML-Ergaenzungsanforderung-Pool"> <xs:complexContent> <xs:restriction base="XML-Wochentag-Pool"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Wochentag-Pool

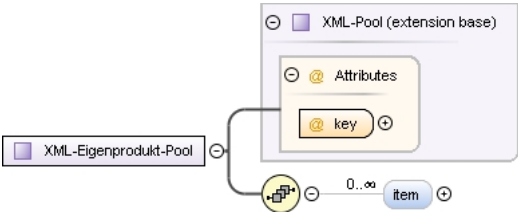
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Complex Types XML-Ergaenzungsanforderung-Pool, XML-Geosegment-Pool Element XML-Tagesbedingung-Item/wochentag-pool |
| Model | nr* |
| Children | nr |
| Source | <pre> <xs:complexType name="XML-Wochentag-Pool"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-EFMPProdukt-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram | | | | | | | | | | | | |
|-----------------|---|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | restriction of XML-Eigenprodukt-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eigenprodukt-Pool<ul style="list-style-type: none">XML-EFMProdukt-Pool | | | | | | | | | | | |
| Used by | Elements XML-PVTarifmodul/efmprodukt-pool, XML-Tarifmodul/efmprodukt-pool | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-EFMProdukt-Pool"> <xs:complexContent> <xs:restriction base="XML-Eigenprodukt-Pool"> <xs:sequence> <xs:element name="item" type="XML-EFMProdukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Eigenprodukt-Pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|----------------|---|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Eigenprodukt-Pool | | | | | | | | | | | |
| Used by | Complex Types XML-EFMProdukt-Pool, XML-Tarifprodukt-Pool | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Eigenprodukt-Pool"> <xs:complexContent></pre> | | | | | | | | | | | |

| | |
|-----------------|--|
| | <pre> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Eigenprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Eigenprodukt-Item

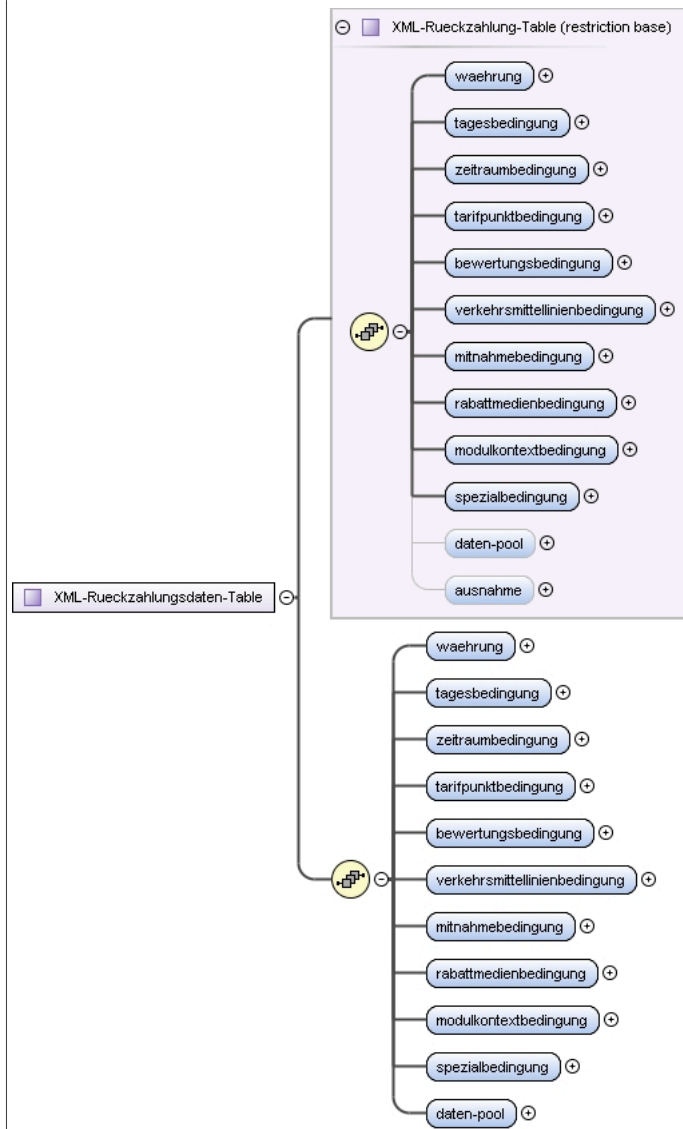
| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <pre> graph TD XML_Eigenprodukt_Item[XML-Eigenprodukt-Item] -- extension base --> XML_Ausgangstext_Item[XML-Ausgangstext-Item] XML_Eigenprodukt_Item -- contains --> XML_NrName_Item[XML-NrName-Item] XML_Eigenprodukt_Item -- contains --> text_matrix[text-matrix] XML_Eigenprodukt_Item -- contains --> seq1[Sequence of elements] XML_NrName_Item -- contains --> nr[nr] XML_NrName_Item -- contains --> name[name] seq1 -- contains --> rueckzahlungsdaten_table[rueckzahlungsdaten-table] seq1 -- contains --> rueckzahlungsausnahme_table[rueckzahlungsausnahme-table] seq1 -- contains --> ungueltigkeitszeitpunktsdaten_table[ungueltigkeitszeitpunktsdaten-table] seq1 -- contains --> ungueltigkeitszeitpunktsausnahme_table[ungueltigkeitszeitpunktsausnahme-table] seq1 -- contains --> preisdaten_table[preisdaten-table] seq1 -- contains --> preisausnahme_table[preisausnahme-table] seq1 -- contains --> gueltigkeitszeitr_Rahmensdaten_table[gueltigkeitszeitr Rahmensdaten-table] seq1 -- contains --> gueltigkeitszeitr_Rahmensausnahme_table[gueltigkeitszeitr Rahmensausnahme-table] seq1 -- contains --> nachfolgedaten_table[nachfolgedaten-table] seq1 -- contains --> nachfolgeausnahme_table[nachfolgeausnahme-table] seq1 -- contains --> efmprodukt[efmprodukt] seq1 -- contains --> identifikation[identifikation] seq1 -- contains --> kontingentierung[kontingentierung] seq1 -- contains --> preisanpassung[preisanpassung] seq1 -- contains --> extNr[extNr] seq1 -- contains --> schluessel[schluessel] seq1 -- contains --> kontrolle[kontrolle] seq1 -- contains --> erfassung[erfassung] seq1 -- contains --> anpassung[anpassung] seq1 -- contains --> darstellung[darstellung] seq1 -- contains --> produktmittlung[produktmittlung] seq1 -- contains --> transaktionsauswertung[transaktionsauswertung] </pre> |
| Type | extension of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item |

| | | | | | |
|-----------------|--|---------|----------------------------|---------------|--|
| | <ul style="list-style-type: none"> XML-Ausgangstext-Item XML-Eigenprodukt-Item | | | | |
| Used by | <table> <tr> <td>Element</td><td>XML-Eigenprodukt-Pool/item</td></tr> <tr> <td>Complex Types</td><td>XML-EFMProdukt-Item, XML-Tarifprodukt-Item</td></tr> </table> | Element | XML-Eigenprodukt-Pool/item | Complex Types | XML-EFMProdukt-Item, XML-Tarifprodukt-Item |
| Element | XML-Eigenprodukt-Pool/item | | | | |
| Complex Types | XML-EFMProdukt-Item, XML-Tarifprodukt-Item | | | | |
| Model | nr, name, text-matrix, rueckzahlungsdaten-table, rueckzahlungsausnahme-table, unguelteigkeitszeitpunktsdaten-table, unguelteigkeitszeitpunktsausnahme-table, preisdaten-table{0,1}, preisausnahme-table{0,1}, gueltigkeitszeitrahmensdaten-table{0,1}, gueltigkeitszeitrahmensausnahme-table{0,1}, nachfolgedaten-table{0,1}, nachfolgeausnahme-table{0,1}, efmprodukt{0,1}, identifikation{0,1}, kontingentierung{0,1}, preisanpassung{0,1}, extNr{0,1}, schluessel{0,1}, kontrolle{0,1}, erfassung{0,1}, anpassung{0,1}, darstellung{0,1}, produktermittlung{0,1}, transaktionsauswertung{0,1} | | | | |
| Children | anpassung, darstellung, efmprodukt, erfassung, extNr, gueltigkeitszeitrahmensausnahme-table, gueltigkeitszeitrahmensdaten-table, identifikation, kontingentierung, kontrolle, nachfolgeausnahme-table, nachfolgedaten-table, name, nr, preisanpassung, preisausnahme-table, preisdaten-table, produktermittlung, rueckzahlungsausnahme-table, rueckzahlungsdaten-table, schluessel, text-matrix, transaktionsauswertung, unguelteigkeitszeitpunktsausnahme-table, unguelteigkeitszeitpunktsdaten-table | | | | |
| Source | <pre> <xs:complexType name="XML-Eigenprodukt-Item"> <xs:complexContent> <xs:extension base="XML-Ausgangstext-Item"> <xs:sequence> <xs:element name="rueckzahlungsdaten-table" type="XML-Rueckzahlungsdaten-Table"/> <xs:element name="rueckzahlungsausnahme-table" type="XML-Rueckzahlungsausnahme-Table"/> <xs:element name="unguelteigkeitszeitpunktsdaten-table" type="XML-Unguelteigkeitszeitpunktsdaten-Table"/> <xs:element name="unguelteigkeitszeitpunktsausnahme-table" type="XML-Unguelteigkeitszeitpunktsausnahme-Table"/> <xs:element name="preisdaten-table" type="XML-Preisdaten-Table" minOccurs="0"/> <xs:element name="preisausnahme-table" type="XML-Preisausnahme-Table" minOccurs="0"/> <xs:element name="gueltigkeitszeitrahmensdaten-table" type="XML-Guelteigkeitszeitrahmensdaten-Table" minOccurs="0"/> <xs:element name="gueltigkeitszeitrahmensausnahme-table" type="XML-Guelteigkeitszeitrahmensausnahme-Table" minOccurs="0"/> <xs:element name="nachfolgedaten-table" type="XML-Nachfolgedaten-Table" minOccurs="0"/> <xs:element name="nachfolgeausnahme-table" type="XML-Nachfolgeausnahme-Table" minOccurs="0"/> </xs:sequence> <xs:element name="efmprodukt" type="XML-Ref01" minOccurs="0"/> <xs:element name="identifikation" type="XML-RefSet0N" minOccurs="0"/> <xs:element name="kontingentierung" type="XML-Ref01" minOccurs="0"/> <xs:element name="preisanpassung" type="XML-BooleanValue" minOccurs="0"/> <xs:element name="extNr" type="XML-StringValue" minOccurs="0"/> <xs:element name="schluessel" type="XML-PVSchluessel-Part" minOccurs="0"/> <xs:element name="kontrolle" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="erfassung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="anpassung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="darstellung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="produktermittlung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="transaktionsauswertung" type="XML-Produktdaten-Part" minOccurs="0"/> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Rueckzahlungsdaten-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | restriction of XML-Rueckzahlung-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Rueckzahlung-Table XML-Rueckzahlungsdaten-Table |
| Used by | Elements XML-EFMProdukt-Item/rueckzahlungsdaten-table, XML-Eigenprodukt-Item/rueckzahlungsdaten-table, XML-Tarifprodukt-Item/rueckzahlungsdaten-table |
| Model | waehrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zeitraumbedingung |
| Source | <pre> <xs:complexType name="XML-Rueckzahlungsdaten-Table"> <xs:complexContent> <xs:restriction base="XML-Rueckzahlung-Table"> <xs:sequence> <xs:element name="waehrung" type="XML-RefList0N"/> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="zeitraumbedingung" type="XML-RefList0N"/> <xs:element name="tarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="bewertungsbedingung" type="XML-RefList0N"/> <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="mitnahmebedingung" type="XML-RefList0N"/> <xs:element name="rabattmedienbedingung" type="XML-RefList0N"/> <xs:element name="modulkontextbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="daten-pool" type="XML-Rueckzahlungsdaten-Pool"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |

| | |
|-----------------|---|
| | <code></xs:complexContent></code> <code></xs:complexType></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Rueckzahlung-Table

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Complex Types XML-Rueckzahlungsausnahme-Table, XML-Rueckzahlungsdaten-Table |
| Model | waehrung , tagesbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool{0,1} , ausnahme{0,1} |
| Children | ausnahme, bewertungsbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zeitraumbedingung |
| Source | <pre> <xs:complexType name="XML-Rueckzahlung-Table"> <xs:sequence> <xs:element name="waehrung" type="XML-RefList0N" /> <xs:element name="tagesbedingung" type="XML-RefList0N" /> <xs:element name="zeitraumbedingung" type="XML-RefList0N" /> <xs:element name="tarifpunktbedingung" type="XML-RefList0N" /> <xs:element name="bewertungsbedingung" type="XML-RefList0N" /> <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N" /> <xs:element name="mitnahmebedingung" type="XML-RefList0N" /> <xs:element name="rabattmedienbedingung" type="XML-RefList0N" /> <xs:element name="modulkontextbedingung" type="XML-RefList0N" /> <xs:element name="spezialbedingung" type="XML-RefList0N" /> <xs:element name="daten-pool" type="XML-Rueckzahlungsdaten-Pool" minOccurs="0" /> <xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Rueckzahlungsdaten-Pool

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-Rueckzahlung-Table/daten-pool, XML-Rueckzahlungsdaten-Table/daten-pool |
| Model | item* |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Rueckzahlungsdaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-Rueckzahlungsdaten-Item" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType> </pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Rueckzahlungsdaten-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Rueckzahlungsdaten-Pool/item |
| Model | betrag , gebuehr |
| Children | betrag, gebuehr |
| Source | <pre><xs:complexType name="XML-Rueckzahlungsdaten-Item"> <xs:sequence> <xs:element name="betrag" type="XML-Preisdaten-Item" /> <xs:element name="gebuehr" type="XML-Preisdaten-Item" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

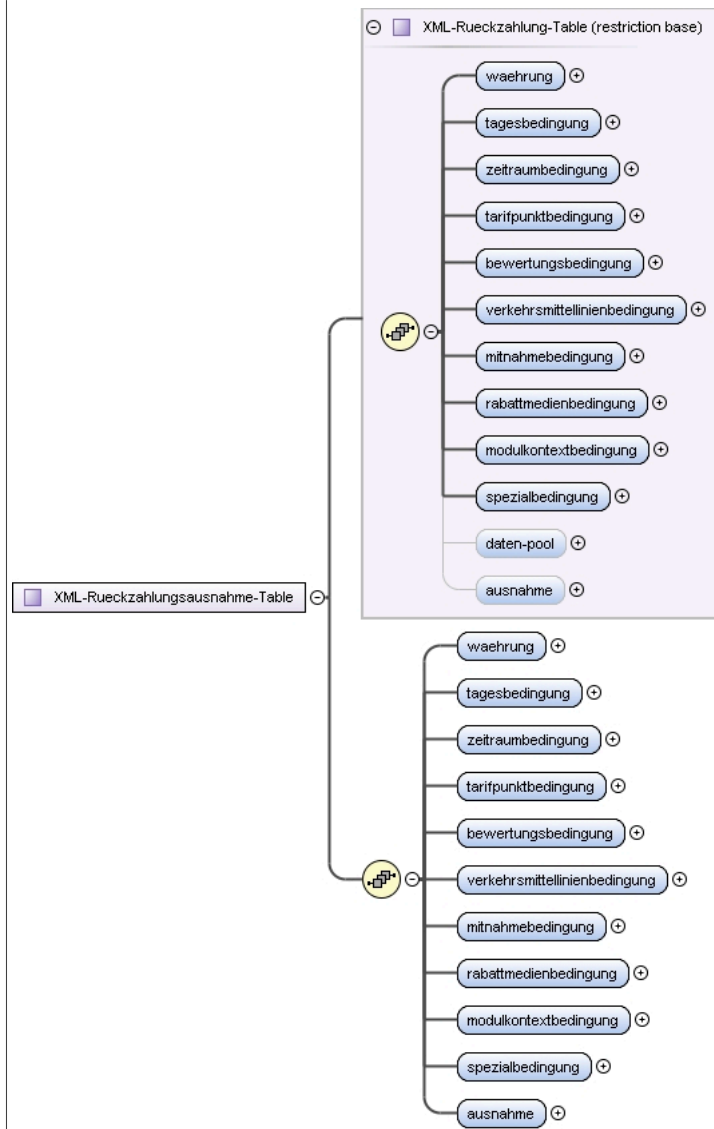
Complex Type XML-Preisdaten-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-Preisdaten-Pool/item, XML-Rueckzahlungsdaten-Item/betrag, XML-Rueckzahlungsdaten-Item/gebuehr |
| Model | wert , mwstsatz{0,1} |
| Children | mwstsatz, wert |
| Source | <pre><xs:complexType name="XML-Preisdaten-Item"> <xs:sequence> <xs:element name="wert" type="XML-IntegerValue" /> <xs:element name="mwstsatz" type="XML-IntegerValue" minOccurs="0" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Rueckzahlungsausnahme-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



Type restriction of XML-Rueckzahlung-Table

- Type hierarchy
- XML-Rueckzahlung-Table
 - XML-Rueckzahlungsausnahme-Table

Used by Elements XML-EFMProdukt-Item/rueckzahlungsausnahme-table, XML-Eigenprodukt-Item/rueckzahlungsausnahme-table, XML-Tarifprodukt-Item/rueckzahlungsausnahme-table

Model **waehrung** , **tagesbedingung** , **zeitraumbedingung** , **tarifpunktbedingung** , **bewertungsbedingung** , **verkehrsmittellinienbedingung** , **mitnahmebedingung** , **rabattmedienbedingung** , **modulkontextbedingung** , **spezialbedingung** , **ausnahme**

Children **ausnahme**, **bewertungsbedingung**, **mitnahmebedingung**, **modulkontextbedingung**, **rabattmedienbedingung**, **spezialbedingung**, **tagesbedingung**, **tarifpunktbedingung**, **verkehrsmittellinienbedingung**, **waehrung**, **zeitraumbedingung**

Source

```
<xs:complexType name="XML-Rueckzahlungsausnahme-Table">
  <xs:complexContent>
    <xs:restriction base="XML-Rueckzahlung-Table">
      <xs:sequence>
        <xs:element name="waehrung" type="XML-RefList0N"/>
        <xs:element name="tagesbedingung" type="XML-RefList0N"/>
        <xs:element name="zeitraumbedingung" type="XML-RefList0N"/>
        <xs:element name="tarifpunktbedingung" type="XML-RefList0N"/>
        <xs:element name="bewertungsbedingung" type="XML-RefList0N"/>
        <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/>
        <xs:element name="mitnahmebedingung" type="XML-RefList0N"/>
        <xs:element name="rabattmedienbedingung" type="XML-RefList0N"/>
        <xs:element name="modulkontextbedingung" type="XML-RefList0N"/>
        <xs:element name="spezialbedingung" type="XML-RefList0N"/>
        <xs:element name="ausnahme" type="XML-RefList0N"/>
      </xs:sequence>
    </xs:restriction>
  </complexContent>
</xs:complexType>
```


| | |
|-----------------|---|
| | <pre></xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ungueltigkeitszeitpunktsdaten-Table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Ungueltigkeitszeitpunkt-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ungueltigkeitszeitpunkt-Table XML-Ungueltigkeitszeitpunktsdaten-Table |
| Used by | Elements XML-EFMProdukt-Item/ungueltigkeitszeitpunktsdaten-table, XML-Eigenprodukt-Item/ungueltigkeitszeitpunktsdaten-table, XML-Tarifprodukt-Item/ungueltigkeitszeitpunktsdaten-table |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | daten-pool, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Source | <pre><xs:complexType name="XML-Ungueltigkeitszeitpunktsdaten-Table"> <xs:complexContent> <xs:restriction base="XML-Ungueltigkeitszeitpunkt-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="zeitraumbedingung" type="XML-RefList0N"/> <xs:element name="modulkontextbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="daten-pool" type="XML-Ungueltigkeitszeitpunktsdaten-Pool"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ungueltigkeitszeitpunkt-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|--|
| Used by | Complex Types XML-Ungueltigkeitszeitpunkt-Tabelle, XML-Ungueltigkeitszeitpunkt-Tabelle |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , daten-pool{0,1} , ausnahme{0,1} |
| Children | ausnahme, daten-pool, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Source | <pre><xs:complexType name="XML-Ungueltigkeitszeitpunkt-Tabelle"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="zeitraumbedingung" type="XML-RefList0N"/> <xs:element name="modulkontextbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="daten-pool" type="XML-Ungueltigkeitszeitpunkt-Tabelle-Pool" minOccurs="0"/> <xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ungueltigkeitszeitpunkt-Tabelle-Pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-Ungueltigkeitszeitpunkt-Tabelle/daten-pool, XML-Ungueltigkeitszeitpunkt-Tabelle/daten-pool |
| Model | item* |
| Children | item |
| Source | <pre><xs:complexType name="XML-Ungueltigkeitszeitpunkt-Tabelle-Pool"> <xs:sequence> <xs:element name="item" type="XML-Ungueltigkeitszeitpunkt-Tabelle-Pool-Item" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Ungueltigkeitszeitpunkt-Tabelle-Item

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Zeitrahmengrenze-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zeitrahmengrenze-Part XML-Zeitrahmengrenze-Part XML-Ungueltigkeitszeitpunkt-Tabelle-Item |
| Used by | Element XML-Ungueltigkeitszeitpunkt-Tabelle-Pool/item |
| Model | zeitspanne , uhrzeit |
| Children | uhrzeit, zeitspanne |

| | |
|-----------------|--|
| Source | <pre> <xs:complexType name="XML-Ungueltigkeitszeitpunktsdaten-Item"> <xs:complexContent> <xs:restriction base="XML-Zeitraumsgrenze-Part"> <xs:sequence> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:sequence> <xs:element name="uhrzeit" type="XML-TimeValue"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zeitraumsgrenze-Part

| | | | | | |
|-----------------|--|--------------|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Type | restriction of XML-Zeitraumsgrenze-Part | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zeitraumsgrenze-Part XML-Zeitraumsgrenze-Part | | | | |
| Used by | <table> <tr> <td>Complex Type</td><td>XML-Ungueltigkeitszeitpunktsdaten-Item</td></tr> <tr> <td>Elements</td><td>XML-Zeitraum-Item/beginn, XML-Zeitraum-Item/ende</td></tr> </table> | Complex Type | XML-Ungueltigkeitszeitpunktsdaten-Item | Elements | XML-Zeitraum-Item/beginn, XML-Zeitraum-Item/ende |
| Complex Type | XML-Ungueltigkeitszeitpunktsdaten-Item | | | | |
| Elements | XML-Zeitraum-Item/beginn, XML-Zeitraum-Item/ende | | | | |
| Model | zeitspanne , uhrzeit | | | | |
| Children | uhrzeit, zeitspanne | | | | |
| Source | <pre> <xs:complexType name="XML-Zeitraumsgrenze-Part"> <xs:complexContent> <xs:restriction base="XML-Zeitraumsgrenze-Part"> <xs:sequence> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:sequence minOccurs="0"> <xs:element name="uhrzeit" type="XML-TimeValue"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Zeitraumsgrenze-Part

| | | | | | |
|--------------|--|--------------|--------------------------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Used by | <table> <tr> <td>Complex Type</td><td>XML-Zeitraumsgrenze-Part</td></tr> <tr> <td>Elements</td><td>XML-Gueltigkeitszeitraumsgrenzen-Item/beginn, XML-Gueltigkeitszeitraumsgrenzen-Item/ende</td></tr> </table> | Complex Type | XML-Zeitraumsgrenze-Part | Elements | XML-Gueltigkeitszeitraumsgrenzen-Item/beginn, XML-Gueltigkeitszeitraumsgrenzen-Item/ende |
| Complex Type | XML-Zeitraumsgrenze-Part | | | | |
| Elements | XML-Gueltigkeitszeitraumsgrenzen-Item/beginn, XML-Gueltigkeitszeitraumsgrenzen-Item/ende | | | | |
| Model | zeitspanne , (uhrzeit unbestimmt) | | | | |
| Children | uhrzeit, unbestimmt, zeitspanne | | | | |

| | |
|-----------------|--|
| Source | <pre> <xs:complexType name="XML-Zeitrahmengrenze-Part"> <xs:sequence> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:choice minOccurs="0"> <xs:element name="uhrzeit" type="XML-TimeValue"/> <xs:element name="unbestimmt" type="XML-VoidValue"/> </xs:choice> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

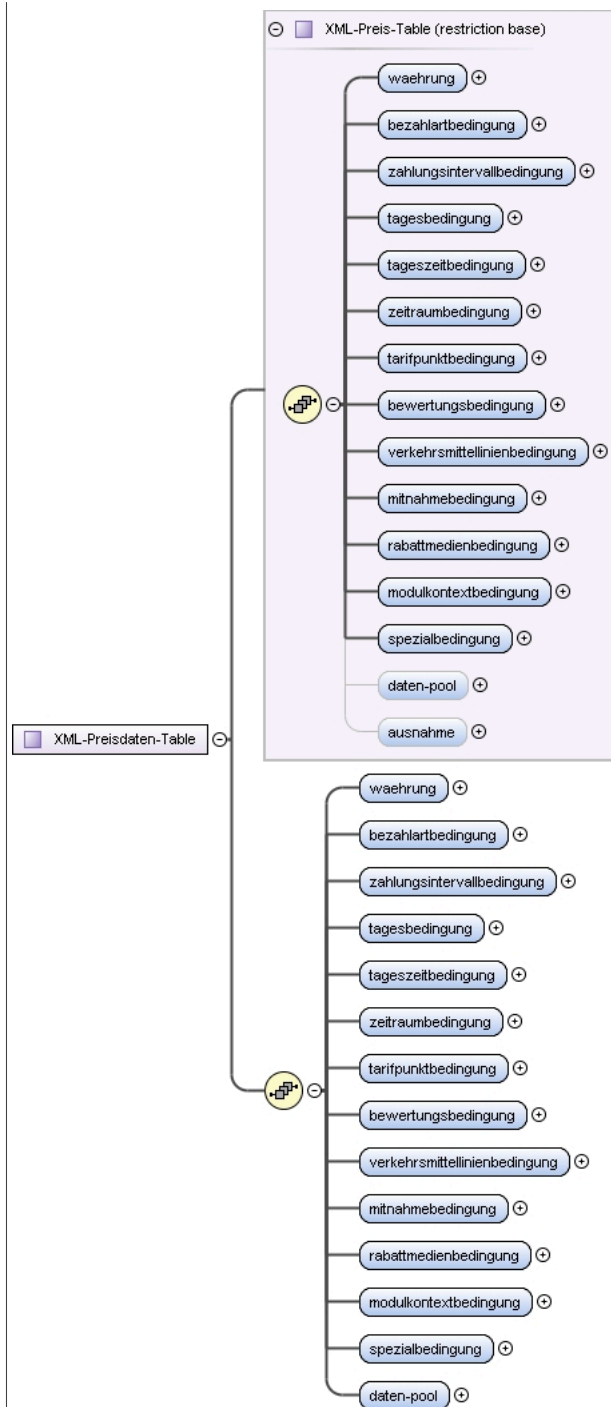
Complex Type XML-Ungultigkeitszeitpunktsausnahme-Table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <pre> graph TD A[XML-Ungultigkeitszeitpunktsausnahme-Table] -- restriction --> B[XML-Ungultigkeitszeitpunkt-Table] A -- sequence --> C[tagesbedingung] A -- sequence --> D[zeitraumbedingung] A -- sequence --> E[modulkontextbedingung] A -- sequence --> F[spezialbedingung] A -- sequence --> G[daten-pool] A -- sequence --> H[ausnahme] </pre> |
| Type | restriction of XML-Ungultigkeitszeitpunkt-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Ungultigkeitszeitpunkt-Table XML-Ungultigkeitszeitpunktsausnahme-Table |
| Used by | <p>Elements</p> <p>XML-EFMProdukt-Item/ungultigkeitszeitpunktsausnahme-table, XML-Eigenprodukt-Item/ungultigkeitszeitpunktsausnahme-table, XML-Tarifprodukt-Item/ungultigkeitszeitpunktsausnahme-table</p> |
| Model | tagesbedingung , zeitraumbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, modulkontextbedingung, spezialbedingung, tagesbedingung, zeitraumbedingung |
| Source | <pre> <xs:complexType name="XML-Ungultigkeitszeitpunktsausnahme-Table"> <xs:complexContent> <xs:restriction base="XML-Ungultigkeitszeitpunkt-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="zeitraumbedingung" type="XML-RefList0N"/> <xs:element name="modulkontextbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="ausnahme" type="XML-RefList0N"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Preisdaten-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|--|
| Type | restriction of XML-Preis-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Preis-Table XML-Preisdaten-Table |
| Used by | Elements XML-Eigenprodukt-Item/preisdaten-table, XML-Tarifprodukt-Item/preisdaten-table |
| Model | währung , bezahllartbedingung , zahlungsintervallbedingung , tagesbedingung , tageszeitbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, bezahllartbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, währung, zahlungsintervallbedingung, zeitraumbedingung |
| Source | <pre><xs:complexType name="XML-Preisdaten-Table"> <xs:complexContent> <xs:restriction base="XML-Preis-Table"></pre> |

| | |
|-----------------|--|
| | <pre> <xs:sequence> <xs:element name="waehrung" type="XML-RefList0N"/> <xs:element name="bezahllartbedingung" type="XML-RefList0N"/> <xs:element name="zahlungsintervallbedingung" type="XML-RefList0N"/> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="tageszeitbedingung" type="XML-RefList0N"/> <xs:element name="zeitraumbedingung" type="XML-RefList0N"/> <xs:element name="tarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="bewertungsbedingung" type="XML-RefList0N"/> <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="mitnahmebedingung" type="XML-RefList0N"/> <xs:element name="rabattmedienbedingung" type="XML-RefList0N"/> <xs:element name="modulkontextbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="daten-pool" type="XML-Preisdaten-Pool"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Preis-Table

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Complex Types XML-PreisAusnahme-Table, XML-Preisdaten-Table |
| Model | waehrung , bezahllartbedingung , zahlungsintervallbedingung , tagesbedingung , tageszeitbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , daten-pool{0,1} , ausnahme{0,1} |
| Children | ausnahme, bewertungsbedingung, bezahllartbedingung, daten-pool, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, waehrung, zahlungsintervallbedingung, zeitraumbedingung |
| Source | <pre> <xs:complexType name="XML-Preis-Table"> <xs:sequence> <xs:element name="waehrung" type="XML-RefList0N"/> <xs:element name="bezahllartbedingung" type="XML-RefList0N"/> <xs:element name="zahlungsintervallbedingung" type="XML-RefList0N"/> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="tageszeitbedingung" type="XML-RefList0N"/> <xs:element name="zeitraumbedingung" type="XML-RefList0N"/> <xs:element name="tarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="bewertungsbedingung" type="XML-RefList0N"/> <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="mitnahmebedingung" type="XML-RefList0N"/> <xs:element name="rabattmedienbedingung" type="XML-RefList0N"/> </xs:sequence> </xs:complexType> </pre> |

| | |
|-----------------|--|
| | <pre> <xs:element name="modulkontextbedingung" type="XML-RefList0N" /> <xs:element name="spezialbedingung" type="XML-RefList0N" /> <xs:element name="daten-pool" type="XML-Preisdaten-Pool" minOccurs="0" /> <xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

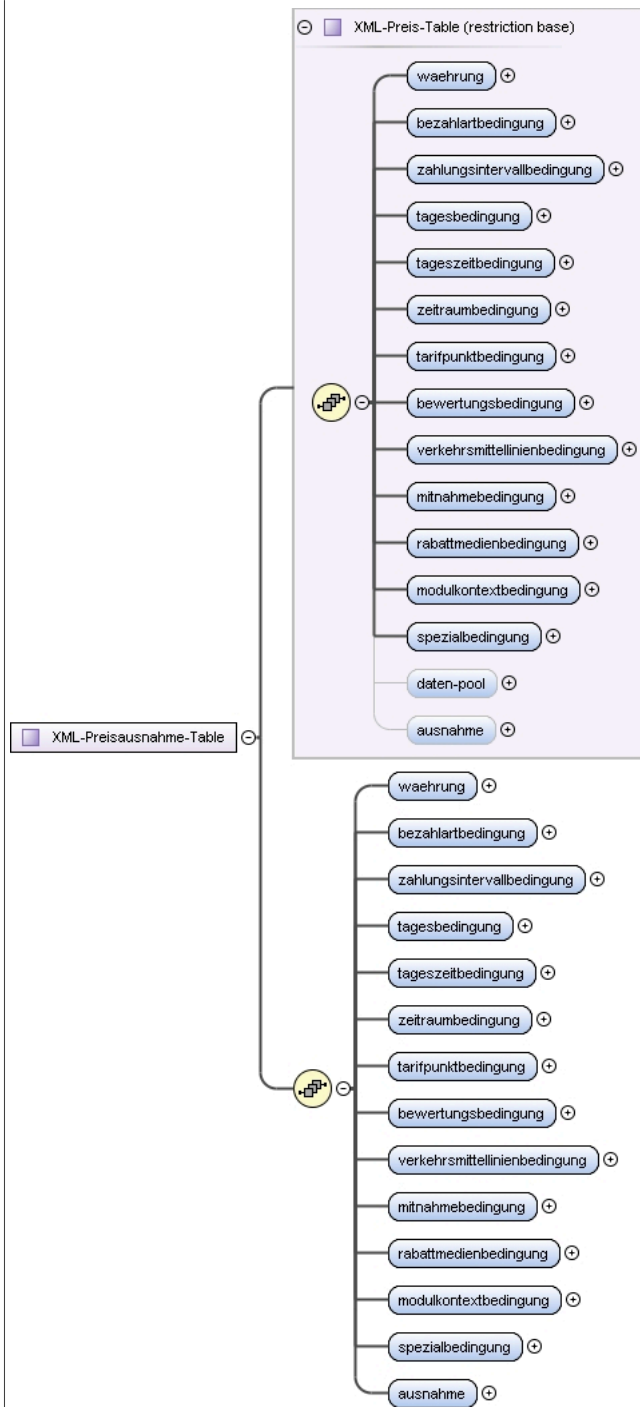
Complex Type XML-Preisdaten-Pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-Preis-Table/daten-pool, XML-Preisdaten-Table/daten-pool |
| Model | item* |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Preisdaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-Preisdaten-Item" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Preisausnahme-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|----------------|---|
| Type | restriction of XML-Preis-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Preis-Table XML-Preisausnahme-Table |
| Used by | Elements XML-Eigenprodukt-Item/preisausnahme-table, XML-Tarifprodukt-Item/preisausnahme-table |
| Model | währung , bezahlarbbedingung , zahlungsintervallbedingung , tagesbedingung , tageszeitbedingung , zeitraumbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , mitnahmebedingung , rabattmedienbedingung , modulkontextbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, bezahlarbbedingung, mitnahmebedingung, modulkontextbedingung, rabattmedienbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung, währung, zahlungsintervallbedingung, zeitraumbedingung |
| Source | <pre><xs:complexType name="XML-Preisausnahme-Table"> <xs:complexContent> <xs:restriction base="XML-Preis-Table"></pre> |

| | |
|-----------------|---|
| | <pre> <xs:sequence> <xs:element name="waehrung" type="XML-RefList0N"/> <xs:element name="bezahlartbedingung" type="XML-RefList0N"/> <xs:element name="zahlungsintervallbedingung" type="XML-RefList0N"/> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="tageszeitbedingung" type="XML-RefList0N"/> <xs:element name="zeitraumbedingung" type="XML-RefList0N"/> <xs:element name="tarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="bewertungsbedingung" type="XML-RefList0N"/> <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="mitnahmebedingung" type="XML-RefList0N"/> <xs:element name="rabattmedienbedingung" type="XML-RefList0N"/> <xs:element name="modulkontextbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="ausnahme" type="XML-RefList0N"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Gueltigkeitszeitrahmensdaten-Table

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Gueltigkeitszeitrahmen-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Gueltigkeitszeitrahmen-Table XML-Gueltigkeitszeitrahmensdaten-Table |
| Used by | Elements XML-Eigenprodukt-Item/gueltigkeitszeitrahmensdaten-table, XML-Tarifprodukt-Item/gueltigkeit-szeitrahmensdaten-table |
| Model | tagesbedingung , tageszeitbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , spezialbedingung , daten-pool |
| Children | bewertungsbedingung, daten-pool, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Source | <pre> <xs:complexType name="XML-Gueltigkeitszeitrahmensdaten-Table"> <xs:complexContent> <xs:restriction base="XML-Gueltigkeitszeitrahmen-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="tageszeitbedingung" type="XML-RefList0N"/> <xs:element name="tarifpunktbedingung" type="XML-RefList0N"/> </pre> |

| | |
|-----------------|--|
| | <pre> <xs:element name="bewertungsbedingung" type="XML-RefList0N"/> <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="daten-pool" type="XML-Gueltigkeitszeitrahmensdaten-Pool"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Gueltigkeitszeitraahmen-Table


| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Complex Types XML-Gueltigkeitszeitraahmensausnahme-Table, XML-Gueltigkeitszeitraahmensdaten-Table |
| Model | tagesbedingung , tageszeitbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , spezialbedingung , daten-pool{0,1} , ausnahme{0,1} |
| Children | ausnahme, bewertungsbedingung, daten-pool, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Source | <pre> <xs:complexType name="XML-Gueltigkeitszeitraahmen-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="tageszeitbedingung" type="XML-RefList0N"/> <xs:element name="tarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="bewertungsbedingung" type="XML-RefList0N"/> <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="daten-pool" type="XML-Gueltigkeitszeitraahmensdaten-Pool" minOccurs="0"/> <xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Gueltigkeitszeitraahmensdaten-Pool

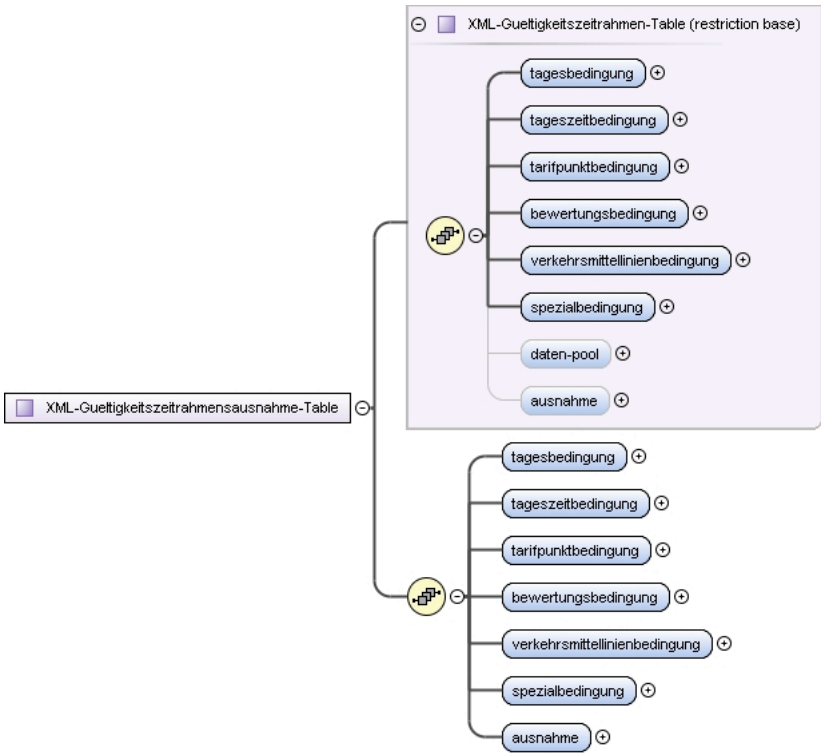
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-Gueltigkeitszeitraahmen-Table/daten-pool, XML-Gueltigkeitszeitraahmensdaten-Table/daten-pool |
| Model | item* |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Gueltigkeitszeitraahmensdaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-Gueltigkeitszeitraahmensdaten-Item" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Gueltigkeitszeitraahmensdaten-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  |
| Used by | Element XML-Gueltigkeitszeitrahmensdaten-Pool/item |
| Model | beginn , ende |
| Children | beginn, ende |
| Source | <pre><xs:complexType name="XML-Gueltigkeitszeitrahmensdaten-Item"> <xs:sequence> <xs:element name="beginn" type="XML-Zeitrahmengrenze-Part" /> <xs:element name="ende" type="XML-Zeitrahmengrenze-Part" /> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Gueltigkeitszeitrahmensausnahme-Table

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | restriction of XML-Gueltigkeitszeitraahmen-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Gueltigkeitszeitraahmen-Table XML-Gueltigkeitszeitrahmensausnahme-Table |
| Used by | Elements XML-Eigenprodukt-Item/gueltigkeitszeitrahmensausnahme-table, XML-Tarifprodukt-Item/gueltigkeitszeitrahmensausnahme-table |
| Model | tagesbedingung , tageszeitbedingung , tarifpunktbedingung , bewertungsbedingung , verkehrsmittellinienbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, bewertungsbedingung, spezialbedingung, tagesbedingung, tageszeitbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Source | <pre><xs:complexType name="XML-Gueltigkeitszeitrahmensausnahme-Table"> <xs:complexContent> <xs:restriction base="XML-Gueltigkeitszeitraahmen-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-RefList0N" /> <xs:element name="tageszeitbedingung" type="XML-RefList0N" /> <xs:element name="tarifpunktbedingung" type="XML-RefList0N" /> <xs:element name="bewertungsbedingung" type="XML-RefList0N" /> <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |

| | |
|-----------------|--|
| | <pre> <xs:element name="spezialbedingung" type="XML-RefList0N" /> <xs:element name="ausnahme" type="XML-RefList0N" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Nachfolgedaten-Table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Nachfolge-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Nachfolge-Table XML-Nachfolgedaten-Table |
| Used by | Elements XML-Eigenprodukt-Item/nachfolgedaten-table, XML-Tarifprodukt-Item/nachfolgedaten-table |
| Model | kriterium , vorgaenger , nachfolger |
| Children | kriterium, nachfolger, vorgaenger |
| Source | <pre> <xs:complexType name="XML-Nachfolgedaten-Table"> <xs:complexContent> <xs:restriction base="XML-Nachfolge-Table"> <xs:sequence> <xs:element name="kriterium" type="XML-RefList0N" /> <xs:element name="vorgaenger" type="XML-RefList0N" /> <xs:element name="nachfolger" type="XML-RefList0N" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Nachfolge-Table

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Complex Types XML-Nachfolgeausnahme-Table, XML-Nachfolgedaten-Table |
| Model | kriterium , vorgaenger , nachfolger{0,1} , ausnahme{0,1} |
| Children | ausnahme, kriterium, nachfolger, vorgaenger |
| Source | <pre> <xs:complexType name="XML-Nachfolge-Table"> <xs:sequence> <xs:element name="kriterium" type="XML-RefList0N" /> <xs:element name="vorgaenger" type="XML-RefList0N" /> </xs:sequence> </xs:complexType> </pre> |

| | |
|-----------------|---|
| | <pre> <xs:element name="nachfolger" type="XML-RefList0N" minOccurs="0" /> <xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Nachfolgeausnahme-Table

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Nachfolge-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Nachfolge-Table XML-Nachfolgeausnahme-Table |
| Used by | Elements XML-Eigenprodukt-Item/nachfolgeausnahme-table, XML-Tarifprodukt-Item/nachfolgeausnahme-table |
| Model | kriterium , vorgaenger , ausnahme |
| Children | ausnahme, kriterium, vorgaenger |
| Source | <pre> <xs:complexType name="XML-Nachfolgeausnahme-Table"> <xs:complexContent> <xs:restriction base="XML-Nachfolge-Table"> <xs:sequence> <xs:element name="kriterium" type="XML-RefList0N" /> <xs:element name="vorgaenger" type="XML-RefList0N" /> <xs:element name="ausnahme" type="XML-RefList0N" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-BooleanValue

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-BooleanContent |
| Type hierarchy | <ul style="list-style-type: none"> xs:boolean XML-BooleanContent XML-BooleanValue |
| Used by | Elements XML-Eigenprodukt-Item/preisanpassung, XML-Tarifprodukt-Item/preisanpassung |
| Source | <pre> <xs:complexType name="XML-BooleanValue"> <xs:simpleContent> <xs:extension base="XML-BooleanContent" /> </xs:simpleContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-PVSchluessel-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Schluessel-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Schluessel-Part <ul style="list-style-type: none"> XML-PVSchluessel-Part |
| Used by | Elements XML-EFMProdukt-Item/schluessel, XML-Eigenprodukt-Item/schluessel |
| Model | mkpv , mktr , mkauth |
| Children | mkauth, mkpv, mktr |
| Source | <pre> <xs:complexType name="XML-PVSchluessel-Part"> <xs:complexContent> <xs:restriction base="XML-Schluessel-Part"> <xs:sequence> <xs:element name="mkpv" type="XML-Ref01" /> <xs:element name="mktr" type="XML-Ref01" /> <xs:element name="mkauth" type="XML-Ref01" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Schluessel-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Complex Types XML-PVSchluessel-Part, XML-RNSchluessel-Part |
| Model | mkpv{0,1} , mktr{0,1} , mkkvp{0,1} , mkauth{0,1} |
| Children | mkauth, mkkvp, mkpv, mktr |
| Source | <pre> <xs:complexType name="XML-Schluessel-Part"> <xs:sequence> <xs:element name="mkpv" type="XML-Ref01" minOccurs="0" /> <xs:element name="mktr" type="XML-Ref01" minOccurs="0" /> <xs:element name="mkkvp" type="XML-Ref01" minOccurs="0" /> <xs:element name="mkauth" type="XML-Ref01" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Produktdaten-Part

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | |
|-----------------|---|--|
| Diagram | | |
| Used by | Elements | XML-EFMProdukt-Item/anpassung, XML-EFMProdukt-Item/darstellung, XML-EFMProdukt-Item/erfassung, XML-EFMProdukt-Item/kontrolle, XML-EFMProdukt-Item/produktermittlung, XML-EFM-Produkt-Item/transaktionsauswertung, XML-Eigenprodukt-Item/anpassung, XML-Eigenprodukt-Item/darstellung, XML-Eigenprodukt-Item/erfassung, XML-Eigenprodukt-Item/kontrolle, XML-Eigenprodukt-Item/produktermittlung, XML-Eigenprodukt-Item/transaktionsauswertung, XML-Tarifprodukt-Item/anpassung, XML-Tarifprodukt-Item/darstellung, XML-Tarifprodukt-Item/erfassung, XML-Tarifprodukt-Item/kontrolle, XML-Tarifprodukt-Item/produktermittlung, XML-Tarifprodukt-Item/transaktionsauswertung |
| Model | funktion , modulkontext , unterstuetztztab , ausgangsdaten-matrix , abhaengigkeitsdaten-table , abhaengigkeitsausnahme-table | |
| Children | abhaengigkeitsausnahme-table, abhaengigkeitsdaten-table, ausgangsdaten-matrix, funktion, modulkontext, unterstuetztztab | |
| Source | <pre> <xs:complexType name="XML-Produktdaten-Part"> <xs:sequence> <xs:element name="funktion" type="XML-Ref01" /> <xs:element name="modulkontext" type="XML-RefSet0N" /> <xs:element name="unterstuetztztab" type="XML-DateValue" /> <xs:element name="ausgangsdaten-matrix" type="XML-Ausgangsdaten-Matrix" /> <xs:element name="abhaengigkeitsdaten-table" type="XML-Abhaengigkeitsdaten-Table" /> <xs:element name="abhaengigkeitsausnahme-table" type="XML-Abhaengigkeitsausnahme-Table" /> </xs:sequence> </xs:complexType> </pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Complex Type XML-Ausgangsdaten-Matrix

| | | |
|-----------------|---|--|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram | | |
| Used by | Element | XML-Produktdaten-Part/ausgangsdaten-matrix |
| Model | ausgangsdaten* | |
| Children | ausgangsdaten | |
| Source | <pre> <xs:complexType name="XML-Ausgangsdaten-Matrix"> <xs:sequence> <xs:element name="ausgangsdaten" type="XML-Ausgangsdaten-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Complex Type XML-Ausgangsdaten-Entry

| | | |
|-----------|----------------------|--|
| Namespace | http://vdv/ka/pkm/2 | |
| Diagram | | |
| Type | extension of XML-Ref | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Ausgangsdaten-Entry | | | |
| Used by | Element XML-Ausgangsdaten-Matrix/ausgangsdaten | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Ausgangsdaten-Entry"> <xs:simpleContent> <xs:extension base="XML-Ref"> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:extension> </xs:simpleContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Abhaengigkeitsdaten-Table

| | | | | |
|-----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Abhaengigkeit-Table | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Abhaengigkeit-Table XML-Abhaengigkeitsdaten-Table | | | |
| Used by | Element XML-Produktdaten-Part/abhaengigkeitsdaten-table | | | |
| Model | kriterium , vorausgesetzt | | | |
| Children | kriterium, vorausgesetzt | | | |
| Source | <pre><xs:complexType name="XML-Abhaengigkeitsdaten-Table"> <xs:complexContent> <xs:restriction base="XML-Abhaengigkeit-Table"> <xs:sequence> <xs:element name="kriterium" type="XML-RefList0N" /> <xs:element name="vorausgesetzt" type="XML-RefList0N" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Abhaengigkeit-Table

| | | | | |
|-----------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Used by | Complex Types XML-Abhaengigkeitsausnahme-Table, XML-Abhaengigkeitsdaten-Table | | | |
| Model | kriterium , vorausgesetzt , ausnahme{0,1} | | | |

| | |
|-----------------|--|
| Children | ausnahme, kriterium, vorausgesetzt |
| Source | <pre><xs:complexType name="XML-Abhaengigkeit-Table"> <xs:sequence> <xs:element name="kriterium" type="XML-RefList0N"/> <xs:element name="vorausgesetzt" type="XML-RefList0N"/> <xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

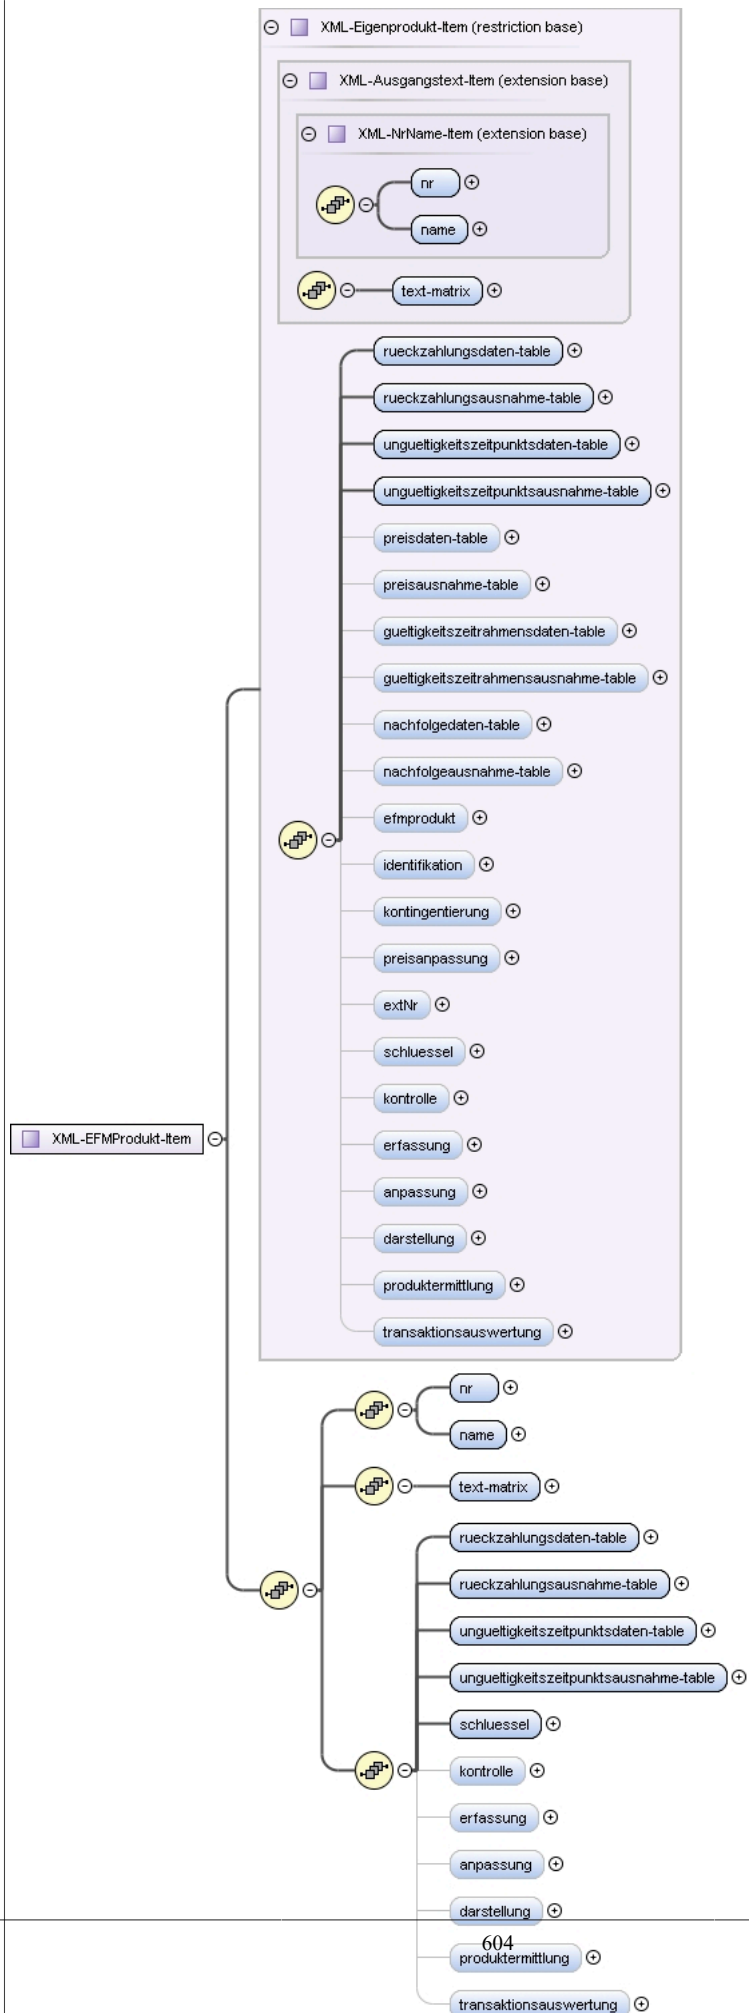
Complex Type XML-Abhaengigkeitsausnahme-Table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the relationship between two complex types. A box labeled 'XML-Abhaengigkeit-Table (restriction base)' contains a sequence of three elements: 'kriterium', 'vorausgesetzt', and 'ausnahme'. A second box labeled 'XML-Abhaengigkeitsausnahme-Table' is shown as a restriction of the first, with a line connecting it to the first box. This restricted type also contains a sequence of the same three elements: 'kriterium', 'vorausgesetzt', and 'ausnahme'.</p> |
| Type | restriction of XML-Abhaengigkeit-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Abhaengigkeit-Table XML-Abhaengigkeitsausnahme-Table |
| Used by | Element XML-Produktdaten-Part/abhaengigkeitsausnahme-table |
| Model | kriterium , vorausgesetzt , ausnahme |
| Children | ausnahme, kriterium, vorausgesetzt |
| Source | <pre><xs:complexType name="XML-Abhaengigkeitsausnahme-Table"> <xs:complexContent> <xs:restriction base="XML-Abhaengigkeit-Table"> <xs:sequence> <xs:element name="kriterium" type="XML-RefList0N"/> <xs:element name="vorausgesetzt" type="XML-RefList0N"/> <xs:element name="ausnahme" type="XML-RefList0N"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-EFMProdukt-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|-----------------|---|
| Type | restriction of XML-Eigenprodukt-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Eigenprodukt-Item XML-EFMProdukt-Item |
| Used by | Element XML-EFMProdukt-Pool/item |
| Model | nr , name , text-matrix , rueckzahlungsdaten-table , rueckzahlungsausnahme-table , unguelteigkeitszeitpunktsdaten-table , unguelteigkeitszeitpunktsausnahme-table , schluessel , kontrolle{0,1} , erfassung{0,1} , anpassung{0,1} , darstellung{0,1} , produktermittlung{0,1} , transaktionsauswertung{0,1} |
| Children | anpassung, darstellung, erfassung, kontrolle, name, nr, produktermittlung, rueckzahlungsausnahme-table, rueckzahlungsdaten-table, schluessel, text-matrix, transaktionsauswertung, unguelteigkeitszeitpunktsausnahme-table, unguelteigkeitszeitpunktsdaten-table |
| Source | <pre> <xs:complexType name="XML-EFMProdukt-Item"> <xs:complexContent> <xs:restriction base="XML-Eigenprodukt-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> <xs:sequence> <xs:element name="rueckzahlungsdaten-table" type="XML-Rueckzahlungsdaten-Table"/> <xs:element name="rueckzahlungsausnahme-table" type="XML-Rueckzahlungsausnahme-Table"/> <xs:element name="unguelteigkeitszeitpunktsdaten-table" type="XML-Unguelteigkeitszeitpunktsdaten-Table"/> <xs:element name="unguelteigkeitszeitpunktsausnahme-table" type="XML-Unguelteigkeitszeitpunktsausnahme-Table"/> <xs:element name="schluessel" type="XML-PVSSchluessel-Part"/> <xs:element name="kontrolle" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="erfassung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="anpassung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="darstellung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="produktermittlung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="transaktionsauswertung" type="XML-Produktdaten-Part" minOccurs="0"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tarifprodukt-Pool

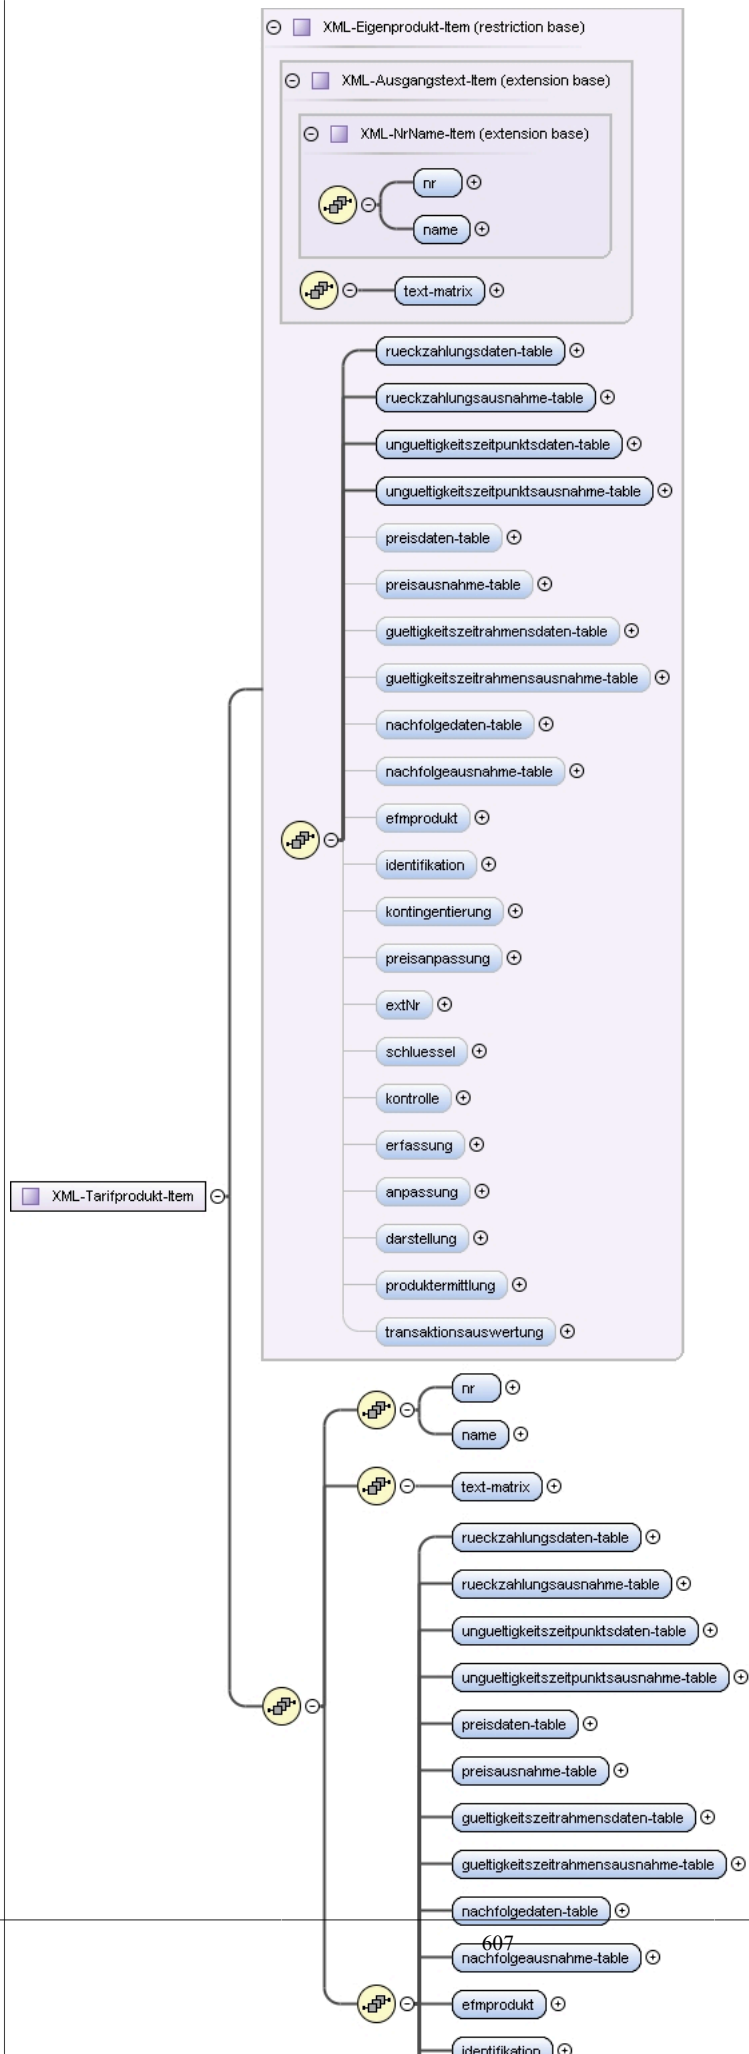
| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Eigenprodukt-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Eigenprodukt-Pool XML-Tarifprodukt-Pool |
| Used by | Elements XML-PVTTarifmodul/tarifprodukt-pool, XML-Tarifmodul/tarifprodukt-pool |

| | | | | |
|----------------------|---|---------|----------|--|
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Tarifprodukt-Pool"> <xs:complexContent> <xs:restriction base="XML-Eigenprodukt-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifprodukt-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

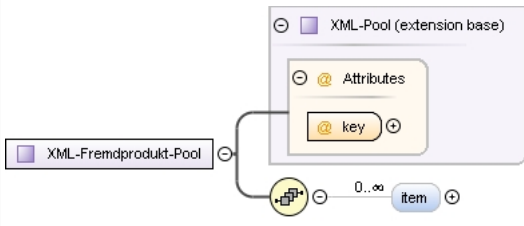
Diagram



| | |
|-----------------|--|
| Type | restriction of XML-Eigenprodukt-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Eigenprodukt-Item XML-Tarifprodukt-Item |
| Used by | Element XML-Tarifprodukt-Pool/item |
| Model | nr , name , text-matrix , rueckzahlungsdaten-table , rueckzahlungsausnahme-table , unguelteigkeitszeitpunktsdaten-table , unguelteigkeitszeitpunktsausnahme-table , preisdaten-table , preisausnahme-table , gueltigkeitszeitrahmensdaten-table , gueltigkeitszeitrahmensausnahme-table , nachfolgedaten-table , nachfolgeausnahme-table , efmprodukt , identifikation , kontingentierung , preisanpassung , extNr , kontrolle{0,1} , erfassung{0,1} , anpassung{0,1} , darstellung{0,1} , produktermittlung{0,1} , transaktionsauswertung{0,1} |
| Children | anpassung , darstellung , efmprodukt , erfassung , extNr , gueltigkeitszeitrahmensausnahme-table , gueltigkeitszeitrahmensdaten-table , identifikation , kontingentierung , kontrolle , nachfolgeausnahme-table , nachfolgedaten-table , name , nr , preisanpassung , preisausnahme-table , preisdaten-table , produktermittlung , rueckzahlungsausnahme-table , rueckzahlungsdaten-table , text-matrix , transaktionsauswertung , unguelteigkeitszeitpunktsausnahme-table , unguelteigkeitszeitpunktsdaten-table |
| Source | <pre> <xs:complexType name="XML-Tarifprodukt-Item"> <xs:complexContent> <xs:restriction base="XML-Eigenprodukt-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> <xs:sequence> <xs:element name="rueckzahlungsdaten-table" type="XML-Rueckzahlungsdaten-Table"/> <xs:element name="rueckzahlungsausnahme-table" type="XML-Rueckzahlungsausnahme-Table"/> <xs:element name="unguelteigkeitszeitpunktsdaten-table" type="XML-Unguelteigkeitszeitpunktsdaten-Table"/> <xs:element name="unguelteigkeitszeitpunktsausnahme-table" type="XML-Unguelteigkeitszeitpunktsausnahme-Table"/> <xs:element name="preisdaten-table" type="XML-Preisdaten-Table"/> <xs:element name="preisausnahme-table" type="XML-Preisausnahme-Table"/> <xs:element name="gueltigkeitszeitrahmensdaten-table" type="XML-Gueltigkeitszeitrahmensdaten-Table"/> <xs:element name="gueltigkeitszeitrahmensausnahme-table" type="XML-Gueltigkeitszeitrahmensausnahme-Table"/> <xs:element name="nachfolgedaten-table" type="XML-Nachfolgedaten-Table"/> <xs:element name="nachfolgeausnahme-table" type="XML-Nachfolgeausnahme-Table"/> <xs:element name="efmprodukt" type="XML-Ref01"/> <xs:element name="identifikation" type="XML-RefSet0N"/> <xs:element name="kontingentierung" type="XML-Ref01"/> <xs:element name="preisanpassung" type="XML-BooleanValue"/> <xs:element name="extNr" type="XML-StringValue"/> <xs:element name="kontrolle" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="erfassung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="anpassung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="darstellung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="produktermittlung" type="XML-Produktdaten-Part" minOccurs="0"/> <xs:element name="transaktionsauswertung" type="XML-Produktdaten-Part" minOccurs="0"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Fremdprodukt-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|--|----------|--|
| Diagram |  | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Fremdprodukt-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/fremdprodukt-pool, XML-Tarifmodul/fremdprodukt-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Fremdprodukt-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Fremdprodukt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Fremdprodukt-Item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Ausgangstext-Item<ul style="list-style-type: none">XML-Fremdprodukt-Item |
| Used by | Element XML-Fremdprodukt-Pool/item |
| Model | nr , name , text-matrix , tarifstand , pv |
| Children | name, nr, pv, tarifstand, text-matrix |
| Source | <pre><xs:complexType name="XML-Fremdprodukt-Item"> <xs:complexContent> <xs:extension base="XML-Ausgangstext-Item"> <xs:sequence></pre> |

| | |
|-----------------|--|
| | <pre> <xs:element name="tarifstand" type="XML-StringValue"/> <xs:element name="pv" type="XML-Organisation-Part"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Produktadapter-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Produktadapter-Pool | | | |
| Used by | Elements XML-RNTarifmodul/produktadapter-pool, XML-Tarifmodul/produktadapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Produktadapter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Produktadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Produktadapter-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

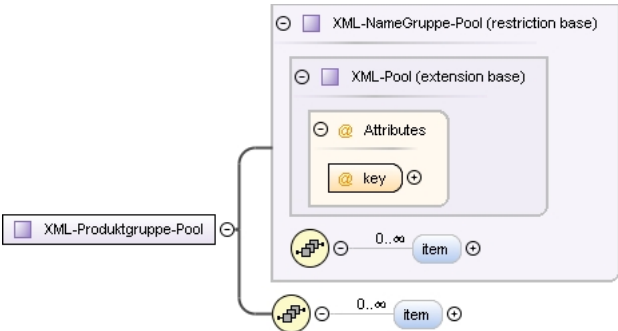
| | |
|-----------------|---|
| Diagram | |
| Type | extension of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Produktadapter-Item |
| Used by | Element XML-Produktadapter-Pool/item |
| Model | nr, name, text-matrix, schluessel, kontrollkontext, erfassungskontext, anpassungskontext, darstellungskontext, produktermittlungskontext, transaktionsauswertungskontext, kvpProduktNr |
| Children | anpassungskontext, darstellungskontext, erfassungskontext, kontrollkontext, kvpProduktNr, name, nr, produktermittlungskontext, schluessel, text-matrix, transaktionsauswertungskontext |
| Source | <pre> <xs:complexType name="XML-Produktadapter-Item"> <xs:complexContent> <xs:extension base="XML-Ausgangstext-Item"> <xs:sequence> <xs:element name="schluessel" type="XML-RNSchluessel-Part"/> <xs:element name="kontrollkontext" type="XML-RefSet0N"/> <xs:element name="erfassungskontext" type="XML-RefSet0N"/> <xs:element name="anpassungskontext" type="XML-RefSet0N"/> <xs:element name="darstellungskontext" type="XML-RefSet0N"/> <xs:element name="produktermittlungskontext" type="XML-RefSet0N"/> <xs:element name="transaktionsauswertungskontext" type="XML-RefSet0N"/> <xs:element name="kvpProduktNr" type="XML-StringValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-RNSchluessel-Part

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Type | restriction of XML-Schluessel-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Schluessel-Part <ul style="list-style-type: none"> XML-RNSchluessel-Part |
| Used by | Element XML-Produktadapter-Item/schluessel |
| Model | mkkvp |
| Children | mkkvp |
| Source | <pre><xs:complexType name="XML-RNSchluessel-Part"> <xs:complexContent> <xs:restriction base="XML-Schluessel-Part"> <xs:sequence> <xs:element name="mkkvp" type="XML-Ref01" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Produktgruppe-Pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | restriction of XML-NameGruppe-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Produktgruppe-Pool | | | | | | | | | | | |
| Used by | Elements XML-PVTarifmodul/produktgruppe-pool, XML-Tarifmodul/produktgruppe-pool | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Produktgruppe-Pool"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Pool"> <xs:sequence> <xs:element name="item" type="XML-NameGruppe-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema PKM.xsd | | | | | | | | | | | |

Complex Type XML-NameGruppe-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

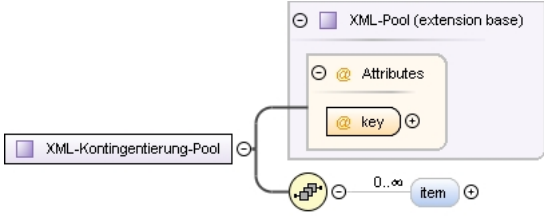
| | | | | |
|-----------------|--|---|----------|--|
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool | | | |
| Used by | Complex Types | XML-Bezahlartbedingung-Pool, XML-Modulkontextbedingung-Pool, XML-Produktgruppe-Pool, XML-Rabattmedienbedingung-Pool, XML-Tarifpunktgruppe-Pool, XML-Verkehrsmittellinienbedingung-Pool, XML-Zahlungsintervallbedingung-Pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-NameGruppe-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-NameGruppe-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-NameGruppe-Item

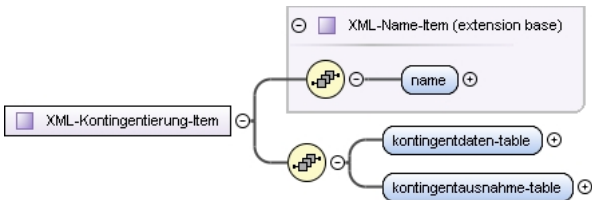
| | | | |
|----------------|---|---|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | <pre>classDiagram class XML-Name-Item { name element } class XML-NameGruppe-Item { } XML-Name-Item < -- XML-NameGruppe-Item</pre> | | |
| Type | extension of XML-Name-Item | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-NameGruppe-Item | | |
| Used by | Elements | XML-NameGruppe-Pool/item, XML-Produktgruppe-Pool/item | |
| | Complex Types | XML-Bezahlartbedingung-Item, XML-Modulkontextbedingung-Item, XML-Produktgruppe-Item, XML-Rabattmedienbedingung-Item, XML-Tarifpunktgruppe-Item, XML-Verkehrsmittellinienbedingung-Item, XML-Zahlungsintervallbedingung-Item | |
| Model | name , element | | |
| Children | element, name | | |
| Source | <pre><xs:complexType name="XML-NameGruppe-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="element" type="XML-RefSet0N"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Kontingentierung-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Kontingentierung-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/kontingentierung-pool, XML-Tarifmodul/kontingentierung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Kontingentierung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Kontingentierung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Kontingentierung-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | extension of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Kontingentierung-Item | | | |
| Used by | Element XML-Kontingentierung-Pool/item | | | |
| Model | name , kontingentdaten-table , kontingentausnahme-table | | | |
| Children | kontingentausnahme-table, kontingentdaten-table, name | | | |
| Source | <pre><xs:complexType name="XML-Kontingentierung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="kontingentdaten-table" type="XML-Kontingentdaten-Table"/> <xs:element name="kontingentausnahme-table" type="XML-Kontingentausnahme-Table"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |

| | |
|-----------------|---|
| | <pre> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Kontingentsdaten-Table

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Kontingents-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Kontingents-Table XML-Kontingentsdaten-Table |
| Used by | Element XML-Kontingentsierung-Item/kontingentsdaten-table |
| Model | tagesbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung , spezialbedingung , daten-pool |
| Children | daten-pool, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Source | <pre> <xs:complexType name="XML-Kontingentsdaten-Table"> <xs:complexContent> <xs:restriction base="XML-Kontingents-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="tarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="daten-pool" type="XML-Kontingentsdaten-Pool"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Kontingents-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Used by | Complex Types XML-Kontingentausnahme-Table, XML-Kontingentdaten-Table |
| Model | tagesbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung , spezialbedingung , daten-pool{0,1} , ausnahme{0,1} |
| Children | ausnahme, daten-pool, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Source | <pre><xs:complexType name="XML-Kontingent-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="tarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="daten-pool" type="XML-Kontingentdaten-Pool" minOccurs="0"/> <xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Kontingentdaten-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-Kontingent-Table/daten-pool, XML-Kontingentdaten-Table/daten-pool |
| Model | item* |
| Children | item |
| Source | <pre><xs:complexType name="XML-Kontingentdaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-Kontingentdaten-Item" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Kontingentdaten-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Kontingentdaten-Pool/item |
| Model | url |
| Children | url |
| Source | <pre><xs:complexType name="XML-Kontingentdaten-Item"> <xs:sequence> <xs:element name="url" type="XML-StringValue"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Kontingentausnahme-Table

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | restriction of XML-Kontingent-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Kontingent-Table XML-Kontingentausnahme-Table |
| Used by | Element XML-Kontingentierung-Item/kontingentausnahme-table |
| Model | tagesbedingung , tarifpunktbedingung , verkehrsmittellinienbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, spezialbedingung, tagesbedingung, tarifpunktbedingung, verkehrsmittellinienbedingung |
| Source | <pre> <xs:complexType name="XML-Kontingentausnahme-Table"> <xs:complexContent> <xs:restriction base="XML-Kontingent-Table"> <xs:sequence> <xs:element name="tagesbedingung" type="XML-RefList0N"/> <xs:element name="tarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="verkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="ausnahme" type="XML-RefList0N"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Nachfolgekriterium-Pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Nachfolgekriterium-Pool |
| Used by | Elements XML-PVTTarifmodul/nachfolgekriterium-pool, XML-Tarifmodul/nachfolgekriterium-pool |
| Model | item* |
| Children | item |

| Attributes | QName | Type | Use | |
|-----------------|---|---------|----------|--|
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Nachfolgekriterium-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Nachfolgekriterium-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Nachfolgekriterium-Item

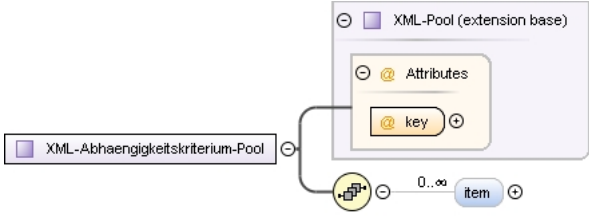
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Nachfolgekriterium-Item |
| Used by | Element XML-Nachfolgekriterium-Pool/item |
| Model | name , funktion , vorgaenger , wirksamkeit |
| Children | funktion, name, vorgaenger, wirksamkeit |
| Source | <pre><xs:complexType name="XML-Nachfolgekriterium-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="funktion" type="XML-Ref01"/> <xs:element name="vorgaenger" type="XML-Kriterienzeitraum-Part"/> <xs:element name="wirksamkeit" type="XML-Kriterienzeitraum-Part"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Kriterienzeitraum-Part

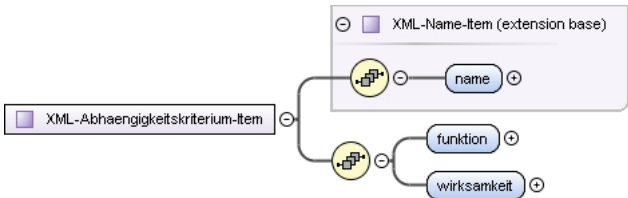
| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-Abhaengigkeitskriterium-Item/wirksamkeit, XML-Nachfolgekriterium-Item/vorgaenger, XML-Nachfolgekriterium-Item/wirksamkeit |
| Model | beginn , ende |
| Children | beginn, ende |
| Source | <pre><xs:complexType name="XML-Kriterienzeitraum-Part"> <xs:sequence></pre> |

| | |
|-----------------|---|
| | <pre> <xs:element name="beginn" type="XML-DatetimeValue" /> <xs:element name="ende" type="XML-DatetimeValue" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Abhaengigkeitskriterium-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Abhaengigkeitskriterium-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/abhaengigkeitskriterium-pool, XML-Tarifmodul/abhaengigkeitskriterium-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Abhaengigkeitskriterium-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Abhaengigkeitskriterium-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Abhaengigkeitskriterium-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | extension of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Abhaengigkeitskriterium-Item | | | |
| Used by | Element XML-Abhaengigkeitskriterium-Pool/item | | | |
| Model | name , funktion , wirksamkeit | | | |
| Children | funktion, name, wirksamkeit | | | |
| Source | <pre> <xs:complexType name="XML-Abhaengigkeitskriterium-Item"> </pre> | | | |

| | |
|-----------------|--|
| | <pre> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="funktion" type="XML-Ref01" /> <xs:element name="wirksamkeit" type="XML-Kriterienzeitraum-Part" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Identifikationsparameter-Pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|--|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Identifikationsparameter-Pool | | | | | | | | | | | |
| Used by | Elements | XML-PVTarifmodul/identifikationsparameter-pool, XML-Tarifmodul/identifikationsparameter-pool | | | | | | | | | | |
| | Complex Type | XML-Identifikationsparameteradapter-Pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Identifikationsparameter-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Identifikationsparameter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Identifikationsparameter-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-NrName-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item <ul style="list-style-type: none"> XML-Identifikationsparameter-Item | | | |

| | | |
|-----------------|---|--|
| Used by | Element | XML-Identifikationsparameter-Pool/item |
| | Complex Type | XML-Identifikationsparameteradapter-Item |
| Model | nr , name , wert-pool | |
| Children | name, nr, wert-pool | |
| Source | <pre><xs:complexType name="XML-Identifikationsparameter-Item"> <xs:complexContent> <xs:extension base="XML-NrName-Item"> <xs:sequence> <xs:element name="wert-pool" type="XML-Identifikationsparameterwert-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Complex Type XML-Identifikationsparameterwert-Pool

| | | | | |
|-----------------|---|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the structural relationships between three XML Schema types. At the top, 'XML-Ausgangstext-Pool (restriction base)' is shown as a container. Inside it, 'XML-Pool (extension base)' is nested. Within 'XML-Pool', there is an 'Attributes' section containing a 'key' attribute. Below the 'Attributes' section, there is a sequence of 'item' elements, each of type 'XML-Identifikationsparameterwert-Item', with a cardinality of '0..∞'. The 'XML-Identifikationsparameterwert-Pool' is shown as a restriction of 'XML-Ausgangstext-Pool'.</p> | | | |
| Type | restriction of XML-Ausgangstext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Identifikationsparameterwert-Pool | | | |
| Used by | Element | XML-Identifikationsparameter-Item/wert-pool | | |
| | Complex Type | XML-Identifikationsparameterwertadapter-Pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Identifikationsparameterwert-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Identifikationsparameterwert-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Identifikationsparameterwert-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | | |
|-----------------|---|---------|--|--------------|--|
| Diagram | | | | | |
| Type | restriction of XML-Ausgangstext-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Identifikationsparameterwert-Item | | | | |
| Used by | <table border="1"> <tr> <td>Element</td> <td>XML-Identifikationsparameterwert-Pool/item</td> </tr> <tr> <td>Complex Type</td> <td>XML-Identifikationsparameterwertadapter-Item</td> </tr> </table> | Element | XML-Identifikationsparameterwert-Pool/item | Complex Type | XML-Identifikationsparameterwertadapter-Item |
| Element | XML-Identifikationsparameterwert-Pool/item | | | | |
| Complex Type | XML-Identifikationsparameterwertadapter-Item | | | | |
| Model | nr , name , text-matrix | | | | |
| Children | name, nr, text-matrix | | | | |
| Source | <pre> <xs:complexType name="XML-Identifikationsparameterwert-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Identifikationsparameteradapter-Pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Identifikationsparameter-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Identifikationsparameter-Pool XML-Identifikationsparameteradapter-Pool |

| | | | | |
|-----------------|---|---------|----------|--|
| Used by | ElementsXML-RNTarifmodul/identifikationsparameteradapter-pool, XML-Tarifmodul/identifikationsparameteradapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Identifikationsparameteradapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Identifikationsparameter-Pool"> <xs:sequence> <xs:element name="item" type="XML-Identifikationsparameteradapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Identifikationsparameteradapter-Item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the <code>XML-Identifikationsparameteradapter-Item</code> as a restriction of <code>XML-Identifikationsparameter-Item</code>. The <code>XML-Identifikationsparameteradapter-Item</code> is shown as a box on the left. A line connects it to a larger box representing the <code>XML-Identifikationsparameter-Item</code> (restriction base). Inside this larger box, there is a sub-box for <code>XML-NrName-Item</code> (extension base) which contains <code>nr</code> and <code>name</code> elements. Below this, there is a <code>wert-pool</code> element. The <code>XML-Identifikationsparameteradapter-Item</code> is shown as a restriction of the <code>XML-Identifikationsparameter-Item</code>, with the <code>nr</code> and <code>name</code> elements being optional (indicated by a circle with a plus sign) and the <code>wert-pool</code> element being optional (indicated by a circle with a plus sign).</p> |
| Type | restriction of XML-Identifikationsparameter-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Identifikationsparameter-Item<ul style="list-style-type: none">XML-Identifikationsparameteradapter-Item |
| Used by | Element XML-Identifikationsparameteradapter-Pool/item |
| Model | nr , name , wert-pool |
| Children | name, nr, wert-pool |
| Source | <pre><xs:complexType name="XML-Identifikationsparameteradapter-Item"> <xs:complexContent> <xs:restriction base="XML-Identifikationsparameter-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:element name="wert-pool" type="XML-Identifikationsparameterwertadapter-Pool"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Identifikationsparameterwertadapter-Pool

| | | | | |
|-----------------|---|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Identifikationsparameterwert-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Identifikationsparameterwert-Pool<ul style="list-style-type: none">XML-Identifikationsparameterwertadapter-Pool | | | |
| Used by | Element | XML-Identifikationsparameteradapter-Item/wert-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Identifikationsparameterwertadapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Identifikationsparameterwert-Pool"> <xs:sequence> <xs:element name="item" type="XML-Identifikationsparameterwertadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Identifikationsparameterwertadapter-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | restriction of XML-Identifikationsparameterwert-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Identifikationsparameterwert-Item XML-Identifikationsparameterwertadapter-Item |
| Used by | Element XML-Identifikationsparameterwertadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Identifikationsparameterwertadapter-Item"> <xs:complexContent> <xs:restriction base="XML-Identifikationsparameterwert-Item"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunkt-Pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Flaechenelement-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool |

| | | | | |
|-----------------|--|---------|----------|--|
| | <ul style="list-style-type: none"> XML-Flaecheelement-Pool XML-Tarifpunkt-Pool | | | |
| Used by | Elements XML-PVTarifmodul/tarifpunkt-pool, XML-Tarifmodul/tarifpunkt-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Tarifpunkt-Pool"> <xs:complexContent> <xs:restriction base="XML-Flaecheelement-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunkt-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Flaecheelement-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Flaecheelement-Pool | | | |
| Used by | Complex Types XML-Tarifpunkt-Pool, XML-Tarifpunktadapter-Pool, XML-Tarifpunktreferenz-Pool, XML-Wegevariante-Pool, XML-Wegevariantenadapter-Pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Flaecheelement-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Flaecheelement-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Flaecheelement-Item

| | | | | | |
|-----------------|---|---------|------------------------------|---------------|--|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Type | extension of XML-Ausgangstext-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Flaecheelement-Item | | | | |
| Used by | <table border="1"> <tr> <td>Element</td><td>XML-Flaecheelement-Pool/item</td></tr> <tr> <td>Complex Types</td><td>XML-Tarifpunkt-Item, XML-Tarifpunktadapter-Item, XML-Tarifpunktreferenz-Item, XML-Wegevariante-Item, XML-Wegevariantenadapter-Item</td></tr> </table> | Element | XML-Flaecheelement-Pool/item | Complex Types | XML-Tarifpunkt-Item, XML-Tarifpunktadapter-Item, XML-Tarifpunktreferenz-Item, XML-Wegevariante-Item, XML-Wegevariantenadapter-Item |
| Element | XML-Flaecheelement-Pool/item | | | | |
| Complex Types | XML-Tarifpunkt-Item, XML-Tarifpunktadapter-Item, XML-Tarifpunktreferenz-Item, XML-Wegevariante-Item, XML-Wegevariantenadapter-Item | | | | |
| Model | nr , name , text-matrix , geobezug , typ{0,1} , ortsbezug{0,1} , tarifpunkt{0,1} , tarifpunktfolge-pool{0,1} | | | | |
| Children | geobezug, name, nr, ortsbezug, tarifpunkt, tarifpunktfolge-pool, text-matrix, typ | | | | |
| Source | <pre> <xs:complexType name="XML-Flaecheelement-Item"> <xs:complexContent> <xs:extension base="XML-Ausgangstext-Item"> <xs:sequence> <xs:element name="geobezug" type="XML-Geobezug-Part"/> <xs:element name="typ" type="XML-StringValue" minOccurs="0"/> <xs:element name="ortsbezug" type="XML-StringValue" minOccurs="0"/> <xs:element name="tarifpunkt" type="XML-RefSet1N" minOccurs="0"/> <xs:element name="tarifpunktfolge-pool" type="XML-Tarifpunktfolge-Pool" minOccurs="0"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Geobezug-Part

| | | | |
|----------------|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | extension of XML-PolygonContent | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:anySimpleType XML-IntegerArrayContent XML-PolygonContent XML-Geobezug-Part | | |
| Used by | <table border="1"> <tr> <td>Elements</td><td>XML-Flaecheelement-Item/geobezug, XML-Tarifpunkt-Item/geobezug, XML-Tarifpunktadapter-Item/geobezug, XML-Tarifpunktreferenz-Item/geobezug, XML-Tarifpunktreferenzadapter-Item/geobezug, XML-Wegevariante-Item/geobezug, XML-Wegevariantenadapter-Item/geobezug</td></tr> </table> | Elements | XML-Flaecheelement-Item/geobezug, XML-Tarifpunkt-Item/geobezug, XML-Tarifpunktadapter-Item/geobezug, XML-Tarifpunktreferenz-Item/geobezug, XML-Tarifpunktreferenzadapter-Item/geobezug, XML-Wegevariante-Item/geobezug, XML-Wegevariantenadapter-Item/geobezug |
| Elements | XML-Flaecheelement-Item/geobezug, XML-Tarifpunkt-Item/geobezug, XML-Tarifpunktadapter-Item/geobezug, XML-Tarifpunktreferenz-Item/geobezug, XML-Tarifpunktreferenzadapter-Item/geobezug, XML-Wegevariante-Item/geobezug, XML-Wegevariantenadapter-Item/geobezug | | |
| Source | <pre> <xs:complexType name="XML-Geobezug-Part"> <xs:simpleContent> </pre> | | |

| | |
|-----------------|---|
| | <pre> <xs:extension base="XML-PolygonContent" /> </xs:simpleContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunktfolge-Pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-Flaecheelement-Item/tarifpunktfolge-pool, XML-Wegevariante-Item/tarifpunktfolge-pool |
| Model | item* |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Tarifpunktfolge-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktfolge-Item" minOccurs="0" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunktfolge-Item


| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Tarifpunktfolge-Pool/item |
| Model | ink exk |
| Children | exk, ink |
| Source | <pre> <xs:complexType name="XML-Tarifpunktfolge-Item"> <xs:choice maxOccurs="unbounded"> <xs:element name="ink" type="XML-TarifpunktfolgeninklusionValue" /> <xs:element name="exk" type="XML-TarifpunktfolgenexklusionValue" /> </xs:choice> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-TarifpunktfolgeninklusionValue

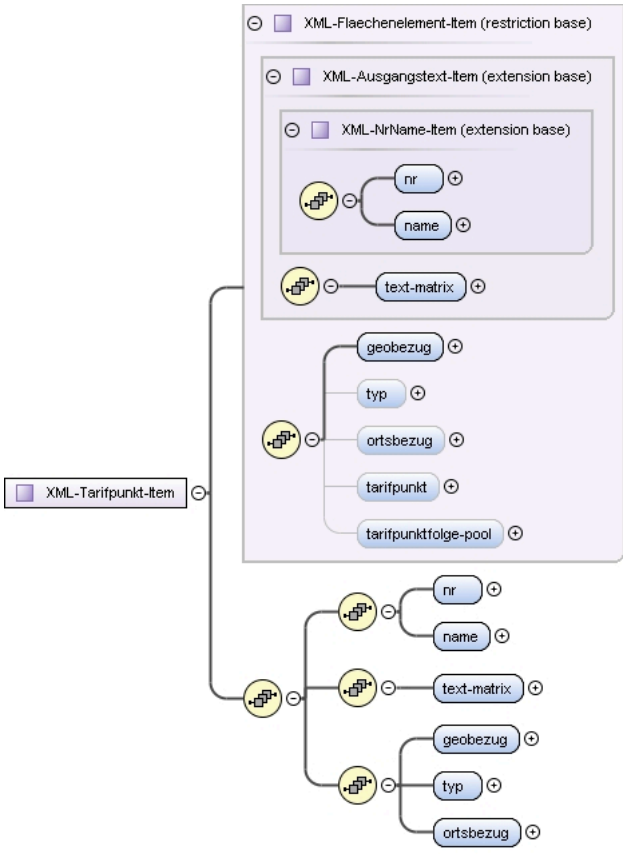
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Ref |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-TarifpunktfolgeninklusionValue |
| Used by | Element XML-Tarifpunktfolge-Item/ink |
| Source | <pre> <xs:complexType name="XML-TarifpunktfolgeninklusionValue"> <xs:simpleContent> <xs:extension base="XML-Ref" /> </xs:simpleContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-TarifpunktfolgenexklusionValue

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram |  |
| Type | extension of XML-Ref |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-TarifpunktfolgenexklusionValue |
| Used by | Element XML-Tarifpunktfolge-Item/exk |
| Source | <pre><xs:complexType name="XML-TarifpunktfolgenexklusionValue"> <xs:simpleContent> <xs:extension base="XML-Ref" /> </xs:simpleContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunkt-Item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | restriction of XML-Flaechenelement-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Flaechenelement-Item XML-Tarifpunkt-Item |
| Used by | Element XML-Tarifpunkt-Pool/item |
| Model | nr , name , text-matrix , geobezug , typ , ortsbezug |
| Children | geobezug, name, nr, ortsbezug, text-matrix, typ |
| Source | <pre><xs:complexType name="XML-Tarifpunkt-Item"> <xs:complexContent> <xs:restriction base="XML-Flaechenelement-Item"></pre> |

| | |
|-----------------|---|
| | <pre> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> <xs:sequence> <xs:element name="geobezug" type="XML-Geobezug-Part"/> <xs:element name="typ" type="XML-StringValue"/> <xs:element name="ortsbezug" type="XML-StringValue"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunktadapter-Pool

| | | | | |
|-----------------|--|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the relationships between three XML Schema components: XML-Flaechenelement-Pool (restriction base), XML-Pool (extension base), and XML-Tarifpunktadapter-Pool. XML-Tarifpunktadapter-Pool is shown as a restriction of XML-Flaechenelement-Pool. XML-Pool is shown as an extension base of XML-Flaechenelement-Pool. XML-Tarifpunktadapter-Pool has a key attribute and a sequence of item elements (0..∞).</p> | | | |
| Type | restriction of XML-Flaechenelement-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaechenelement-Pool<ul style="list-style-type: none">XML-Tarifpunktadapter-Pool | | | |
| Used by | Elements | XML-RNTarifmodul/tarifpunktadapter-pool, XML-Tarifmodul/tarifpunktadapter-pool | | |
| | Complex Type | XML-Tarifpunktreferenzadapter-Pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Tarifpunktadapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Flaechenelement-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifpunktadapter-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | | |
|-----------------|---|---------|---------------------------------|--------------|------------------------------------|
| Diagram | | | | | |
| Type | restriction of XML-Flaechenelement-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Flaechenelement-Item XML-Tarifpunktadapter-Item | | | | |
| Used by | <table> <tr> <td>Element</td><td>XML-Tarifpunktadapter-Pool/item</td></tr> <tr> <td>Complex Type</td><td>XML-Tarifpunktreferenzadapter-Item</td></tr> </table> | Element | XML-Tarifpunktadapter-Pool/item | Complex Type | XML-Tarifpunktreferenzadapter-Item |
| Element | XML-Tarifpunktadapter-Pool/item | | | | |
| Complex Type | XML-Tarifpunktreferenzadapter-Item | | | | |
| Model | nr , name , text-matrix , geobezug , typ | | | | |
| Children | geobezug, name, nr, text-matrix, typ | | | | |
| Source | <pre> <xs:complexType name="XML-Tarifpunktadapter-Item"> <xs:complexContent> <xs:restriction base="XML-Flaechenelement-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> <xs:sequence> <xs:element name="geobezug" type="XML-Geobezug-Part"/> <xs:element name="typ" type="XML-StringValue"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Tarifpunktgruppe-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | restriction of XML-NameGruppe-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-NameGruppe-Pool <ul style="list-style-type: none"> XML-Tarifpunktgruppe-Pool | | | |
| Used by | Elements XML-PVTarifmodul/tarifpunktgruppe-pool, XML-Tarifmodul/tarifpunktgruppe-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Tarifpunktgruppe-Pool"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktgruppe-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifpunktgruppe-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-NameGruppe-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-NameGruppe-Item <ul style="list-style-type: none"> XML-Tarifpunktgruppe-Item | | | |
| Used by | Element XML-Tarifpunktgruppe-Pool/item | | | |
| Model | name , element | | | |

| | |
|-----------------|--|
| Children | element, name |
| Source | <pre> <xs:complexType name="XML-Tarifpunktgruppe-Item"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Item"> <xs:sequence> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="element" type="XML-RefSet0N"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunktreferenz-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Flaechenelement-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Flaechenelement-Pool <ul style="list-style-type: none"> XML-Tarifpunktreferenz-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/tarifpunktreferenz-pool, XML-Tarifmodul/tarifpunktreferenz-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Tarifpunktreferenz-Pool"> <xs:complexContent> <xs:restriction base="XML-Flaechenelement-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktreferenz-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifpunktreferenz-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|--|
| Diagram | |
| Type | restriction of XML-Flaechenelement-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Flaechenelement-Item XML-Tarifpunktreferenz-Item |
| Used by | Element XML-Tarifpunktreferenz-Pool/item |
| Model | nr , name , text-matrix , geobezug , typ , ortsbezug , tarifpunkt |
| Children | geobezug, name, nr, ortsbezug, tarifpunkt, text-matrix, typ |
| Source | <pre> <xs:complexType name="XML-Tarifpunktreferenz-Item"> <xs:complexContent> <xs:restriction base="XML-Flaechenelement-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> <xs:sequence> <xs:element name="geobezug" type="XML-Geobezug-Part"/> <xs:element name="typ" type="XML-StringValue"/> <xs:element name="ortsbezug" type="XML-StringValue"/> <xs:element name="tarifpunkt" type="XML-RefSet1N"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

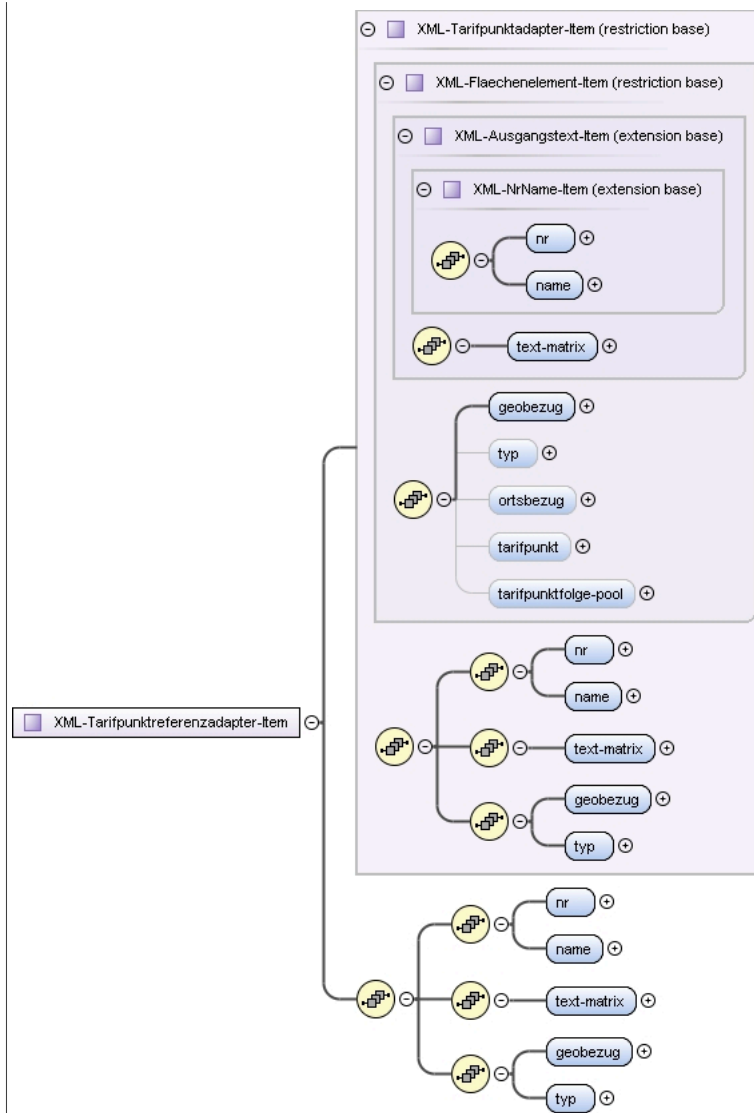
Complex Type XML-Tarifpunktreferenzadapter-Pool

| | | | | |
|-----------------|--|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Tarifpunktadapter-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaecheelement-Pool<ul style="list-style-type: none">XML-Tarifpunktadapter-Pool<ul style="list-style-type: none">XML-Tarifpunktreferenzadapter-Pool | | | |
| Used by | Elements | XML-RNTarifmodul/tarifpunktreferenzadapter-pool, XML-Tarifmodul/tarifpunktreferenzadapter-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Tarifpunktreferenzadapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Tarifpunktadapter-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktreferenzadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifpunktreferenzadapter-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



Type restriction of XML-Tarifpunktadapter-Item

- Type hierarchy
- XML-NrName-Item
 - XML-Ausgangstext-Item
 - XML-Flaecheelement-Item
 - XML-Tarifpunktadapter-Item
 - XML-Tarifpunktreferenzadapter-Item

Used by Element XML-Tarifpunktreferenzadapter-Pool/item

Model nr , name , text-matrix , geobezug , typ

Children geobezug, name, nr, text-matrix, typ

Source

```

<xs:complexType name="XML-Tarifpunktreferenzadapter-Item">
  <xs:complexContent>
    <xs:restriction base="XML-Tarifpunktadapter-Item">
      <xs:sequence>
        <xs:sequence>
          <xs:element name="nr" type="XML-IntegerValue"/>
          <xs:element name="name" type="XML-StringValue"/>
        </xs:sequence>
        <xs:sequence>
          <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/>
        </xs:sequence>
        <xs:sequence>
          <xs:element name="geobezug" type="XML-Geobezug-Part"/>
          <xs:element name="typ" type="XML-StringValue"/>
        </xs:sequence>
      </xs:sequence>
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>
  
```

| | |
|-----------------|---|
| | <pre> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungstyp-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Name-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Name-Pool <ul style="list-style-type: none"> XML-Zuordnungstyp-Pool | | | |
| Used by | Elements XML-PVTarifmodul/zuordnungstyp-pool, XML-Tarifmodul/zuordnungstyp-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Zuordnungstyp-Pool"> <xs:complexContent> <xs:restriction base="XML-Name-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zuordnungstyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zuordnungstyp-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Zuordnungstyp-Item | | | |
| Used by | Element XML-Zuordnungstyp-Pool/item | | | |

| | |
|-----------------|---|
| Model | name |
| Children | name |
| Source | <pre><xs:complexType name="XML-Zuordnungstyp-Item"> <xs:complexContent> <xs:restriction base="XML-Name-Item"> <xs:sequence> <xs:element name="name" type="XML-StringValue" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungsdaten-Matrix

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Zuordnung-Matrix |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zuordnung-Matrix XML-Zuordnungsdaten-Matrix |
| Used by | Elements XML-PVTTarifmodul/zuordnungsdaten-matrix, XML-Tarifmodul/zuordnungsdaten-matrix |
| Model | typ* |
| Children | typ |
| Source | <pre><xs:complexType name="XML-Zuordnungsdaten-Matrix"> <xs:complexContent> <xs:restriction base="XML-Zuordnung-Matrix"> <xs:sequence> <xs:element name="typ" type="XML-Zuordnungsdatentyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

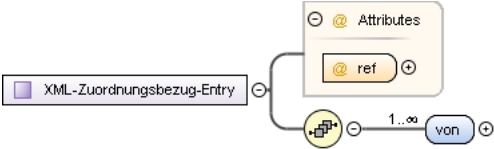
Complex Type XML-Zuordnung-Matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Complex Types XML-Zuordnungsausnahme-Matrix, XML-Zuordnungsdaten-Matrix |
| Model | typ* |
| Children | typ |
| Source | <pre><xs:complexType name="XML-Zuordnung-Matrix"> <xs:sequence> <xs:element name="typ" type="XML-Zuordnungstyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungstyp-Entry

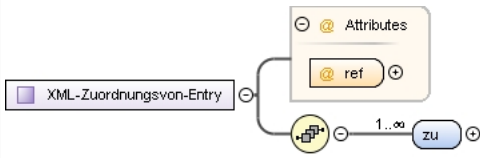
| | | | |
|-----------------|---|---|------------|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Used by | Element | XML-Zuordnung-Matrix/typ | |
| | Complex Types | XML-Zuordnungsausnahmetyp-Entry, XML-Zuordnungsdatentyp-Entry | |
| Model | bezug+ | | |
| Children | bezug | | |
| Attributes | QName | Type | Use |
| | ref | XML-Ref | required |
| Source | <pre><xs:complexType name="XML-Zuordnungstyp-Entry"> <xs:sequence> <xs:element name="bezug" type="XML-Zuordnungsbezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Complex Type XML-Zuordnungsbezug-Entry

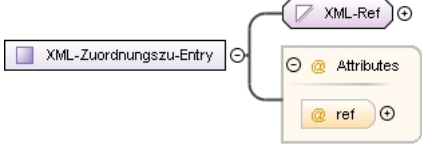
| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | |
|-----------------|---|---|------|-----|--|-----|---------|----------|--|--|--|
| Diagram |  | | | | | | | | | | |
| Used by | Element | XML-Zuordnungstyp-Entry/bezug | | | | | | | | | |
| | Complex Types | XML-Zuordnungsausnahmebezug-Entry, XML-Zuordnungsdatenbezug-Entry | | | | | | | | | |
| Model | von+ | | | | | | | | | | |
| Children | von | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | |
| QName | Type | Use | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Zuordnungsbezug-Entry"> <xs:sequence> <xs:element name="von" type="XML-Zuordnungsvon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | |

Complex Type XML-Zuordnungsvon-Entry

| | | | |
|-----------|---------------------|--|--|
| Namespace | http://vdv/ka/pkm/2 | | |
|-----------|---------------------|--|--|

| | | | | |
|-----------------|---|---|----------|--|
| Diagram |  | | | |
| Used by | Element | XML-Zuordnungsbezug-Entry/von | | |
| | Complex Types | XML-Zuordnungsausnahmevon-Entry, XML-Zuordnungsdatenvon-Entry | | |
| Model | zu+ | | | |
| Children | zu | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Zuordnungsvon-Entry"> <xs:sequence> <xs:element name="zu" type="XML-Zuordnungsvon-Entry" maxOccurs="unbounded" /> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zuordnungszu-Entry

| | | | | |
|-----------------|---|---|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | extension of XML-Ref | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Zuordnungszu-Entry | | | |
| Used by | Element | XML-Zuordnungsvon-Entry/zu | | |
| | Complex Types | XML-Zuordnungsausnahmezu-Entry, XML-Zuordnungsdatenzu-Entry | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | optional | |
| Source | <pre><xs:complexType name="XML-Zuordnungszu-Entry"> <xs:simpleContent> <xs:extension base="XML-Ref"> <xs:attribute name="ref" type="XML-Ref" /> </xs:extension> </xs:simpleContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zuordnungsdatentyp-Entry

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | restriction of XML-Zuordnungstyp-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zuordnungstyp-Entry XML-Zuordnungsdatentyp-Entry | | | |
| Used by | Element XML-Zuordnungsdaten-Matrix/typ | | | |
| Model | bezug+ | | | |
| Children | bezug | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Zuordnungsdatentyp-Entry"> <xs:complexContent> <xs:restriction base="XML-Zuordnungstyp-Entry"> <xs:sequence> <xs:element name="bezug" type="XML-Zuordnungsdatenbezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zuordnungsdatenbezug-Entry

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Zuordnungsbezug-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zuordnungsbezug-Entry XML-Zuordnungsdatenbezug-Entry | | | |
| Used by | Element XML-Zuordnungsdatentyp-Entry/bezug | | | |
| Model | von+ | | | |
| Children | von | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Zuordnungsdatenbezug-Entry"> <xs:complexContent> <xs:restriction base="XML-Zuordnungsbezug-Entry"> <xs:sequence> <xs:element name="von" type="XML-Zuordnungsdatenenvon-Entry" maxOccurs="unbounded"> </pre> | | | |

| | |
|-----------------|--|
| | <pre> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungsdaten-von-Entry

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Zuordnungs-von-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zuordnungs-von-Entry XML-Zuordnungsdaten-von-Entry | | | |
| Used by | Element XML-Zuordnungsdatenbezug-Entry/von | | | |
| Model | zu+ | | | |
| Children | zu | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Zuordnungsdaten-von-Entry"> <xs:complexContent> <xs:restriction base="XML-Zuordnungs-von-Entry"> <xs:sequence> <xs:element name="zu" type="XML-Zuordnungsdatenzu-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zuordnungsdatenzu-Entry

| | | | | |
|-----------|---------------------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Zuordnungszu-Entry | | | |

| | |
|-----------------|---|
| Type hierarchy | <ul style="list-style-type: none"> • xs:int • XML-Ref • XML-Zuordnungszu-Entry • XML-Zuordnungsdatenzu-Entry |
| Used by | Element XML-Zuordnungsdatenvon-Entry/zu |
| Source | <pre><xs:complexType name="XML-Zuordnungsdatenzu-Entry"> <xs:simpleContent> <xs:restriction base="XML-Zuordnungszu-Entry"> <xs:attribute name="ref" type="XML-Ref" use="prohibited"/> </xs:restriction> </xs:simpleContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungsausnahme-Matrix

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Zuordnung-Matrix |
| Type hierarchy | <ul style="list-style-type: none"> • XML-Zuordnung-Matrix • XML-Zuordnungsausnahme-Matrix |
| Used by | Elements XML-PVTTarifmodul/zuordnungsausnahme-matrix, XML-Tarifmodul/zuordnungsausnahme-matrix |
| Model | typ* |
| Children | typ |
| Source | <pre><xs:complexType name="XML-Zuordnungsausnahme-Matrix"> <xs:complexContent> <xs:restriction base="XML-Zuordnung-Matrix"> <xs:sequence> <xs:element name="typ" type="XML-Zuordnungsausnahmetyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zuordnungsausnahmetyp-Entry

| | |
|-----------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Zuordnungstyp-Entry |

| | | | | |
|-----------------|---|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> XML-Zuordnungstyp-Entry XML-Zuordnungsausnahmetyp-Entry | | | |
| Used by | Element XML-Zuordnungsausnahme-Matrix/typ | | | |
| Model | bezug+ | | | |
| Children | bezug | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Zuordnungsausnahmetyp-Entry"> <xs:complexContent> <xs:restriction base="XML-Zuordnungstyp-Entry"> <xs:sequence> <xs:element name="bezug" type="XML-Zuordnungsausnahmebezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zuordnungsausnahmebezug-Entry

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Zuordnungsbezug-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zuordnungsbezug-Entry XML-Zuordnungsausnahmebezug-Entry | | | |
| Used by | Element XML-Zuordnungsausnahmetyp-Entry/bezug | | | |
| Model | von+ | | | |
| Children | von | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Zuordnungsausnahmebezug-Entry"> <xs:complexContent> <xs:restriction base="XML-Zuordnungsbezug-Entry"> <xs:sequence> <xs:element name="von" type="XML-Zuordnungsausnahmevon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zuordnungsausnahmevon-Entry

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | restriction of XML-Zuordnungsvon-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Zuordnungsvon-Entry XML-Zuordnungsausnahmevon-Entry | | | |
| Used by | Element XML-Zuordnungsausnahmebezug-Entry/von | | | |
| Model | zu+ | | | |
| Children | zu | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Zuordnungsausnahmevon-Entry"> <xs:complexContent> <xs:restriction base="XML-Zuordnungsvon-Entry"> <xs:sequence> <xs:element name="zu" type="XML-Zuordnungsausnahmezu-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zuordnungsausnahmezu-Entry

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Zuordnungszu-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Zuordnungszu-Entry XML-Zuordnungsausnahmezu-Entry | | | |
| Used by | Element XML-Zuordnungsausnahmevon-Entry/zu | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Zuordnungsausnahmezu-Entry"> <xs:simpleContent> </pre> | | | |

| | |
|-----------------|---|
| | <pre> <xs:restriction base="XML-Zuordnungszu-Entry"> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:restriction> </xs:simpleContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Wegevariante-Pool

| | | | | |
|-----------------|---|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <pre>graph TD XMLWegevariantePool[XML-Wegevariante-Pool] -- restriction base --> XMLFlaecheelementPool[XML-Flaecheelement-Pool] XMLFlaecheelementPool -- extension base --> XMLPool[XML-Pool] XMLPool -- contains --> Attributes[Attributes] Attributes -- contains --> key[key] XMLWegevariantePool -- contains --> item1[item 0..∞] XMLWegevariantePool -- contains --> item2[item 0..∞]</pre> | | | |
| Type | restriction of XML-Flaecheelement-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaecheelement-Pool<ul style="list-style-type: none">XML-Wegevariante-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/wegevariante-pool, XML-Tarifmodul/wegevariante-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Wegevariante-Pool"> <xs:complexContent> <xs:restriction base="XML-Flaecheelement-Pool"> <xs:sequence> <xs:element name="item" type="XML-Wegevariante-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Wegevariante-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | restriction of XML-Flaecheelement-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Flaecheelement-Item XML-Wegevariante-Item |
| Used by | Element XML-Wegevariante-Pool/item |
| Model | nr , name , text-matrix , geobezug , tarifpunktfolge-pool |
| Children | geobezug, name, nr, tarifpunktfolge-pool, text-matrix |
| Source | <pre> <xs:complexType name="XML-Wegevariante-Item"> <xs:complexContent> <xs:restriction base="XML-Flaecheelement-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> <xs:sequence> <xs:element name="geobezug" type="XML-Geobezug-Part"/> <xs:element name="tarifpunktfolge-pool" type="XML-Tarifpunktfolge-Pool"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Wegevariantenadapter-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram | | | | | | | | | | | | |
|-----------------|---|--|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | restriction of XML-Flaecheelement-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Flaecheelement-Pool<ul style="list-style-type: none">XML-Wegevariantenadapter-Pool | | | | | | | | | | | |
| Used by | Elements | XML-RNTarifmodul/wegevariantenadapter-pool, XML-Tarifmodul/wegevariantenadapter-pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Wegevariantenadapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Flaecheelement-Pool"> <xs:sequence> <xs:element name="item" type="XML-Wegevariantenadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Wegevariantenadapter-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | restriction of XML-Flaecheelement-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Flaecheelement-Item XML-Wegevariantenadapter-Item |
| Used by | Element XML-Wegevariantenadapter-Pool/item |
| Model | nr , name , text-matrix , geobezug |
| Children | geobezug, name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Wegevariantenadapter-Item"> <xs:complexContent> <xs:restriction base="XML-Flaecheelement-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> <xs:sequence> <xs:element name="geobezug" type="XML-Geobezug-Part"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungstyp-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

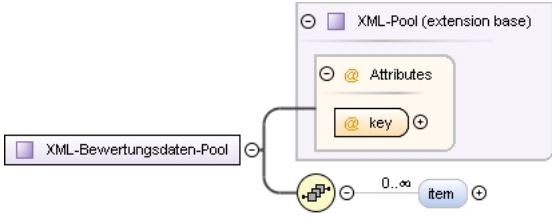
| Diagram | | | | | | | | | | | | |
|-----------------|---|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | restriction of XML-Name-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool<ul style="list-style-type: none">XML-Bewertungstyp-Pool | | | | | | | | | | | |
| Used by | Elements XML-PVTarifmodul/bewertungstyp-pool, XML-Tarifmodul/bewertungstyp-pool | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Bewertungstyp-Pool"> <xs:complexContent> <xs:restriction base="XML-Name-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bewertungstyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Bewertungstyp-Item

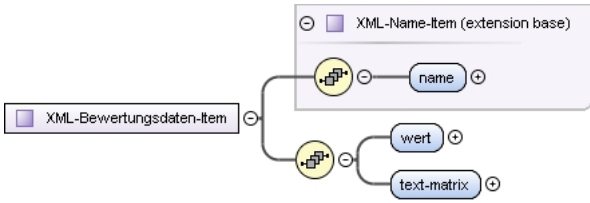
| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Bewertungstyp-Item | | | |
| Used by | Element XML-Bewertungstyp-Pool/item | | | |
| Model | name | | | |
| Children | name | | | |
| Source | <pre> <xs:complexType name="XML-Bewertungstyp-Item"> <xs:complexContent> <xs:restriction base="XML-Name-Item"> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Bewertungsdaten-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Bewertungsdaten-Pool | | | |
| Used by | Elements XML-PVTarifmodul/bewertungsdaten-pool, XML-Tarifmodul/bewertungsdaten-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsdaten-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bewertungsdaten-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsdaten-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | extension of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Bewertungsdaten-Item | | | |
| Used by | Element XML-Bewertungsdaten-Pool/item | | | |
| Model | name , wert , text-matrix | | | |
| Children | name, text-matrix, wert | | | |
| Source | <pre><xs:complexType name="XML-Bewertungsdaten-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="wert" type="XML-ValueFunction"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |

| | |
|-----------------|--|
| | <pre> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungsdaten-Matrix

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Bewertung-Matrix |
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertung-Matrix XML-Bewertungsdaten-Matrix |
| Used by | Elements XML-PVTarifmodul/bewertungsdaten-matrix, XML-Tarifmodul/bewertungsdaten-matrix |
| Model | typ* |
| Children | typ |
| Source | <pre> <xs:complexType name="XML-Bewertungsdaten-Matrix"> <xs:complexContent> <xs:restriction base="XML-Bewertung-Matrix"> <xs:sequence> <xs:element name="typ" type="XML-Bewertungsdatentyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bewertung-Matrix

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Complex Types XML-Bewertungsausnahme-Matrix, XML-Bewertungsdaten-Matrix |
| Model | typ* |
| Children | typ |
| Source | <pre> <xs:complexType name="XML-Bewertung-Matrix"> <xs:sequence> <xs:element name="typ" type="XML-Bewertungstyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungstyp-Entry

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---|----------|--|
| Diagram | | | | |
| Used by | Element | XML-Bewertung-Matrix/typ | | |
| | Complex Types | XML-Bewertungsausnahmetyp-Entry, XML-Bewertungsdatentyp-Entry | | |
| Model | bezug+ | | | |
| Children | bezug | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungstyp-Entry"> <xs:sequence> <xs:element name="bezug" type="XML-Bewertungsbezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsbezug-Entry

| | | | | |
|-----------------|--|---|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Used by | Element | XML-Bewertungstyp-Entry/bezug | | |
| | Complex Types | XML-Bewertungsausnahmebezug-Entry, XML-Bewertungsdatenbezug-Entry | | |
| Model | von+ | | | |
| Children | von | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsbezug-Entry"> <xs:sequence> <xs:element name="von" type="XML-Bewertungsvon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsvon-Entry

| | | | | |
|-----------|---------------------|-------------------------------|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Used by | Element | XML-Bewertungsbezug-Entry/von | | |

| | | | | |
|-----------------|---|---------|----------|--|
| | Complex Types XML-Bewertungsausnahmevon-Entry, XML-Bewertungsdatenon-Entry | | | |
| Model | nach+ | | | |
| Children | nach | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsvon-Entry"> <xs:sequence> <xs:element name="nach" type="XML-Bewertungsnach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsnach-Entry

| | | | | |
|-----------------|--|---|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Used by | Element | XML-Bewertungsvon-Entry/nach | | |
| | Complex Types | XML-Bewertungsausnahmenach-Entry, XML-Bewertungsdatennach-Entry | | |
| Model | ueber+ | | | |
| Children | ueber | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsnach-Entry"> <xs:sequence> <xs:element name="ueber" type="XML-Bewertungsueber-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsueber-Entry

| | | | | |
|----------------|--|---|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Ref | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int <ul style="list-style-type: none"> XML-Ref <ul style="list-style-type: none"> XML-Bewertungsueber-Entry | | | |
| Used by | Element | XML-Bewertungsnach-Entry/ueber | | |
| | Complex Types | XML-Bewertungsausnahmeueber-Entry, XML-Bewertungsdatenueber-Entry | | |

| Attributes | QName | Type | Use | |
|-----------------|---|---------|----------|--|
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsueber-Entry"> <xs:simpleContent> <xs:extension base="XML-Ref"> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:extension> </xs:simpleContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsdatentyp-Entry

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Bewertungstyp-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertungstyp-Entry <ul style="list-style-type: none"> XML-Bewertungsdatentyp-Entry | | | |
| Used by | Element XML-Bewertungsdaten-Matrix/typ | | | |
| Model | bezug+ | | | |
| Children | bezug | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsdatentyp-Entry"> <xs:complexContent> <xs:restriction base="XML-Bewertungstyp-Entry"> <xs:sequence> <xs:element name="bezug" type="XML-Bewertungsdatenbezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsdatenbezug-Entry

| | | | | |
|-----------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Bewertungsbezug-Entry | | | |

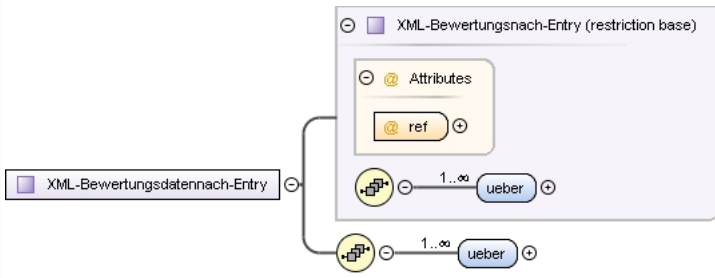
| | | | | |
|-----------------|---|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertungsbezug-Entry XML-Bewertungsdatenbezug-Entry | | | |
| Used by | Element XML-Bewertungsdatentyp-Entry/bezug | | | |
| Model | von+ | | | |
| Children | von | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Bewertungsdatenbezug-Entry"> <xs:complexContent> <xs:restriction base="XML-Bewertungsbezug-Entry"> <xs:sequence> <xs:element name="von" type="XML-Bewertungsdatenvon-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsdatenvon-Entry

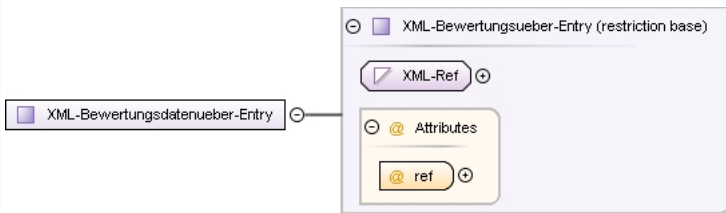
| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Bewertungsvon-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertungsvon-Entry XML-Bewertungsdatenvon-Entry | | | |
| Used by | Element XML-Bewertungsdatenbezug-Entry/von | | | |
| Model | nach+ | | | |
| Children | nach | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Bewertungsdatenvon-Entry"> <xs:complexContent> <xs:restriction base="XML-Bewertungsvon-Entry"> <xs:sequence> <xs:element name="nach" type="XML-Bewertungsdatennach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsdatennach-Entry

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram |  | | | | | | | | | | | |
|-----------------|---|-----------------------------------|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | restriction of XML-Bewertungsnach-Entry | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Bewertungsnach-Entry<ul style="list-style-type: none">XML-Bewertungsdatennach-Entry | | | | | | | | | | | |
| Used by | Element | XML-Bewertungsdatenvon-Entry/nach | | | | | | | | | | |
| Model | ueber+ | | | | | | | | | | | |
| Children | ueber | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Bewertungsdatennach-Entry"> <xs:complexContent> <xs:restriction base="XML-Bewertungsnach-Entry"> <xs:sequence> <xs:element name="ueber" type="XML-Bewertungsdatenueber-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Bewertungsdatenueber-Entry

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | restriction of XML-Bewertungsueber-Entry | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:int<ul style="list-style-type: none">• XML-Ref<ul style="list-style-type: none">• XML-Bewertungsueber-Entry<ul style="list-style-type: none">• XML-Bewertungsdatenueber-Entry | | | | | | | | | | | |
| Used by | Element XML-Bewertungsdatennach-Entry/ueber | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Bewertungsdatenueber-Entry"> <xs:simpleContent> <xs:restriction base="XML-Bewertungsueber-Entry" /> </xs:simpleContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Bewertungsausnahme-Matrix

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Bewertung-Matrix |
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertung-Matrix <ul style="list-style-type: none"> XML-Bewertungsausnahme-Matrix |
| Used by | Elements XML-PVTarifmodul/bewertungsausnahme-matrix, XML-Tarifmodul/bewertungsausnahme-matrix |
| Model | typ* |
| Children | typ |
| Source | <pre> <xs:complexType name="XML-Bewertungsausnahme-Matrix"> <xs:complexContent> <xs:restriction base="XML-Bewertung-Matrix"> <xs:sequence> <xs:element name="typ" type="XML-Bewertungsausnahmetyp-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungsausnahmetyp-Entry

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|----------------|---|-----------------------------------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | restriction of XML-Bewertungstyp-Entry | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Bewertungstyp-Entry<ul style="list-style-type: none">XML-Bewertungsausnahmetyp-Entry | | | | | | | | | | | |
| Used by | Element | XML-Bewertungsausnahme-Matrix/typ | | | | | | | | | | |
| Model | bezug+ | | | | | | | | | | | |
| Children | bezug | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Bewertungsausnahmetyp-Entry"> <xs:complexContent> <xs:restriction base="XML-Bewertungstyp-Entry"> <xs:sequence> <xs:element name="bezug" type="XML-Bewertungsausnahmebezug-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |

| | |
|-----------------|---|
| | <pre> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungsausnahmebezug-Entry

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Bewertungsbezug-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertungsbezug-Entry XML-Bewertungsausnahmebezug-Entry | | | |
| Used by | Element XML-Bewertungsausnahmetyp-Entry/bezug | | | |
| Model | von+ | | | |
| Children | von | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Bewertungsausnahmebezug-Entry"> <xs:complexContent> <xs:restriction base="XML-Bewertungsbezug-Entry"> <xs:sequence> <xs:element name="von" type="XML-Bewertungsausnahmevern-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsausnahmevern-Entry

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Bewertungsvon-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertungsvon-Entry | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| | <ul style="list-style-type: none"> XML-Bewertungsausnahmevon-Entry | | | |
| Used by | Element XML-Bewertungsausnahmebezug-Entry/von | | | |
| Model | nach+ | | | |
| Children | nach | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsausnahmevon-Entry"> <xs:complexContent> <xs:restriction base="XML-Bewertungsvon-Entry"> <xs:sequence> <xs:element name="nach" type="XML-Bewertungsausnahmenach-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsausnahmenach-Entry

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Bewertungsnach-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Bewertungsnach-Entry <ul style="list-style-type: none"> XML-Bewertungsausnahmenach-Entry | | | |
| Used by | Element XML-Bewertungsausnahmevon-Entry/nach | | | |
| Model | ueber+ | | | |
| Children | ueber | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsausnahmenach-Entry"> <xs:complexContent> <xs:restriction base="XML-Bewertungsnach-Entry"> <xs:sequence> <xs:element name="ueber" type="XML-Bewertungsausnahmeueber-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsausnahmeueber-Entry

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|--|----------|--|
| Diagram | | | | |
| Type | restriction of XML-Bewertungsueber-Entry | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Bewertungsueber-Entry XML-Bewertungsausnahmeueber-Entry | | | |
| Used by | Element | XML-Bewertungsausnahmenach-Entry/ueber | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsausnahmeueber-Entry"> <xs:simpleContent> <xs:restriction base="XML-Bewertungsueber-Entry" /> </xs:simpleContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Linie-Pool

| | | | | |
|----------------|---|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Linie-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/linie-pool, XML-Tarifmodul/linie-pool | | |
| | Complex Type | XML-Verkehrsmitteltyp-Pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Linie-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Linie-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Linie-Item

| | | | | | |
|-----------------|--|---------|---------------------|--------------|----------------------------|
| Namespace | http://vdv/ka/pkm/2 | | | | |
| Diagram | | | | | |
| Type | extension of XML-Ausgangstext-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item <ul style="list-style-type: none"> XML-Ausgangstext-Item <ul style="list-style-type: none"> XML-Linie-Item | | | | |
| Used by | <table> <tr> <td>Element</td><td>XML-Linie-Pool/item</td></tr> <tr> <td>Complex Type</td><td>XML-Verkehrsmitteltyp-Item</td></tr> </table> | Element | XML-Linie-Pool/item | Complex Type | XML-Verkehrsmitteltyp-Item |
| Element | XML-Linie-Pool/item | | | | |
| Complex Type | XML-Verkehrsmitteltyp-Item | | | | |
| Model | nr , name , text-matrix , bezug | | | | |
| Children | bezug, name, nr, text-matrix | | | | |
| Source | <pre> <xs:complexType name="XML-Linie-Item"> <xs:complexContent> <xs:extension base="XML-Ausgangstext-Item"> <xs:sequence> <xs:element name="bezug" type="XML-Ref01" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Linienadapter-Pool

| | | | |
|----------------|---|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Type | restriction of XML-Ausgangstext-Pool | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Ausgangstext-Pool <ul style="list-style-type: none"> XML-Linienadapter-Pool | | |
| Used by | <table> <tr> <td>Elements</td><td>XML-RNTarifmodul/linienadapter-pool, XML-Tarifmodul/linienadapter-pool</td></tr> </table> | Elements | XML-RNTarifmodul/linienadapter-pool, XML-Tarifmodul/linienadapter-pool |
| Elements | XML-RNTarifmodul/linienadapter-pool, XML-Tarifmodul/linienadapter-pool | | |
| Model | item* | | |

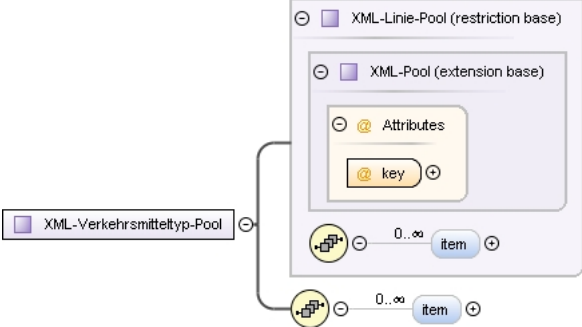
| | | | | |
|-----------------|--|-------------|------------|--|
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Linienadapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Linienadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Linienadapter-Item

| | | | | |
|-----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Ausgangstext-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Linienadapter-Item | | | |
| Used by | Element XML-Linienadapter-Pool/item | | | |
| Model | nr , name , text-matrix | | | |
| Children | name, nr, text-matrix | | | |
| Source | <pre><xs:complexType name="XML-Linienadapter-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Verkehrsmitteltyp-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram |  | | | | | | | | | | | |
|-----------------|--|--|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | restriction of XML-Linie-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Linie-Pool<ul style="list-style-type: none">XML-Verkehrsmitteltyp-Pool | | | | | | | | | | | |
| Used by | Elements | XML-PVTarifmodul/verkehrsmitteltyp-pool, XML-Tarifmodul/verkehrsmitteltyp-pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Verkehrsmitteltyp-Pool"> <xs:complexContent> <xs:restriction base="XML-Linie-Pool"> <xs:sequence> <xs:element name="item" type="XML-Verkehrsmitteltyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Verkehrsmitteltyp-Item

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |

| | |
|-----------------|--|
| Type | restriction of XML-Linie-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Linie-Item XML-Verkehrsmitteltyp-Item |
| Used by | Element XML-Verkehrsmitteltyp-Pool/item |
| Model | nr , name , text-matrix , bezug |
| Children | bezug, name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Verkehrsmitteltyp-Item"> <xs:complexContent> <xs:restriction base="XML-Linie-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> <xs:sequence> <xs:element name="bezug" type="XML-Ref01"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Verkehrsmitteltypadapter-Pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Ausgangstext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangstext-Pool XML-Verkehrsmitteltypadapter-Pool | | | |
| Used by | Elements XML-RNTarifmodul/verkehrsmitteltypadapter-pool, XML-Tarifmodul/verkehrsmitteltypadapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Verkehrsmitteltypadapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Verkehrsmitteltypadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </pre> | | | |

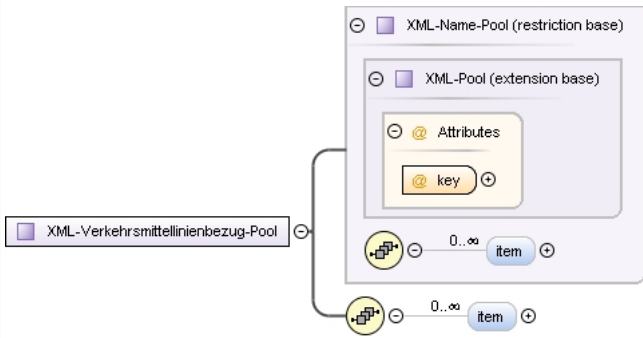
| | |
|-----------------|---|
| | <pre> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Verkehrsmitteltypadapter-Item

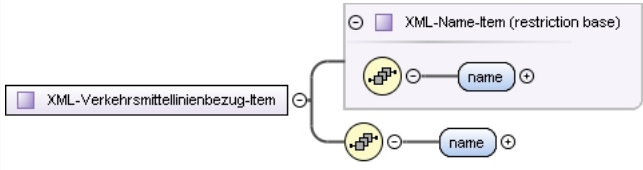
| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Verkehrsmitteltypadapter-Item |
| Used by | Element XML-Verkehrsmitteltypadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Verkehrsmitteltypadapter-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Verkehrsmittellinienbezug-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| Diagram |  | | | | | | | | | | | |
|-----------------|--|---|------|-----|--|-----|---------|----------|--|--|--|--|
| Type | restriction of XML-Name-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Name-Pool<ul style="list-style-type: none">XML-Verkehrsmittellinienbezug-Pool | | | | | | | | | | | |
| Used by | Elements | XML-PVTTarifmodul/verkehrsmittellinienbezug-pool, XML-Tarifmodul/verkehrsmittellinienbezug-pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Verkehrsmittellinienbezug-Pool"> <xs:complexContent> <xs:restriction base="XML-Name-Pool"> <xs:sequence> <xs:element name="item" type="XML-Verkehrsmittellinienbezug-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicit key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Verkehrsmittellinienbezug-Item

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  |
| Type | restriction of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Verkehrsmittellinienbezug-Item |
| Used by | ElementXML-Verkehrsmittellinienbezug-Pool/item |
| Model | name |
| Children | name |
| Source | <pre><xs:complexType name="XML-Verkehrsmittellinienbezug-Item"> <xs:complexContent> <xs:restriction base="XML-Name-Item"> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |

| | |
|-----------------|---|
| | <code></xs:complexType></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bezahlart-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Ausgangstext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Ausgangstext-Pool <ul style="list-style-type: none"> XML-Bezahlart-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/bezahlart-pool, XML-Tarifmodul/bezahlart-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Bezahlart-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bezahlart-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bezahlart-Item

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |

| | |
|-----------------|--|
| Type | restriction of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Bezahlart-Item |
| Used by | Element XML-Bezahlart-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Bezahlart-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bezahlartadapter-Pool

| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Ausgangstext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangstext-Pool XML-Bezahlartadapter-Pool | | | |
| Used by | Elements XML-RNTarifmodul/bezahlartadapter-pool, XML-Tarifmodul/bezahlartadapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Bezahlartadapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bezahlartadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </pre> | | | |

| | |
|-----------------|---|
| | <pre></xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bezahlartadapter-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Bezahlartadapter-Item |
| Used by | Element XML-Bezahlartadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Bezahlartadapter-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Waehrung-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | | | | |
|-----------------|--|---------|----------|--|
| Type | restriction of XML-Ausgangstext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Ausgangstext-Pool <ul style="list-style-type: none"> XML-Waehrung-Pool | | | |
| Used by | Elements XML-PVTarifmodul/waehrung-pool, XML-Tarifmodul/waehrung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Waehrung-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Waehrung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Waehrung-Item

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-Waehrung-Item. It is a restriction of XML-Ausgangstext-Item. The diagram shows a box for XML-Waehrung-Item connected to a box for XML-Ausgangstext-Item (restriction base). Inside the restriction base box, there is a box for XML-NrName-Item (extension base). The XML-NrName-Item box contains two elements: 'nr' and 'name'. The XML-Ausgangstext-Item box contains two elements: 'nr' and 'name'. The XML-Waehrung-Item box contains two elements: 'nr' and 'name'.</p> |
| Type | restriction of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Ausgangstext-Item<ul style="list-style-type: none">XML-Waehrung-Item |
| Used by | Element XML-Waehrung-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Waehrung-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |

| | |
|-----------------|---|
| | <pre> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Waehrungsadapter-Pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|---|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | restriction of XML-Ausgangstext-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Waehrungsadapter-Pool | | | | | | | | | | | |
| Used by | Elements XML-RNTarifmodul/waehrungsadapter-pool, XML-Tarifmodul/waehrungsadapter-pool | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Waehrungsadapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Waehrungsadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Waehrungsadapter-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | restriction of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Waehrungsadapter-Item |
| Used by | Element XML-Waehrungsadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Waehrungsadapter-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zahlungsintervall-Pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Ausgangstext-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangstext-Pool XML-Zahlungsintervall-Pool |
| Used by | Elements XML-PVTTarifmodul/zahlungsintervall-pool, XML-Tarifmodul/zahlungsintervall-pool |
| Model | item* |

| | | | | |
|----------------------|---|-------------|------------|--|
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Zahlungsintervall-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zahlungsintervall-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zahlungsintervall-Item

| | | | | |
|----------------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Ausgangstext-Item | | | |
| Type hierar- chy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Zahlungsintervall-Item | | | |
| Used by | Element XML-Zahlungsintervall-Pool/item | | | |
| Model | nr , name , text-matrix | | | |
| Children | name, nr, text-matrix | | | |
| Source | <pre> <xs:complexType name="XML-Zahlungsintervall-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zahlungsintervalladapter-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Ausgangstext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Ausgangstext-Pool <ul style="list-style-type: none"> XML-Zahlungsintervalladapter-Pool | | | |
| Used by | Elements XML-RNTarifmodul/zahlungsintervalladapter-pool, XML-Tarifmodul/zahlungsintervalladapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Zahlungsintervalladapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zahlungsintervalladapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zahlungsintervalladapter-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Ausgangstext-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item <ul style="list-style-type: none"> XML-Zahlungsintervalladapter-Item | | | |

| | |
|-----------------|--|
| | <ul style="list-style-type: none"> XML-Ausgangstext-Item XML-Zahlungsintervalladapter-Item |
| Used by | Element XML-Zahlungsintervalladapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Zahlungsintervalladapter-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue" /> <xs:element name="name" type="XML-StringValue" /> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix" /> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Mitnahmetyp-Pool

| | | | | |
|-----------------|---|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | <p>The diagram illustrates the relationships between three XML Schema types: XML-Mitnahmetyp-Pool, XML-Ausgangstext-Pool, and XML-Pool. XML-Mitnahmetyp-Pool is a restriction of XML-Ausgangstext-Pool. XML-Ausgangstext-Pool is an extension of XML-Pool. XML-Pool has a key attribute and a sequence of items.</p> | | | |
| Type | restriction of XML-Ausgangstext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Mitnahmetyp-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/mitnahmetyp-pool, XML-Tarifmodul/mitnahmetyp-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Mitnahmetyp-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Mitnahmetyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Mitnahmetyp-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Mitnahmetyp-Item |
| Used by | Element XML-Mitnahmetyp-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Mitnahmetyp-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Mitnahmetypadapter-Pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Ausgangstext-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangstext-Pool |

| | | | | |
|-----------------|---|--|----------|--|
| | <ul style="list-style-type: none">XML-Mitnahmetypadapter-Pool | | | |
| Used by | Elements | XML-RNTarifmodul/mitnahmetypadapter-pool, XML-Tarifmodul/mitnahmetypadapter-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Mitnahmetypadapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Mitnahmetypadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Mitnahmetypadapter-Item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none">• XML-NrName-Item• XML-Ausgangstext-Item• XML-Mitnahmetypadapter-Item |
| Used by | Element XML-Mitnahmetypadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Mitnahmetypadapter-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Rabattmedientyp-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Ausgangstext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Ausgangstext-Pool <ul style="list-style-type: none"> XML-Rabattmedientyp-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/rabattmedientyp-pool, XML-Tarifmodul/rabattmedientyp-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Rabattmedientyp-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Rabattmedientyp-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Rabattmedientyp-Item

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |

| | |
|-----------------|--|
| Type | restriction of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Rabattmedientyp-Item |
| Used by | Element XML-Rabattmedientyp-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Rabattmedientyp-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Rabattmedientypadapter-Pool

| | | | | |
|----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Ausgangstext-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Ausgangstext-Pool XML-Rabattmedientypadapter-Pool | | | |
| Used by | Elements XML-RNTarifmodul/rabattmedientypadapter-pool, XML-Tarifmodul/rabattmedientypadapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Rabattmedientypadapter-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Rabattmedientypadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </pre> | | | |

| | |
|-----------------|---|
| | <pre></xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Rabattmedientypadapter-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Rabattmedientypadapter-Item |
| Used by | Element XML-Rabattmedientypadapter-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre><xs:complexType name="XML-Rabattmedientypadapter-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Modulkontext-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | restriction of XML-NrName-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Modulkontext-Pool | | | |
| Used by | Elements XML-PVTarifmodul/modulkontext-pool, XML-Tarifmodul/modulkontext-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Modulkontext-Pool"> <xs:complexContent> <xs:restriction base="XML-NrName-Pool"> <xs:sequence> <xs:element name="item" type="XML-Modulkontext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Modulkontext-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-Modulkontext-Item type. It is a restriction of the XML-NrName-Item type (restriction base). The XML-Modulkontext-Item type is defined as a sequence of two elements: 'nr' (XML-IntegerValue) and 'name' (XML-StringValue). The diagram shows the XML-Modulkontext-Item type as a restriction of the XML-NrName-Item type, with the restriction base being XML-NrName-Item. The XML-Modulkontext-Item type is defined as a sequence of two elements: 'nr' (XML-IntegerValue) and 'name' (XML-StringValue).</p> |
| Type | restriction of XML-NrName-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-NrName-Item<ul style="list-style-type: none">XML-Modulkontext-Item |
| Used by | ElementXML-Modulkontext-Pool/item |
| Model | nr , name |
| Children | name, nr |
| Source | <pre><xs:complexType name="XML-Modulkontext-Item"> <xs:complexContent> <xs:restriction base="XML-NrName-Item"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Modulkontextadapter-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|---------|----------|--|
| Diagram | | | | |
| Type | restriction of XML-NrName-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-NrName-Pool <ul style="list-style-type: none"> XML-Modulkontextadapter-Pool | | | |
| Used by | Elements XML-RNTarifmodul/modulkontextadapter-pool, XML-Tarifmodul/modulkontextadapter-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Modulkontextadapter-Pool"> <xs:complexContent> <xs:restriction base="XML-NrName-Pool"> <xs:sequence> <xs:element name="item" type="XML-Modulkontextadapter-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Modulkontextadapter-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-NrName-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item <ul style="list-style-type: none"> XML-Modulkontextadapter-Item | | | |
| Used by | Element XML-Modulkontextadapter-Pool/item | | | |
| Model | nr , name | | | |
| Children | name, nr | | | |
| Source | <pre> <xs:complexType name="XML-Modulkontextadapter-Item"> <xs:complexContent> <xs:restriction base="XML-NrName-Item"> <xs:sequence> </pre> | | | |

| | |
|-----------------|---|
| | <pre> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Spezialbedingung-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Spezialbedingung-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/spezialbedingung-pool, XML-Tarifmodul/spezialbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Spezialbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Spezialbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Spezialbedingung-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Spezialbedingung-Item | | | |
| Used by | Element XML-Spezialbedingung-Pool/item | | | |
| Model | name , funktion | | | |
| Children | funktion, name | | | |
| Source | <pre> <xs:complexType name="XML-Spezialbedingung-Item"> <xs:complexContent> </pre> | | | |

| | |
|-----------------|--|
| | <pre> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="funktion" type="XML-Ref11" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tagesbedingung-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Tagesbedingung-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/tagesbedingung-pool, XML-Tarifmodul/tagesbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Tagesbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tagesbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tagesbedingung-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Tagesbedingung-Item | | | |
| Used by | Element XML-Tagesbedingung-Pool/item | | | |
| Model | name , wochentag-pool , kalendertag-pool | | | |
| Children | kalendertag-pool, name, wochentag-pool | | | |

| | |
|-----------------|--|
| Source | <pre> <xs:complexType name="XML-Tagesbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="wochentag-pool" type="XML-Wochentag-Pool"/> <xs:element name="kalendertag-pool" type="XML-Kalendertag-Pool"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Kalendertag-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Tagesbedingung-Item/kalendertag-pool |
| Model | datum* |
| Children | datum |
| Source | <pre> <xs:complexType name="XML-Kalendertag-Pool"> <xs:sequence> <xs:element name="datum" type="XML-DateValue" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>Sortiert nach Inhalt</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tageszeitbedingung-Pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|----------------|---|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Tageszeitbedingung-Pool | | | | | | | | | | | |
| Used by | Elements XML-PVTarifmodul/tageszeitbedingung-pool, XML-Tarifmodul/tageszeitbedingung-pool | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Tageszeitbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tageszeitbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </pre></pre> | | | | | | | | | | | |

| | |
|-----------------|---|
| | <code></xs:complexType></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tageszeitbedingung-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Tageszeitbedingung-Item |
| Used by | Element XML-Tageszeitbedingung-Pool/item |
| Model | name , zeitabschnitt-pool |
| Children | name, zeitabschnitt-pool |
| Source | <pre><xs:complexType name="XML-Tageszeitbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="zeitabschnitt-pool" type="XML-Zeitabschnitt-Pool"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zeitabschnitt-Pool

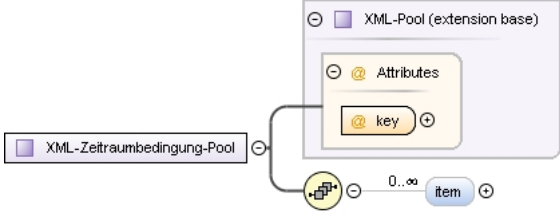
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Tageszeitbedingung-Item/zeitabschnitt-pool |
| Model | item+ |
| Children | item |
| Source | <pre><xs:complexType name="XML-Zeitabschnitt-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zeitabschnitt-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zeitabschnitt-Item

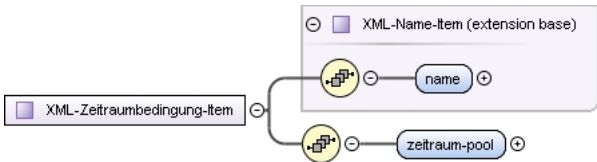
| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Zeitabschnitt-Pool/item |
| Model | von , bis |
| Children | bis, von |
| Source | <pre><xs:complexType name="XML-Zeitabschnitt-Item"></pre> |

| | |
|-----------------|---|
| | <pre> <xs:sequence> <xs:element name="von" type="XML-TimeValue" /> <xs:element name="bis" type="XML-TimeValue" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zeitraumbedingung-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Zeitraumbedingung-Pool | | | |
| Used by | Elements XML-PVTarifmodul/zeitraumbedingung-pool, XML-Tarifmodul/zeitraumbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Zeitraumbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zeitraumbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zeitraumbedingung-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | extension of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-Zeitraumbedingung-Item | | | |
| Used by | Element XML-Zeitraumbedingung-Pool/item | | | |
| Model | name , zeitraum-pool | | | |
| Children | name, zeitraum-pool | | | |
| Source | <pre> <xs:complexType name="XML-Zeitraumbedingung-Item"> <xs:complexContent> </pre> | | | |

| | |
|-----------------|---|
| | <pre> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="zeitraum-pool" type="XML-Zeitraum-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zeitraum-Pool

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Zeitraumbedingung-Item/zeitraum-pool |
| Model | item+ |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Zeitraum-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zeitraum-Item" maxOccurs="unbounded" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Zeitraum-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Zeitraum-Pool/item |
| Model | beginn , ende |
| Children | beginn, ende |
| Source | <pre> <xs:complexType name="XML-Zeitraum-Item"> <xs:sequence> <xs:element name="beginn" type="XML-Zeitraumsgrenze-Part" /> <xs:element name="ende" type="XML-Zeitraumsgrenze-Part" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Tarifpunktbedingung-Pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Tarifpunktbedingung-Pool |
| Used by | Elements XML-PVTTarifmodul/tarifpunktbedingung-pool, XML-Tarifmodul/tarifpunktbedingung-pool |
| Model | item* |
| Children | item |

| Attributes | QName | Type | Use | |
|-----------------|--|---------|----------|--|
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Tarifpunktbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifpunktbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifpunktbedingung-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Tarifpunktbedingung-Item |
| Used by | Element XML-Tarifpunktbedingung-Pool/item |
| Model | name , von , nach , ueber |
| Children | nach, name, ueber, von |
| Source | <pre> <xs:complexType name="XML-Tarifpunktbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="von" type="XML-Ref01" /> <xs:element name="nach" type="XML-Ref01" /> <xs:element name="ueber" type="XML-Ref01" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bewertungsbedingung-Pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool |

| | | | | |
|-----------------|--|--|----------|--|
| | <ul style="list-style-type: none">XML-Bewertungsbedingung-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/bewertungsbedingung-pool, XML-Tarifmodul/bewertungsbedingung-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bewertungsbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bewertungsbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bewertungsbedingung-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <pre>graph LR Base[XML-Name-Item (extension base)] --> Name[name] Ext[XML-Bewertungsbedingung-Item] --> Base Ext --> Child1(()) Child1 --> Bewertungstyp[bewertungstyp] Child1 --> Werte[werte]</pre> |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Bewertungsbedingung-Item |
| Used by | Element XML-Bewertungsbedingung-Pool/item |
| Model | name , bewertungstyp , werte |
| Children | bewertungstyp, name, werte |
| Source | <pre><xs:complexType name="XML-Bewertungsbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="bewertungstyp" type="XML-Ref1"/> <xs:element name="werte" type="XML-ArrayValue"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Geosegmentbedingung-Pool

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |

| | | | | |
|-----------------|---|---------|----------|--|
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Geosegmentbedingung-Pool | | | |
| Used by | Elements XML-PVTarifmodul/geosegmentbedingung-pool, XML-Tarifmodul/geosegmentbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Geosegmentbedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Geosegmentbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Geosegmentbedingung-Item

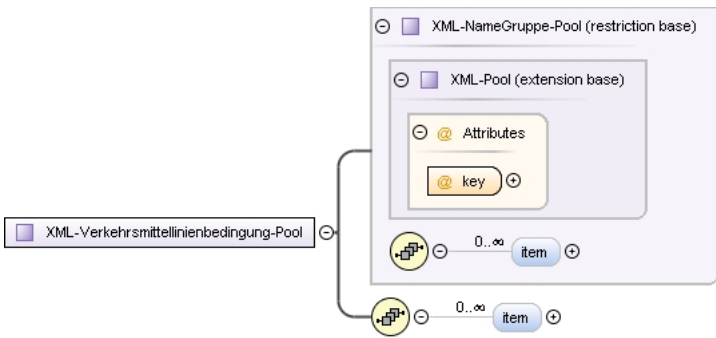
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <pre>classDiagram class XML-Name-Item["XML-Name-Item (extension base)"] { name } class XML-Geosegmentbedingung-Item { geosegment-pool } XML-Name-Item < -- XML-Geosegmentbedingung-Item</pre> |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-Item<ul style="list-style-type: none">XML-Geosegmentbedingung-Item |
| Used by | Element XML-Geosegmentbedingung-Pool/item |
| Model | name , geosegment-pool |
| Children | geosegment-pool, name |
| Source | <pre><xs:complexType name="XML-Geosegmentbedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="geosegment-pool" type="XML-Geosegment-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Geosegment-Pool

| | | | | |
|-----------|-----------------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-Wochentag-Pool | | | |

| | |
|-----------------|---|
| Type hierarchy | <ul style="list-style-type: none"> XML-Wochentag-Pool XML-Geosegment-Pool |
| Used by | Element XML-Geosegmentbedingung-Item/geosegment-pool |
| Model | nr* |
| Children | nr |
| Source | <pre> <xs:complexType name="XML-Geosegment-Pool"> <xs:complexContent> <xs:restriction base="XML-Wochentag-Pool"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach Inhalt}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Verkehrsmittellinienbedingung-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | restriction of XML-NameGruppe-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-NameGruppe-Pool XML-Verkehrsmittellinienbedingung-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/verkehrsmittellinienbedingung-pool, XML-Tarifmodul/verkehrsmittellinienbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Verkehrsmittellinienbedingung-Pool"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Pool"> <xs:sequence> <xs:element name="item" type="XML-Verkehrsmittellinienbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Verkehrsmittellinienbedingung-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-NameGruppe-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-NameGruppe-Item XML-Verkehrsmittellinienbedingung-Item |
| Used by | Element XML-Verkehrsmittellinienbedingung-Pool/item |
| Model | name , element |
| Children | element, name |
| Source | <pre> <xs:complexType name="XML-Verkehrsmittellinienbedingung-Item"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Item"> <xs:sequence> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="element" type="XML-RefSet0N"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bezahlartbedingung-Pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-NameGruppe-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-NameGruppe-Pool XML-Bezahlartbedingung-Pool |
| Used by | Elements XML-PVTTarifmodul/bezahlartbedingung-pool, XML-Tarifmodul/bezahlartbedingung-pool |

| | | | | |
|-----------------|---|---------|----------|--|
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Bezahlartbedingung-Pool"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bezahlartbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bezahlartbedingung-Item

| | | | | |
|-----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-NameGruppe-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-NameGruppe-Item XML-Bezahlartbedingung-Item | | | |
| Used by | Element XML-Bezahlartbedingung-Pool/item | | | |
| Model | name , element | | | |
| Children | element, name | | | |
| Source | <pre><xs:complexType name="XML-Bezahlartbedingung-Item"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Item"> <xs:sequence> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="element" type="XML-RefSet0N"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zahlungsintervallbedingung-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

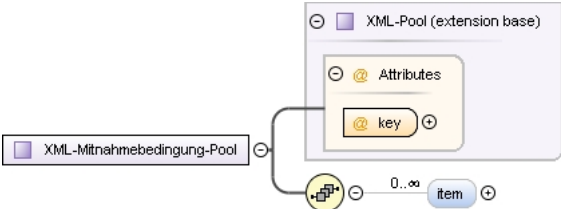
| | | | | |
|-----------------|---|--|----------|--|
| Diagram | | | | |
| Type | restriction of XML-NameGruppe-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NameGruppe-Pool<ul style="list-style-type: none">XML-Zahlungsintervallbedingung-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/zahlungsintervallbedingung-pool, XML-Tarifmodul/zahlungsintervallbedingung-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Zahlungsintervallbedingung-Pool"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Pool"> <xs:sequence> <xs:element name="item" type="XML-Zahlungsintervallbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Zahlungsintervallbedingung-Item

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-NameGruppe-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item <ul style="list-style-type: none"> XML-NameGruppe-Item <ul style="list-style-type: none"> XML-Zahlungsintervallbedingung-Item | | | |
| Used by | Element | XML-Zahlungsintervallbedingung-Pool/item | | |

| | |
|-----------------|--|
| Model | name , element |
| Children | element, name |
| Source | <pre> <xs:complexType name="XML-Zahlungsintervallbedingung-Item"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Item"> <xs:sequence> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="element" type="XML-RefSet0N"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Mitnahmebedingung-Pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram |  | | | | | | | | | | | |
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Mitnahmebedingung-Pool | | | | | | | | | | | |
| Used by | Elements XML-PVTarifmodul/mitnahmebedingung-pool, XML-Tarifmodul/mitnahmebedingung-pool | | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Mitnahmebedingung-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Mitnahmebedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | | | | | | | | |

Complex Type XML-Mitnahmebedingung-Item

| | | | | |
|-----------|----------------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Name-Item | | | |

| | |
|-----------------|---|
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Mitnahmebedingung-Item |
| Used by | Element XML-Mitnahmebedingung-Pool/item |
| Model | name , anzahl-matrix |
| Children | anzahl-matrix, name |
| Source | <pre><xs:complexType name="XML-Mitnahmebedingung-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="anzahl-matrix" type="XML-Mitnahmeanzahl-Matrix"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Mitnahmeanzahl-Matrix

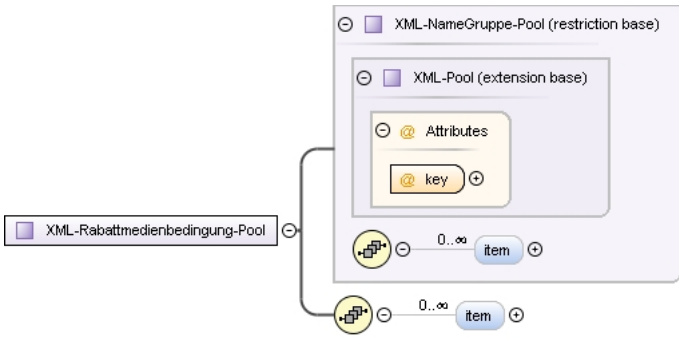
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Mitnahmebedingung-Item/anzahl-matrix |
| Model | anzahl+ |
| Children | anzahl |
| Source | <pre><xs:complexType name="XML-Mitnahmeanzahl-Matrix"> <xs:sequence> <xs:element name="anzahl" type="XML-Mitnahmeanzahl-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Mitnahmeanzahl-Entry

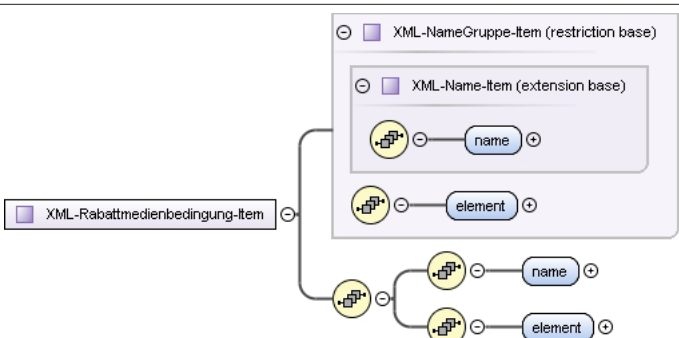
| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|----------------|--|----------|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | extension of XML-IntegerValue | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:long<ul style="list-style-type: none">• XML-IntegerContent<ul style="list-style-type: none">• XML-IntegerValue<ul style="list-style-type: none">• XML-Mitnahmeanzahl-Entry | | | | | | | | | | | |
| Used by | Element XML-Mitnahmeanzahl-Matrix/anzahl | | | | | | | | | | | |
| Attributes | <table><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr><tr><td>ref</td><td>XML-Ref</td><td>required</td><td></td></tr></table> | QName | Type | Use | | ref | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| ref | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Mitnahmeanzahl-Entry"> <xs:complexContent> <xs:extension base="XML-IntegerValue"> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |

| | |
|-----------------|---|
| | <pre> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Rabattmedienbedingung-Pool

| | | | | |
|-----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | restriction of XML-NameGruppe-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-NameGruppe-Pool XML-Rabattmedienbedingung-Pool | | | |
| Used by | Elements XML-PVTarifmodul/rabattmedienbedingung-pool, XML-Tarifmodul/rabattmedienbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Rabattmedienbedingung-Pool"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Pool"> <xs:sequence> <xs:element name="item" type="XML-Rabattmedienbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicit key attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Rabattmedienbedingung-Item

| | | | | |
|-----------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |

| | |
|-----------------|---|
| Type | restriction of XML-NameGruppe-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-NameGruppe-Item XML-Rabattmedienbedingung-Item |
| Used by | Element XML-Rabattmedienbedingung-Pool/item |
| Model | name , element |
| Children | element, name |
| Source | <pre> <xs:complexType name="XML-Rabattmedienbedingung-Item"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Item"> <xs:sequence> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="element" type="XML-RefSet0N"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Modulkontextbedingung-Pool

| | | | | |
|----------------|---|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | restriction of XML-NameGruppe-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-NameGruppe-Pool XML-Modulkontextbedingung-Pool | | | |
| Used by | Elements XML-PVTTarifmodul/modulkontextbedingung-pool, XML-Tarifmodul/modulkontextbedingung-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Modulkontextbedingung-Pool"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Pool"> <xs:sequence> <xs:element name="item" type="XML-Modulkontextbedingung-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implicit key Attribute}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Modulkontextbedingung-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-NameGruppe-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-NameGruppe-Item XML-Modulkontextbedingung-Item |
| Used by | Element XML-Modulkontextbedingung-Pool/item |
| Model | name , element |
| Children | element, name |
| Source | <pre> <xs:complexType name="XML-Modulkontextbedingung-Item"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Item"> <xs:sequence> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="element" type="XML-RefSet0N"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-BIFAInterpretation-Pool

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-BIFAInterpretation-Pool |
| Used by | Elements XML-PVTarifmodul/bifainterpretation-pool, XML-Tarifmodul/bifainterpretation-pool |
| Model | item* |
| Children | item |

| Attributes | QName | Type | Use | |
|-----------------|--|---------|----------|--|
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-BIFAInterpretation-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-BIFAInterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-BIFAInterpretation-Item

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-BIFAInterpretation-Item |
| Used by | Element XML-BIFAInterpretation-Pool/item |
| Model | name , abfahrtszeit , ankunftszeit , vontarifpunkt , nachtarifpunkt , uebertarifpunkte , ueberwegevariante , verkehrsmittellinienbezug , produktgrenzpunkt-daten-table , produktgrenzpunkt-ausnahme-table |
| Children | abfahrtszeit, ankunftszeit, nachtarifpunkt, name, produktgrenzpunkt-ausnahme-table, produktgrenzpunkt-daten-table, uebertarifpunkte, ueberwegevariante, verkehrsmittellinienbezug, vontarifpunkt |
| Source | <pre><xs:complexType name="XML-BIFAInterpretation-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="abfahrtszeit" type="XML-Ref01"/> <xs:element name="ankunftszeit" type="XML-Ref01"/> <xs:element name="vontarifpunkt" type="XML-Ref01"/> <xs:element name="nachtarifpunkt" type="XML-Ref01"/> <xs:element name="uebertarifpunkte" type="XML-Ref01"/> <xs:element name="ueberwegevariante" type="XML-Ref01"/> <xs:element name="verkehrsmittellinienbezug" type="XML-Ref01"/> <xs:element name="produktgrenzpunkt-daten-table" type="XML-Produktgrenzpunkt-daten-Table"/> <xs:element name="produktgrenzpunkt-ausnahme-table" type="XML-Produktgrenzpunkt-ausnahme-Table"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Produktgrenzpunktdaten-Table

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the XML-Produktgrenzpunktdaten-Table complex type. It is a restriction of the XML-Produktgrenzpunkt-Table (restriction base). The base type contains 14 elements, each with a cardinality of 1 (indicated by a circle with a plus sign). The XML-Produktgrenzpunktdaten-Table type is a restriction of this base, inheriting all elements except for ausnahme.</p> <p>XML-Produktgrenzpunkt-Table (restriction base) elements:</p> <ul style="list-style-type: none"> vorherproduktgruppe vorhertagesbedingung vorhertageszeitbedingung vorhertarifpunktbedingung vorherbewertungsbedingung vorherverkehrsmittellinienbedingung nachherproduktgruppe nachhertagesbedingung nachhertageszeitbedingung nachhertarifpunktbedingung nachherbewertungsbedingung nachherverkehrsmittellinienbedingung spezialbedingung ausnahme <p>XML-Produktgrenzpunktdaten-Table elements (restriction):</p> <ul style="list-style-type: none"> vorherproduktgruppe vorhertagesbedingung vorhertageszeitbedingung vorhertarifpunktbedingung vorherbewertungsbedingung vorherverkehrsmittellinienbedingung nachherproduktgruppe nachhertagesbedingung nachhertageszeitbedingung nachhertarifpunktbedingung nachherbewertungsbedingung nachherverkehrsmittellinienbedingung spezialbedingung |
| Type | restriction of XML-Produktgrenzpunkt-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktgrenzpunkt-Table XML-Produktgrenzpunktdaten-Table |
| Used by | Element XML-BIFAIInterpretation-Item/produktgrenzpunktdaten-table |
| Model | vorherproduktgruppe , vorhertagesbedingung , vorhertageszeitbedingung , vorhertarifpunktbedingung , vorherbewertungsbedingung , vorherverkehrsmittellinienbedingung , nachherproduktgruppe , nachhertagesbedingung , nachhertageszeitbedingung , nachhertarifpunktbedingung , nachherbewertungsbedingung , nachherverkehrsmittellinienbedingung , spezialbedingung |
| Children | nachherbewertungsbedingung, nachherproduktgruppe, nachhertagesbedingung, nachhertageszeitbedingung, nachhertarifpunktbedingung, nachherverkehrsmittellinienbedingung, spezialbedingung, vorherbewertungsbedingung, vorherproduktgruppe, vorhertagesbedingung, vorhertageszeitbedingung, vorhertarifpunktbedingung, vorherverkehrsmittellinienbedingung |

| | |
|-----------------|---|
| Source | <pre> <xs:complexType name="XML-Produktgrenzpunkt-Table"> <xs:complexContent> <xs:restriction base="XML-Produktgrenzpunkt-Table"> <xs:sequence> <xs:element name="vorherproduktgruppe" type="XML-RefList0N"/> <xs:element name="vorhertagesbedingung" type="XML-RefList0N"/> <xs:element name="vorhertageszeitbedingung" type="XML-RefList0N"/> <xs:element name="vorhertarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="vorherbewertungsbedingung" type="XML-RefList0N"/> <xs:element name="vorherverkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="nachherproduktgruppe" type="XML-RefList0N"/> <xs:element name="nachhertagesbedingung" type="XML-RefList0N"/> <xs:element name="nachhertageszeitbedingung" type="XML-RefList0N"/> <xs:element name="nachhertarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="nachherbewertungsbedingung" type="XML-RefList0N"/> <xs:element name="nachherverkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Produktgrenzpunkt-Table

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Complex Types XML-Produktgrenzpunktausnahme-Table, XML-Produktgrenzpunkt-Table |
| Model | vorherproduktgruppe , vorhertagesbedingung , vorhertageszeitbedingung , vorhertarifpunktbedingung , vorherbewertungsbedingung , vorherverkehrsmittellinienbedingung , nachherproduktgruppe , nachhertagesbedingung , nachhertageszeitbedingung , nachhertarifpunktbedingung , nachherbewertungsbedingung , nachherverkehrsmittellinienbedingung , spezialbedingung , ausnahme{0,1} |
| Children | ausnahme, nachherbewertungsbedingung, nachherproduktgruppe, nachhertagesbedingung, nachhertageszeitbedingung, nachhertarifpunktbedingung, nachherverkehrsmittellinienbedingung, spezialbedingung, vorherbewertungsbedingung, vorherproduktgruppe, vorhertagesbedingung, vorhertageszeitbedingung, vorhertarifpunktbedingung, vorherverkehrsmittellinienbedingung |
| Source | <pre> <xs:complexType name="XML-Produktgrenzpunkt-Table"> <xs:sequence> <xs:element name="vorherproduktgruppe" type="XML-RefList0N"/> <xs:element name="vorhertagesbedingung" type="XML-RefList0N"/> <xs:element name="vorhertageszeitbedingung" type="XML-RefList0N"/> <xs:element name="vorhertarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="vorherbewertungsbedingung" type="XML-RefList0N"/> <xs:element name="vorherverkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="nachherproduktgruppe" type="XML-RefList0N"/> <xs:element name="nachhertagesbedingung" type="XML-RefList0N"/> <xs:element name="nachhertageszeitbedingung" type="XML-RefList0N"/> <xs:element name="nachhertarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="nachherbewertungsbedingung" type="XML-RefList0N"/> </pre> |

| | |
|-----------------|---|
| | <pre> <xs:element name="nachherverkehrsmittellinienbedingung" type="XML-RefList0N" /> <xs:element name="spezialbedingung" type="XML-RefList0N" /> <xs:element name="ausnahme" type="XML-RefList0N" minOccurs="0" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Produktgrenzpunktausnahme-Table

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the structure of the complex type XML-Produktgrenzpunktausnahme-Table, which is a restriction of the XML-Produktgrenzpunkt-Table (restriction base). The structure is organized into two main groups, each containing a sequence of elements:</p> <ul style="list-style-type: none"> Group 1 (Left): <ul style="list-style-type: none"> vorherproduktgruppe vorhertagesbedingung vorhertageszeitbedingung vorherarifpunktbedingung vorherbewertungsbedingung vorherverkehrsmittellinienbedingung Group 2 (Right): <ul style="list-style-type: none"> nachherproduktgruppe nachhertagesbedingung nachhertageszeitbedingung nachherarifpunktbedingung nachherbewertungsbedingung nachherverkehrsmittellinienbedingung spezialbedingung ausnahme <p>The elements are connected by a central vertical line, indicating their sequence within the table structure.</p> |
| Type | restriction of XML-Produktgrenzpunkt-Table |
| Type hierarchy | <ul style="list-style-type: none"> XML-Produktgrenzpunkt-Table XML-Produktgrenzpunktausnahme-Table |
| Used by | Element XML-BIFAInterpretation-Item/produktgrenzpunktausnahme-table |

| | |
|-----------------|--|
| Model | vorherproduktgruppe , vorhertagesbedingung , vorhertageszeitbedingung , vorhertarifpunktbedingung , vorherbewertungsbedingung , vorherverkehrsmittellinienbedingung , nachherproduktgruppe , nachhertagesbedingung , nachhertageszeitbedingung , nachhertarifpunktbedingung , nachherbewertungsbedingung , nachherverkehrsmittellinienbedingung , spezialbedingung , ausnahme |
| Children | ausnahme, nachherbewertungsbedingung, nachherproduktgruppe, nachhertagesbedingung, nachhertageszeitbedingung, nachhertarifpunktbedingung, nachherverkehrsmittellinienbedingung, spezialbedingung, vorherbewertungsbedingung, vorherproduktgruppe, vorhertagesbedingung, vorhertageszeitbedingung, vorhertarifpunktbedingung, vorherverkehrsmittellinienbedingung |
| Source | <pre> <xs:complexType name="XML-Produktgrenzpunkt-Tabelle"> <xs:complexContent> <xs:restriction base="XML-Produktgrenzpunkt-Table"> <xs:sequence> <xs:element name="vorherproduktgruppe" type="XML-RefList0N"/> <xs:element name="vorhertagesbedingung" type="XML-RefList0N"/> <xs:element name="vorhertageszeitbedingung" type="XML-RefList0N"/> <xs:element name="vorhertarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="vorherbewertungsbedingung" type="XML-RefList0N"/> <xs:element name="vorherverkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="nachherproduktgruppe" type="XML-RefList0N"/> <xs:element name="nachhertagesbedingung" type="XML-RefList0N"/> <xs:element name="nachhertageszeitbedingung" type="XML-RefList0N"/> <xs:element name="nachhertarifpunktbedingung" type="XML-RefList0N"/> <xs:element name="nachherbewertungsbedingung" type="XML-RefList0N"/> <xs:element name="nachherverkehrsmittellinienbedingung" type="XML-RefList0N"/> <xs:element name="spezialbedingung" type="XML-RefList0N"/> <xs:element name="ausnahme" type="XML-RefList0N"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Nummerninterpretation-Pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|-----------------|--|---|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | <p>The diagram illustrates the relationship between two XML Schema types. A box labeled 'XML-Nummerninterpretation-Pool' is connected by a line to a larger box labeled 'XML-Pool (extension base)'. Inside the 'XML-Pool' box, there is a section for 'Attributes' which contains a 'key' attribute. Below the 'XML-Pool' box, there is a box for 'item' with a cardinality of '0..∞'.</p> | | | | | | | | | | | |
| Type | extension of XML-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Nummerninterpretation-Pool | | | | | | | | | | | |
| Used by | Elements | XML-PVTarifmodul/nummerninterpretation-pool, XML-RNTarifmodul/nummerninterpretation-pool, XML-Tarifmodul/nummerninterpretation-pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Nummerninterpretation-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Nummerninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema PKM.xsd | | | | | | | | | | | |

Complex Type XML-Nummerninterpretation-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-NrName-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Nummerninterpretation-Item |
| Used by | Element XML-Nummerninterpretation-Pool/item |
| Model | nr , name , nummertext-pool |
| Children | name, nr, nummertext-pool |
| Source | <pre> <xs:complexType name="XML-Nummerninterpretation-Item"> <xs:complexContent> <xs:extension base="XML-NrName-Item"> <xs:sequence> <xs:element name="nummertext-pool" type="XML-Nummerntext-Pool"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Nummerntext-Pool

| Namespace | http://vdv/ka/pkm/2 | | | | | | | | | | | |
|----------------|--|---|------|-----|--|-----|---------|----------|--|--|--|--|
| Diagram | | | | | | | | | | | | |
| Type | restriction of XML-Ausgangstext-Pool | | | | | | | | | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Ausgangstext-Pool<ul style="list-style-type: none">XML-Nummerntext-Pool | | | | | | | | | | | |
| Used by | Element | XML-Nummerninterpretation-Item/nummerntext-pool | | | | | | | | | | |
| Model | item* | | | | | | | | | | | |
| Children | item | | | | | | | | | | | |
| Attributes | <table><thead><tr><th>QName</th><th>Type</th><th>Use</th><th></th></tr></thead><tbody><tr><td>key</td><td>XML-Ref</td><td>required</td><td></td></tr></tbody></table> | QName | Type | Use | | key | XML-Ref | required | | | | |
| QName | Type | Use | | | | | | | | | | |
| key | XML-Ref | required | | | | | | | | | | |
| Source | <pre><xs:complexType name="XML-Nummerntext-Pool"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Pool"> <xs:sequence> <xs:element name="item" type="XML-Nummerntext-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation></pre> | | | | | | | | | | | |

| | |
|-----------------|---|
| | <pre> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Nummerntext-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Ausgangstext-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Ausgangstext-Item XML-Nummerntext-Item |
| Used by | Element XML-Nummerntext-Pool/item |
| Model | nr , name , text-matrix |
| Children | name, nr, text-matrix |
| Source | <pre> <xs:complexType name="XML-Nummerntext-Item"> <xs:complexContent> <xs:restriction base="XML-Ausgangstext-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Bitleisteninterpretation-Pool

| | |
|-----------|-----------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-Pool |

| | | | | |
|-----------------|--|---------|----------|--|
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Bitleisteninterpretation-Pool | | | |
| Used by | Elements XML-PVTarifmodul/bitleisteninterpretation-pool, XML-Tarifmodul/bitleisteninterpretation-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Bitleisteninterpretation-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Bitleisteninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Bitleisteninterpretation-Item

| | | | | |
|-----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Name-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-Bitleisteninterpretation-Item | | | |
| Used by | Element XML-Bitleisteninterpretation-Pool/item | | | |
| Model | name , tarifpunkt | | | |
| Children | name, tarifpunkt | | | |
| Source | <pre> <xs:complexType name="XML-Bitleisteninterpretation-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="tarifpunkt" type="XML-RefList1N" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Raumnummerninterpretation-Pool

| | | | | |
|-----------|---------------------|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |

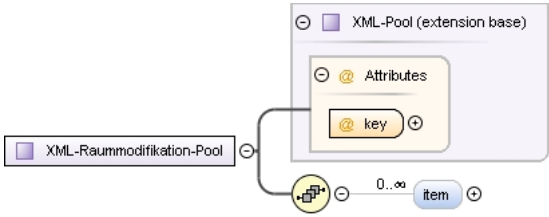
| | | | | |
|-----------------|--|--|----------|--|
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-Raumnummerninterpretation-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/raumnummerninterpretation-pool, XML-Tarifmodul/raumnummerninterpretation-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Raumnummerninterpretation-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Raumnummerninterpretation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Raumnummerninterpretation-Item

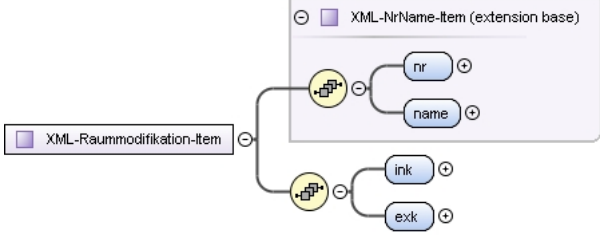
| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | <p>The diagram illustrates the relationship between two XML Schema types. A box labeled 'XML-Raumnummerninterpretation-Item' is connected by a line with an open circle to a larger box labeled 'XML-Name-Item (extension base)'. Inside the 'XML-Name-Item' box, there is a sequence of two elements: 'name' and 'raummodifikation-pool', each represented by a cylinder icon with a plus sign.</p> |
| Type | extension of XML-Name-Item |
| Type hierarchy | <ul style="list-style-type: none">XML-Name-ItemXML-Raumnummerninterpretation-Item |
| Used by | Element XML-Raumnummerninterpretation-Pool/item |
| Model | name , raummodifikation-pool |
| Children | name, raummodifikation-pool |
| Source | <pre><xs:complexType name="XML-Raumnummerninterpretation-Item"> <xs:complexContent> <xs:extension base="XML-Name-Item"> <xs:sequence> <xs:element name="raummodifikation-pool" type="XML-Raummodifikation-Pool" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Raummodifikation-Pool

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

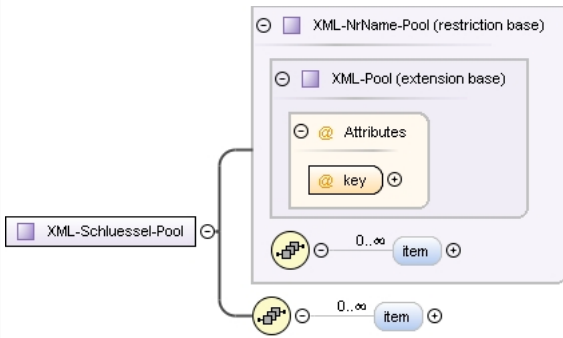
| | | | | |
|-----------------|--|---------|----------|--|
| Diagram |  | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool <ul style="list-style-type: none"> XML-Raummodifikation-Pool | | | |
| Used by | Element XML-Raumnummerninterpretation-Item/raummodifikation-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Raummodifikation-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Raummodifikation-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implizites key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Raummodifikation-Item

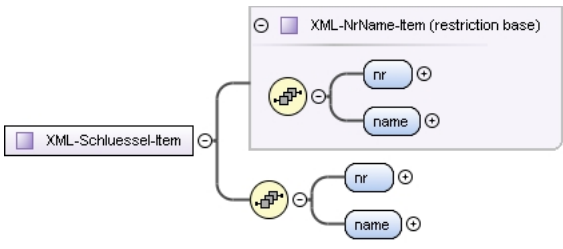
| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | extension of XML-NrName-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item <ul style="list-style-type: none"> XML-Raummodifikation-Item | | | |
| Used by | Element XML-Raummodifikation-Pool/item | | | |
| Model | nr , name , ink , exk | | | |
| Children | exk , ink , name , nr | | | |
| Source | <pre> <xs:complexType name="XML-Raummodifikation-Item"> <xs:complexContent> <xs:extension base="XML-NrName-Item"> <xs:sequence> <xs:element name="ink" type="XML-RefSet0N"/> <xs:element name="exk" type="XML-RefSet0N"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Schluessel-Pool

| | | | | |
|------------------|--|---|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | restriction of XML-NrName-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none">XML-Pool<ul style="list-style-type: none">XML-NrName-Pool<ul style="list-style-type: none">XML-Schluessel-Pool | | | |
| Used by | Elements | XML-PVTarifmodul/schluessel-pool, XML-RNTarifmodul/schluessel-pool, XML-Tarifmodul/schlues-sel-pool | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Schluessel-Pool"> <xs:complexContent> <xs:restriction base="XML-NrName-Pool"> <xs:sequence> <xs:element name="item" type="XML-Schluessel-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut, Sortiert nach erstem Element}</ xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |
| Schema loca-tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Schluessel-Item

| | | | | |
|----------------|--|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | restriction of XML-NrName-Item | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item <ul style="list-style-type: none"> XML-Schluessel-Item | | | |

| | |
|-----------------|---|
| Used by | Element XML-Schluessel-Pool/item |
| Model | nr , name |
| Children | name, nr |
| Source | <pre> <xs:complexType name="XML-Schluessel-Item"> <xs:complexContent> <xs:restriction base="XML-NrName-Item"> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

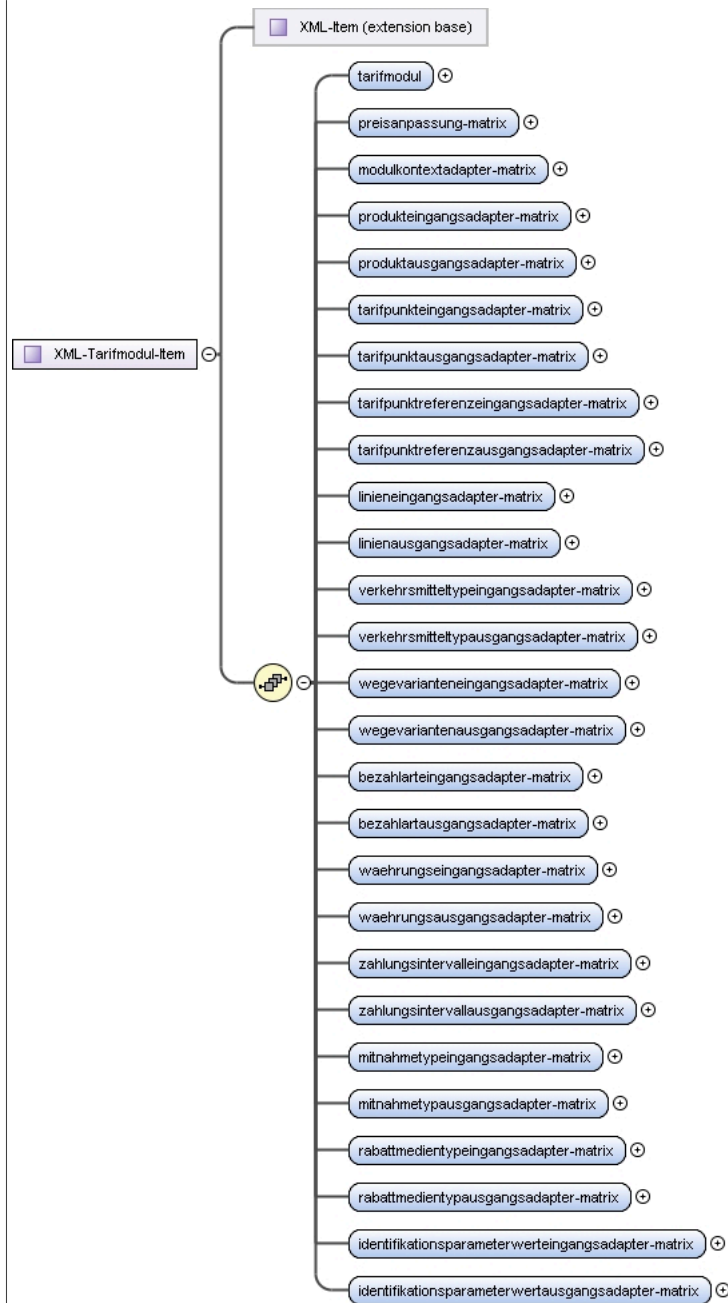
Complex Type XML-Tarifmodul-Pool

| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Type | extension of XML-Pool | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Pool XML-Tarifmodul-Pool | | | |
| Used by | Elements XML-RNTarifmodul/tarifmodul-pool, XML-Tarifmodul/tarifmodul-pool | | | |
| Model | item* | | | |
| Children | item | | | |
| Attributes | QName | Type | Use | |
| | key | XML-Ref | required | |
| Source | <pre> <xs:complexType name="XML-Tarifmodul-Pool"> <xs:complexContent> <xs:extension base="XML-Pool"> <xs:sequence> <xs:element name="item" type="XML-Tarifmodul-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Implies key Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Tarifmodul-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|


Diagram



| | |
|----------------|--|
| Type | extension of XML-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Item XML-Tarifmodul-Item |
| Used by | Element XML-Tarifmodul-Pool/item |
| Model | tarifmodul , preisanpassung-matrix , modulkontextadapter-matrix , produkteingangsadapter-matrix , produktausgangsadapter-matrix , tarifpunkteingangsadapter-matrix , tarifpunktausgangsadapter-matrix , tarifpunktreferenzeingangsadapter-matrix , tarifpunktreferenzausgangsadapter-matrix , linieneingangsadapter-matrix , linienausgangsadapter-matrix , verkehrsmitteltypingangsadapter-matrix , verkehrsmittelpausgangsadapter-matrix , wegevarianteneingangsadapter-matrix , wegevariantenausgangsadapter-matrix , bezahlarteingangsadapter-matrix , bezahlartausgangsadapter-matrix , waehrungseingangsadapter-matrix , waehrungsausgangsadapter-matrix , zahlungsintervalleingangsadapter-matrix , zahlungsintervallausgangsadapter-matrix , mitnahmetypingangsadapter-matrix , mitnahmetypausgangsadapter-matrix , rabattmedientypingangsadapter-matrix , rabattmedientypausgangsadapter-matrix , identifikationsparameterwerteingangsadapter-matrix , identifikationsparameterwertausgangsadapter-matrix |
| Children | bezahlartausgangsadapter-matrix, bezahlarteingangsadapter-matrix, identifikationsparameterwertausgangsadapter-matrix, identifikationsparameterwerteingangsadapter-matrix, linienausgangsadapter-matrix, linieneingangsadapter-matrix, mitnahmetypausgangsadapter-matrix, mitnahmetypingangsadapter-matrix, modulkontextadapter-matrix, preisanpassung-matrix, produktausgangsadapter-matrix, produkteingangsadapter-matrix, rabattmedientypausgangsadapter-matrix, rabattmedientypingangsadapter-matrix |

| | |
|-----------------|--|
| | gangsadapter-matrix, tarifmodul, tarifpunktausgangsadapter-matrix, tarifpunkteingangsadapter-matrix, tarifpunktreferenzausgangsadapter-matrix, tarifpunktreferenzeingangsadapter-matrix, verkehrsmitteltypausgangsadapter-matrix, verkehrsmitteltypeingangsadapter-matrix, wachrungsausgangsadapter-matrix, wachrungseingangsadapter-matrix, wegevariantenausgangsadapter-matrix, wegevarianteneingangsadapter-matrix, zahlungsintervallausgangsadapter-matrix, zahlungsintervalleingangsadapter-matrix |
| Source | <pre> <xs:complexType name="XML-Tarifmodul-Item"> <xs:complexContent> <xs:extension base="XML-Item"> <xs:sequence> <xs:element name="tarifmodul" type="XML-PVTarifmodul" /> <xs:element name="preisanpassung-matrix" type="XML-Preisanpassung-Matrix" /> <xs:element name="modulkontextadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="produkteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="produktausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> <xs:element name="tarifpunkteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="tarifpunktausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> <xs:element name="tarifpunktreferenzeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="tarifpunktreferenzausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> <xs:element name="linieneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="linienausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> <xs:element name="verkehrsmitteltypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="verkehrsmitteltypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> <xs:element name="wegevarianteneingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="wegevariantenausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> <xs:element name="bezahlarteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="bezahlartausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> <xs:element name="wachrungseingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="wachrungsausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> <xs:element name="zahlungsintervalleingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="zahlungsintervallausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> <xs:element name="mitnahmetypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="mitnahmetypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> <xs:element name="rabattmedientypeingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="rabattmedientypausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> <xs:element name="identifikationsparameterwerteingangsadapter-matrix" type="XML-Eingangsadapter-Matrix" /> <xs:element name="identifikationsparameterwertausgangsadapter-matrix" type="XML-Ausgangsadapter-Matrix" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  XML-Item |
| Used by | Complex Type XML-Tarifmodul-Item |
| Source | <pre><xs:complexType name="XML-Item" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-PVTarifmodul

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram

XML-Tarifmodul (restriction base)



| | |
|----------------|---|
| Type | restriction of XML-Tarifmodul |
| Type hierarchy | <ul style="list-style-type: none"> XML-Tarifmodul XML-PVTTarifmodul |
| Used by | Elements XML-Tarifmodul-Item/tarifmodul, pvtm |
| Model | version , herausgeber , fachablauf , text-matrix , sprache-pool , eingangsschnittstelle-pool , ausgangsschnittstelle-pool , ausgangskontext-pool , datentabelle-pool , schritt-pool , variable-pool , funktion-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , ausgangsdaten-pool , ausgangsdatenfamilie-pool , organisation-pool , efmprodukt-pool , tarifprodukt-pool , fremdprodukt-pool , produktgruppe-pool , kontingentierung-pool , nachfolgekriterium-pool , abhaengigkeitskriterium-pool , identifikationsparameter-pool , tarifpunkt-pool , tarifpunktgruppe-pool , tarifpunktreferenz-pool , zuordnungstyp-pool , zuordnungsdaten-matrix , zuordnungsdaten-matrix , bewertungsausnahme-matrix , linie-pool , verkehrsmitteltyp-pool , verkehrsmittellinienbezug-pool , bezahlart-pool , wachrung-pool , zahlungsintervall-pool , mitnahmetyp-pool , rabattmedientyp-pool , modulkontext-pool , spezialbedingung-pool , tagesbedingung-pool , tageszeitbedingung-pool , zeitraumbedingung-pool , tarifpunktbedingung-pool , bewertungsbedingung-pool , geosegmentbedingung-pool , verkehrsmittellinienbedingung-pool , bezahlartbedingung-pool , zahlungsintervallbedingung-pool , mitnahmebedingung-pool , tarifpunktbedingung-pool , modulkontextbedingung-pool , bifainterpretation-pool , nummerninterpretation-pool , bitleisteninterpretation-pool , raumnummerninterpretation-pool , schlussel-pool , kommentar-pool , signatur , annotation |
| Children | abhaengigkeitskriterium-pool , annotation , ausgangsdaten-pool , ausgangsdatenfamilie-pool , ausgangskontext-pool , ausgangsschnittstelle-pool , ausnahme-pool , auswahldaten-pool , auswahloption-pool , bewertungsausnahme-matrix , bewertungsbedingung-pool , bewertungsdaten-matrix , bewertungsdaten-pool , bewertungstyp-pool , bezahlart-pool , bezahlartbedingung-pool , bifainterpretation-pool , bitleisteninterpretation-pool , datentabelle-pool , efmprodukt-pool , eingangsschnittstelle-pool , fachablauf , fremdprodukt-pool , funktion-pool , geosegmentbedingung-pool , herausgeber , identifikationsparameter-pool , kommentar-pool , kontingentierung-pool , linie-pool , mitnahmebedingung-pool , mitnahmetyp-pool , modulkontext-pool , modulkontextbedingung-pool , nachfolgekriterium-pool , nummerninterpretation-pool , organisation-pool , produktgruppe-pool , rabattmedienbedingung-pool , rabattmedientyp-pool , raumnummerninterpretation-pool , schlussel-pool , schritt-pool , signatur , spezialbedingung-pool , sprache-pool , tagesbedingung-pool , tageszeitbedingung-pool , tarifprodukt-pool , tarifpunkt-pool , tarifpunktbedingung-pool , tarifpunktgruppe-pool , tarifpunktreferenz-pool , text-matrix , variable-pool , verkehrsmittellinienbezug-pool , verkehrsmitteltyp-pool , version , wachrung-pool , wegevariante-pool , zahlungsintervall-pool , zahlungsintervallbedingung-pool , zeitraumbedingung-pool , zuordnungsdaten-matrix , zuordnungsdaten-matrix , zuordnungstyp-pool |
| Source | <pre> <xs:complexType name="XML-PVTTarifmodul"> <xs:complexContent> <xs:restriction base="XML-Tarifmodul"> <xs:sequence> <xs:element name="version" type="XML-Version-Part"/> <xs:element name="herausgeber" type="XML-Organisation-Part"/> <xs:element name="fachablauf" type="XML-PVFachablauf-Part"/> <xs:element name="text-matrix" type="XML-Ausgangstext-Matrix"/> <xs:element name="sprache-pool" type="XML-Sprache-Pool"/> <xs:element name="eingangsschnittstelle-pool" type="XML-Eingangsschnittstelle-Pool"/> <xs:element name="ausgangsschnittstelle-pool" type="XML-Ausgangsschnittstelle-Pool"/> <xs:element name="ausgangskontext-pool" type="XML-Ausgangskontext-Pool"/> <xs:element name="datentabelle-pool" type="XML-Datentabelle-Pool"/> <xs:element name="schritt-pool" type="XML-Schritt-Pool"/> <xs:element name="variable-pool" type="XML-Variable-Pool"/> <xs:element name="funktion-pool" type="XML-Funktion-Pool"/> <xs:element name="ausnahme-pool" type="XML-Ausnahme-Pool"/> <xs:element name="auswahldaten-pool" type="XML-Auswahldaten-Pool"/> <xs:element name="auswahloption-pool" type="XML-Auswahloption-Pool"/> <xs:element name="ausgangsdaten-pool" type="XML-Ausgangsdaten-Pool"/> <xs:element name="ausgangsdatenfamilie-pool" type="XML-Ausgangsdatenfamilie-Pool"/> <xs:element name="organisation-pool" type="XML-Organisation-Pool"/> <xs:element name="efmprodukt-pool" type="XML-EFMProdukt-Pool"/> <xs:element name="tarifprodukt-pool" type="XML-Tarifprodukt-Pool"/> <xs:element name="fremdprodukt-pool" type="XML-Fremdprodukt-Pool"/> <xs:element name="produktgruppe-pool" type="XML-Produktgruppe-Pool"/> <xs:element name="kontingentierung-pool" type="XML-Kontingentierung-Pool"/> <xs:element name="nachfolgekriterium-pool" type="XML-Nachfolgekriterium-Pool"/> <xs:element name="abhaengigkeitskriterium-pool" type="XML-Abhaengigkeitskriterium-Pool"/> <xs:element name="identifikationsparameter-pool" type="XML-Identifikationsparameter-Pool"/> <xs:element name="tarifpunkt-pool" type="XML-Tarifpunkt-Pool"/> <xs:element name="tarifpunktgruppe-pool" type="XML-Tarifpunktgruppe-Pool"/> <xs:element name="tarifpunktreferenz-pool" type="XML-Tarifpunktreferenz-Pool"/> <xs:element name="zuordnungstyp-pool" type="XML-Zuordnungstyp-Pool"/> <xs:element name="zuordnungsdaten-matrix" type="XML-Zuordnungsdaten-Matrix"/> <xs:element name="zuordnungsdaten-matrix" type="XML-Zuordnungsdaten-Matrix"/> <xs:element name="wegevariante-pool" type="XML-Wegevariante-Pool"/> <xs:element name="bewertungstyp-pool" type="XML-Bewertungstyp-Pool"/> <xs:element name="bewertungsdaten-pool" type="XML-Bewertungsdaten-Pool"/> <xs:element name="bewertungsdaten-matrix" type="XML-Bewertungsdaten-Matrix"/> <xs:element name="bewertungsausnahme-matrix" type="XML-Bewertungsausnahme-Matrix"/> <xs:element name="linie-pool" type="XML-Linie-Pool"/> <xs:element name="verkehrsmitteltyp-pool" type="XML-Verkehrsmitteltyp-Pool"/> <xs:element name="verkehrsmittellinienbezug-pool" type="XML-Verkehrsmittellinienbezug-Pool"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |

| | |
|-----------------|---|
| | <pre> <xs:element name="bezahlart-pool" type="XML-Bezahlart-Pool"/> <xs:element name="waehrung-pool" type="XML-Waehrung-Pool"/> <xs:element name="zahlungsintervall-pool" type="XML-Zahlungsintervall-Pool"/> <xs:element name="mitnahmetyp-pool" type="XML-Mitnahmetyp-Pool"/> <xs:element name="rabattmedientyp-pool" type="XML-Rabattmedientyp-Pool"/> <xs:element name="modulkontext-pool" type="XML-Modulkontext-Pool"/> <xs:element name="spezialbedingung-pool" type="XML-Spezialbedingung-Pool"/> <xs:element name="tagesbedingung-pool" type="XML-Tagesbedingung-Pool"/> <xs:element name="tageszeitbedingung-pool" type="XML-Tageszeitbedingung-Pool"/> <xs:element name="zeitraumbedingung-pool" type="XML-Zeitraumbedingung-Pool"/> <xs:element name="tarifpunktbedingung-pool" type="XML-Tarifpunktbedingung-Pool"/> <xs:element name="bewertungsbedingung-pool" type="XML-Bewertungsbedingung-Pool"/> <xs:element name="geosegmentbedingung-pool" type="XML-Geosegmentbedingung-Pool"/> <xs:element name="verkehrsmittellinienbedingung-pool" type="XML-Verkehrsmittellinienbedingung-Pool"/> <xs:element name="bezahlartbedingung-pool" type="XML-Bezahlartbedingung-Pool"/> <xs:element name="zahlungsintervallbedingung-pool" type="XML-Zahlungsintervallbedingung-Pool"/> <xs:element name="mitnahmebedingung-pool" type="XML-Mitnahmebedingung-Pool"/> <xs:element name="rabattmedienbedingung-pool" type="XML-Rabattmedienbedingung-Pool"/> <xs:element name="modulkontextbedingung-pool" type="XML-Modulkontextbedingung-Pool"/> <xs:element name="bifainterpretation-pool" type="XML-BIFAInterpretation-Pool"/> <xs:element name="nummerninterpretation-pool" type="XML-Nummerninterpretation-Pool"/> <xs:element name="bitleisteninterpretation-pool" type="XML-Bitleisteninterpretation-Pool"/> <xs:element name="raumnummerninterpretation-pool" type="XML-Raumnummerninterpretation-Pool"/> > <xs:element name="schluessel-pool" type="XML-Schluessel-Pool"/> <xs:element name="kommentar-pool" type="XML-Kommentar-Pool"/> <xs:element name="signatur" type="XML-Signatur-Part"/> <xs:element name="annotation" type="XML-Annotation-Part"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Kommentar-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-PVTTarifmodul/kommentar-pool, XML-RNTarifmodul/kommentar-pool, XML-Tarifmodul/kommentar-pool |
| Model | item* |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Kommentar-Pool"> <xs:sequence> <xs:element name="item" type="XML-Kommentar-Item" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Kommentar-Item

| | |
|-----------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Kommentar-Pool/item |
| Model | text , item |
| Children | item, text |
| Source | <pre> <xs:complexType name="XML-Kommentar-Item"> <xs:sequence> <xs:element name="text" type="XML-StringValue"/> <xs:element name="item" type="XML-RefSet1N"/> </xs:sequence> </xs:complexType> </pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Signatur-Part

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-PVTarifmodul/signatur, XML-RNTarifmodul/signatur, XML-Tarifmodul/signatur |
| Model | type , data |
| Children | data, type |
| Source | <pre><xs:complexType name="XML-Signatur-Part"> <xs:sequence minOccurs="0" maxOccurs="unbounded"> <xs:element name="type" type="XML-StringValue"/> <xs:element name="data" type="XML-BinaryValue"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Annotation-Part

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Elements XML-PVTarifmodul/annotation, XML-RNTarifmodul/annotation, XML-Tarifmodul/annotation |
| Model | data* |
| Children | data |
| Source | <pre><xs:complexType name="XML-Annotation-Part"> <xs:sequence> <xs:element name="data" type="XML-BinaryValue" minOccurs="0" maxOccurs="unbounded"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-PVFachablauf-Part

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram | |
| Type | restriction of XML-Fachablauf-Part |
| Type hierarchy | <ul style="list-style-type: none"> XML-Fachablauf-Part XML-PVFachablauf-Part |
| Used by | Element XML-PVTarifmodul/fachablauf |
| Model | kontrollstart , erfassungsstart , anpassungsstart , darstellungsstart , produktermittlungsstart , transaktionsauswertungsstart , pruefungin , pruefungvor , pruefungnach |
| Children | anpassungsstart , darstellungsstart , erfassungsstart , kontrollstart , produktermittlungsstart , pruefungin , pruefungnach , pruefungvor , transaktionsauswertungsstart |
| Source | <pre> <xs:complexType name="XML-PVFachablauf-Part"> <xs:complexContent> <xs:restriction base="XML-Fachablauf-Part"> <xs:sequence> <xs:element name="kontrollstart" type="XML-Ref11"/> <xs:element name="erfassungsstart" type="XML-Ref11"/> <xs:element name="anpassungsstart" type="XML-Ref11"/> <xs:element name="darstellungsstart" type="XML-Ref11"/> <xs:element name="produktermittlungsstart" type="XML-Ref11"/> <xs:element name="transaktionsauswertungsstart" type="XML-Ref11"/> <xs:element name="pruefungin" type="XML-Ref01"/> <xs:element name="pruefungvor" type="XML-DurationValue"/> <xs:element name="pruefungnach" type="XML-DurationValue"/> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Preisanpassung-Matrix


| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |

| | |
|-----------------|---|
| Used by | Element XML-Tarifmodul-Item/preisanpassung-matrix |
| Model | a* |
| Children | a |
| Source | <pre><xs:complexType name="XML-Preisanpassung-Matrix"> <xs:sequence> <xs:element name="a" type="XML-Preisanpassung-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Preisanpassung-Entry

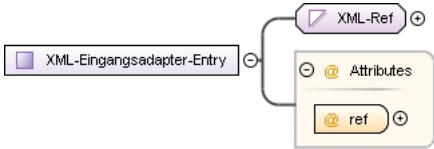
| | | | | |
|-----------------|---|-----------------------------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Used by | Element | XML-Preisanpassung-Matrix/a | | |
| Model | betrag+ | | | |
| Children | betrag | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Preisanpassung-Entry"> <xs:sequence> <xs:element name="betrag" type="XML-IntegerValue" maxOccurs="unbounded" /> </xs:sequence> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Eingangsadapter-Matrix

| | | | |
|-----------|---|--|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram |  | | |
| Used by | Elements | XML-Tarifmodul-Item/bezahlarteingangsadapter-matrix, XML-Tarifmodul-Item/identifikationsparameterwerteingangsadapter-matrix, XML-Tarifmodul-Item/linieneingangsadapter-matrix, XML-Tarifmodul-Item/mitnahmetypeingangsadapter-matrix, XML-Tarifmodul-Item/modulkontextadapter-matrix, XML-Tarifmodul-Item/produkteingangsadapter-matrix, XML-Tarifmodul-Item/rabattmedientypeingangsadapter-matrix, XML-Tarifmodul-Item/tarifpunkteingangsadapter-matrix, XML-Tarifmodul-Item/tarifpunktreferenzeingangsadapter-matrix, XML-Tarifmodul-Item/verkehrsmitteltypeingangsadapter-matrix, XML-Tarifmodul-Item/wachrungseingangsadapter-matrix, XML-Tarifmodul-Item/wegevarianteneingangsadapter-matrix, XML-Tarifmodul-Item/zahlungsintervalleingangsadapter-matrix | |
| Model | e* | | |
| Children | e | | |
| Source | <pre><xs:complexType name="XML-Eingangsadapter-Matrix"> <xs:sequence> <xs:element name="e" type="XML-Eingangsadapter-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Eingangsadapter-Entry


| | | | | |
|-----------------|--|---------|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | extension of XML-Ref | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int XML-Ref XML-Eingangsadapter-Entry | | | |
| Used by | Element XML-Eingangsadapter-Matrix/e | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Eingangsadapter-Entry"> <xs:simpleContent> <xs:extension base="XML-Ref"> <xs:attribute name="ref" type="XML-Ref" use="required"/> </xs:extension> </xs:simpleContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Ausgangsadapter-Matrix

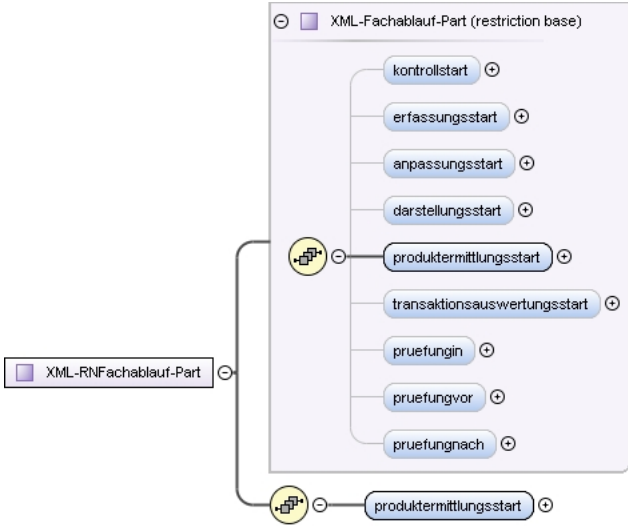
| | | | |
|-----------------|---|--|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Used by | Elements | XML-Tarifmodul-Item/bezahlartausgangsadapter-matrix, XML-Tarifmodul-Item/identifikationsparameterwertausgangsadapter-matrix, XML-Tarifmodul-Item/linienausgangsadapter-matrix, XML-Tarifmodul-Item/mitnahmetypausgangsadapter-matrix, XML-Tarifmodul-Item/produktausgangsadapter-matrix, XML-Tarifmodul-Item/rabattmedientypausgangsadapter-matrix, XML-Tarifmodul-Item/tarifpunkttausgangsadapter-matrix, XML-Tarifmodul-Item/tarifpunktreferenzausgangsadapter-matrix, XML-Tarifmodul-Item/verkehrsmitteltypausgangsadapter-matrix, XML-Tarifmodul-Item/wachungsausgangsadapter-matrix, XML-Tarifmodul-Item/wegevariantenausgangsadapter-matrix, XML-Tarifmodul-Item/zahlungsintervallausgangsadapter-matrix | |
| Model | a* | | |
| Children | a | | |
| Source | <pre><xs:complexType name="XML-Ausgangsadapter-Matrix"> <xs:sequence> <xs:element name="a" type="XML-Ausgangsadapter-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Complex Type XML-Ausgangsadapter-Entry

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|-------------|------------|--|
| Diagram |  | | | |
| Type | extension of XML-Ref | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:int <ul style="list-style-type: none"> XML-Ref <ul style="list-style-type: none"> XML-Ausgangsadapter-Entry | | | |
| Used by | Element XML-Ausgangsadapter-Matrix/a | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Ref | required | |
| Source | <pre><xs:complexType name="XML-Ausgangsadapter-Entry"> <xs:simpleContent> <xs:extension base="XML-Ref"> <xs:attribute name="ref" type="XML-Ref" use="required" /> </xs:extension> </xs:simpleContent> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-RNFachablauf-Part

| | | | | |
|----------------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram |  | | | |
| Type | restriction of XML-Fachablauf-Part | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-Fachablauf-Part <ul style="list-style-type: none"> XML-RNFachablauf-Part | | | |
| Used by | Element XML-RNTarifmodul/fachablauf | | | |
| Model | produktermittlungsstart | | | |
| Children | produktermittlungsstart | | | |
| Source | <pre><xs:complexType name="XML-RNFachablauf-Part"> <xs:complexContent> <xs:restriction base="XML-Fachablauf-Part"> <xs:sequence> <xs:element name="produktermittlungsstart" type="XML-Ref11" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> | | | |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |
|-----------------|---|

Complex Type XML-Produktgruppe-Item

| | |
|-----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-NameGruppe-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-Name-Item XML-NameGruppe-Item XML-Produktgruppe-Item |
| Model | name , element |
| Children | element, name |
| Source | <pre> <xs:complexType name="XML-Produktgruppe-Item"> <xs:complexContent> <xs:restriction base="XML-NameGruppe-Item"> <xs:sequence> <xs:sequence> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="element" type="XML-RefSet0N"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Testanfrage

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Testdaten |
| Type hierarchy | <ul style="list-style-type: none"> XML-Testdaten XML-Testanfrage |

| | |
|-----------------|---|
| Used by | Element pkm-testanfrage |
| Model | zeitpunkt , bemerkung , testfall-pool , testmodul-pool |
| Children | bemerkung, testfall-pool, testmodul-pool, zeitpunkt |
| Source | <pre> <xs:complexType name="XML-Testanfrage"> <xs:complexContent> <xs:restriction base="XML-Testdaten"> <xs:sequence> <xs:element name="zeitpunkt" type="XML-DatetimeValue" /> <xs:element name="bemerkung" type="XML-StringValue" /> <xs:element name="testfall-pool" type="XML-Testfallanfrage-Pool" /> <xs:element name="testmodul-pool" type="XML-Testmodul-Pool" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Testdaten

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Complex Types XML-Testanfrage, XML-Testergebnis |
| Model | zeitpunkt , bemerkung , testfall-pool , testmodul-pool |
| Children | bemerkung, testfall-pool, testmodul-pool, zeitpunkt |
| Source | <pre> <xs:complexType name="XML-Testdaten"> <xs:sequence> <xs:element name="zeitpunkt" type="XML-DatetimeValue" /> <xs:element name="bemerkung" type="XML-StringValue" /> <xs:element name="testfall-pool" type="XML-Testfalldaten-Pool" /> <xs:element name="testmodul-pool" type="XML-Testmodul-Pool" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Testfalldaten-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | Element XML-Testdaten/testfall-pool |
| | Complex Types XML-Testfallanfrage-Pool, XML-Testfallergebnis-Pool |
| Model | item+ |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Testfalldaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-Testfalldaten-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Testfalldaten-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | | |
|-----------------|--|---------|-----------------------------|---------------|---|
| Diagram | | | | | |
| Type | extension of XML-NrName-Item | | | | |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Testfalldaten-Item | | | | |
| Used by | <table border="1"> <tr> <td>Element</td> <td>XML-Testfalldaten-Pool/item</td> </tr> <tr> <td>Complex Types</td> <td>XML-Testfallanfrage-Item, XML-Testfallergebnis-Item</td> </tr> </table> | Element | XML-Testfalldaten-Pool/item | Complex Types | XML-Testfallanfrage-Item, XML-Testfallergebnis-Item |
| Element | XML-Testfalldaten-Pool/item | | | | |
| Complex Types | XML-Testfallanfrage-Item, XML-Testfallergebnis-Item | | | | |
| Model | nr , name , status{0,1} , bemerkung{0,1} , eingabewert-matrix , ausgabewert-matrix{0,1} , erwartungswert-matrix | | | | |
| Children | ausgabewert-matrix, bemerkung, eingabewert-matrix, erwartungswert-matrix, name, nr, status | | | | |
| Source | <pre> <xs:complexType name="XML-Testfalldaten-Item"> <xs:complexContent> <xs:extension base="XML-NrName-Item"> <xs:sequence> <xs:element name="status" type="XML-IntegerValue" minOccurs="0"/> <xs:element name="bemerkung" type="XML-StringValue" minOccurs="0"/> <xs:element name="eingabewert-matrix" type="XML-Testdaten-Matrix"/> <xs:element name="ausgabewert-matrix" type="XML-Testdaten-Matrix" minOccurs="0"/> <xs:element name="erwartungswert-matrix" type="XML-Testdaten-Matrix"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | | |

Complex Type XML-Testdaten-Matrix

| | | | |
|-----------------|--|----------|--|
| Namespace | http://vdv/ka/pkm/2 | | |
| Diagram | | | |
| Used by | <table border="1"> <tr> <td>Elements</td> <td>XML-Testfallanfrage-Item/eingabewert-matrix, XML-Testfallanfrage-Item/erwartungswert-matrix, XML-Testfalldaten-Item/ausgabewert-matrix, XML-Testfalldaten-Item/eingabewert-matrix, XML-Testfallergebnis-Item/ausgabewert-matrix, XML-Testfallergebnis-Item/eingabewert-matrix, XML-Testfallergebnis-Item/erwartungswert-matrix</td> </tr> </table> | Elements | XML-Testfallanfrage-Item/eingabewert-matrix, XML-Testfallanfrage-Item/erwartungswert-matrix, XML-Testfalldaten-Item/ausgabewert-matrix, XML-Testfalldaten-Item/eingabewert-matrix, XML-Testfallergebnis-Item/ausgabewert-matrix, XML-Testfallergebnis-Item/eingabewert-matrix, XML-Testfallergebnis-Item/erwartungswert-matrix |
| Elements | XML-Testfallanfrage-Item/eingabewert-matrix, XML-Testfallanfrage-Item/erwartungswert-matrix, XML-Testfalldaten-Item/ausgabewert-matrix, XML-Testfalldaten-Item/eingabewert-matrix, XML-Testfallergebnis-Item/ausgabewert-matrix, XML-Testfallergebnis-Item/eingabewert-matrix, XML-Testfallergebnis-Item/erwartungswert-matrix | | |
| Model | schnittstelle* | | |
| Children | schnittstelle | | |
| Source | <pre> <xs:complexType name="XML-Testdaten-Matrix"> <xs:sequence> <xs:element name="schnittstelle" type="XML-Testdatenschnittstelle-Entry" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> | | |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | |

Complex Type XML-Testdatenschnittstelle-Entry

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | | | | |
|-----------------|---|------------------|------------|--|
| Diagram | | | | |
| Used by | Element XML-Testdaten-Matrix/schnittstelle | | | |
| Model | parameter+ | | | |
| Children | parameter | | | |
| Attributes | QName | Type | Use | |
| | id | xs:unsignedShort | required | |
| Source | <pre> <xs:complexType name="XML-Testdatenschnittstelle-Entry"> <xs:sequence> <xs:element name="parameter" type="XML-Testdatenparameter-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="id" type="xs:unsignedShort" use="required"/> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Testdatenparameter-Entry

| | | | | |
|-----------------|---|------------------|------------|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Used by | Element XML-Testdatenschnittstelle-Entry/parameter | | | |
| Model | ablauf+ | | | |
| Children | ablauf | | | |
| Attributes | QName | Type | Use | |
| | nr | xs:unsignedShort | required | |
| Source | <pre> <xs:complexType name="XML-Testdatenparameter-Entry"> <xs:sequence> <xs:element name="ablauf" type="XML-Testdatenablauf-Entry" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Attribut (lexikographisch)}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> <xs:attribute name="nr" type="xs:unsignedShort" use="required"/> </xs:complexType> </pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Testdatenablauf-Entry

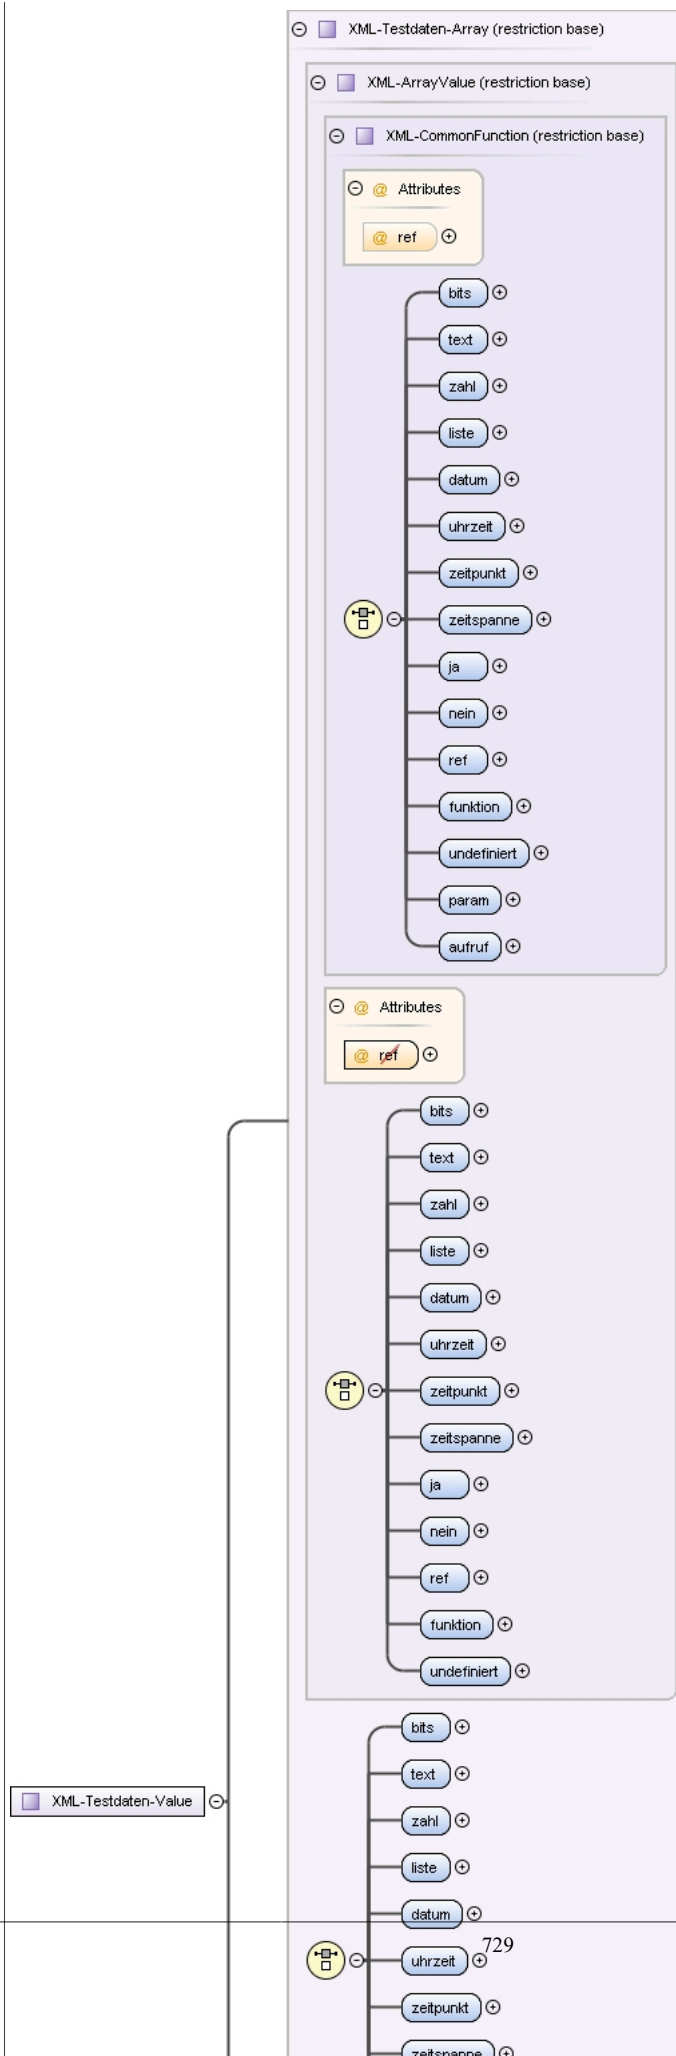
| | | | | |
|-----------|---|--|--|--|
| Namespace | http://vdv/ka/pkm/2 | | | |
| Diagram | | | | |
| Used by | Element XML-Testdatenparameter-Entry/ablauf | | | |
| Model | wert+ | | | |

| | | | | |
|-----------------|--|--------------------|------------|--|
| Children | wert | | | |
| Attributes | QName | Type | Use | |
| | ref | XML-Testablauf-Ref | required | |
| Source | <pre><xs:complexType name="XML-Testdatenablauf-Entry"> <xs:sequence> <xs:element name="wert" type="XML-Testdaten-Value" maxOccurs="unbounded" /> </xs:sequence> <xs:attribute name="ref" type="XML-Testablauf-Ref" use="required" /> </xs:complexType></pre> | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | | | |

Complex Type XML-Testdaten-Value

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram

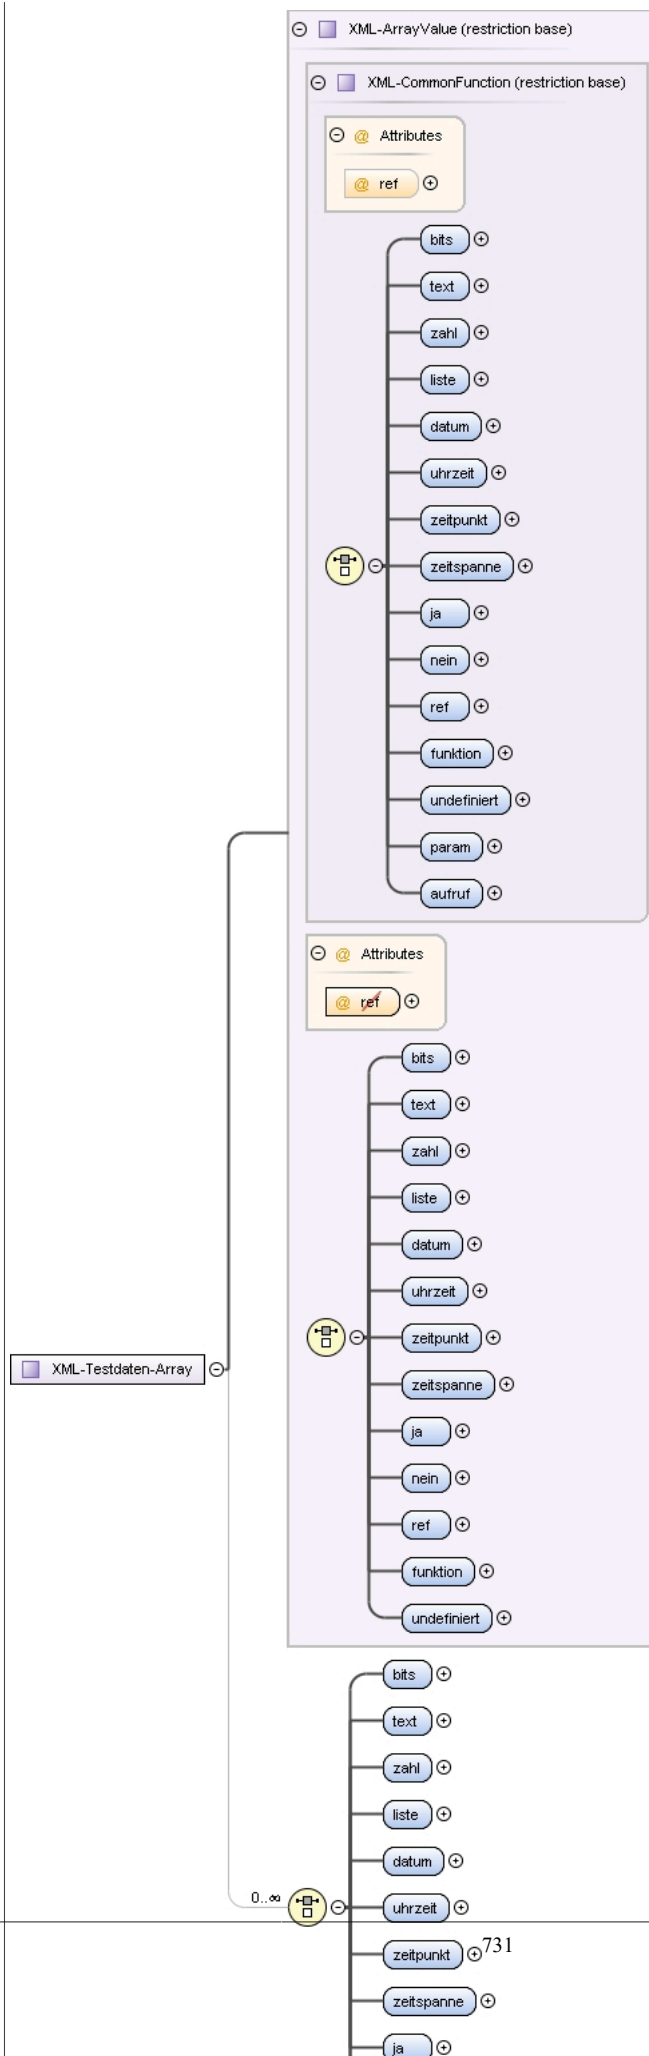


| | |
|-----------------|--|
| Type | restriction of XML-Testdaten-Array |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue XML-Testdaten-Array XML-Testdaten-Value |
| Used by | Element XML-Testdatenablauf-Entry/wert |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein undefiniert |
| Children | bits, datum, ja, liste, nein, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Source | <pre> <xs:complexType name="XML-Testdaten-Value"> <xs:complexContent> <xs:restriction base="XML-Testdaten-Array"> <xs:choice> <xs:element name="bits" type="XML-BinaryValue"/> <xs:element name="text" type="XML-StringValue"/> <xs:element name="zahl" type="XML-IntegerValue"/> <xs:element name="liste" type="XML-Testdaten-Array"/> <xs:element name="datum" type="XML-DateValue"/> <xs:element name="uhrzeit" type="XML-TimeValue"/> <xs:element name="zeitpunkt" type="XML-DatetimeValue"/> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:element name="ja" type="XML-TrueValue"/> <xs:element name="nein" type="XML-FalseValue"/> <xs:element name="undefiniert" type="XML-VoidValue"/> </xs:choice> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Testdaten-Array

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

Diagram



| | |
|-----------------|---|
| Type | restriction of XML-ArrayValue |
| Type hierarchy | <ul style="list-style-type: none"> XML-CommonFunction XML-ArrayValue XML-Testdaten-Array |
| Used by | <div>Complex Type XML-Testdaten-Value</div> <div>Elements XML-Testdaten-Array/liste, XML-Testdaten-Value/liste</div> |
| Model | bits text zahl liste datum uhrzeit zeitpunkt zeitspanne ja nein undefiniert |
| Children | bits, datum, ja, liste, nein, text, uhrzeit, undefiniert, zahl, zeitpunkt, zeitspanne |
| Source | <pre> <xs:complexType name="XML-Testdaten-Array"> <xs:complexContent> <xs:restriction base="XML-ArrayValue"> <xs:choice minOccurs="0" maxOccurs="unbounded"> <xs:element name="bits" type="XML-BinaryValue"/> <xs:element name="text" type="XML-StringValue"/> <xs:element name="zahl" type="XML-IntegerValue"/> <xs:element name="liste" type="XML-Testdaten-Array"/> <xs:element name="datum" type="XML-DateValue"/> <xs:element name="uhrzeit" type="XML-TimeValue"/> <xs:element name="zeitpunkt" type="XML-DatetimeValue"/> <xs:element name="zeitspanne" type="XML-DurationValue"/> <xs:element name="ja" type="XML-TrueValue"/> <xs:element name="nein" type="XML-FalseValue"/> <xs:element name="undefiniert" type="XML-VoidValue"/> </xs:choice> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Testmodul-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Used by | <div>Elements XML-Testanfrage/testmodul-pool, XML-Testdaten/testmodul-pool, XML-Testergebnis/testmodul-pool</div> |
| Model | item* |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Testmodul-Pool"> <xs:sequence> <xs:element name="item" type="XML-Testmodul-Item" minOccurs="0" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Testmodul-Item

| | |
|----------------|---|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | extension of XML-NrName-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item |

| | |
|-----------------|--|
| | <ul style="list-style-type: none"> XML-Testmodul-Item |
| Used by | Element XML-Testmodul-Pool/item |
| Model | nr , name , moduldaten{0,1} |
| Children | moduldaten, name, nr |
| Source | <pre><xs:complexType name="XML-Testmodul-Item"> <xs:complexContent> <xs:extension base="XML-NrName-Item"> <xs:sequence> <xs:element name="moduldaten" type="XML-RNTarifmodul" minOccurs="0" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Testfallanfrage-Pool

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Testfalldaten-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Testfalldaten-Pool XML-Testfallanfrage-Pool |
| Used by | Element XML-Testanfrage/testfall-pool |
| Model | item+ |
| Children | item |
| Source | <pre><xs:complexType name="XML-Testfallanfrage-Pool"> <xs:complexContent> <xs:restriction base="XML-Testfalldaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-Testfallanfrage-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

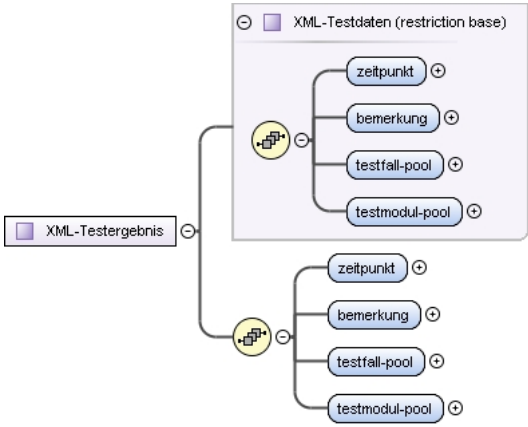
Complex Type XML-Testfallanfrage-Item

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

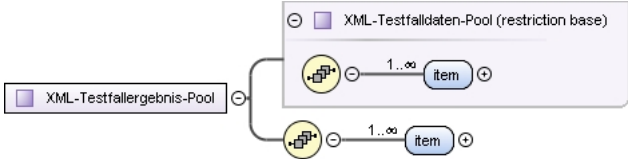
| | |
|-----------------|---|
| Diagram | <p>The diagram illustrates the structure of the <code>XML-Testfallanfrage-Item</code> type. It is a restriction of <code>XML-Testfalldaten-Item</code> (restriction base). The <code>XML-Testfalldaten-Item</code> type is an extension of <code>XML-NrName-Item</code> (extension base). The <code>XML-NrName-Item</code> type contains two elements: <code>nr</code> (XML-IntegerValue) and <code>name</code> (XML-StringValue). The <code>XML-Testfalldaten-Item</code> type contains four elements: <code>status</code> (XML-IntegerValue), <code>bemerkung</code> (XML-StringValue), <code>eingabewert-matrix</code> (XML-Testdaten-Matrix), and <code>ausgabewert-matrix</code> (XML-Testdaten-Matrix). The <code>XML-Testfallanfrage-Item</code> type contains three elements: <code>nr</code> (XML-IntegerValue), <code>name</code> (XML-StringValue), and <code>erwartungswert-matrix</code> (XML-Testdaten-Matrix).</p> |
| Type | restriction of XML-Testfalldaten-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Testfalldaten-Item XML-Testfallanfrage-Item |
| Used by | Element XML-Testfallanfrage-Pool/item |
| Model | nr , name , eingabewert-matrix , erwartungswert-matrix |
| Children | eingabewert-matrix, erwartungswert-matrix, name, nr |
| Source | <pre> <xs:complexType name="XML-Testfallanfrage-Item"> <xs:complexContent> <xs:restriction base="XML-Testfalldaten-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue"/> <xs:element name="name" type="XML-StringValue"/> </xs:sequence> <xs:sequence> <xs:element name="eingabewert-matrix" type="XML-Testdaten-Matrix"/> <xs:element name="erwartungswert-matrix" type="XML-Testdaten-Matrix"/> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Testergebnis

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/pkm/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Diagram |  The diagram shows a restriction of the XML-Testdaten type. The base type is XML-Testdaten (restriction base). The XML-Testergebnis type is defined as a restriction of XML-Testdaten. It contains a sequence of four elements: zeitpunkt, bemerkung, testfall-pool, and testmodul-pool. Each element is represented by a box with a plus sign and a minus sign, indicating it is a required element. |
| Type | restriction of XML-Testdaten |
| Type hierarchy | <ul style="list-style-type: none"> XML-Testdaten XML-Testergebnis |
| Used by | Element pkm-testergebnis |
| Model | zeitpunkt , bemerkung , testfall-pool , testmodul-pool |
| Children | bemerkung, testfall-pool, testmodul-pool, zeitpunkt |
| Source | <pre> <xs:complexType name="XML-Testergebnis"> <xs:complexContent> <xs:restriction base="XML-Testdaten"> <xs:sequence> <xs:element name="zeitpunkt" type="XML-DatetimeValue" /> <xs:element name="bemerkung" type="XML-StringValue" /> <xs:element name="testfall-pool" type="XML-Testfallergebnis-Pool" /> <xs:element name="testmodul-pool" type="XML-Testmodul-Pool" /> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Testfallergebnis-Pool

| | |
|----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram |  The diagram shows a restriction of the XML-Testfalldaten-Pool type. The base type is XML-Testfalldaten-Pool (restriction base). The XML-Testfallergebnis-Pool type is defined as a restriction of XML-Testfalldaten-Pool. It contains a sequence of one or more items, each represented by a box with a plus sign and a minus sign, indicating it is a required element. The sequence is labeled with '1..∞'. |
| Type | restriction of XML-Testfalldaten-Pool |
| Type hierarchy | <ul style="list-style-type: none"> XML-Testfalldaten-Pool XML-Testfallergebnis-Pool |
| Used by | Element XML-Testergebnis/testfall-pool |
| Model | item+ |
| Children | item |
| Source | <pre> <xs:complexType name="XML-Testfallergebnis-Pool"> <xs:complexContent> <xs:restriction base="XML-Testfalldaten-Pool"> <xs:sequence> <xs:element name="item" type="XML-Testfallergebnis-Item" maxOccurs="unbounded"> <xs:annotation> <xs:documentation>{Sortiert nach erstem Element}</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:restriction> </xs:complexContent> </pre> |

| | |
|-----------------|---|
| | </xs:complexType> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Complex Type XML-Testfallergebnis-Item

| | |
|-----------------|--|
| Namespace | http://vdv/ka/pkm/2 |
| Diagram | |
| Type | restriction of XML-Testfalldaten-Item |
| Type hierarchy | <ul style="list-style-type: none"> XML-NrName-Item XML-Testfalldaten-Item XML-Testfallergebnis-Item |
| Used by | Element XML-Testfallergebnis-Pool/item |
| Model | nr , name , status , bemerkung , eingabewert-matrix , ausgabewert-matrix , erwartungswert-matrix |
| Children | ausgabewert-matrix, bemerkung, eingabewert-matrix, erwartungswert-matrix, name, nr, status |
| Source | <pre> <xs:complexType name="XML-Testfallergebnis-Item"> <xs:complexContent> <xs:restriction base="XML-Testfalldaten-Item"> <xs:sequence> <xs:sequence> <xs:element name="nr" type="XML-IntegerValue" /> <xs:element name="name" type="XML-StringValue" /> </xs:sequence> <xs:sequence> <xs:element name="status" type="XML-IntegerValue" /> <xs:element name="bemerkung" type="XML-StringValue" /> <xs:element name="eingabewert-matrix" type="XML-Testdaten-Matrix" /> <xs:element name="ausgabewert-matrix" type="XML-Testdaten-Matrix" /> <xs:element name="erwartungswert-matrix" type="XML-Testdaten-Matrix" /> </xs:sequence> </xs:sequence> </xs:restriction> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Namespace: "http://vdv/ka/common/types/2"


Schema(s)

Imported schema XML-Schema_Common_Types.xsd


| | |
|-----------------|---|
| Namespace | http://vdv/ka/common/types/2 |
| Properties | attribute form default: unqualified |
| | element form default: unqualified |
| | version: 1.11.1 |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |

Simple Type(s)


Simple Type tns:ReferenceNumberFour

| | |
|-----------------|--|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Integer der den positiven Zahlenraum von vier Bytes umfasst |
| Diagram |  |
| Type | tns:INT4 |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:ReferenceNumberFour |
| Facets | maxInclusive 4294967295 |
| | minInclusive 0 |
| Used by | Simple Type pkm:Modulversion_NUMMER |
| | Elements tns:Berechtigung_ID_Type/berechtigungNummer, tns:NmApplikationInstanz_ID_Type/NmAppInstanznummer |
| Source | <pre><xs:simpleType name="ReferenceNumberFour"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT4"/> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |


Simple Type tns:INT4

| | |
|-----------------|---|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Integer der den positiven Zahlenraum von vier Bytes umfasst |
| Diagram |  |
| Type | restriction of xs:unsignedInt |
| Facets | maxInclusive 4294967295 |
| | minInclusive 0 |
| Used by | Simple Types tns:ReferenceNumberFour, tns:SequenceNumberFour, tns:SperrlistenZyklusNummer_Type |
| Source | <pre><xs:simpleType name="INT4"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="4294967295"/> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |

Simple Type `tns:ReferenceNumberOne`

| | | | |
|-----------------|--|----------------------|--|
| Namespace | http://vdv/ka/common/types/2 | | |
| Annotations | Integer der den positiven Zahlenraum von einem Byte umfasst | | |
| Diagram |  | | |
| Type | tns:INT1 | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:ReferenceNumberOne | | |
| Facets | maxInclusive | 255 | |
| | minInclusive | 0 | |
| Used by | Simple Type | pkm:Modulstatus_CODE | |
| Source | <pre><xs:simpleType name="ReferenceNumberOne"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von einem Byte umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT1" /> </xs:simpleType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | |

Simple Type `tns:INT1`

| | | | |
|-----------------|---|---|--|
| Namespace | http://vdv/ka/common/types/2 | | |
| Annotations | Integer der den positiven Zahlenraum eines Bytes umfasst | | |
| Diagram |  | | |
| Type | restriction of xs:unsignedInt | | |
| Facets | maxInclusive | 255 | |
| | minInclusive | 0 | |
| Used by | Simple Types | tns:Abrechnungsverfahren_CODE_Type, tns:AuftragsTyp_CODE, tns:Bezahlart_CODE_Type, tns:CommonServiceResultCode, tns:KommunikationsPartnerRolle, tns:NmTransaktionsTyp_CODE, tns:OrtsTyp_CODE_Type, tns:ReferenceNumberOne, tns:SequenceNumberOne, tns:StatusCode, tns:TerminalTyp_CODE_Type | |
| | Elements | tns:ION_TX_HEADER_Type/transSignaturTyp, tns:ION_TX_HEADER_Type/transStatus, tns:ION_TX_HEADER_Type/transTransaktionsTyp, tns:ION_TX_HEADER_Type/transWiederholungsZaehler, tns:SymSchluessel_ID_Type/schluesselNummer, tns:SymSchluessel_ID_Type/schluesselVersion, tns:TXA_Type/transAblehnungGrund, tns:TX_SANF_Type/sperrSperrgrund | |
| Source | <pre><xs:simpleType name="INT1"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum eines Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="255"/> </xs:restriction> </xs:simpleType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | |

Simple Type `tns:DateTimeCompact`

| | | | |
|-------------|--|--|--|
| Namespace | http://vdv/ka/common/types/2 | | |
| Annotations | <p>Datum mit Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschränkt, so dass ueber eine binaere Darstellung im Nutzermedium 4 Byte ausreichend sind.</p> <p>1990-01-01T:00:00:00 entspricht "keiner Angabe".</p> <p>Der erste gueltige Wert ist 1990-01-02T00:00:02, da angenommen wird, dass DateTimeCompact sich aus DateCompact und TimeCompact (siehe BOM Spez.) zusammensetzt.</p> <p>Achtung: es wird lokale Zeit verwendet (keine Zeitzonen) um</p> | | |

| | | |
|-----------------|--|---|
| | ungueltige Werte bei Abschneiden einer Zeitzoneinformation zu vermeiden! | |
| Diagram | | |
| Type | restriction of xs:dateTime | |
| Facets | maxInclusive | 2117-12-31T23:59:58 |
| | minInclusive | 1990-01-01T00:00:00 |
| Used by | Elements | pkm:TX_MODUL/modulguelteigkeitsbeginn, tns:TX_BER_Type/berGuelteigkeitsbeginn, tns:TX_BER_Type/berGuelteigkeitsende |
| Source | <pre><xs:simpleType name="DateTimeCompact"> <xs:annotation> <xs:documentation>Datum mit Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschaenkt, so dass ueber eine binaere Darstellung im Nutzermedium 4 Byte ausreichend sind. 1990-01-01T00:00:00 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02T00:00:02, da angenommen wird, dass DateTimeCompact sich aus DateCompact und TimeCompact (siehe BOM Spez.) zusammensetzt. Achtung: es wird lokale Zeit verwendet (keine Zeitzone) um ungueltige Werte bei Abschneiden einer Zeitzoneinformation zu vermeiden!</xs:documentation> </xs:annotation> <xs:restriction base="xs:dateTime"> <xs:minInclusive value="1990-01-01T00:00:00"/> <xs:maxInclusive value="2117-12-31T23:59:58"/> </xs:restriction> </xs:simpleType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | |

Simple Type tns:DateCompact


| | | |
|-----------------|--|---|
| Namespace | http://vdv/ka/common/types/2 | |
| Annotations | Datum ohne Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschaenkt, so dass ueber eine binaere Darstellung im Nutzermedium 2 Byte ausreichend sind. 1990-01-01 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02 (siehe BOM Spez.). | |
| Diagram | | |
| Type | restriction of xs:date | |
| Facets | maxInclusive | 2117-12-31 |
| | minInclusive | 1990-01-01 |
| Used by | Elements | pkm:TX_MODUL_Bereitstellung/bereitstellungsdatum, pkm:TX_MODUL_Lieferung/sendedatum |
| Source | <pre><xs:simpleType name="DateCompact"> <xs:annotation> <xs:documentation>Datum ohne Uhrzeit, nutzt den ISO Standard in XML, jedoch wird der Wertebereich eingeschaenkt, so dass ueber eine binaere Darstellung im Nutzermedium 2 Byte ausreichend sind. 1990-01-01 entspricht "keiner Angabe". Der erste gueltige Wert ist 1990-01-02 (siehe BOM Spez.).</xs:documentation> </xs:annotation> <xs:restriction base="xs:date"> <xs:minInclusive value="1990-01-01"/> <xs:maxInclusive value="2117-12-31"/> </xs:restriction> </xs:simpleType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | |

Simple Type tns:ReferenceNumberTwo


| | | |
|----------------|--|--|
| Namespace | http://vdv/ka/common/types/2 | |
| Annotations | Integer der den positiven Zahlenraum von zwei Bytes umfasst | |
| Diagram | | |
| Type | tns:INT2 | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT2 | |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> • tns:ReferenceNumberTwo |
| Facets | maxInclusive 65535 |
| | minInclusive 0 |
| Used by | Simple Type tns:Organisation_ID |
| | Elements tns:EFMProdukt_ID_Type/produktNummer, tns:SymSchlüssel_ID_Type/schlüsselInhaber_ID, tns:Terminal_ID_Type/terminalNummer |
| Source | <pre><xs:simpleType name="ReferenceNumberTwo"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT2"/> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |


Simple Type tns:INT2

| | |
|-----------------|--|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Integer der den positiven Zahlenraum von zwei Bytes umfasst |
| Diagram |  |
| Type | restriction of xs:unsignedInt |
| Facets | maxInclusive 65535 |
| | minInclusive 0 |
| Used by | Simple Types tns:ReferenceNumberTwo, tns:SequenceNumberTwo |
| Source | <pre><xs:simpleType name="INT2"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="65535"/> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |


Simple Type tns:SequenceNumberFour

| | |
|-----------------|--|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Integer der den positiven Zahlenraum von vier Bytes umfasst. Fachlich eine aufsteigende Sequenznummer. |
| Diagram |  |
| Type | tns:INT4 |
| Type hierarchy | <ul style="list-style-type: none"> • xs:unsignedInt • tns:INT4 • tns:SequenceNumberFour |
| Facets | maxInclusive 4294967295 |
| | minInclusive 0 |
| Used by | Element tns:IONTransaktion_ID_Type/transSequenznummer |
| Source | <pre><xs:simpleType name="SequenceNumberFour"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von vier Bytes umfasst. Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT4"/> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |


Simple Type `tns:DateTime`

| | |
|-----------------|--|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Datum mit Uhrzeit (nutzt den Standard) |
| Diagram |  |
| Type | xs:dateTime |
| Used by | Element <code>tns:ION_TX_HEADER_Type/transTransaktionsZeitpunkt</code> |
| Source | <pre><xs:simpleType name="DateTime"> <xs:annotation> <xs:documentation>Datum mit Uhrzeit (nutzt den Standard)</xs:documentation> </xs:annotation> <xs:restriction base="xs:dateTime" /> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |

Simple Type `tns:BitString16`

| | | | | | |
|-----------------|---|--------|----|---------|--|
| Namespace | http://vdv/ka/common/types/2 | | | | |
| Annotations | String mit Laenge von 16 Zeichen, die nur "0" oder "1" enthalten duerfen | | | | |
| Diagram |  | | | | |
| Type | restriction of xs:string | | | | |
| Facets | <table> <tr> <td>length</td><td>16</td></tr> <tr> <td>pattern</td><td> [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1] </td></tr> </table> | length | 16 | pattern | [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1] |
| length | 16 | | | | |
| pattern | [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1] | | | | |
| Used by | Element <code>tns:ION_TX_HEADER_Type/transVersion</code> | | | | |
| Source | <pre><xs:simpleType name="BitString16"> <xs:annotation> <xs:documentation>String mit Laenge von 16 Zeichen, die nur "0" oder "1" enthalten duerfen</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="16" fixed="true"/> <xs:pattern value="[0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1]" /> </xs:restriction> </xs:simpleType></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | | | |


Simple Type `tns:BitString1`

| | | | | | |
|-----------------|---|--------|---|---------|-------|
| Namespace | http://vdv/ka/common/types/2 | | | | |
| Annotations | String mit Laenge von 1 Zeichen, das nur "0" oder "1" enthalten darf | | | | |
| Diagram |  | | | | |
| Type | restriction of xs:string | | | | |
| Facets | <table> <tr> <td>length</td><td>1</td></tr> <tr> <td>pattern</td><td>[0-1]</td></tr> </table> | length | 1 | pattern | [0-1] |
| length | 1 | | | | |
| pattern | [0-1] | | | | |
| Source | <pre><xs:simpleType name="BitString1"> <xs:annotation> <xs:documentation>String mit Laenge von 1 Zeichen, das nur "0" oder "1" enthalten darf</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="1" fixed="true"/> <xs:pattern value="[0-1]" /> </xs:restriction> </xs:simpleType></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | | | |


Simple Type `tns:BitString8`

| | | | | | |
|-----------------|--|--------|---|---------|--|
| Namespace | http://vdv/ka/common/types/2 | | | | |
| Annotations | String mit Laenge von 8 Zeichen, die nur "0" oder "1" enthalten duerfen | | | | |
| Diagram |  | | | | |
| Type | restriction of xs:string | | | | |
| Facets | <table> <tr> <td>length</td><td>8</td></tr> <tr> <td>pattern</td><td>[0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1]</td></tr> </table> | length | 8 | pattern | [0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1] |
| length | 8 | | | | |
| pattern | [0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1] | | | | |
| Source | <pre><xs:simpleType name="BitString8"> <xs:annotation> <xs:documentation>String mit Laenge von 8 Zeichen, die nur "0" oder "1" enthalten duerfen</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="8" fixed="true"/> <xs:pattern value="[0-1][0-1][0-1][0-1][0-1][0-1][0-1][0-1]"/> </xs:restriction> </xs:simpleType></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | | | |


Simple Type `tns:Date`

| | |
|-----------------|--|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Datum ohne Uhrzeit (nutzt den Standard) |
| Diagram |  |
| Type | xs:date |
| Used by | Element <code>tns:TXDEABER_Req_Type/prodAkzeptanzEnde</code> |
| Source | <pre><xs:simpleType name="Date"> <xs:annotation> <xs:documentation>Datum ohne Uhrzeit (nutzt den Standard)</xs:documentation> </xs:annotation> <xs:restriction base="xs:date"/> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |

Simple Type `tns:Datef`

| | | | | | |
|-----------------|--|--------|---|---------|--|
| Namespace | http://vdv/ka/common/types/2 | | | | |
| Annotations | BCD codierte Darstellung eines Datums als "Hexstring" in der Form yyyymmdd. "00000000" ist fuer "keine Angabe". Die Einschraenkung von 00010101 bis 99991231 wie in der BOM gefordert wird ueber das Pattern abgebildet. | | | | |
| Diagram |  | | | | |
| Type | restriction of xs:string | | | | |
| Facets | <table> <tr> <td>length</td><td>8</td></tr> <tr> <td>pattern</td><td>[0-9][0-9][0-9][0-9][0-1][0-9][0-3][0-9]</td></tr> </table> | length | 8 | pattern | [0-9][0-9][0-9][0-9][0-1][0-9][0-3][0-9] |
| length | 8 | | | | |
| pattern | [0-9][0-9][0-9][0-9][0-1][0-9][0-3][0-9] | | | | |
| Source | <pre><xs:simpleType name="Datef"> <xs:annotation> <xs:documentation>BCD codierte Darstellung eines Datums als "Hexstring" in der Form yyyymmdd. "00000000" ist fuer "keine Angabe". Die Einschraenkung von 00010101 bis 99991231 wie in der BOM gefordert wird ueber das Pattern abgebildet.</xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:length value="8" fixed="true"/> <xs:pattern value="[0-9][0-9][0-9][0-9][0-1][0-9][0-3][0-9]"/> </xs:restriction> </xs:simpleType></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | | | |

Simple Type `tns:INT3`

| | | | | | |
|-----------------|---|--------------|----------|--------------|---|
| Namespace | http://vdv/ka/common/types/2 | | | | |
| Annotations | Integer der den positiven Zahlenraum von drei Bytes umfasst | | | | |
| Diagram |  | | | | |
| Type | restriction of xs:unsignedInt | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 16777215 | minInclusive | 0 |
| maxInclusive | 16777215 | | | | |
| minInclusive | 0 | | | | |
| Used by | Simple Types tns:ReferenceNumberThree, tns:SequenceNumberThree | | | | |
| Source | <pre><xs:simpleType name="INT3"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:minInclusive value="0"/> <xs:maxInclusive value="16777215"/> </xs:restriction> </xs:simpleType></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | | | |

Simple Type `tns:OctetString1`


| | | | |
|-----------------|--|--------|---|
| Namespace | http://vdv/ka/common/types/2 | | |
| Annotations | Hexstring mit einer maximalen Laenge von 1 Byte (2 Zeichen) | | |
| Diagram |  | | |
| Type | restriction of xs:hexBinary | | |
| Facets | <table> <tr> <td>length</td><td>1</td></tr> </table> | length | 1 |
| length | 1 | | |
| Source | <pre><xs:simpleType name="OctetString1"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 1 Byte (2 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="1" fixed="true"/> </xs:restriction> </xs:simpleType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | |

Simple Type `tns:OctetString4`


| | | | |
|-----------------|--|--------|---|
| Namespace | http://vdv/ka/common/types/2 | | |
| Annotations | Hexstring mit einer maximalen Laenge von 4 Byte (8 Zeichen) | | |
| Diagram |  | | |
| Type | restriction of xs:hexBinary | | |
| Facets | <table> <tr> <td>length</td><td>4</td></tr> </table> | length | 4 |
| length | 4 | | |
| Source | <pre><xs:simpleType name="OctetString4"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 4 Byte (8 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="4" fixed="true"/> </xs:restriction> </xs:simpleType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | |

Simple Type `tns:OctetString8`


| | |
|-------------|--|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Hexstring mit einer maximalen Laenge von 8 Byte (16 Zeichen) |

| | |
|-----------------|---|
| Diagram |  |
| Type | restriction of xs:hexBinary |
| Facets | length 8 |
| Used by | Elements tns:appNmTransaktionMAC_Type/appMAC_AH, tns:appNmTransaktionMAC_Type/appMAC_KVP, tns:berNmTransaktionMAC_Type/berMAC_KVP, tns:berNmTransaktionMAC_Type/berMAC_PV |
| Source | <pre><xs:simpleType name="OctetString8"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 8 Byte (16 Zeichen)</ </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="8" fixed="true"/> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |

Simple Type tns:OctetString10

| | |
|-----------------|--|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Hexstring mit einer maximalen Laenge von 10 Byte (20 Zeichen) |
| Diagram |  |
| Type | restriction of xs:hexBinary |
| Facets | length 10 |
| Used by | Element tns:TX_BER_Type/berBezahlMittel |
| Source | <pre><xs:simpleType name="OctetString10"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 10 Byte (20 Zeichen)</ </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="10" fixed="true"/> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |

Simple Type tns:OctetString12


| | |
|-----------------|--|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Hexstring mit einer maximalen Laenge von 12 Byte (24 Zeichen) |
| Diagram |  |
| Type | restriction of xs:hexBinary |
| Facets | length 12 |
| Used by | Element tns:ASymSchluessel_ID_Type/signaturSchluessel |
| Source | <pre><xs:simpleType name="OctetString12"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 12 Byte (24 Zeichen)</ </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="12" fixed="true"/> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |

Simple Type tns:OctetString128


| | |
|-------------|---|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Hexstring mit einer maximalen Laenge von 128 Byte (256 Zeichen) |

| | |
|-----------------|--|
| Diagram |  |
| Type | restriction of xs:hexBinary |
| Facets | length 128 |
| Source | <pre><xs:simpleType name="OctetString128"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 128 Byte (256 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="128" fixed="true"/> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |

Simple Type tns:OctetString200

| | |
|-----------------|--|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Hexstring mit einer maximalen Laenge von 200 Byte (400 Zeichen) |
| Diagram |  |
| Type | restriction of xs:hexBinary |
| Facets | length 200 |
| Source | <pre><xs:simpleType name="OctetString200"> <xs:annotation> <xs:documentation>Hexstring mit einer maximalen Laenge von 200 Byte (400 Zeichen)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="200" fixed="true"/> </xs:restriction> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |

Simple Type tns:ReferenceNumberThree


| | | | | | |
|-----------------|---|--------------|---------------------------|--------------|-----------------|
| Namespace | http://vdv/ka/common/types/2 | | | | |
| Annotations | Integer der den positiven Zahlenraum von drei Bytes umfasst | | | | |
| Diagram |  | | | | |
| Type | tns:INT3 | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 16777215 | minInclusive | 0 |
| maxInclusive | 16777215 | | | | |
| minInclusive | 0 | | | | |
| Used by | <table> <tr> <td>Element</td><td>tns:Ort_ID_Type/ortNummer</td></tr> <tr> <td>Simple Type</td><td>tns:SAM_ID_Type</td></tr> </table> | Element | tns:Ort_ID_Type/ortNummer | Simple Type | tns:SAM_ID_Type |
| Element | tns:Ort_ID_Type/ortNummer | | | | |
| Simple Type | tns:SAM_ID_Type | | | | |
| Source | <pre><xs:simpleType name="ReferenceNumberThree"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT3"/> </xs:simpleType></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | | | |

Simple Type tns:SequenceNumberOne


| | |
|-------------|---|
| Namespace | http://vdv/ka/common/types/2 |
| Annotations | Integer der den positiven Zahlenraum von einem Byte umfasst |

| | | | | | |
|-----------------|--|--------------|-----|--------------|---|
| | Fachlich eine aufsteigende Sequenznummer. | | | | |
| Diagram |  | | | | |
| Type | tns:INT1 | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:SequenceNumberOne | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 |
| maxInclusive | 255 | | | | |
| minInclusive | 0 | | | | |
| Source | <pre><xs:simpleType name="SequenceNumberOne"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von einem Byte umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT1"/> </xs:simpleType></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | | | |

Simple Type tns:SequenceNumberTwo

| | | | | | |
|-----------------|--|--------------|-------|--------------|---|
| Namespace | http://vdv/ka/common/types/2 | | | | |
| Annotations | Integer der den positiven Zahlenraum von zwei Bytes umfasst Fachlich eine aufsteigende Sequenznummer. | | | | |
| Diagram |  | | | | |
| Type | tns:INT2 | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:SequenceNumberTwo | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 65535 | minInclusive | 0 |
| maxInclusive | 65535 | | | | |
| minInclusive | 0 | | | | |
| Source | <pre><xs:simpleType name="SequenceNumberTwo"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von zwei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT2"/> </xs:simpleType></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd | | | | |

Simple Type tns:SequenceNumberThree

| | | | | | |
|----------------|--|--------------|----------|--------------|---|
| Namespace | http://vdv/ka/common/types/2 | | | | |
| Annotations | Integer der den positiven Zahlenraum von drei Bytes umfasst Fachlich eine aufsteigende Sequenznummer. | | | | |
| Diagram |  | | | | |
| Type | tns:INT3 | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:SequenceNumberThree | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 16777215 | minInclusive | 0 |
| maxInclusive | 16777215 | | | | |
| minInclusive | 0 | | | | |
| Source | <pre><xs:simpleType name="SequenceNumberThree"> <xs:annotation> <xs:documentation>Integer der den positiven Zahlenraum von drei Bytes umfasst Fachlich eine aufsteigende Sequenznummer.</xs:documentation> </xs:annotation> <xs:restriction base="tns:INT3"/> </xs:simpleType></pre> | | | | |

| | |
|-----------------|---|
| | <pre> </xs:annotation> <xs:restriction base="tns:INT3"/> </xs:simpleType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/types/2/XML-Schema_Common_Types.xsd |

Namespace: "http://vdv/ka/common/2"

Schema(s)

Imported schema XML-Schema_KA_Common.xsd

| | |
|-----------------|--|
| Namespace | http://vdv/ka/common/2 |
| Properties | attribute form default: unqualified |
| | element form default: unqualified |
| | version: 1.11.1 |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd |

Element(s)

Element tns:VX

| | |
|-----------------|---|
| Namespace | http://vdv/ka/common/2 |
| Annotations | <p>KA VX Nachricht</p> <p>Eine VX Nachricht wird bei einer asynchronen Anwendungskommunikation als Bestaetigung einer Dienstanfrage gesendet.</p> <p>Durch die VX Nachricht wird dem anfragenden System der Status der iniitalen Datenuebermittlung mitgeteilt.</p> |
| Diagram | |
| Type | tns:VX_Message_Type |
| Properties | content: complex |
| Model | StatusCode , StatusText |
| Children | StatusCode, StatusText |
| Instance | <pre> <tns:VX xmlns:tns="http://vdv/ka/common/2"> <StatusCode>{1,1}</StatusCode> <StatusText>{1,1}</StatusText> </tns:VX> </pre> |
| Source | <pre> <xs:element name="VX" type="tns:VX_Message_Type"> <xs:annotation> <xs:documentation>KA VX Nachricht Eine VX Nachricht wird bei einer asynchronen Anwendungskommunikation als Bestaetigung einer Dienstanfrage gesendet. Durch die VX Nachricht wird dem anfragenden System der Status der iniitalen Datenuebermittlung mitgeteilt.</xs:documentation> </xs:annotation> </xs:element> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd |


Simple Type(s)

Simple Type tns:Organisation_ID

| | |
|----------------|--|
| Namespace | http://vdv/ka/common/2 |
| Annotations | Type: Eindeutiger Identifier einer Organisation |
| Diagram | |
| Type | tns:ReferenceNumberTwo |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt |


| | |
|-----------------|--|
| | <ul style="list-style-type: none"> • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID |
| Facets | maxInclusive 65535 |
| | minInclusive 0 |
| Used by | Elements tns:Berechtigung_ID_Type/kvp_ID, tns:EFMProdukt_ID_Type/organisationID, tns:IONTransaktion_ID_Type/transSender_ID, tns:ION_TX_HEADER_Type/transEmpfaenger_ID, tns:NmApplikationInstanz_ID_Type/kvp_ID, tns:Ort_ID_Type/ortDomaene_ID, tns:TXSNAWA_Req_Type/orgSperrkandidat, tns:TXSNAWB_Req_Type/orgSperrkandidat, tns:Terminal_ID_Type/terminalOwner_ID |
| Source | <pre><xs:simpleType name="Organisation_ID"> <xs:annotation> <xs:documentation>Type: Eindeutiger Identifier einer Organisation</xs:documentation> </xs:annotation> <xs:restriction base="ct:ReferenceNumberTwo"/> </xs:simpleType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd |

Simple Type tns:KommunikationsParterRolle

| | |
|----------------|--|
| Namespace | http://vdv/ka/common/2 |
| Annotations | Rolle des Kommunikationspartners: 1=KVP, 2=DL, 3=PV, 4=AH, 5=KOSES |
| Diagram |  |
| Type | restriction of tns:INT1 |
| Type hierarchy | <ul style="list-style-type: none"> • xs:unsignedInt • tns:INT1 • tns:KommunikationsParterRolle |
| Facets | maxInclusive 255 |
| | minInclusive 0 |
| | enumeration 0 Unbekannt |
| | enumeration 1 KVP |
| | enumeration 2 DL |
| | enumeration 3 PV |
| | enumeration 4 AH |
| | enumeration 5 KOSES |
| | enumeration 254 ZVM |
| Used by | Elements tns:IONTransaktion_ID_Type/transSenderRolle, tns:ION_TX_HEADER_Type/transEmpfaengerRolle |
| Source | <pre><xs:simpleType name="KommunikationsParterRolle"> <xs:annotation> <xs:documentation>Rolle des Kommunikationspartners: 1=KVP, 2=DL, 3=PV, 4=AH, 5=KOSES</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Unbekannt</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>KVP</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>DL</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> </pre> |

| | |
|-----------------|--|
| | <pre> <xs:documentation>PV</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>AH</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>KOSES</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="254"> <xs:annotation> <xs:documentation>ZVM</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd |

Simple Type tns:StatusCode

| | | | |
|----------------|---|--------------------------------|---|
| Namespace | http://vdv/ka/common/2 | | |
| Annotations | Status Codes einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten) | | |
| Diagram |  | | |
| Type | restriction of tns:INT1 | | |
| Type hierarchy | <ul style="list-style-type: none">xs:unsignedInt<ul style="list-style-type: none">tns:INT1<ul style="list-style-type: none">tns:StatusCode | | |
| Facets | maxInclusive | 255 | |
| | minInclusive | 0 | |
| | enumeration | 0 | Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor. |
| | enumeration | 1 | Ungueltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden. |
| | enumeration | 2 | Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde. |
| | enumeration | 3 | Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt. |
| | enumeration | 4 | Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden. |
| | enumeration | 5 | Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit. |
| | enumeration | 6 | Die asynchrone Nachricht kann nicht zwischengespeichert werden. |
| | enumeration | 7 | Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt. |
| | enumeration | 255 | Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden. |
| Used by | Element | tns:VX_Message_Type/StatusCode | |
| Source | <pre><xs:simpleType name="StatusCode"> <xs:annotation> <xs:documentation>Status Codes einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"></pre> | | |

| | |
|-----------------|--|
| | <pre> <xs:annotation> <xs:documentation>Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Ungueltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde.</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="4"> <xs:annotation> <xs:documentation>Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="5"> <xs:annotation> <xs:documentation>Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit.</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="6"> <xs:annotation> <xs:documentation>Die asynchrone Nachricht kann nicht zwischengespeichert werden.</ xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="7"> <xs:annotation> <xs:documentation>Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt.</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="255"> <xs:annotation> <xs:documentation>Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden.</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd |


Simple Type tns:StatusText

| | |
|-------------|--|
| Namespace | http://vdv/ka/common/2 |
| Annotations | Textuelle Beschreibung des "Status Codes" einer KA VX Nachricht |
| Diagram | <pre> classDiagram class StatusText class xs_string["xs:string"] StatusText -- > xs_string </pre> |
| Type | restriction of xs:string |
| Facets | maxLength 255 |
| Used by | Element tns:VX_Message_Type/StatusText |
| Source | <pre> <xs:simpleType name="StatusText"> <xs:annotation> <xs:documentation>Textuelle Beschreibung des "Status Codes" einer KA VX Nachricht</ xs:documentation> </xs:annotation> <xs:restriction base="xs:string"> <xs:maxLength value="255"/> </xs:restriction> </xs:simpleType> </pre> |

| | |
|-----------------|--|
| | <code></xs:simpleType></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd |

Complex Type(s)

Complex Type `tns:VX_Message_Type`

| | |
|-----------------|---|
| Namespace | http://vdv/ka/common/2 |
| Annotations | Type: Struktur einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten) |
| Diagram |  |
| Used by | Element <code>tns:VX</code> |
| Model | StatusCode , StatusText |
| Children | StatusCode, StatusText |
| Source | <pre> <xs:complexType name="VX_Message_Type"> <xs:annotation> <xs:documentation>Type: Struktur einer KA VX Nachricht (Bestaetigung der ZVM fuer asynchrone Nachrichten)</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="StatusCode" type="tns:StatusCode" /> <xs:element name="StatusText" type="tns:StatusText" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd |

Namespace: "http://vdv/ka/ion/2"

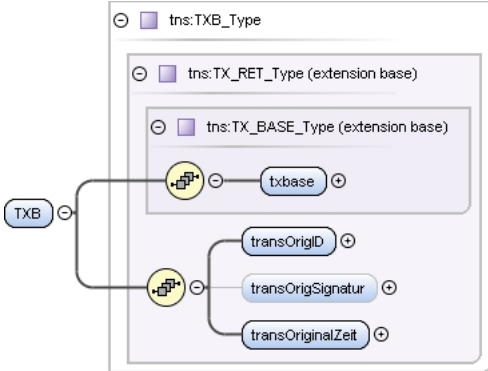
Schema(s)

Imported schema XML-Schema_ION.xsd

| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Properties | attribute form default: unqualified element form default: unqualified version: 1.11.1 |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element(s)

Element `tns:TXB`

| | |
|-------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Bestaetigung einer ION-Transaktion |
| Diagram |  |
| Type | tns:TXB_Type |

| | |
|-----------------|---|
| Type hierarchy | <ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_RET_Type • tns:TXB_Type |
| Properties | content: complex |
| Model | txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit |
| Children | transOrigID, transOrigSignatur, transOriginalZeit, txbase |
| Instance | <pre><tns:TXB xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> </tns:TXB></pre> |
| Source | <pre><xs:element name="TXB" type="tns:TXB_Type"> <xs:annotation> <xs:documentation>Element: Bestaetigung einer ION-Transaktion</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXA

| | |
|-----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Ablehnung einer ION-Transaktion |
| Diagram | |
| Type | tns:TXA_Type |
| Type hierarchy | <ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_RET_Type • tns:TXA_Type |
| Properties | content: complex |
| Model | txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , transAblehnungGrund |
| Children | transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase |
| Instance | <pre><tns:TXA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> <transAblehnungGrund>{1,1}</transAblehnungGrund> </tns:TXA></pre> |
| Source | <pre><xs:element name="TXA" type="tns:TXA_Type"> <xs:annotation> <xs:documentation>Element: Ablehnung einer ION-Transaktion</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXBRequest

| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Mitteilung eines Verarbeitungsstatus (OK) |
| Diagram | |
| Type | tns:TXB_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXB_Type |
| Properties | content: complex |
| Model | txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit |
| Children | transOrigID, transOrigSignatur, transOriginalZeit, txbase |
| Instance | <pre><tns:TXBRequest xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> </tns:TXBRequest></pre> |
| Source | <pre><xs:element name="TXBRequest" type="tns:TXB_Type"> <xs:annotation> <xs:documentation>Element: Mitteilung eines Verarbeitungsstatus (OK)</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXARequest

| | |
|----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Mitteilung eines Verarbeitungsstatus (Fehlerhaft im Drittsystem) |
| Diagram | |
| Type | tns:TXA_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type |

| | |
|-----------------|--|
| | <ul style="list-style-type: none"> • tns:TX_RET_Type • tns:TXA_Type |
| Properties | content: complex |
| Model | txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , transAblehnungGrund |
| Children | transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase |
| Instance | <pre><tns:TXARequest xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <transOrigID>{1,1}</transOrigID> <transOrigSignatur>{0,1}</transOrigSignatur> <transOriginalZeit>{1,1}</transOriginalZeit> <transAblehnungGrund>{1,1}</transAblehnungGrund> </tns:TXARequest></pre> |
| Source | <pre><xs:element name="TXARequest" type="tns:TXA_Type"> <xs:annotation> <xs:documentation>Element: Mitteilung eines Verarbeitungsstatus (Fehlerhaft im Drittsystem)</ xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXDEABER

| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Dienstanfrage: "Loeschen einer Produkt-Akzeptanz von allen akzeptierenden Organisationen" |
| Diagram | |
| Type | tns:TXDEABER_Req_Type |
| Type hierarchy | <ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXDEABER_Req_Type |
| Properties | content: complex |
| Model | txbase , prodAkzeptanzEnde , prodProdukt_ID |
| Children | prodAkzeptanzEnde, prodProdukt_ID, txbase |
| Instance | <pre><tns:TXDEABER xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <prodAkzeptanzEnde>{1,1}</prodAkzeptanzEnde> <prodProdukt_ID>{1,1}</prodProdukt_ID> </tns:TXDEABER></pre> |
| Source | <pre><xs:element name="TXDEABER" type="tns:TXDEABER_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage: "Loeschen einer Produkt-Akzeptanz von allen akzeptierenden Organisationen"</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSMITA

| | |
|-------------|--------------------------------------|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Sperrmitteilung Applikation |

| | |
|-----------------|---|
| Diagram | |
| Type | tns:TXSMITA_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITA_Type |
| Properties | content: complex nillable: false |
| Model | txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat |
| Children | appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase |
| Instance | <pre><tns:TXSMITA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <appSperrkandidat>{1,1}</appSperrkandidat> </tns:TXSMITA></pre> |
| Source | <pre><xs:element name="TXSMITA" type="tns:TXSMITA_Type" nillable="false"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung Applikation</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSFREIMITA

| | |
|----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Sperrfreigabemitteilung Applikation |
| Diagram | |
| Type | tns:TXSFREIMITA_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITA_Type |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> • tns:TXSFREIMITA_Type |
| Properties | content: complex |
| Model | txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat |
| Children | appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase |
| Instance | <pre><tns:TXSFREIMITA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <appSperrkandidat>{1,1}</appSperrkandidat> </tns:TXSFREIMITA></pre> |
| Source | <pre><xs:element name="TXSFREIMITA" type="tns:TXSFREIMITA_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung Applikation</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSANFSYMK

| | |
|-----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Sperranforderung fuer einen symmetrischen Schluessel |
| Diagram | |
| Type | tns:TXSANFSYMK_Type |
| Type hierarchy | <ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TX_SANF_Type • tns:TXSANFSYMK_Type |
| Properties | content: complex |
| Model | txbase , sperrSperrgrund , keySperrkandidatsym |
| Children | keySperrkandidatsym, sperrSperrgrund, txbase |
| Instance | <pre><tns:TXSANFSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSANFSYMK></pre> |
| Source | <pre><xs:element name="TXSANFSYMK" type="tns:TXSANFSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer einen symmetrischen Schluessel</ </xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSANFASYMK

| | |
|-------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Sperranforderung fuer einen asymmetrischen Schluessel |

| | |
|-----------------|---|
| Diagram | |
| Type | tns:TXSANFASYMK_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFASYMK_Type |
| Properties | content: complex |
| Model | txbase , sperrSperrgrund , keySperrkandidatasy |
| Children | keySperrkandidatasy, sperrSperrgrund, txbase |
| Instance | <pre><tns:TXSANFASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatasy>{1,1}</keySperrkandidatasy> </tns:TXSANFASYMK></pre> |
| Source | <pre><xs:element name="TXSANFASYMK" type="tns:TXSANFASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperranforderung fuer einen asymmetrischen Schluessel</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSAANFSYMK

| | |
|----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel |
| Diagram | |
| Type | tns:TXSAANFSYMK_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFSYMK_Type tns:TXSAANFSYMK_Type |
| Properties | content: complex |

| | |
|-----------------|--|
| Model | txbase , sperrSperrgrund , keySperrkandidatsym |
| Children | keySperrkandidatsym, sperrSperrgrund, txbase |
| Instance | <pre><tns:TXSAANFASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSAANFASYMK></pre> |
| Source | <pre><xs:element name="TXSAANFASYMK" type="tns:TXSAANFASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel</ </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSAANFASYMK

| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel |
| Diagram | |
| Type | tns:TXSAANFASYMK_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFASYMK_Type tns:TXSAANFASYMK_Type |
| Properties | content: complex |
| Model | txbase , sperrSperrgrund , keySperrkandidatasym |
| Children | keySperrkandidatasym, sperrSperrgrund, txbase |
| Instance | <pre><tns:TXSAANFASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrSperrgrund>{1,1}</sperrSperrgrund> <keySperrkandidatasym>{1,1}</keySperrkandidatasym> </tns:TXSAANFASYMK></pre> |
| Source | <pre><xs:element name="TXSAANFASYMK" type="tns:TXSAANFASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel</ </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSFREIMITSYM

| | |
|-------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Sperrfreigabemitteilung symmetrischer Key |

| | |
|-----------------|---|
| Diagram | |
| Type | tns:TXSFREIMITSYMK_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITSYMK_Type |
| Properties | content: complex |
| Model | tbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym |
| Children | keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, tbase |
| Instance | <pre><tns:TXSFREIMITSYMK xmlns:tns="http://vdv/ka/ion/2"> <tbase>{1,1}</tbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSFREIMITSYMK></pre> |
| Source | <pre><xs:element name="TXSFREIMITSYMK" type="tns:TXSFREIMITSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung symmetrischer Key</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSFREIMITASYMK

| | |
|----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Sperrfreigabemitteilung asymmetrischer Key |
| Diagram | |
| Type | tns:TXSFREIMITASYMK_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITASYMK_Type |
| Properties | content: complex |
| Model | tbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatasym |

| | |
|-----------------|---|
| Children | keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase |
| Instance | <pre><tns:TXSFREIMITASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSFREIMITASYMK></pre> |
| Source | <pre><xs:element name="TXSFREIMITASYMK" type="tns:TXSFREIMITASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrfreigabemitteilung asymmetrischer Key</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSMITSYMK

| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Sperrmitteilung symmetrischer Schluessel |
| Diagram | |
| Type | tns:TXSMITSYMK_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITSYMK_Type |
| Properties | content: complex |
| Model | txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym |
| Children | keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase |
| Instance | <pre><tns:TXSMITSYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatsym>{1,1}</keySperrkandidatsym> </tns:TXSMITSYMK></pre> |
| Source | <pre><xs:element name="TXSMITSYMK" type="tns:TXSMITSYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung symmetrischer Schluessel</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSMITASYMK

| | |
|-------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Sperrmitteilung asymmetrischer Schluessel |

| | |
|-----------------|---|
| Diagram | |
| Type | tns:TXSMITASYMK_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITASYMK_Type |
| Properties | content: complex |
| Model | txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatasymp |
| Children | keySperrkandidatasymp, sperrAnforderungBezug, sperrEntscheidung, txbase |
| Instance | <pre><tns:TXSMITASYMK xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <sperrAnforderungBezug>{1,1}</sperrAnforderungBezug> <sperrEntscheidung>{1,1}</sperrEntscheidung> <keySperrkandidatasymp>{1,1}</keySperrkandidatasymp> </tns:TXSMITASYMK></pre> |
| Source | <pre><xs:element name="TXSMITASYMK" type="tns:TXSMITASYMK_Type"> <xs:annotation> <xs:documentation>Element: Sperrmitteilung asymmetrischer Schluessel</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSNAWA

| | |
|----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Dienstanfrage "Sperrnachweis Applikation" |
| Diagram | |
| Type | tns:TXSNAWA_Req_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWA_Req_Type |
| Properties | content: complex |
| Model | txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrtransaktionApplikation , appNmTransaktionMAC |
| Children | appNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionApplikation, txbase, zyklusNummer |

| | |
|-----------------|---|
| Instance | <pre><tns:TXSNAWA xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <samSperrkandidat>{1,1}</samSperrkandidat> <orgSperrkandidat>{1,1}</orgSperrkandidat> <zyklusNummer>{1,1}</zyklusNummer> <sperrrtransaktionApplikation>{1,1}</sperrrtransaktionApplikation> <appNmTransaktionMAC>{1,1}</appNmTransaktionMAC> </tns:TXSNAWA></pre> |
| Source | <pre><xs:element name="TXSNAWA" type="tns:TXSNAWA_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage "Sperrnachweis Applikation"</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSNAWB

| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Element: Dienstanfrage "Sperrnachweis Berechtigung" |
| Diagram | |
| Type | tns:TXSNAWB_Req_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWB_Req_Type |
| Properties | content: complex |
| Model | txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrrtransaktionBerechtigung , berNmTransaktionMAC |
| Children | berNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrrtransaktionBerechtigung, txbase, zyklusNummer |
| Instance | <pre><tns:TXSNAWB xmlns:tns="http://vdv/ka/ion/2"> <txbase>{1,1}</txbase> <samSperrkandidat>{1,1}</samSperrkandidat> <orgSperrkandidat>{1,1}</orgSperrkandidat> <zyklusNummer>{1,1}</zyklusNummer> <sperrrtransaktionBerechtigung>{1,1}</sperrrtransaktionBerechtigung> <berNmTransaktionMAC>{1,1}</berNmTransaktionMAC> </tns:TXSNAWB></pre> |
| Source | <pre><xs:element name="TXSNAWB" type="tns:TXSNAWB_Req_Type"> <xs:annotation> <xs:documentation>Element: Dienstanfrage "Sperrnachweis Berechtigung"</xs:documentation> </xs:annotation> </xs:element></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Simple Type(s)

Simple Type tns:PrintableString

| | |
|-----------|--------------------------|
| Namespace | http://vdv/ka/ion/2 |
| Diagram | |
| Type | restriction of xs:string |

| | | |
|-----------------|---|---|
| Facets | pattern | [-p]* |
| Used by | Elements | pkm:TX_MODUL/bemerkung, pkm:TX_MODUL/modulnamenszusatz, pkm:TX_MODUL/schnittstellenversion, pkm:TX_MODUL_Bereitstellung/url, pkm:TX_MODUL_Lieferung/lieferart, tns:TX-AS_Type/transSendeAuftrag |
| Source | <pre><xs:simpleType name="PrintableString"> <xs:restriction base="xs:string"> <xs:pattern value="[-p]*"/> </xs:restriction> </xs:simpleType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | |

Simple Type tns:TransSignatur_Type

| | | |
|-----------------|--|---|
| Namespace | http://vdv/ka/ion/2 | |
| Annotations | Typ fuer die Signatur auf der Transaktion (altes Verfahren) | |
| Diagram | | |
| Type | restriction of xs:hexBinary | |
| Facets | length | 128 |
| Used by | Elements | tns:ION_TX_HEADER_Type/transSignatur, tns:TX_RET_Type/transOrigSignatur |
| Source | <pre><xs:simpleType name="TransSignatur_Type"> <xs:annotation> <xs:documentation>Typ fuer die Signatur auf der Transaktion (altes Verfahren)</xs:documentation> </xs:annotation> <xs:restriction base="xs:hexBinary"> <xs:length value="128" fixed="true"/> </xs:restriction> </xs:simpleType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | |

Simple Type tns:CommonServiceResultCode

| | | | |
|----------------|---|-----|---|
| Namespace | http://vdv/ka/ion/2 | | |
| Annotations | Dienstuebergreifende Ergebniscodes. In BOM Ablehnungstype_Code bis auf Fall "0". Dieser Typ ist nicht direkt eingebunden und dient der Vollstaendigkeit der Schnittstelle. | | |
| Diagram | | | |
| Type | restriction of tns:INT1 | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:CommonServiceResultCode | | |
| Facets | maxInclusive | 255 | |
| | minInclusive | 0 | |
| | enumeration | 2 | Daten des SOAP Headers stimmen nicht mit den Transaktionsdaten der fachlichen Nachricht ueberein. |
| | enumeration | 3 | Falsche Senderrolle |
| | enumeration | 4 | Organisations-ID des Senders ist unbekannt |
| | enumeration | 5 | Die Organisation wurde durch den AH gesperrt |
| | enumeration | 8 | Transaktion betrifft gesperrtes Objekt |
| | enumeration | 9 | Falsche Referenz |
| | enumeration | 254 | Service/Transaktion wird nicht unterstuetzt |
| Source | <pre><xs:simpleType name="CommonServiceResultCode"> <xs:annotation> <xs:documentation>Dienstuebergreifende Ergebniscodes. In BOM Ablehnungstype_Code bis auf Fall "0". Dieser Typ ist nicht direkt eingebunden und dient der Vollstaendigkeit der Schnittstelle.</ </xs:annotation> </xs:simpleType></pre> | | |

```

<xs:restriction base="ct:INT1">
  <!-- <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Erfolgreich</
xs:documentation>
      </xs:annotation> </xs:enumeration> -->
  <xs:enumeration value="2">
    <xs:annotation>
      <xs:documentation>Daten des SOAP Headers stimmen nicht mit den Transaktionsdaten der
fachlichen Nachricht ueberein.</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="3">
    <xs:annotation>
      <xs:documentation>Falsche Senderrolle</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="4">
    <xs:annotation>
      <xs:documentation>Organisations-ID des Senders ist unbekannt</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="5">
    <xs:annotation>
      <xs:documentation>Die Organisation wurde durch den AH gesperrt</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="8">
    <xs:annotation>
      <xs:documentation>Transaktion betrifft gesperrtes Objekt</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="9">
    <xs:annotation>
      <xs:documentation>Falsche Referenz</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="254">
    <xs:annotation>
      <xs:documentation>Service/Transaktion wird nicht unterstuetzt</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
</xs:restriction>
</xs:simpleType>

```

| | |
|----------------------|---|
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ ion/2/XML-Schema_ION.xsd |
|----------------------|---|

Simple Type tns:NmTransaktionsTyp_CODE

| | | | |
|---------------------|--|-----|--|
| Namespace | http://vdv/ka/ion/2 | | |
| Annotations | Der NmTransaktionstyp_CODE klassifiziert Arten von Transaktionen, die mit Wertobjekten auf dem Nutzermedium auftreten | | |
| Diagram | | | |
| Type | restriction of tns:INT1 | | |
| Type hierar- chy | <ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:NmTransaktionsTyp_CODE | | |
| Facets | maxInclusive | 255 | |
| | minInclusive | 0 | |
| | enumeration | 0 | Keine Angabe |
| | enumeration | 1 | Ausgabetransaktion - Applikation oder Berechtigung |
| | enumeration | 2 | Entwertung |
| | enumeration | 11 | CI |
| | enumeration | 12 | CO |
| | enumeration | 15 | Einzahlung - Berechtigung |
| | enumeration | 16 | CI nach Fahrtfortsetzung |
| | enumeration | 18 | NTP Aendern |
| | enumeration | 20 | Sperrtransaktion Applikation oder Berechtigung |

| | | |
|-------------|----|--|
| enumeration | 21 | Entsperrtransaktion Applikation oder Berechtigung |
| enumeration | 22 | BI |
| enumeration | 23 | BO |
| enumeration | 24 | INOUT |
| enumeration | 25 | Rueckgabetransaktion - Applikation oder Berechtigung |
| enumeration | 27 | Kontrolle |
| enumeration | 28 | Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung (POB/PEB/WEB) |
| enumeration | 29 | Belastungstransaktion WEB mit Autoload |
| enumeration | 30 | WEB Buchung(Laden/Entladen) |
| enumeration | 31 | WEB-CI mit Autoload |
| enumeration | 32 | WEB-CO mit Autoload |
| enumeration | 33 | Kontrolle nach CI; BIBO oder Entwertung |
| enumeration | 34 | Check personal (CPKontrolldatensatz fuer Kontrollterminal) |
| enumeration | 35 | Auto CO |
| enumeration | 36 | manuelles CO (nachtraeglich durch den Nutzer) |
| enumeration | 37 | Ausgabe EFS ueber Aktionsliste |
| enumeration | 38 | Entsperrtransaktion EFS ueber Aktionsliste |
| enumeration | 39 | Rückgabetransaktion EFS ueber Aktionsliste |

Source

```
<xs:simpleType name="NmTransaktionsTyp_CODE">
  <xs:annotation>
    <xs:documentation>Der NmTransaktionstyp_CODE klassifiziert Arten von Transaktionen, die mit
    Wertobjekten auf dem Nutzermedium auftreten</xs:documentation>
  </xs:annotation>
  <xs:restriction base="ct:INT1">
    <xs:enumeration value="0">
      <xs:annotation>
        <xs:documentation>Keine Angabe</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="1">
      <xs:annotation>
        <xs:documentation>Ausgabetransaktion - Applikation oder Berechtigung</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="2">
      <xs:annotation>
        <xs:documentation>Entwertung</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="11">
      <xs:annotation>
        <xs:documentation>CI</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="12">
      <xs:annotation>
        <xs:documentation>CO</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="15">
      <xs:annotation>
        <xs:documentation>Einzahlung - Berechtigung</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="16">
      <xs:annotation>
        <xs:documentation>CI nach Fahrtfortsetzung</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="18">
      <xs:annotation>
        <xs:documentation>NTP Aendern</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
    <xs:enumeration value="20">
      <xs:annotation>
        <xs:documentation>Spertransaktion Applikation oder Berechtigung</xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>
```


```

    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="21">
    <xs:annotation>
      <xs:documentation>Entsperrtransaktion Applikation oder Berechtigung</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="22">
    <xs:annotation>
      <xs:documentation>BI</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="23">
    <xs:annotation>
      <xs:documentation>BO</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="24">
    <xs:annotation>
      <xs:documentation>INOUT</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="25">
    <xs:annotation>
      <xs:documentation>Rueckgabetransaktion - Applikation oder Berechtigung</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="27">
    <xs:annotation>
      <xs:documentation>Kontrolle</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="28">
    <xs:annotation>
      <xs:documentation>Belastungstransaktion - Berechtigung und Gutschriften bei Rueckzahlung
(POB/PEB/WEB)</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="29">
    <xs:annotation>
      <xs:documentation>Belastungstransaktion WEB mit Autoload</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="30">
    <xs:annotation>
      <xs:documentation>WEB Buchung(Laden/Entladen)</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="31">
    <xs:annotation>
      <xs:documentation>WEB-CI mit Autoload</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="32">
    <xs:annotation>
      <xs:documentation>WEB-CO mit Autoload</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="33">
    <xs:annotation>
      <xs:documentation>Kontrolle nach CI; BIBO oder Entwertung</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="34">
    <xs:annotation>
      <xs:documentation>Check personal (CPKontrolldatensatz fuer Kontrollterminal)</
xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="35">
    <xs:annotation>
      <xs:documentation>Auto CO</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="36">
    <xs:annotation>
      <xs:documentation>manuelles CO (nachtraeglich durch den Nutzer)</xs:documentation>
    </xs:annotation>
  </xs:enumeration>
  <xs:enumeration value="37">
    <xs:annotation>
      <xs:documentation>Ausgabe EFS ueber Aktionsliste</xs:documentation>
    </xs:annotation>
  </xs:enumeration>


```

| | |
|-----------------|---|
| | <pre> </xs:enumeration> <xs:enumeration value="38"> <xs:annotation> <xs:documentation>Entsperrtransaktion EFS ueber Aktionsliste</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="39"> <xs:annotation> <xs:documentation>Rückgabetransaktion EFS ueber Aktionsliste</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Simple Type `tns:OrtsTyp_CODE_Type`

| | | | | | |
|-----------------|---|--------------|-----|--------------|---|
| Namespace | http://vdv/ka/ion/2 | | | | |
| Annotations | Classifies locations, see Spec BOM, table 6-69. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung OrtsTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden. | | | | |
| Diagram |  | | | | |
| Type | tns:INT1 | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:OrtsTyp_CODE_Type | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 |
| maxInclusive | 255 | | | | |
| minInclusive | 0 | | | | |
| Used by | Element tns:Ort_ID_Type/ortTyp | | | | |
| Source | <pre> <xs:simpleType name="OrtsTyp_CODE_Type"> <xs:annotation> <xs:documentation>Classifies locations, see Spec BOM, table 6-69. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung OrtsTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"/> </xs:simpleType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Simple Type `tns:AuftragsTyp_CODE`

| | | | | | |
|----------------|--|--------------|-----|--------------|---|
| Namespace | http://vdv/ka/ion/2 | | | | |
| Annotations | Der Code des Auftrages als Aufzaehlung. | | | | |
| Diagram |  | | | | |
| Type | tns:INT1 | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:AuftragsTyp_CODE | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 |
| maxInclusive | 255 | | | | |
| minInclusive | 0 | | | | |
| Used by | Element tns:TXAS_Type/transSendeAuftragstyp | | | | |
| Source | <pre> <xs:simpleType name="AuftragsTyp_CODE"> <xs:annotation> </pre> | | | | |

| | |
|-----------------|--|
| | <pre> <xs:documentation>Der Code des Auftrages als Aufzaehlung.</xs:documentation> </xs:annotation> <!-- TODO: bitte als Aufzaehlung!!! --> <xs:restriction base="ct:INT1"/> </xs:simpleType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Simple Type `tns:Abrechnungsverfahren_CODE_Type`

| | | | |
|-----------------|--|--|--------------|
| Namespace | http://vdv/ka/ion/2 | | |
| Annotations | Der Abrechnungsverfahren_CODE klassifiziert das Verfahren der Fahrpreisabrechnung. | | |
| Diagram |  | | |
| Type | restriction of tns:INT1 | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:Abrechnungsverfahren_CODE_Type | | |
| Facets | maxInclusive | 255 | |
| | minInclusive | 0 | |
| | enumeration | 0 | Keine Angabe |
| | enumeration | 1 | Pre-Paid |
| | enumeration | 2 | Post-Paid |
| | enumeration | 3 | Trip-Paid |
| Used by | Element | tns:TX_BER_Type/prodAbrechnungsverfahren | |
| Source | <pre><xs:simpleType name="Abrechnungsverfahren_CODE_Type"> <xs:annotation> <xs:documentation>Der Abrechnungsverfahren_CODE klassifiziert das Verfahren der Fahrpreisabrechnung.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"> <xs:enumeration value="0"> <xs:annotation> <xs:documentation>Keine Angabe</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="1"> <xs:annotation> <xs:documentation>Pre-Paid</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="2"> <xs:annotation> <xs:documentation>Post-Paid</xs:documentation> </xs:annotation> </xs:enumeration> <xs:enumeration value="3"> <xs:annotation> <xs:documentation>Trip-Paid</xs:documentation> </xs:annotation> </xs:enumeration> </xs:restriction> </xs:simpleType></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | |

Simple Type `tns:Bezahlart_CODE_Type`

| | |
|-------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | <p>Der BezahlArt_CODE klassifiziert Arten der Bezahlung (von Wertobjekten der Kernapplikation).</p> <p>Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software</p> |


| | | |
|-----------------|---|------------------------------|
| | mit Hilfe der Aufzaehlung BezahlartEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden. | |
| Diagram | | |
| Type | tns:INT1 | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:Bezahlart_CODE_Type | |
| Facets | maxInclusive | 255 |
| | minInclusive | 0 |
| Used by | Element | tns:TX_BER_Type/berBezahlArt |
| Source | <pre><xs:simpleType name="Bezahlart_CODE_Type"> <xs:annotation> <xs:documentation>Der BezahlArt_CODE klassifiziert Arten der Bezahlung (von Wertobjekten der Kernapplikation). Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung BezahlartEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"/> </xs:simpleType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | |

Simple Type tns:TerminalTyp_CODE_Type


| | | |
|-----------------|--|----------------------------------|
| Namespace | http://vdv/ka/ion/2 | |
| Annotations | <p>Classifies terminals. From EN 1545: DeviceTypeCode. See Spec BOM table 6-85. Der TerminalTyp_CODE klassifiziert Terminals. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung TerminalTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</p> | |
| Diagram | | |
| Type | tns:INT1 | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TerminalTyp_CODE_Type | |
| Facets | maxInclusive | 255 |
| | minInclusive | 0 |
| Used by | Element | tns:Terminal_ID_Type/terminalTyp |
| Source | <pre><xs:simpleType name="TerminalTyp_CODE_Type"> <xs:annotation> <xs:documentation>Classifies terminals. From EN 1545: DeviceTypeCode. See Spec BOM table 6-85. Der TerminalTyp_CODE klassifiziert Terminals. Die direkte Referenz auf die Aufzaehlung wurde im Rahmen von CR-239 entfernt und damit die automatische Validierung auf die Beschraenkung der Aufzaehlungselemente entfernt, um Codes erweitern zu koennen. Der sematische Check muss in der Software mit Hilfe der Aufzaehlung TerminalTypeEnum_Type im entsprechenden Schema (XML-Schema_ION_Enums_ext-1.x.x.xsd) umgesetzt werden.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT1"/> </xs:simpleType></pre> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | |

Simple Type tns:SAM_ID_Type

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/ion/2 |
|-----------|---------------------|

| | | | | | |
|-----------------|---|--------------|----------|--------------|---|
| Annotations | Type: Eindeutiger Identifizierer eines Secure Application Module (SAM) | | | | |
| Diagram |  | | | | |
| Type | tns:ReferenceNumberThree | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT3 <ul style="list-style-type: none"> tns:ReferenceNumberThree <ul style="list-style-type: none"> tns:SAM_ID_Type | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 16777215 | minInclusive | 0 |
| maxInclusive | 16777215 | | | | |
| minInclusive | 0 | | | | |
| Used by | Elements tns:TXSNAWA_Req_Type/samSperrkandidat, tns:TXSNAWB_Req_Type/samSperrkandidat | | | | |
| Source | <pre><xs:simpleType name="SAM_ID_Type"> <xs:annotation> <xs:documentation>Type: Eindeutiger Identifizierer eines Secure Application Module (SAM)</xs:documentation> </xs:annotation> <xs:restriction base="ct:ReferenceNumberThree" /> </xs:simpleType></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Simple Type tns:Mitteilung_CODE_Type

| | | | | | | | | | |
|-----------------|---|-------------|---|-------------|---|-------------|---|-------------|---|
| Namespace | http://vdv/ka/ion/2 | | | | | | | | |
| Annotations | Typ: Mitteilung Codes BOM 6_40 | | | | | | | | |
| Diagram |  | | | | | | | | |
| Type | restriction of xs:unsignedInt | | | | | | | | |
| Facets | <table> <tr> <td>enumeration</td><td>1</td></tr> <tr> <td>enumeration</td><td>2</td></tr> <tr> <td>enumeration</td><td>3</td></tr> <tr> <td>enumeration</td><td>4</td></tr> </table> | enumeration | 1 | enumeration | 2 | enumeration | 3 | enumeration | 4 |
| enumeration | 1 | | | | | | | | |
| enumeration | 2 | | | | | | | | |
| enumeration | 3 | | | | | | | | |
| enumeration | 4 | | | | | | | | |
| Used by | Element tns:TX_SMIT_Type/sperrEntscheidung | | | | | | | | |
| Source | <pre><xs:simpleType name="Mitteilung_CODE_Type"> <xs:annotation> <xs:documentation>Typ: Mitteilung Codes BOM 6_40</xs:documentation> </xs:annotation> <xs:restriction base="xs:unsignedInt"> <xs:enumeration value="1"/> <xs:enumeration value="2"/> <xs:enumeration value="3"/> <xs:enumeration value="4"/> </xs:restriction> </xs:simpleType></pre> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | | | | | |

Simple Type tns:SperrlistenZyklusNummer_Type

| | |
|-------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | <p>Die sperrlistenZyklusNummer ist eine streng Monoton aufsteigende Sequenznummer.</p> <p>Sie wird in einem festen konfigurierbaren Turnus zu einem bestimmten Zeitpunkt inkrementiert (z.B. 1 mal taeglich um 1:00 Uhr).</p> <p>Zu einer SperrlistenZyklusNummer werden alle Sperrobjektzustaende, die zu diesem Zeitpunkt im Kose System erfasst wurden, assoziiert.</p> <p>Sie gilt Systemweit und ist nicht an Organisationen oder Rollen gebunden.</p> <p>Wird eine Differenzsperrliste unter Angabe der sperrlistenZyklusNummer angefordert, so werden alle Sperrobjektaenderungen zwischen</p> |

| | | | | | |
|-----------------|--|--------------|------------|--------------|---|
| | dieser ZyklusNummer und der aktuellen ZyklusNummer uebertragen. | | | | |
| Diagram | | | | | |
| Type | tns:INT4 | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SperrlistenZyklusNummer_Type | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 4294967295 | minInclusive | 0 |
| maxInclusive | 4294967295 | | | | |
| minInclusive | 0 | | | | |
| Used by | Elements tns:TXSNAWA_Req_Type/zyklusNummer, tns:TXSNAWB_Req_Type/zyklusNummer | | | | |
| Source | <pre> <xs:simpleType name="SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die sperrlistenZyklusNummer ist eine streng Monoton aufsteigende Sequenznummer. Sie wird in einem festen konfigurierbaren Turnus zu einem bestimmten Zeitpunkt inkrementiert (z.B. 1 mal taeglich um 1:00 Uhr). Zu einer SperrlistenZyklusNummer werden alle Sperrobjektzustaende, die zu diesem Zeitpunkt im Kose System erfasst wurden, assoziiert. Sie gilt Systemweit und ist nicht an Organisationen oder Rollen gebunden. Wird eine Differenzsperrliste unter Angabe der sperrlistenZyklusNummer angefordert, so werden alle Sperrobjektaenderungen zwischen dieser ZyklusNummer und der aktuellen ZyklusNummer uebertragen.</xs:documentation> </xs:annotation> <xs:restriction base="ct:INT4" /> </xs:simpleType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Complex Type(s)

Complex Type tns:TX_BASE_Type

| | |
|-----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Basisdaten fuer alle Transaktionen |
| Diagram | |
| Used by | Complex Types pkm:TXVPVTM_Type, tns:TXAS_Type, tns:TXDEABER_Req_Type, tns:TXSNAWA_Req_Type, tns:TXSNAWB_Req_Type, tns:TX_RET_Type, tns:TX_SANF_Type, tns:TX_SMIT_Type |
| Model | txbase |
| Children | txbase |
| Source | <pre> <xs:complexType name="TX_BASE_Type"> <xs:annotation> <xs:documentation>Basisdaten fuer alle Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="txbase" type="tns:ION_TX_HEADER_Type"> <xs:annotation> <xs:documentation>Fachliche Daten ueber die in der Transaktion involvierten Systeme</ </xs:annotation> </xs:element> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:ION_TX_HEADER_Type

| | |
|-------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Routing relevante Daten des Nachrichtenkopfs von VDV KA Transaktionen |

| | |
|-----------------|--|
| Diagram | |
| Used by | Element tns:TX_BASE_Type/txbase |
| Model | transAuftrag{0,1} , transEmpfaenger_ID , transEmpfaengerRolle , transStatus{0,1} , transTransaktion_ID , transTransaktionsTyp{0,1} , transTransaktionsZeitpunkt , transVersion{0,1} , transWiederholungsZaehler{0,1} , transSignaturTyp{0,1} , transSignaturZertifikat{0,1} , transSignatur{0,1} |
| Children | transAuftrag, transEmpfaengerRolle, transEmpfaenger_ID, transSignatur, transSignaturTyp, transSignaturZertifikat, transStatus, transTransaktion_ID, transTransaktionsTyp, transTransaktionsZeitpunkt, transVersion, transWiederholungsZaehler |
| Source | <pre> <xs:complexType name="ION_TX_HEADER_Type"> <xs:annotation> <xs:documentation>Routing relevante Daten des Nachrichtenkopfs von VDV KA Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="transAuftrag" type="xs:string" minOccurs="0" maxOccurs="1"/> <xs:element name="transEmpfaenger_ID" type="ka:Organisation_ID"> <xs:annotation> <xs:documentation>Eindeutige OrganisationsId des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element> <xs:element name="transEmpfaengerRolle" type="ka:KommunikationsParterRolle"> <xs:annotation> <xs:documentation>Rolle des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element> <xs:element name="transStatus" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transTransaktion_ID" type="tns:IONTransaktion_ID_Type"/> <xs:element name="transTransaktionsTyp" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transTransaktionsZeitpunkt" type="ct:DateTime"> <xs:annotation> <xs:documentation>Zeitpunkt der Dienstanfrage gemaess den Angaben der Dienstauftrufers. Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist moeglicherweise die Aussagekraft dieses Feldes sehr gering.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="transVersion" type="ct:BitString16" minOccurs="0" maxOccurs="1"/> <xs:element name="transWiederholungsZaehler" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transSignaturTyp" type="ct:INT1" minOccurs="0" maxOccurs="1"/> <xs:element name="transSignaturZertifikat" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:hexBinary"> <xs:length value="378" fixed="true"/> </xs:restriction> </xs:simpleType> </xs:element> <xs:element name="transSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:IONTransaktion_ID_Type

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/ion/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Annotations | <p>Typ: ID fuer Transaktionen, die ueber das ION (Interoperables Netzwerk) durchgefuehrt werden.</p> <p>Aufgabe dieses Elements ist es, eine Korrelation zwischen der Dienstantwort und der ursprunglichen Dienstanfrage herzustellen.</p> <p>transSequenznummer wird initial vom Dienstafrufer vergeben und wird unveraendert fuer die Dauer der Kommunikation genutzt.</p> |
| Diagram | |
| Used by | <p>Elements</p> <p>tns:ION_TX_HEADER_Type/transTransaktion_ID, tns:TX_RET_Type/transOrigID, tns:TX_SMIT_Type/sperrAnforderungBezug</p> |
| Model | transSequenznummer , transSenderRolle , transSender_ID |
| Children | transSenderRolle, transSender_ID, transSequenznummer |
| Source | <pre> <xs:complexType name="IONTransaktion_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID fuer Transaktionen, die ueber das ION (Interoperables Netzwerk) durchgefuehrt werden. Aufgabe dieses Elements ist es, eine Korrelation zwischen der Dienstantwort und der ursprunglichen Dienstanfrage herzustellen. transSequenznummer wird initial vom Dienstafrufer vergeben und wird unveraendert fuer die Dauer der Kommunikation genutzt.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="transSequenznummer" type="ct:SequenceNumberFour"/> <xs:element name="transSenderRolle" type="ka:KommunikationsParterRolle"/> <xs:element name="transSender_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:Ort_ID_Type

| | |
|-----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Datenstruktur Ort_ID |
| Diagram | |
| Model | ortTyp , ortNummer , ortDomaene_ID |
| Children | ortDomaene_ID, ortNummer, ortTyp |
| Source | <pre> <xs:complexType name="Ort_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Ort_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="ortTyp" type="tns:OrtsTyp_CODE_Type"/> <xs:element name="ortNummer" type="ct:ReferenceNumberThree"/> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="ortDomaene_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:Terminal_ID_Type

| | |
|-------------|--------------------------------|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Datenstruktur Terminal_ID |
| Diagram | |

| | |
|-----------------|--|
| Model | terminalTyp , terminalNumber , terminalOwner_ID |
| Children | terminalNumber, terminalOwner_ID, terminalTyp |
| Source | <pre><xs:complexType name="Terminal_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur Terminal_ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="terminalTyp" type="tns:TerminalTyp_CODE_Type"/> <xs:element name="terminalNumber" type="ct:ReferenceNumberTwo"/> <xs:element name="terminalOwner_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:NmApplikationInstanz_ID_Type

| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: ID einer Applikationsinstanz auf dem Nutzermedium |
| Diagram | |
| Used by | Element tns:TXSMITA_Type/appSperrkandidat |
| Model | NmAppInstanznummer , kvp_ID |
| Children | NmAppInstanznummer, kvp_ID |
| Source | <pre><xs:complexType name="NmApplikationInstanz_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID einer Applikationsinstanz auf dem Nutzermedium</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="NmAppInstanznummer" type="ct:ReferenceNumberFour"/> <xs:element name="kvp_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:Berechtigung_ID_Type

| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: ID einer Berechtigung |
| Diagram | |
| Model | berechtigungNummer , kvp_ID |
| Children | berechtigungNummer, kvp_ID |
| Source | <pre><xs:complexType name="Berechtigung_ID_Type"> <xs:annotation> <xs:documentation>Typ: ID einer Berechtigung</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berechtigungNummer" type="ct:ReferenceNumberFour"/> <xs:element name="kvp_ID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:EFMPProdukt_ID_Type

| | |
|-------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Datenstruktur EFMPProdukt_ID, bestehend aus Produktverantwortlichen und Produktnummer (zusammen eindeutig) |

| | |
|-----------------|---|
| Diagram | |
| Used by | Element tns:TXDEABER_Req_Type/prodProdukt_ID |
| Model | produktNummer{0,1} , organisationID |
| Children | organisationID, produktNummer |
| Source | <pre> <xs:complexType name="EFMPProdukt_ID_Type"> <xs:annotation> <xs:documentation>Typ: Datenstruktur EFMPProdukt_ID, bestehend aus Produktverantwortlichen und Produktnummer (zusammen eindeutig)</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="produktNummer" type="ct:ReferenceNumberTwo" minOccurs="0" maxOccurs="1"/> <xs:element name="organisationID" type="ka:Organisation_ID"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:Transaktionsdatensatz_Type

| | |
|-----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Transaktionsdatensatz |
| Diagram | |
| Used by | Elements tns:TXSNAWA_Req_Type/sperrtransaktionApplikation, tns:TXSNAWB_Req_Type/sperrtransaktion-Berechtigung |
| Model | Transaktionsdaten |
| Children | Transaktionsdaten |
| Source | <pre> <xs:complexType name="Transaktionsdatensatz_Type"> <xs:annotation> <xs:documentation>Typ: Transaktionsdatensatz</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="Transaktionsdaten" type="xs:hexBinary"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:SymSchluessel_ID_Type

| | |
|-------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Schluessel ID |
| Diagram | |
| Used by | Elements tns:TXSANFSYMK_Type/keySperrkandidatsym, tns:TXSFREIMITSYMK_Type/keySperrkandidatsym, tns:TXSMITSYMK_Type/keySperrkandidatsym, tns:appNmTransaktionMAC_Type/appMAC_AH_Schluessel_ID, tns:appNmTransaktionMAC_Type/appMAC_KVP_Schluessel_ID, tns:berNmTransaktionMAC_Type/berMAC_KVP_Schluessel_ID, tns:berNmTransaktionMAC_Type/berMAC_PV_Schluessel_ID |
| Model | schluesselNummer , schluesselVersion , schluesselInhaber_ID |
| Children | schluesselInhaber_ID, schluesselNummer, schluesselVersion |
| Source | <pre> <xs:complexType name="SymSchluessel_ID_Type"> <xs:annotation> <xs:documentation>Typ: Schluessel ID</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="schluesselNummer" type="ct:INT1"/> <xs:element name="schluesselVersion" type="ct:INT1"/> <xs:element name="schluesselInhaber_ID" type="ct:ReferenceNumberTwo"/> </xs:sequence> </pre> |

| | |
|-----------------|---|
| | <code></xs:complexType></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type `tns:ASymSchluessel_ID_Type`

| | |
|-----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Type: Identifizierungsmerkmal, das den Schluessel eindeutig bestimmt. |
| Diagram | |
| Used by | Elements tns:TXSANFASYMK_Type/keySperrkandidatasym, tns:TXSFREIMITASYMK_Type/keySperrkandidatasym, tns:TXSMITASYMK_Type/keySperrkandidatasym |
| Model | signaturSchluessel |
| Children | signaturSchluessel |
| Source | <pre><xs:complexType name="ASymSchluessel_ID_Type"> <xs:annotation> <xs:documentation>Type: Identifizierungsmerkmal, das den Schluessel eindeutig bestimmt.</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="signaturSchluessel" type="ct:OctetString12"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type `tns:appNmTransaktionMAC_Type`

| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: MAC-Sicherung fuer Applikations-Transaktionen |
| Diagram | |
| Used by | Element tns:TXSNAWA_Req_Type/appNmTransaktionMAC |
| Model | appMAC_AH , appMAC_KVP , appMAC_AH_Schluessel_ID , appMAC_KVP_Schluessel_ID |
| Children | appMAC_AH, appMAC_AH_Schluessel_ID, appMAC_KVP, appMAC_KVP_Schluessel_ID |
| Source | <pre><xs:complexType name="appNmTransaktionMAC_Type"> <xs:annotation> <xs:documentation>Typ: MAC-Sicherung fuer Applikations-Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="appMAC_AH" type="ct:OctetString8"/> <xs:element name="appMAC_KVP" type="ct:OctetString8"/> <xs:element name="appMAC_AH_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/> <xs:element name="appMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type `tns:berNmTransaktionMAC_Type`

| | |
|-------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: MAC-Sicherung fuer Berechtigungs-Transaktionen |
| Diagram | |

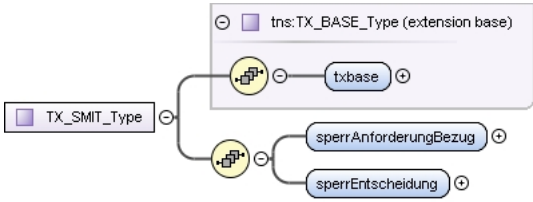
| | |
|-----------------|--|
| Used by | Element tns:TXSNAWB_Req_Type/berNmTransaktionMAC |
| Model | berMAC_PV , berMAC_KVP , berMAC_PV_Schluesssel_ID , berMAC_KVP_Schluesssel_ID |
| Children | berMAC_KVP, berMAC_KVP_Schluesssel_ID, berMAC_PV, berMAC_PV_Schluesssel_ID |
| Source | <pre> <xs:complexType name="berNmTransaktionMAC_Type"> <xs:annotation> <xs:documentation>Typ: MAC-Sicherung fuer Berechtigungs-Transaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berMAC_PV" type="ct:OctetString8"/> <xs:element name="berMAC_KVP" type="ct:OctetString8"/> <xs:element name="berMAC_PV_Schluesssel_ID" type="tns:SymSchluesssel_ID_Type"/> <xs:element name="berMAC_KVP_Schluesssel_ID" type="tns:SymSchluesssel_ID_Type"/> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TX_RET_Type

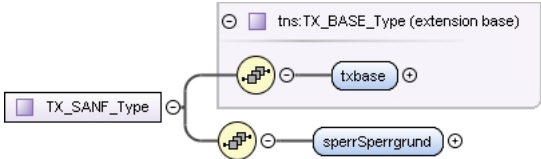
| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Basisdaten fuer Antworttransaktion |
| Diagram | |
| Type | extension of tns:TX_BASE_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type |
| Used by | Complex Types tns:TXA_Type, tns:TXB_Type |
| Model | txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit |
| Children | transOrigID, transOrigSignatur, transOriginalZeit, txbase |
| Source | <pre> <xs:complexType name="TX_RET_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Antworttransaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="transOrigID" type="tns:IONTransaktion_ID_Type"/> <xs:element name="transOrigSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/> <xs:element name="transOriginalZeit" type="xs:dateTime"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TX_SMIT_Type

| | |
|-------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Basisdaten fuer Sperrmitteilungen |

| | |
|-----------------|---|
| Diagram |  |
| Type | extension of tns:TX_BASE_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type |
| Used by | Complex Types tns:TXSFREIMITASYMK_Type, tns:TXSFREIMITSYMK_Type, tns:TXSMITASYMK_Type, tns:TXSMITA_Type, tns:TXSMITSYMK_Type |
| Model | txbase , sperrAnforderungBezug , sperrEntscheidung |
| Children | sperrAnforderungBezug, sperrEntscheidung, txbase |
| Source | <pre> <xs:complexType name="TX_SMIT_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Sperrmitteilungen</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="sperrAnforderungBezug" type="tns:IONTransaktion_ID_Type"/> <xs:element name="sperrEntscheidung" type="tns:Mitteilung_CODE_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TX_SANF_Type

| | |
|-----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Basisdaten fuer Sperranforderungen |
| Diagram |  |
| Type | extension of tns:TX_BASE_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type |
| Used by | Complex Types tns:TXSANFASYMK_Type, tns:TXSANFSYMK_Type |
| Model | txbase , sperrSperrgrund |
| Children | sperrSperrgrund, txbase |
| Source | <pre> <xs:complexType name="TX_SANF_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Sperranforderungen</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <!-- Wilk Hoffmann: muss spaeter aus Aufzaehlung kommen --> <xs:element name="sperrSperrgrund" type="ct:INT1"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TX_BER_Type

| | |
|-----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Basisdaten fuer Berechtigungstransaktionen |
| Diagram | |
| Model | berGueltigkeitsbeginn , berGueltigkeitsende , prodAbrechnungsVerfahren , berBezahlArt , berBezahlMittel |
| Children | berBezahlArt, berBezahlMittel, berGueltigkeitsbeginn, berGueltigkeitsende, prodAbrechnungsVerfahren |
| Source | <pre> <xs:complexType name="TX_BER_Type"> <xs:annotation> <xs:documentation>Typ: Basisdaten fuer Berechtigungstransaktionen</xs:documentation> </xs:annotation> <xs:sequence> <xs:element name="berGueltigkeitsbeginn" type="ct:DateTimeCompact" /> <xs:element name="berGueltigkeitsende" type="ct:DateTimeCompact" /> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="prodAbrechnungsVerfahren" type="tns:Abrechnungsverfahren_CODE_Type" /> <!-- Wilk Hoffmann: korrigiert --> <xs:element name="berBezahlArt" type="tns:Bezahlart_CODE_Type" /> <xs:element name="berBezahlMittel" type="ct:OctetString10" /> </xs:sequence> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXA_Type

| | |
|----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Ablehnung einer ION-Transaktion |
| Diagram | |
| Type | extension of tns:TX_RET_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXA_Type |
| Used by | Elements tns:TXA, tns:TXAResponse |
| Model | txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit , transAblehnungGrund |
| Children | transAblehnungGrund, transOrigID, transOrigSignatur, transOriginalZeit, txbase |
| Source | <pre> <xs:complexType name="TXA_Type"> <xs:annotation> <xs:documentation>Typ: Ablehnung einer ION-Transaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_RET_Type"> <xs:sequence> </pre> |

| | |
|----------------------|--|
| | <pre> <xs:element name="transAblehnungGrund" type="ct:INT1"> <xs:annotation> <xs:documentation>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst, getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceResultCode'). Es wird empfohlen, fuer die vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</xs:documentation> </xs:annotation> </xs:element> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXB_Type

| | |
|----------------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Bestaetigung einer ION-Transaktion |
| Diagram | <pre> classDiagram class tnsTXB_Type["tns:TXB_Type"] class tnsTX_RET_Type["tns:TX_RET_Type (extension base)"] class txbase class transOrigID class transOrigSignatur class transOriginalZeit tnsTXB_Type -- > tnsTX_RET_Type tnsTXB_Type -- txbase tnsTX_RET_Type -- transOrigID tnsTX_RET_Type -- transOrigSignatur tnsTX_RET_Type -- transOriginalZeit </pre> |
| Type | extension of tns:TX_RET_Type |
| Type hierar- chy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_RET_Type tns:TXB_Type |
| Used by | Elements tns:TXB, tns:TXBRequest |
| Model | txbase , transOrigID , transOrigSignatur{0,1} , transOriginalZeit |
| Children | transOrigID, transOrigSignatur, transOriginalZeit, txbase |
| Source | <pre> <xs:complexType name="TXB_Type"> <xs:annotation> <xs:documentation>Typ: Bestaetigung einer ION-Transaktion</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_RET_Type" /> </xs:complexContent> </xs:complexType> </pre> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXAS_Type

| | |
|-------------|------------------------------|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Aufforderung zum Senden |

| | |
|-----------------|---|
| Diagram | |
| Type | extension of tns:TX_BASE_Type |
| Type hierarchy | <ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXAS_Type |
| Model | txbase , transSendeAuftrag , transSendeAuftragstyp |
| Children | transSendeAuftrag, transSendeAuftragstyp, txbase |
| Source | <pre> <xs:complexType name="TXAS_Type"> <xs:annotation> <xs:documentation>Typ: Aufforderung zum Senden</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="transSendeAuftrag"> <xs:simpleType> <xs:restriction base="tns:PrintableString"> <xs:minLength value="0"/> <xs:maxLength value="10"/> </xs:restriction> </xs:simpleType> </xs:element> <!-- TODO Wilk Hoffmann: Wenn dann bitte mit Aufzaehlung (verschoben bis stabil)--> <xs:element name="transSendeAuftragstyp" type="tns:AuftragsTyp_CODE"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXDEABER_Req_Type

| | |
|----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Dienstanfrage "Entfernen einer Produkt Akzeptanz fuer alle Organisationen" |
| Diagram | |
| Type | extension of tns:TX_BASE_Type |
| Type hierarchy | <ul style="list-style-type: none"> • tns:TX_BASE_Type • tns:TXDEABER_Req_Type |
| Used by | Element tns:TXDEABER |
| Model | txbase , prodAkzeptanzEnde , prodProdukt_ID |
| Children | prodAkzeptanzEnde, prodProdukt_ID, txbase |
| Source | <pre> <xs:complexType name="TXDEABER_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Entfernen einer Produkt Akzeptanz fuer alle Organisationen"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:element name="prodAkzeptanzEnde" type="ct:Date"/> <xs:element name="prodProdukt_ID" type="tns:EFMPprodukt_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |

| | |
|-----------------|---|
| | <pre> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXSMITA_Type

| | | | | | |
|-----------------|--|--------------|----------------------|---------|-------------|
| Namespace | http://vdv/ka/ion/2 | | | | |
| Annotations | Typ: Sperrmitteilung Applikation | | | | |
| Diagram | | | | | |
| Type | extension of tns:TX_SMIT_Type | | | | |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITA_Type | | | | |
| Used by | <table> <tr> <td>Complex Type</td><td>tns:TXSFREIMITA_Type</td></tr> <tr> <td>Element</td><td>tns:TXSMITA</td></tr> </table> | Complex Type | tns:TXSFREIMITA_Type | Element | tns:TXSMITA |
| Complex Type | tns:TXSFREIMITA_Type | | | | |
| Element | tns:TXSMITA | | | | |
| Model | txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat | | | | |
| Children | appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase | | | | |
| Source | <pre> <xs:complexType name="TXSMITA_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="appSperrkandidat" type="tns:NmApplikationInstanz_ID_Type" nillable="false"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Complex Type tns:TXSFREIMITA_Type

| | |
|-------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Sperrfreigabemitteilung Applikation |
| Diagram | |

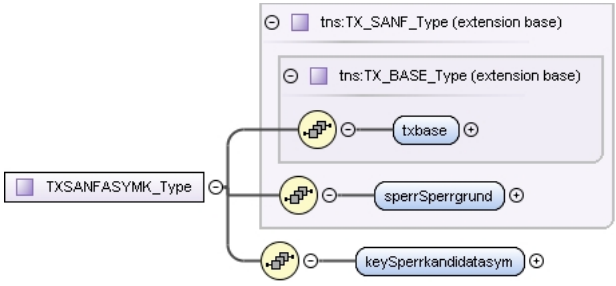
| | |
|-----------------|--|
| Type | extension of tns:TXSMITA_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITA_Type tns:TXSFREIMITA_Type |
| Used by | Element tns:TXSFREIMITA |
| Model | txbase , sperrAnforderungBezug , sperrEntscheidung , appSperrkandidat |
| Children | appSperrkandidat, sperrAnforderungBezug, sperrEntscheidung, txbase |
| Source | <pre><xs:complexType name="TXSFREIMITA_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung Applikation</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSMITA_Type" /> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXSANFSYMK_Type

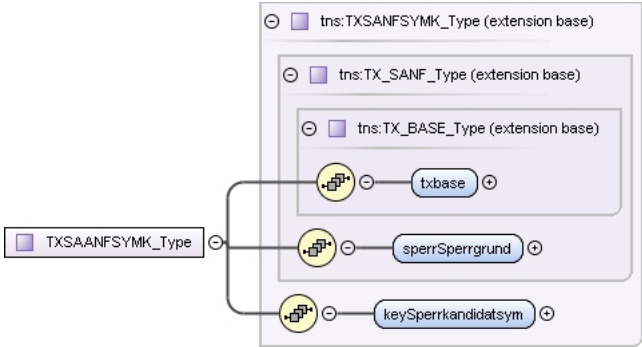
| | |
|-----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Sperranforderung fuer einen symmetrischen Schluessel |
| Diagram | |
| Type | extension of tns:TX_SANF_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFSYMK_Type |
| Used by | Complex Type tns:TXSAANFSYMK_Type Element tns:TXSANFSYMK |
| Model | txbase , sperrSperrgrund , keySperrkandidatsym |
| Children | keySperrkandidatsym, sperrSperrgrund, txbase |
| Source | <pre><xs:complexType name="TXSANFSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer einen symmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SANF_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXSANFASYMK_Type

| | |
|-------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Sperranforderung fuer einen asymmetrischen Schluessel |

| | |
|-----------------|--|
| Diagram |  The diagram shows the structure of the <code>tns:TXSANFASYMK_Type</code> complex type. It is an extension of <code>tns:TX_SANF_Type</code> (extension base). Inside <code>tns:TX_SANF_Type</code> is the <code>tns:TX_BASE_Type</code> (extension base), which contains the <code>txbase</code> element. The <code>tns:TXSANFASYMK_Type</code> also contains the <code>sperrSperrgrund</code> and <code>keySperrkandidatasy</code> elements, which are not part of the <code>tns:TX_BASE_Type</code> extension base. |
| Type | extension of <code>tns:TX_SANF_Type</code> |
| Type hierarchy | <ul style="list-style-type: none"> • <code>tns:TX_BASE_Type</code> • <code>tns:TX_SANF_Type</code> • <code>tns:TXSANFASYMK_Type</code> |
| Used by | <div>Complex Type</div> <div><code>tns:TXSAANFASYMK_Type</code></div> <div>Element</div> <div><code>tns:TXSANFASYMK</code></div> |
| Model | <code>txbase</code> , <code>sperrSperrgrund</code> , <code>keySperrkandidatasy</code> |
| Children | <code>keySperrkandidatasy</code> , <code>sperrSperrgrund</code> , <code>txbase</code> |
| Source | <pre> <xs:complexType name="TXSANFASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperranforderung fuer einen asymmetrischen Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SANF_Type"> <xs:sequence> <xs:element name="keySperrkandidatasy" type="tns:ASymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type `tns:TXSAANFSYMK_Type`

| | |
|----------------|--|
| Namespace | <code>http://vdv/ka/ion/2</code> |
| Annotations | Typ: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel |
| Diagram |  The diagram shows the structure of the <code>tns:TXSAANFSYMK_Type</code> complex type. It is an extension of <code>tns:TXSANFSYMK_Type</code> (extension base). Inside <code>tns:TXSANFSYMK_Type</code> is the <code>tns:TX_SANF_Type</code> (extension base), which contains the <code>tns:TX_BASE_Type</code> (extension base). The <code>tns:TX_BASE_Type</code> contains the <code>txbase</code> element. The <code>tns:TXSANFSYMK_Type</code> also contains the <code>sperrSperrgrund</code> and <code>keySperrkandidatasy</code> elements, which are not part of the <code>tns:TX_BASE_Type</code> extension base. |
| Type | extension of <code>tns:TXSANFSYMK_Type</code> |
| Type hierarchy | <ul style="list-style-type: none"> • <code>tns:TX_BASE_Type</code> • <code>tns:TX_SANF_Type</code> • <code>tns:TXSANFSYMK_Type</code> • <code>tns:TXSAANFSYMK_Type</code> |
| Used by | <div>Element</div> <div><code>tns:TXSAANFSYMK</code></div> |
| Model | <code>txbase</code> , <code>sperrSperrgrund</code> , <code>keySperrkandidatasy</code> |
| Children | <code>keySperrkandidatasy</code> , <code>sperrSperrgrund</code> , <code>txbase</code> |
| Source | <pre> <xs:complexType name="TXSAANFSYMK_Type"> </pre> |

| | |
|-----------------|---|
| | <pre> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer einen symmetrischen Schluessel</ xs:documentation> </xs:annotation> <xs:complexType> <xs:extension base="tns:TXSANFASYMK_Type" /> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXSAANFASYMK_Type

| | |
|-----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel |
| Diagram | |
| Type | extension of tns:TXSANFASYMK_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SANF_Type tns:TXSANFASYMK_Type tns:TXSAANFASYMK_Type |
| Used by | Element tns:TXSAANFASYMK |
| Model | txbase , sperrSperrgrund , keySperrkandidatasymp |
| Children | keySperrkandidatasymp, sperrSperrgrund, txbase |
| Source | <pre> <xs:complexType name="TXSAANFASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperraufhebungsanforderung fuer einen asymmetrischen Schluessel</ xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TXSANFASYMK_Type" /> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXSFREIMITSYMK_Type

| | |
|-------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Sperrfreigabemitteilung symmetrischer Schluessel |
| Diagram | |

| | |
|-----------------|--|
| Type | extension of tns:TX_SMIT_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITSYMK_Type |
| Used by | Element tns:TXSFREIMITSYMK |
| Model | txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym |
| Children | keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase |
| Source | <pre><xs:complexType name="TXSFREIMITSYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung symmetrischer Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXSFREIMITASYMK_Type

| | |
|-----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Sperrfreigabemitteilung asymmetrischer Schluessel |
| Diagram | |
| Type | extension of tns:TX_SMIT_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSFREIMITASYMK_Type |
| Used by | Element tns:TXSFREIMITASYMK |
| Model | txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatasym |
| Children | keySperrkandidatasym, sperrAnforderungBezug, sperrEntscheidung, txbase |
| Source | <pre><xs:complexType name="TXSFREIMITASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrfreigabemitteilung asymmetrischer Schluessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatasym" type="tns:ASymSchluessel_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXSMITSYMK_Type

| | |
|-----------|---------------------|
| Namespace | http://vdv/ka/ion/2 |
|-----------|---------------------|

| | |
|-----------------|---|
| Annotations | Type: Sperrmitteilung symmetrischer Schuessel |
| Diagram | <pre> classDiagram class tnsTX_SMIT_Type["tns:TX_SMIT_Type (extension base)"] class tnsTX_BASE_Type["tns:TX_BASE_Type (extension base)"] class TXSMITSYMK_Type["TXSMITSYMK_Type"] class txbase["txbase"] class sperrAnforderungBezug["sperrAnforderungBezug"] class sperrEntscheidung["sperrEntscheidung"] class keySperrkandidatsym["keySperrkandidatsym"] tnsTX_SMIT_Type < -- TXSMITSYMK_Type tnsTX_SMIT_Type < -- txbase tnsTX_SMIT_Type < -- sperrAnforderungBezug tnsTX_SMIT_Type < -- sperrEntscheidung tnsTX_SMIT_Type < -- keySperrkandidatsym TXSMITSYMK_Type -- txbase TXSMITSYMK_Type -- sperrAnforderungBezug TXSMITSYMK_Type -- sperrEntscheidung TXSMITSYMK_Type -- keySperrkandidatsym </pre> |
| Type | extension of tns:TX_SMIT_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TX_SMIT_Type tns:TXSMITSYMK_Type |
| Used by | Element tns:TXSMITSYMK |
| Model | txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatsym |
| Children | keySperrkandidatsym, sperrAnforderungBezug, sperrEntscheidung, txbase |
| Source | <pre> <xs:complexType name="TXSMITSYMK_Type"> <xs:annotation> <xs:documentation>Type: Sperrmitteilung symmetrischer Schuessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type"/> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXSMITASYMK_Type

| | |
|----------------|--|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Sperrmitteilung asymmetrischer Schuessel |
| Diagram | <pre> classDiagram class tnsTX_SMIT_Type["tns:TX_SMIT_Type (extension base)"] class tnsTX_BASE_Type["tns:TX_BASE_Type (extension base)"] class tbase class sperrAnforderungBezug class sperrEntscheidung class TXSMITASYMK_Type class keySperrkandidatasym tnsTX_SMIT_Type -- > tnsTX_BASE_Type tnsTX_BASE_Type -- > tbase tbase -- > sperrAnforderungBezug tbase -- > sperrEntscheidung TXSMITASYMK_Type -- > keySperrkandidatasym </pre> |
| Type | extension of tns:TX_SMIT_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type <ul style="list-style-type: none"> tns:TX_SMIT_Type <ul style="list-style-type: none"> tns:TXSMITASYMK_Type |
| Used by | Element tns:TXSMITASYMK |
| Model | txbase , sperrAnforderungBezug , sperrEntscheidung , keySperrkandidatasym |
| Children | keySperrkandidatasym, sperrAnforderungBezug, sperrEntscheidung, txbase |
| Source | <pre> <xs:complexType name="TXSMITASYMK_Type"> <xs:annotation> <xs:documentation>Typ: Sperrmitteilung asymmetrischer Schuessel </xs:documentation> </xs:annotation> <xs:sequence> <xs:element type="txbase" minOccurs="1" maxOccurs="1"/> <xs:element type="keySperrkandidatasym" minOccurs="1" maxOccurs="1"/> </xs:sequence> </xs:complexType> </pre> |

| | |
|-----------------|--|
| | <pre> <xs:documentation>Typ: Sperrmitteilung asymmetrischer Schuessel</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_SMIT_Type"> <xs:sequence> <xs:element name="keySperrkandidatasym" type="tns:ASymSchluessel_ID_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXSNAWA_Req_Type

| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Dienstanfrage "Sperrnachweis Applikation" |
| Diagram | <pre> graph TD TXSNAWA_Req_Type -- extension base --> TX_BASE_Type[tns:TX_BASE_Type] TXSNAWA_Req_Type -- choice --> txbase[txbase] TXSNAWA_Req_Type -- choice --> samSperrkandidat[samSperrkandidat] TXSNAWA_Req_Type -- choice --> orgSperrkandidat[orgSperrkandidat] TXSNAWA_Req_Type -- choice --> zyklusNummer[zyklusNummer] TXSNAWA_Req_Type -- choice --> sperrtransaktionApplikation[sperrtransaktionApplikation] TXSNAWA_Req_Type -- choice --> appNmTransaktionMAC[appNmTransaktionMAC] </pre> |
| Type | extension of tns:TX_BASE_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWA_Req_Type |
| Used by | Element tns:TXSNAWA |
| Model | txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrtransaktionApplikation , appNmTransaktionMAC |
| Children | appNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrtransaktionApplikation, txbase, zyklusNummer |
| Source | <pre> <xs:complexType name="TXSNAWA_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Sperrnachweis Applikation"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:choice minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Wurde eine Applikation Aufgrund einer SAM bzw. Organisationssperre durchgefuehrt, so ist die SAM bzw. Org ID in dem jeweiligen Element zu uebermitteln.</ xs:documentation> </xs:annotation> <xs:element name="samSperrkandidat" type="tns:SAM_ID_Type" /> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID" /> </xs:choice> <xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="sperrtransaktionApplikation" type="tns:Transaktionsdatensatz_Type" /> <xs:element name="appNmTransaktionMAC" type="tns:appNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Complex Type tns:TXSNAWB_Req_Type

| | |
|-----------------|---|
| Namespace | http://vdv/ka/ion/2 |
| Annotations | Typ: Dienstanfrage "Sperrnachweis Berechtigung" |
| Diagram | |
| Type | extension of tns:TX_BASE_Type |
| Type hierarchy | <ul style="list-style-type: none"> tns:TX_BASE_Type tns:TXSNAWB_Req_Type |
| Used by | Element tns:TXSNAWB |
| Model | txbase , (samSperrkandidat orgSperrkandidat) , zyklusNummer , sperrrtransaktionBerechtigung , berNmTransaktionMAC |
| Children | berNmTransaktionMAC, orgSperrkandidat, samSperrkandidat, sperrrtransaktionBerechtigung, txbase, zyklusNummer |
| Source | <pre> <xs:complexType name="TXSNAWB_Req_Type"> <xs:annotation> <xs:documentation>Typ: Dienstanfrage "Sperrnachweis Berechtigung"</xs:documentation> </xs:annotation> <xs:complexContent> <xs:extension base="tns:TX_BASE_Type"> <xs:sequence> <xs:choice minOccurs="0" maxOccurs="1"> <xs:annotation> <xs:documentation>Wurde eine Applikation Aufgrund einer SAM bzw. Organisationssperre durchgefuehrt, so ist die SAM bzw. Org ID in dem jeweiligen Element zu uebermitteln.</ xs:documentation> </xs:annotation> <xs:element name="samSperrkandidat" type="tns:SAM_ID_Type" /> <xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/> </xs:choice> <xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element> <xs:element name="sperrrtransaktionBerechtigung" type="tns:Transaktionsdatensatz_Type" /> <xs:element name="berNmTransaktionMAC" type="tns:berNmTransaktionMAC_Type" /> </xs:sequence> </xs:extension> </xs:complexContent> </xs:complexType> </pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Namespace: ""

Element(s)

Element pkm:TX_MODUL / modulgueltigkeitsbeginn

| | |
|-----------|--------------|
| Namespace | No namespace |
| Diagram | |

| | |
|-----------------|--|
| Type | tns:DateTimeCompact |
| Properties | content: simple |
| Facets | maxInclusive 2117-12-31T23:59:58 |
| | minInclusive 1990-01-01T00:00:00 |
| Source | <code><xs:element name="modulgueltigkeitsbeginn" type="ct:DateTimeCompact" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Element **pkm:TX_MODUL / modulversion**


| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram | |
| Type | pkm:Modulversion_NUMMER |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT4 <ul style="list-style-type: none"> tns:ReferenceNumberFour <ul style="list-style-type: none"> pkm:Modulversion_NUMMER |
| Properties | content: simple |
| Facets | maxInclusive 4294967295 |
| | minInclusive 0 |
| Source | <code><xs:element name="modulversion" type="tns:Modulversion_NUMMER" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Element **pkm:TX_MODUL / modulstatus**


| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram | |
| Type | pkm:Modulstatus_CODE |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:ReferenceNumberOne <ul style="list-style-type: none"> pkm:Modulstatus_CODE |
| Properties | content: simple |
| Facets | maxInclusive 255 |
| | minInclusive 0 |
| | enumeration 0 Undefined |
| | enumeration 1 Entwurf |
| | enumeration 2 Freigegeben |
| Source | <code><xs:element name="modulstatus" type="tns:Modulstatus_CODE" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Element **pkm:TX_MODUL / schnittstellenversion**


| | |
|-----------|--------------|
| Namespace | No namespace |
|-----------|--------------|

| | |
|-----------------|--|
| Diagram |  |
| Type | tns:PrintableString |
| Properties | content: simple |
| Facets | pattern [-p]* |
| Source | <code><xs:element name="schnittstellenversion" type="ion:PrintableString"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |


Element pkm:TX_MODUL / modulnamenszusatz

| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:PrintableString |
| Properties | content: simple |
| Facets | pattern [-p]* |
| Source | <code><xs:element name="modulnamenszusatz" type="ion:PrintableString"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Element pkm:TX_MODUL / bemerkung

| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:PrintableString |
| Properties | content: simple |
| Facets | pattern [-p]* |
| Source | <code><xs:element name="bemerkung" type="ion:PrintableString"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Element pkm:TX_MODUL_Daten / pvtarifmodul

| | |
|-------------|--|
| Namespace | No namespace |
| Annotations | <p>Dieses Element enthaelt die PKM Beschreibung in XML, deren Format in pkm:XML-PVTarifmodul bzw. http://vdv/ka/pkm/2/XML-PVTarifmodul definiert wird. Die Daten liegen im XML Format vor, die im gzip Format (RFC1952) komprimiert und anschliessend Base64 codiert sind.</p> <p>Um die PKM Beschreibungsdaten zu erhalten, muss eine Dekodierung von Base64 nach Binary stattfinden. Dieses Binaerformat ist dann gezippt und kann nach Umwandeln in eine Datei mit einer Standard-Software auf Windows oder Unix entpackt werden.</p> <p>Das Einbetten der XML-Struktur in gezippten Base64 bietet zum einen den Vorteil der Komprimierung von ca. 10:1. Zum anderen ist ein weiterer Vorteil, dass die XSD-Validierung nicht bei Annahme der Nachricht stattfindet sondern zu einem spaeteren Zeitpunkt durchgefuehrt werden kann. Damit kann die Annahme eines PKM-Moduls synchron erfolgen.</p> |
| Diagram |  |
| Type | xs:base64Binary |
| Properties | content: simple |
| Source | <pre><xs:element name="pvtarifmodul" type="xs:base64Binary" xmlns:xmime="http://www.w3.org/2003/11/xmime" xmime:expectedContentTypes="application/gzip"> <xs:annotation></pre> |

| | |
|----------------------|--|
| | <pre> <xs:documentation>Dieses Element enthaelt die PKM Beschreibung in XML, deren Format in pkm:XML- PVTarifmodul bzw. http://vdv/ka/pkm/2/XML-PVTarifmodul definiert wird. Die Daten liegen im XML Format vor, die im gzip Format (RFC1952) komprimiert und anschliessend Base64 codiert sind. Um die PKM Beschreibungsdaten zu erhalten, muss eine Dekodierung von Base64 nach Binary stattfinden. Dieses Binaerformat ist dann gezippt und kann nach Umwandeln in eine Datei mit einer Standard- Software auf Windows oder Unix entpackt werden. Das Einbetten der XML-Struktur in gezippten Base64 bietet zum einen den Vorteil der Komprimierung von ca. 10:1. Zum anderen ist ein weiterer Vorteil, dass die XSD-Validierung nicht bei Annahme der Nachricht stattfindet sondern zu einem spaeteren Zeitpunkt durchgefuehrt werden kann. Damit kann die Annahme eines PKM-Moduls synchron erfolgen.</ xs:documentation> </xs:annotation> </xs:element> </pre> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/2/XML-Schema_PKM_TX.xsd |

Element pkm:TX_MODUL_Bereitstellung / url

| | |
|----------------------|--|
| Namespace | No namespace |
| Diagram | |
| Type | tns:PrintableString |
| Properties | content: simple |
| Facets | pattern [-p]* |
| Source | <xs:element name="url" type="ion:PrintableString"/> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/2/XML-Schema_PKM_TX.xsd |

Element pkm:TX_MODUL_Bereitstellung / bereitstellungsdatum


| | |
|----------------------|--|
| Namespace | No namespace |
| Diagram | |
| Type | tns:DateCompact |
| Properties | content: simple |
| Facets | maxInclusive 2117-12-31 minInclusive 1990-01-01 |
| Source | <xs:element name="bereitstellungsdatum" type="ct:DateCompact"/> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/2/XML-Schema_PKM_TX.xsd |

Element pkm:TX_MODUL_Lieferung / lieferart

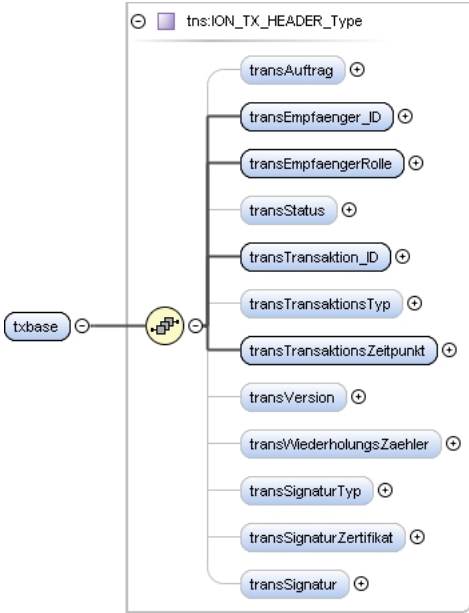
| | |
|----------------------|--|
| Namespace | No namespace |
| Diagram | |
| Type | tns:PrintableString |
| Properties | content: simple |
| Facets | pattern [-p]* |
| Source | <xs:element name="lieferart" type="ion:PrintableString"/> |
| Schema loca- tion | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ pkm/2/XML-Schema_PKM_TX.xsd |

Element pkm:TX_MODUL_Lieferung / sendedatum

| | |
|-----------|--------------|
| Namespace | No namespace |
|-----------|--------------|

| | | | | | |
|-----------------|--|--------------|------------|--------------|------------|
| Diagram |  | | | | |
| Type | tns:DateCompact | | | | |
| Properties | content: simple | | | | |
| Facets | <table border="1"> <tr> <td>maxInclusive</td> <td>2117-12-31</td> </tr> <tr> <td>minInclusive</td> <td>1990-01-01</td> </tr> </table> | maxInclusive | 2117-12-31 | minInclusive | 1990-01-01 |
| maxInclusive | 2117-12-31 | | | | |
| minInclusive | 1990-01-01 | | | | |
| Source | <code><xs:element name="sendedatum" type="ct:DateCompact" /></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd | | | | |

Element tns:TX_BASE_Type / txbase

| | |
|-------------|---|
| Namespace | No namespace |
| Annotations | Fachliche Daten ueber die in der Transaktion involvierten Systeme |
| Diagram |  |
| Type | tns:ION_TX_HEADER_Type |
| Properties | content: complex |
| Model | transAuftrag{0,1}, transEmpfaenger_ID, transEmpfaengerRolle, transStatus{0,1}, transTransaktion_ID, transTransaktionsTyp{0,1}, transTransaktionsZeitpunkt, transVersion{0,1}, transWiederholungsZaehler{0,1}, transSignaturTyp{0,1}, transSignaturZertifikat{0,1}, transSignatur{0,1} |
| Children | transAuftrag, transEmpfaengerRolle, transEmpfaenger_ID, transSignatur, transSignaturTyp, transSignaturZertifikat, transStatus, transTransaktion_ID, transTransaktionsTyp, transTransaktionsZeitpunkt, transVersion, transWiederholungsZaehler |
| Instance | <pre> <txbase> <transAuftrag>{0,1}</transAuftrag> <transEmpfaenger_ID>{1,1}</transEmpfaenger_ID> <transEmpfaengerRolle>{1,1}</transEmpfaengerRolle> <transStatus>{0,1}</transStatus> <transTransaktion_ID>{1,1}</transTransaktion_ID> <transTransaktionsTyp>{0,1}</transTransaktionsTyp> <transTransaktionsZeitpunkt>{1,1}</transTransaktionsZeitpunkt> <transVersion>{0,1}</transVersion> <transWiederholungsZaehler>{0,1}</transWiederholungsZaehler> <transSignaturTyp>{0,1}</transSignaturTyp> <transSignaturZertifikat>{0,1}</transSignaturZertifikat> <transSignatur>{0,1}</transSignatur> </txbase> </pre> |
| Source | <pre> <xs:element name="txbase" type="tns:ION_TX_HEADER_Type"> <xs:annotation> <xs:documentation>Fachliche Daten ueber die in der Transaktion involvierten Systeme</xs:documentation> </xs:annotation> </pre> |

| | |
|-----------------|---|
| | <code></xs:element></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element `tns:ION_TX_HEADER_Type` / `transAuftrag`

| | | | | | | | |
|-----------------|---|----------|--------|------------|---|------------|---|
| Namespace | No namespace | | | | | | |
| Diagram | | | | | | | |
| Type | xs:string | | | | | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table> | content: | simple | minOccurs: | 0 | maxOccurs: | 1 |
| content: | simple | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | 1 | | | | | | |
| Source | <code><xs:element name="transAuftrag" type="xs:string" minOccurs="0" maxOccurs="1"/></code> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | | | |

Element `tns:ION_TX_HEADER_Type` / `transEmpfaenger_ID`

| | | | | | |
|-----------------|---|--------------|--------|--------------|---|
| Namespace | No namespace | | | | |
| Annotations | Eindeutige OrganisationsId des Nachrichtenempfaengers | | | | |
| Diagram | | | | | |
| Type | tns:Organisation_ID | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID | | | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> </table> | content: | simple | | |
| content: | simple | | | | |
| Facets | <table> <tr><td>maxInclusive</td><td>65535</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 65535 | minInclusive | 0 |
| maxInclusive | 65535 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="transEmpfaenger_ID" type="ka:Organisation_ID"> <xs:annotation> <xs:documentation>Eindeutige OrganisationsId des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Element `tns:ION_TX_HEADER_Type` / `transEmpfaengerRolle`

| | | | | | |
|----------------|---|--------------|--------|--------------|---|
| Namespace | No namespace | | | | |
| Annotations | Rolle des Nachrichtenempfaengers | | | | |
| Diagram | | | | | |
| Type | tns:KommunikationsParterRolle | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:KommunikationsParterRolle | | | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> </table> | content: | simple | | |
| content: | simple | | | | |
| Facets | <table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 |
| maxInclusive | 255 | | | | |
| minInclusive | 0 | | | | |

| | | | |
|-----------------|--|-----|-----------|
| | enumeration | 0 | Unbekannt |
| | enumeration | 1 | KVP |
| | enumeration | 2 | DL |
| | enumeration | 3 | PV |
| | enumeration | 4 | AH |
| | enumeration | 5 | KOSES |
| | enumeration | 254 | ZVM |
| Source | <pre><xs:element name="transEmpfaengerRolle" type="ka:KommunikationsParterRolle"> <xs:annotation> <xs:documentation>Rolle des Nachrichtenempfaengers</xs:documentation> </xs:annotation> </xs:element></pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | |

Element tns:ION_TX_HEADER_Type / transStatus


| | | | | | | | |
|-----------------|---|--------------|--------|--------------|---|------------|---|
| Namespace | No namespace | | | | | | |
| Diagram | | | | | | | |
| Type | tns:INT1 | | | | | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table> | content: | simple | minOccurs: | 0 | maxOccurs: | 1 |
| content: | simple | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | 1 | | | | | | |
| Facets | <table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 | | |
| maxInclusive | 255 | | | | | | |
| minInclusive | 0 | | | | | | |
| Source | <pre><xs:element name="transStatus" type="ct:INT1" minOccurs="0" maxOccurs="1"/></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | | | |

Element tns:ION_TX_HEADER_Type / transTransaktion_ID


| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram | |
| Type | tns:IONTransaktion_ID_Type |
| Properties | content: complex |
| Model | transSequenznummer , transSenderRolle , transSender_ID |
| Children | transSenderRolle, transSender_ID, transSequenznummer |
| Instance | <pre><transTransaktion_ID> <transSequenznummer>{1,1}</transSequenznummer> <transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </transTransaktion_ID></pre> |
| Source | <pre><xs:element name="transTransaktion_ID" type="tns:IONTransaktion_ID_Type" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:IONTransaktion_ID_Type / transSequenznummer


| | |
|-----------|--------------|
| Namespace | No namespace |
|-----------|--------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | tns:SequenceNumberFour |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SequenceNumberFour |
| Properties | content: simple |
| Facets | maxInclusive 4294967295 |
| | minInclusive 0 |
| Source | <code><xs:element name="transSequenznummer" type="ct:SequenceNumberFour"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:IONTransaktion_ID_Type / transSenderRolle

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:KommunikationsParterRolle |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:KommunikationsParterRolle |
| Properties | content: simple |
| Facets | maxInclusive 255 |
| | minInclusive 0 |
| | enumeration 0 Unbekannt |
| | enumeration 1 KVP |
| | enumeration 2 DL |
| | enumeration 3 PV |
| | enumeration 4 AH |
| | enumeration 5 KOSES |
| | enumeration 254 ZVM |
| Source | <code><xs:element name="transSenderRolle" type="ka:KommunikationsParterRolle"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:IONTransaktion_ID_Type / transSender_ID

| | |
|----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:Organisation_ID |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID |
| Properties | content: simple |
| Facets | maxInclusive 65535 |
| | minInclusive 0 |

| | |
|-----------------|---|
| Source | <code><xs:element name="transSender_ID" type="ka:Organisation_ID" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element **tns:ION_TX_HEADER_Type** / **transTransaktionsTyp**

| | | | | | | | |
|-----------------|---|--------------|--------|--------------|---|------------|---|
| Namespace | No namespace | | | | | | |
| Diagram | | | | | | | |
| Type | tns:INT1 | | | | | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table> | content: | simple | minOccurs: | 0 | maxOccurs: | 1 |
| content: | simple | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | 1 | | | | | | |
| Facets | <table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 | | |
| maxInclusive | 255 | | | | | | |
| minInclusive | 0 | | | | | | |
| Source | <code><xs:element name="transTransaktionsTyp" type="ct:INT1" minOccurs="0" maxOccurs="1" /></code> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | | | |

Element **tns:ION_TX_HEADER_Type** / **transTransaktionsZeitpunkt**

| | | | |
|-----------------|--|----------|--------|
| Namespace | No namespace | | |
| Annotations | Zeitpunkt der Dienstanfrage gemäss den Angaben der Dienstaufrufer. Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist möglicherweise die Aussagekraft dieses Feldes sehr gering. | | |
| Diagram | | | |
| Type | tns:DateTime | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Source | <pre> <xs:element name="transTransaktionsZeitpunkt" type="ct:DateTime"> <xs:annotation> <xs:documentation>Zeitpunkt der Dienstanfrage gemäss den Angaben der Dienstaufrufer. Achtung: Aufgrund von potentiell unsynchronisierten, lokalen Uhren der Kommunikationspartnern ist möglicherweise die Aussagekraft dieses Feldes sehr gering.</xs:documentation> </xs:annotation> </xs:element> </pre> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | |

Element **tns:ION_TX_HEADER_Type** / **transVersion**

| | | | | | | | |
|-----------------|---|----------|--------|------------|--|------------|---|
| Namespace | No namespace | | | | | | |
| Diagram | | | | | | | |
| Type | tns:BitString16 | | | | | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table> | content: | simple | minOccurs: | 0 | maxOccurs: | 1 |
| content: | simple | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | 1 | | | | | | |
| Facets | <table> <tr><td>length</td><td>16</td></tr> <tr><td>pattern</td><td> [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1] </td></tr> </table> | length | 16 | pattern | [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1] | | |
| length | 16 | | | | | | |
| pattern | [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1][0-1][0-1][0-1][0-1] [0-1] | | | | | | |
| Source | <code><xs:element name="transVersion" type="ct:BitString16" minOccurs="0" maxOccurs="1" /></code> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | | | |

Element `tns:ION_TX_HEADER_Type / transWiederholungsZaehler`

| | | | | | | | |
|-----------------|---|--------------|--------|--------------|---|------------|---|
| Namespace | No namespace | | | | | | |
| Diagram | | | | | | | |
| Type | tns:INT1 | | | | | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table> | content: | simple | minOccurs: | 0 | maxOccurs: | 1 |
| content: | simple | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | 1 | | | | | | |
| Facets | <table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 | | |
| maxInclusive | 255 | | | | | | |
| minInclusive | 0 | | | | | | |
| Source | <code><xs:element name="transWiederholungsZaehler" type="ct:INT1" minOccurs="0" maxOccurs="1"/></code> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | | | |

Element `tns:ION_TX_HEADER_Type / transSignaturTyp`

| | | | | | | | |
|-----------------|---|--------------|--------|--------------|---|------------|---|
| Namespace | No namespace | | | | | | |
| Diagram | | | | | | | |
| Type | tns:INT1 | | | | | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table> | content: | simple | minOccurs: | 0 | maxOccurs: | 1 |
| content: | simple | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | 1 | | | | | | |
| Facets | <table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 | | |
| maxInclusive | 255 | | | | | | |
| minInclusive | 0 | | | | | | |
| Source | <code><xs:element name="transSignaturTyp" type="ct:INT1" minOccurs="0" maxOccurs="1"/></code> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | | | |

Element `tns:ION_TX_HEADER_Type / transSignaturZertifikat`

| | | | | | | | |
|-----------------|--|----------|--------|------------|---|------------|---|
| Namespace | No namespace | | | | | | |
| Diagram | | | | | | | |
| Type | restriction of xs:hexBinary | | | | | | |
| Properties | <table> <tr><td>content:</td><td>simple</td></tr> <tr><td>minOccurs:</td><td>0</td></tr> <tr><td>maxOccurs:</td><td>1</td></tr> </table> | content: | simple | minOccurs: | 0 | maxOccurs: | 1 |
| content: | simple | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | 1 | | | | | | |
| Facets | <table> <tr><td>length</td><td>378</td></tr> </table> | length | 378 | | | | |
| length | 378 | | | | | | |
| Source | <pre> <xs:element name="transSignaturZertifikat" minOccurs="0" maxOccurs="1"> <xs:simpleType> <xs:restriction base="xs:hexBinary"> <xs:length value="378" fixed="true"/> </xs:restriction> </xs:simpleType> </xs:element> </pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | | | |

Element `tns:ION_TX_HEADER_Type / transSignatur`

| | |
|-----------|--------------|
| Namespace | No namespace |
| Diagram | |

| | |
|-----------------|---|
| Type | tns:TransSignatur_Type |
| Properties | content: simple |
| | minOccurs: 0 |
| | maxOccurs: 1 |
| Facets | length 128 |
| Source | <code><xs:element name="transSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element **pkm:TXVPVTM_Type / modulinformationDaten**

| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram | |
| Type | pkm:TX_MODULE_Daten |
| Type hierarchy | <ul style="list-style-type: none"> pkm:TX_MODULE pkm:TX_MODULE_Daten |
| Properties | content: complex |
| Model | modulgueltigkeitsbeginn , modulversion , modulstatus , schnittstellenversion , modulnamenszusatz , bemerkung , pvtarifmodul |
| Children | bemerkung, modulgueltigkeitsbeginn, modulnamenszusatz, modulstatus, modulversion, pvtarifmodul, schnittstellenversion |
| Instance | <pre> <modulinformationDaten> <modulgueltigkeitsbeginn>{1,1}</modulgueltigkeitsbeginn> <modulversion>{1,1}</modulversion> <modulstatus>{1,1}</modulstatus> <schnittstellenversion>{1,1}</schnittstellenversion> <modulnamenszusatz>{1,1}</modulnamenszusatz> <bemerkung>{1,1}</bemerkung> <pvtarifmodul>{1,1}</pvtarifmodul> </modulinformationDaten> </pre> |
| Source | <code><xs:element name="modulinformationDaten" type="tns:TX_MODULE_Daten"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Element **pkm:TXVPVTM_Type / modulinformationBereitstellung**

| | |
|-----------|--------------|
| Namespace | No namespace |
|-----------|--------------|

| | |
|-----------------|---|
| Diagram | |
| Type | pkm:TX_MODUL_Bereitstellung |
| Type hierarchy | <ul style="list-style-type: none"> pkm:TX_MODUL pkm:TX_MODUL_Bereitstellung |
| Properties | content: complex |
| Model | modulgueligkeitsbeginn , modulversion , modulstatus , schnittstellenversion , modulnamenszusatz , bemerkung , url , bereitstellungsdatum |
| Children | bemerkung, bereitstellungsdatum, modulgueligkeitsbeginn, modulnamenszusatz, modulstatus, modulversion, schnittstellenversion, url |
| Instance | <pre> <modulinformationBereitstellung> <modulgueligkeitsbeginn>{1,1}</modulgueligkeitsbeginn> <modulversion>{1,1}</modulversion> <modulstatus>{1,1}</modulstatus> <schnittstellenversion>{1,1}</schnittstellenversion> <modulnamenszusatz>{1,1}</modulnamenszusatz> <bemerkung>{1,1}</bemerkung> <url>{1,1}</url> <bereitstellungsdatum>{1,1}</bereitstellungsdatum> </modulinformationBereitstellung> </pre> |
| Source | <xs:element name="modulinformationBereitstellung" type="tns:TX_MODUL_Bereitstellung" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Element pkm:TXVPVTM_Type / modulinformationLieferung

| | |
|-----------|--------------|
| Namespace | No namespace |
|-----------|--------------|


| | |
|-----------------|---|
| Diagram | |
| Type | pkm:TX_MODULE_Lieferung |
| Type hierarchy | <ul style="list-style-type: none"> pkm:TX_MODULE pkm:TX_MODULE_Lieferung |
| Properties | content: complex |
| Model | modulgueltigkeitsbeginn , modulversion , modulstatus , schnittstellenversion , modulnamenszusatz , bemerkung , lieferart , senddatum |
| Children | bemerkung, lieferart, modulgueltigkeitsbeginn, modulnamenszusatz, modulstatus, modulversion, schnittstellenversion, senddatum |
| Instance | <pre> <modulinformationLieferung> <modulgueltigkeitsbeginn>{1,1}</modulgueltigkeitsbeginn> <modulversion>{1,1}</modulversion> <modulstatus>{1,1}</modulstatus> <schnittstellenversion>{1,1}</schnittstellenversion> <modulnamenszusatz>{1,1}</modulnamenszusatz> <bemerkung>{1,1}</bemerkung> <lieferart>{1,1}</lieferart> <senddatum>{1,1}</senddatum> </modulinformationLieferung> </pre> |
| Source | <xs:element name="modulinformationLieferung" type="tns:TX_MODULE_Lieferung"/> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM_TX.xsd |

Element tns:VX_Message_Type / StatusCode


| | | | | | |
|----------------|--|--------------|-----|--------------|---|
| Namespace | No namespace | | | | |
| Diagram | | | | | |
| Type | tns:StatusCode | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:StatusCode | | | | |
| Properties | content: simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 |
| maxInclusive | 255 | | | | |
| minInclusive | 0 | | | | |

| | | | |
|-----------------|--|-----|---|
| | enumeration | 0 | Die Nachricht wurde erfolgreich entgegengenommen und alle notwendigen Informationen zur Weiterleitung liegen vor. |
| | enumeration | 1 | Ungueltige Nachricht. Die Sender ID oder die Routing Information kann nicht aus dem SOAP Header extrahiert werden. |
| | enumeration | 2 | Ungleiche Sender ID. Die Sender ID, die im SOAP Header uebertragen wurde passt nicht zu der Sender ID, die in der VM zum Zertifikat des Senders hinterlegt wurde. |
| | enumeration | 3 | Unbekannter oder gesperrter Empfaenger oder zu den Routing Informationen ist in der VM keine technische Empfaengeradresse hinterlegt. |
| | enumeration | 4 | Verbindungsproblem zum Empfaenger. Es konnte keine Verbindung zum Empfaenger aufgebaut werden. |
| | enumeration | 5 | Timeout. Der Empfaenger antwortet nicht in einer vorgegebenen Zeit. |
| | enumeration | 6 | Die asynchrone Nachricht kann nicht zwischengespeichert werden. |
| | enumeration | 7 | Die Organisations-ID des Senders ist gesperrt oder der Vermittlungsstelle nicht bekannt. |
| | enumeration | 255 | Technisches Problem. Es liegt ein technisches Problem vor. Die Nachricht konnte nicht erfolgreich entgegengenommen werden. |
| Source | <xs:element name="StatusCode" type="tns:StatusCode" /> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd | | |

Element tns:VX_Message_Type / StatusText


| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:StatusText |
| Properties | content: simple |
| Facets | maxLength 255 |
| Source | <xs:element name="StatusText" type="tns:StatusText" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/common/2/XML-Schema_KA_Common.xsd |

Element tns:Ort_ID_Type / ortTyp


| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:OrtsTyp_CODE_Type |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:OrtsTyp_CODE_Type |
| Properties | content: simple |
| Facets | maxInclusive 255 minInclusive 0 |
| Source | <xs:element name="ortTyp" type="tns:OrtsTyp_CODE_Type" /> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:Ort_ID_Type / ortNummer


| | |
|-----------|--------------|
| Namespace | No namespace |
|-----------|--------------|

| | | | | | |
|-----------------|---|--------------|----------|--------------|---|
| Diagram |  | | | | |
| Type | tns:ReferenceNumberThree | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree | | | | |
| Properties | content: simple | | | | |
| Facets | <table border="1"> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 16777215 | minInclusive | 0 |
| maxInclusive | 16777215 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="ortNummer" type="ct:ReferenceNumberThree" /></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |


Element tns:Ort_ID_Type / ortDomaene_ID

| | | | | | |
|-----------------|---|--------------|-------|--------------|---|
| Namespace | No namespace | | | | |
| Diagram |  | | | | |
| Type | tns:Organisation_ID | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID | | | | |
| Properties | content: simple | | | | |
| Facets | <table border="1"> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 65535 | minInclusive | 0 |
| maxInclusive | 65535 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="ortDomaene_ID" type="ka:Organisation_ID" /></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Element tns:Terminal_ID_Type / terminalTyp


| | | | | | |
|-----------------|---|--------------|-----|--------------|---|
| Namespace | No namespace | | | | |
| Diagram |  | | | | |
| Type | tns:TerminalTyp_CODE_Type | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:TerminalTyp_CODE_Type | | | | |
| Properties | content: simple | | | | |
| Facets | <table border="1"> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 |
| maxInclusive | 255 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="terminalTyp" type="tns:TerminalTyp_CODE_Type" /></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Element tns:Terminal_ID_Type / terminalNummer


| | |
|-----------|---|
| Namespace | No namespace |
| Diagram |  |

| | |
|-----------------|--|
| Type | tns:ReferenceNumberTwo |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT2 <ul style="list-style-type: none"> tns:ReferenceNumberTwo |
| Properties | content: simple |
| Facets | maxInclusive 65535 |
| | minInclusive 0 |
| Source | <code><xs:element name="terminalNumber" type="ct:ReferenceNumberTwo"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |


Element tns:Terminal_ID_Type / terminalOwner_ID

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:Organisation_ID |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT2 <ul style="list-style-type: none"> tns:ReferenceNumberTwo <ul style="list-style-type: none"> tns:Organisation_ID |
| Properties | content: simple |
| Facets | maxInclusive 65535 |
| | minInclusive 0 |
| Source | <code><xs:element name="terminalOwner_ID" type="ka:Organisation_ID"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:NmApplikationInstanz_ID_Type / NmAppInstanznummer

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:ReferenceNumberFour |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT4 <ul style="list-style-type: none"> tns:ReferenceNumberFour |
| Properties | content: simple |
| Facets | maxInclusive 4294967295 |
| | minInclusive 0 |
| Source | <code><xs:element name="NmAppInstanznummer" type="ct:ReferenceNumberFour"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:NmApplikationInstanz_ID_Type / kvp_ID

| | |
|----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:Organisation_ID |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt |

| | |
|-----------------|---|
| | <ul style="list-style-type: none"> • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID |
| Properties | content: simple |
| Facets | maxInclusive 65535 |
| | minInclusive 0 |
| Source | <code><xs:element name="kvp_ID" type="ka:Organisation_ID"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:Berechtigung_ID_Type / berechtigungNummer

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram | |
| Type | tns:ReferenceNumberFour |
| Type hierarchy | <ul style="list-style-type: none"> • xs:unsignedInt • tns:INT4 • tns:ReferenceNumberFour |
| Properties | content: simple |
| Facets | maxInclusive 4294967295 |
| | minInclusive 0 |
| Source | <code><xs:element name="berechtigungNummer" type="ct:ReferenceNumberFour"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:Berechtigung_ID_Type / kvp_ID

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram | |
| Type | tns:Organisation_ID |
| Type hierarchy | <ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID |
| Properties | content: simple |
| Facets | maxInclusive 65535 |
| | minInclusive 0 |
| Source | <code><xs:element name="kvp_ID" type="ka:Organisation_ID"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:EFMProdukt_ID_Type / produktNummer

| | |
|----------------|--|
| Namespace | No namespace |
| Diagram | |
| Type | tns:ReferenceNumberTwo |
| Type hierarchy | <ul style="list-style-type: none"> • xs:unsignedInt |

| | | | | | | | |
|-----------------|---|--------------|--------|--------------|---|------------|---|
| | <ul style="list-style-type: none"> • tns:INT2 • tns:ReferenceNumberTwo | | | | | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> <tr> <td>minOccurs:</td><td>0</td></tr> <tr> <td>maxOccurs:</td><td>1</td></tr> </table> | content: | simple | minOccurs: | 0 | maxOccurs: | 1 |
| content: | simple | | | | | | |
| minOccurs: | 0 | | | | | | |
| maxOccurs: | 1 | | | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 65535 | minInclusive | 0 | | |
| maxInclusive | 65535 | | | | | | |
| minInclusive | 0 | | | | | | |
| Source | <code><xs:element name="produktNummer" type="ct:ReferenceNumberTwo" minOccurs="0" maxOccurs="1"/></code> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | | | |

Element tns:EFMProdukt_ID_Type / organisationID

| | | | | | |
|-----------------|---|--------------|--------|--------------|---|
| Namespace | No namespace | | | | |
| Diagram | | | | | |
| Type | tns:Organisation_ID | | | | |
| Type hierarchy | <ul style="list-style-type: none"> • xs:unsignedInt • tns:INT2 • tns:ReferenceNumberTwo • tns:Organisation_ID | | | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple | | |
| content: | simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 65535 | minInclusive | 0 |
| maxInclusive | 65535 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="organisationID" type="ka:Organisation_ID"/></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |


Element tns:Transaktionsdatensatz_Type / Transaktionsdaten

| | | | |
|-----------------|---|----------|--------|
| Namespace | No namespace | | |
| Diagram | | | |
| Type | xs:hexBinary | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple |
| content: | simple | | |
| Source | <code><xs:element name="Transaktionsdaten" type="xs:hexBinary"/></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | |


Element tns:SymSchluessel_ID_Type / schluesselNummer

| | | | | | |
|-----------------|---|--------------|--------|--------------|---|
| Namespace | No namespace | | | | |
| Diagram | | | | | |
| Type | tns:INT1 | | | | |
| Properties | <table> <tr> <td>content:</td><td>simple</td></tr> </table> | content: | simple | | |
| content: | simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 |
| maxInclusive | 255 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="schluesselNummer" type="ct:INT1"/></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |


Element **tns:SymSchluessel_ID_Type** / **schluesselVersion**

| | | | | | |
|-----------------|---|--------------|-----|--------------|---|
| Namespace | No namespace | | | | |
| Diagram |  | | | | |
| Type | tns:INT1 | | | | |
| Properties | content: simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 |
| maxInclusive | 255 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="schluesselVersion" type="ct:INT1" /></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |


Element **tns:SymSchluessel_ID_Type** / **schluesselInhaber_ID**

| | | | | | |
|-----------------|---|--------------|-------|--------------|---|
| Namespace | No namespace | | | | |
| Diagram |  | | | | |
| Type | tns:ReferenceNumberTwo | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo | | | | |
| Properties | content: simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 65535 | minInclusive | 0 |
| maxInclusive | 65535 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="schluesselInhaber_ID" type="ct:ReferenceNumberTwo" /></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |


Element **tns:ASymSchluessel_ID_Type** / **signaturSchluessel**

| | | | |
|-----------------|---|--------|----|
| Namespace | No namespace | | |
| Diagram |  | | |
| Type | tns:OctetString12 | | |
| Properties | content: simple | | |
| Facets | <table> <tr> <td>length</td><td>12</td></tr> </table> | length | 12 |
| length | 12 | | |
| Source | <code><xs:element name="signaturSchluessel" type="ct:OctetString12" /></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | |

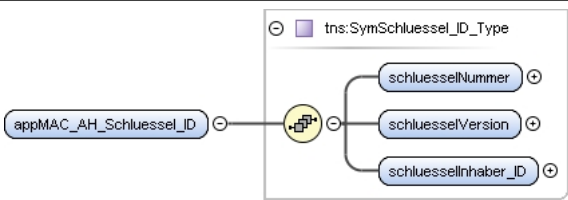
Element **tns:appNmTransaktionMAC_Type** / **appMAC_AH**

| | | | |
|-----------------|---|--------|---|
| Namespace | No namespace | | |
| Diagram |  | | |
| Type | tns:OctetString8 | | |
| Properties | content: simple | | |
| Facets | <table> <tr> <td>length</td><td>8</td></tr> </table> | length | 8 |
| length | 8 | | |
| Source | <code><xs:element name="appMAC_AH" type="ct:OctetString8" /></code> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | |

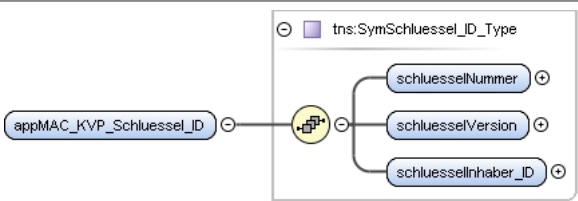
Element `tns:appNmTransaktionMAC_Type` / `appMAC_KVP`

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | <code>tns:OctetString8</code> |
| Properties | content: simple |
| Facets | length 8 |
| Source | <code><xs:element name="appMAC_KVP" type="ct:OctetString8"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |


Element `tns:appNmTransaktionMAC_Type` / `appMAC_AH_Schluessel_ID`

| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram |  |
| Type | <code>tns:SymSchluessel_ID_Type</code> |
| Properties | content: complex |
| Model | <code>schluesselNummer</code> , <code>schluesselVersion</code> , <code>schluesselInhaber_ID</code> |
| Children | <code>schluesselInhaber_ID</code> , <code>schluesselNummer</code> , <code>schluesselVersion</code> |
| Instance | <pre><appMAC_AH_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </appMAC_AH_Schluessel_ID></pre> |
| Source | <code><xs:element name="appMAC_AH_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |


Element `tns:appNmTransaktionMAC_Type` / `appMAC_KVP_Schluessel_ID`

| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram |  |
| Type | <code>tns:SymSchluessel_ID_Type</code> |
| Properties | content: complex |
| Model | <code>schluesselNummer</code> , <code>schluesselVersion</code> , <code>schluesselInhaber_ID</code> |
| Children | <code>schluesselInhaber_ID</code> , <code>schluesselNummer</code> , <code>schluesselVersion</code> |
| Instance | <pre><appMAC_KVP_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </appMAC_KVP_Schluessel_ID></pre> |
| Source | <code><xs:element name="appMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

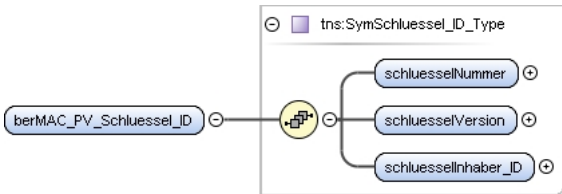
Element `tns:berNmTransaktionMAC_Type` / `berMAC_PV`

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | <code>tns:OctetString8</code> |
| Properties | content: simple |
| Facets | length 8 |
| Source | <code><xs:element name="berMAC_PV" type="ct:OctetString8"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

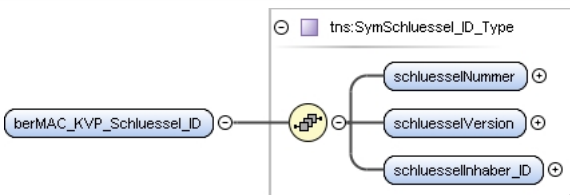
Element `tns:berNmTransaktionMAC_Type` / `berMAC_KVP`

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | <code>tns:OctetString8</code> |
| Properties | content: simple |
| Facets | length 8 |
| Source | <code><xs:element name="berMAC_KVP" type="ct:OctetString8"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element `tns:berNmTransaktionMAC_Type` / `berMAC_PV_Schluessel_ID`

| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram |  |
| Type | <code>tns:SymSchluessel_ID_Type</code> |
| Properties | content: complex |
| Model | <code>schluesselNummer</code> , <code>schluesselVersion</code> , <code>schluesselInhaber_ID</code> |
| Children | <code>schluesselInhaber_ID</code> , <code>schluesselNummer</code> , <code>schluesselVersion</code> |
| Instance | <pre><berMAC_PV_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </berMAC_PV_Schluessel_ID></pre> |
| Source | <code><xs:element name="berMAC_PV_Schluessel_ID" type="tns:SymSchluessel_ID_Type"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element `tns:berNmTransaktionMAC_Type` / `berMAC_KVP_Schluessel_ID`

| | |
|-----------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | <code>tns:SymSchluessel_ID_Type</code> |

| | |
|-----------------|--|
| Properties | content: complex |
| Model | schluesselNummer , schluesselVersion , schluesselInhaber_ID |
| Children | schluesselInhaber_ID, schluesselNummer, schluesselVersion |
| Instance | <pre><berMAC_KVP_Schluessel_ID> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </berMAC_KVP_Schluessel_ID></pre> |
| Source | <code><xs:element name="berMAC_KVP_Schluessel_ID" type="tns:SymSchluessel_ID_Type" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TX_RET_Type / transOrigID

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram | <pre> graph LR transOrigID((transOrigID)) --- tnsIONTransaktion_ID_Type[tns:IONTransaktion_ID_Type] tnsIONTransaktion_ID_Type --- transSequenznummer((transSequenznummer)) tnsIONTransaktion_ID_Type --- transSenderRolle((transSenderRolle)) tnsIONTransaktion_ID_Type --- transSender_ID((transSender_ID)) </pre> |
| Type | tns:IONTransaktion_ID_Type |
| Properties | content: complex |
| Model | transSequenznummer , transSenderRolle , transSender_ID |
| Children | transSenderRolle, transSender_ID, transSequenznummer |
| Instance | <pre><transOrigID> <transSequenznummer>{1,1}</transSequenznummer> <transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </transOrigID></pre> |
| Source | <code><xs:element name="transOrigID" type="tns:IONTransaktion_ID_Type" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TX_RET_Type / transOrigSignatur

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram | <pre> graph LR transOrigSignatur((transOrigSignatur)) --- tnsTransSignatur_Type[tns:TransSignatur_Type] </pre> |
| Type | tns:TransSignatur_Type |
| Properties | content: simple minOccurs: 0 maxOccurs: 1 |
| Facets | length 128 |
| Source | <code><xs:element name="transOrigSignatur" minOccurs="0" maxOccurs="1" type="tns:TransSignatur_Type" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TX_RET_Type / transOriginalZeit

| | |
|------------|--|
| Namespace | No namespace |
| Diagram | <pre> graph LR transOriginalZeit((transOriginalZeit)) --- xsdateTime(xs:dateTime) </pre> |
| Type | xs:dateTime |
| Properties | content: simple |
| Source | <code><xs:element name="transOriginalZeit" type="xs:dateTime" /></code> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |
|-----------------|---|

Element **tns:TX_SMIT_Type** / **sperrAnforderungBezug**

| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram | |
| Type | tns:IONTransaktion_ID_Type |
| Properties | content: complex |
| Model | transSequenznummer , transSenderRolle , transSender_ID |
| Children | transSenderRolle, transSender_ID, transSequenznummer |
| Instance | <pre><sperrAnforderungBezug> <transSequenznummer>{1,1}</transSequenznummer> <transSenderRolle>{1,1}</transSenderRolle> <transSender_ID>{1,1}</transSender_ID> </sperrAnforderungBezug></pre> |
| Source | <code><xs:element name="sperrAnforderungBezug" type="tns:IONTransaktion_ID_Type" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element **tns:TX_SMIT_Type** / **sperrEntscheidung**


| | | | | | | | | | |
|-----------------|--|-------------|---|-------------|---|-------------|---|-------------|---|
| Namespace | No namespace | | | | | | | | |
| Diagram | | | | | | | | | |
| Type | tns:Mitteilung_CODE_Type | | | | | | | | |
| Properties | content: simple | | | | | | | | |
| Facets | <table> <tr><td>enumeration</td><td>1</td></tr> <tr><td>enumeration</td><td>2</td></tr> <tr><td>enumeration</td><td>3</td></tr> <tr><td>enumeration</td><td>4</td></tr> </table> | enumeration | 1 | enumeration | 2 | enumeration | 3 | enumeration | 4 |
| enumeration | 1 | | | | | | | | |
| enumeration | 2 | | | | | | | | |
| enumeration | 3 | | | | | | | | |
| enumeration | 4 | | | | | | | | |
| Source | <code><xs:element name="sperrEntscheidung" type="tns:Mitteilung_CODE_Type" /></code> | | | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | | | | | |

Element **tns:TX_SANF_Type** / **sperrSperrgrund**


| | | | | | |
|-----------------|---|--------------|-----|--------------|---|
| Namespace | No namespace | | | | |
| Diagram | | | | | |
| Type | tns:INT1 | | | | |
| Properties | content: simple | | | | |
| Facets | <table> <tr><td>maxInclusive</td><td>255</td></tr> <tr><td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 |
| maxInclusive | 255 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="sperrSperrgrund" type="ct:INT1" /></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Element **tns:TX_BER_Type** / **berGueltingkeitsbeginn**


| | |
|-----------|--------------|
| Namespace | No namespace |
|-----------|--------------|

| | | | | | |
|-----------------|---|--------------|---------------------|--------------|---------------------|
| Diagram |  | | | | |
| Type | tns:DateTimeCompact | | | | |
| Properties | content: simple | | | | |
| Facets | <table border="1"> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table> | maxInclusive | 2117-12-31T23:59:58 | minInclusive | 1990-01-01T00:00:00 |
| maxInclusive | 2117-12-31T23:59:58 | | | | |
| minInclusive | 1990-01-01T00:00:00 | | | | |
| Source | <code><xs:element name="berGueltigkeitsbeginn" type="ct:DateTimeCompact" /></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |


Element tns:TX_BER_Type / berGueltigkeitsende

| | | | | | |
|-----------------|---|--------------|---------------------|--------------|---------------------|
| Namespace | No namespace | | | | |
| Diagram |  | | | | |
| Type | tns:DateTimeCompact | | | | |
| Properties | content: simple | | | | |
| Facets | <table border="1"> <tr> <td>maxInclusive</td><td>2117-12-31T23:59:58</td></tr> <tr> <td>minInclusive</td><td>1990-01-01T00:00:00</td></tr> </table> | maxInclusive | 2117-12-31T23:59:58 | minInclusive | 1990-01-01T00:00:00 |
| maxInclusive | 2117-12-31T23:59:58 | | | | |
| minInclusive | 1990-01-01T00:00:00 | | | | |
| Source | <code><xs:element name="berGueltigkeitsende" type="ct:DateTimeCompact" /></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Element tns:TX_BER_Type / prodAbrechnungsverfahren


| | | | |
|-----------------|--|--------|--------------|
| Namespace | No namespace | | |
| Diagram |  | | |
| Type | tns:Abrechnungsverfahren_CODE_Type | | |
| Type hierarchy | <ul style="list-style-type: none">• xs:unsignedInt<ul style="list-style-type: none">• tns:INT1<ul style="list-style-type: none">• tns:Abrechnungsverfahren_CODE_Type | | |
| Properties | content: | simple | |
| Facets | maxInclusive | 255 | |
| | minInclusive | 0 | |
| | enumeration | 0 | Keine Angabe |
| | enumeration | 1 | Pre-Paid |
| | enumeration | 2 | Post-Paid |
| | enumeration | 3 | Trip-Paid |
| Source | <xs:element name="prodAbrechnungsverfahren" type="tns:Abrechnungsverfahren_CODE_Type" /> | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | |

Element tns:TX_BER_Type / berBezahlArt


| | |
|----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:Bezahlart_CODE_Type |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT1 <ul style="list-style-type: none"> tns:Bezahlart_CODE_Type |

| | |
|-----------------|---|
| Properties | content: simple |
| Facets | maxInclusive 255 |
| | minInclusive 0 |
| Source | <code><xs:element name="berBezahlArt" type="tns:Bezahlart_CODE_Type"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TX_BER_Type / berBezahlMittel


| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:OctetString10 |
| Properties | content: simple |
| Facets | length 10 |
| Source | <code><xs:element name="berBezahlMittel" type="ct:OctetString10"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXA_Type / transAblehnungGrund

| | |
|-------------|--|
| Namespace | No namespace |
| Annotations | <p>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst, getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceResultCode'). Es wird empfohlen, fuer die vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</p> |
| Diagram |  |
| Type | tns:INT1 |
| Properties | content: simple |
| Facets | maxInclusive 255 |
| | minInclusive 0 |
| Source | <pre> <xs:element name="transAblehnungGrund" type="ct:INT1"> <xs:annotation> <xs:documentation>WICHTIG: Aus Historischen Gruenden ist TXA_Type ein allgemeiner Typ, der von allen teilnehmenden Systemen genutzt wird. Das fuehrt dazu, dass sich alle Systeme dieselben 'transAblehnungGrund' Fehlercodes teilen. Dies ist suboptimal, da, wann immer sich einer der 'transAblehnungGrund' Fehlercodes veraendert, alle teilnehmenden Systeme angepasst, getestet und in einer neuen Version zur Verfuegung gestellt werden muessten. Um TXA wie bisher weiterverwenden zu koennen, und um das beschriebene Abhaengigkeitsproblem zu vermeiden, wurde dieses Feld nicht mit expliziter Aufzaehlung der moeglichen Fehlercodes, sondern mit einem simplen numerischen Typen versehen. Die genauen Fehlercodes sind der Schnittstelle des jeweiligen konkreten teilnehmenden Systems zu entnehmen. Die Codes 0 bis 9 (einschliesslich) sind fuer allgemeine Fehler reserviert und duerfen von den teilnehmenden Systemen nur fuer die vorgesehene Semantik verwendet werden (siehe Typ 'CommonServiceResultCode'). Es wird empfohlen, fuer die vollstaendigkeit der Schnittstelle, in den XSDs des jeweiligen Systems einen Aufzaehlungstypen vom Basistypen 'ct:INT1' mit den jeweiligen Fehlercodes des Systems zu definieren.</xs:documentation> </xs:annotation> </xs:element> </pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |
|-----------------|---|


Element **tns:TXAS_Type** / **transSendeAuftrag**

| | | | | | | | |
|-----------------|--|-----------|---|-----------|----|---------|--------|
| Namespace | No namespace | | | | | | |
| Diagram |  | | | | | | |
| Type | restriction of tns:PrintableString | | | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:string tns:PrintableString | | | | | | |
| Properties | content: simple | | | | | | |
| Facets | <table> <tr> <td>minLength</td><td>0</td></tr> <tr> <td>maxLength</td><td>10</td></tr> <tr> <td>pattern</td><td>[-p]*</td></tr> </table> | minLength | 0 | maxLength | 10 | pattern | [-p]* |
| minLength | 0 | | | | | | |
| maxLength | 10 | | | | | | |
| pattern | [-p]* | | | | | | |
| Source | <pre><xs:element name="transSendeAuftrag"> <xs:simpleType> <xs:restriction base="tns:PrintableString"> <xs:minLength value="0"/> <xs:maxLength value="10"/> </xs:restriction> </xs:simpleType> </xs:element></pre> | | | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | | | |

Element **tns:TXAS_Type** / **transSendeAuftragstyp**


| | | | | | |
|-----------------|---|--------------|-----|--------------|---|
| Namespace | No namespace | | | | |
| Diagram |  | | | | |
| Type | tns:AuftragsTyp_CODE | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT1 tns:AuftragsTyp_CODE | | | | |
| Properties | content: simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>255</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 255 | minInclusive | 0 |
| maxInclusive | 255 | | | | |
| minInclusive | 0 | | | | |
| Source | <pre><xs:element name="transSendeAuftragstyp" type="tns:AuftragsTyp_CODE" /></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Element **tns:TXDEABER_Req_Type** / **prodAkzeptanzEnde**


| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:Date |
| Properties | content: simple |
| Source | <pre><xs:element name="prodAkzeptanzEnde" type="ct:Date" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element **tns:TXDEABER_Req_Type** / **prodProdukt_ID**

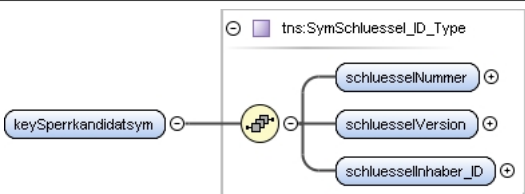
| | |
|-----------|--------------|
| Namespace | No namespace |
|-----------|--------------|

| | |
|-----------------|---|
| Diagram |  |
| Type | tns:EFMProdukt_ID_Type |
| Properties | content: complex |
| Model | produktNummer{0,1} , organisationID |
| Children | organisationID, produktNummer |
| Instance | <pre><prodProdukt_ID> <produktNummer>{0,1}</produktNummer> <organisationID>{1,1}</organisationID> </prodProdukt_ID></pre> |
| Source | <pre><xs:element name="prodProdukt_ID" type="tns:EFMProdukt_ID_Type" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSMITA_Type / appSperrkandidat


| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:NmApplikationInstanz_ID_Type |
| Properties | content: complex nillable: false |
| Model | NmAppInstanznummer , kvp_ID |
| Children | NmAppInstanznummer, kvp_ID |
| Instance | <pre><appSperrkandidat> <NmAppInstanznummer>{1,1}</NmAppInstanznummer> <kvp_ID>{1,1}</kvp_ID> </appSperrkandidat></pre> |
| Source | <pre><xs:element name="appSperrkandidat" type="tns:NmApplikationInstanz_ID_Type" nillable="false" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSANFSYMK_Type / keySperrkandidatsym

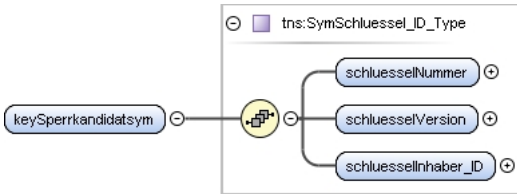
| | |
|------------|--|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:SymSchluessel_ID_Type |
| Properties | content: complex |
| Model | schluesselNummer , schluesselVersion , schluesselInhaber_ID |
| Children | schluesselInhaber_ID, schluesselNummer, schluesselVersion |
| Instance | <pre><keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </keySperrkandidatsym></pre> |
| Source | <pre><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |
|-----------------|---|


Element **tns:TXSANFASYMK_Type** / **keySperrkandidatasy**

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:ASymSchluessel_ID_Type |
| Properties | content: complex |
| Model | signaturSchluessel |
| Children | signaturSchluessel |
| Instance | <pre><keySperrkandidatasy> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidatasy></pre> |
| Source | <pre><xs:element name="keySperrkandidatasy" type="tns:ASymSchluessel_ID_Type" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element **tns:TXSFREIMITSYMK_Type** / **keySperrkandidatsym**

| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:SymSchluessel_ID_Type |
| Properties | content: complex |
| Model | schluesselNummer , schluesselVersion , schluesselInhaber_ID |
| Children | schluesselInhaber_ID, schluesselNummer, schluesselVersion |
| Instance | <pre><keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </keySperrkandidatsym></pre> |
| Source | <pre><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type" /></pre> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element **tns:TXSFREIMITASYMK_Type** / **keySperrkandidatasy**

| | |
|------------|--|
| Namespace | No namespace |
| Diagram |  |
| Type | tns:ASymSchluessel_ID_Type |
| Properties | content: complex |
| Model | signaturSchluessel |
| Children | signaturSchluessel |
| Instance | <pre><keySperrkandidatasy> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidatasy></pre> |
| Source | <pre><xs:element name="keySperrkandidatasy" type="tns:ASymSchluessel_ID_Type" /></pre> |

| | |
|-----------------|---|
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |
|-----------------|---|

Element **tns:TXSMITSYMK_Type** / **keySperrkandidatsym**

| | |
|-----------------|--|
| Namespace | No namespace |
| Diagram | |
| Type | tns:SymSchluessel_ID_Type |
| Properties | content: complex |
| Model | schluesselNummer , schluesselVersion , schluesselInhaber_ID |
| Children | schluesselInhaber_ID, schluesselNummer, schluesselVersion |
| Instance | <pre><keySperrkandidatsym> <schluesselNummer>{1,1}</schluesselNummer> <schluesselVersion>{1,1}</schluesselVersion> <schluesselInhaber_ID>{1,1}</schluesselInhaber_ID> </keySperrkandidatsym></pre> |
| Source | <code><xs:element name="keySperrkandidatsym" type="tns:SymSchluessel_ID_Type"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element **tns:TXSMITASYMK_Type** / **keySperrkandidatasym**


| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram | |
| Type | tns:ASymSchluessel_ID_Type |
| Properties | content: complex |
| Model | signaturSchluessel |
| Children | signaturSchluessel |
| Instance | <pre><keySperrkandidatasym> <signaturSchluessel>{1,1}</signaturSchluessel> </keySperrkandidatasym></pre> |
| Source | <code><xs:element name="keySperrkandidatasym" type="tns:ASymSchluessel_ID_Type"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element **tns:TXSNAWA_Req_Type** / **samSperrkandidat**


| | | | | | |
|----------------|---|--------------|----------|--------------|---|
| Namespace | No namespace | | | | |
| Diagram | | | | | |
| Type | tns:SAM_ID_Type | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt <ul style="list-style-type: none"> tns:INT3 <ul style="list-style-type: none"> tns:ReferenceNumberThree <ul style="list-style-type: none"> tns:SAM_ID_Type | | | | |
| Properties | content: simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 16777215 | minInclusive | 0 |
| maxInclusive | 16777215 | | | | |
| minInclusive | 0 | | | | |

| | |
|-----------------|---|
| Source | <code><xs:element name="samSperrkandidat" type="tns:SAM_ID_Type" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSNAWA_Req_Type / orgSperrkandidat

| | | | | | |
|-----------------|---|--------------|-------|--------------|---|
| Namespace | No namespace | | | | |
| Diagram |  | | | | |
| Type | tns:Organisation_ID | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID | | | | |
| Properties | content: simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 65535 | minInclusive | 0 |
| maxInclusive | 65535 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="orgSperrkandidat" type="ka:Organisation_ID" /></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Element tns:TXSNAWA_Req_Type / zyklusNummer

| | | | | | |
|-----------------|---|--------------|------------|--------------|---|
| Namespace | No namespace | | | | |
| Annotations | Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste. | | | | |
| Diagram |  | | | | |
| Type | tns:SperrlistenZyklusNummer_Type | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SperrlistenZyklusNummer_Type | | | | |
| Properties | content: simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 4294967295 | minInclusive | 0 |
| maxInclusive | 4294967295 | | | | |
| minInclusive | 0 | | | | |
| Source | <pre><xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element></pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Element tns:TXSNAWA_Req_Type / sperrtransaktionApplikation

| | |
|-----------|---|
| Namespace | No namespace |
| Diagram |  |

| | |
|-----------------|---|
| Type | tns:Transaktionsdatensatz_Type |
| Properties | content: complex |
| Model | Transaktionsdaten |
| Children | Transaktionsdaten |
| Instance | <pre><sperrtransaktionApplikation> <Transaktionsdaten>{1,1}</Transaktionsdaten> </sperrtransaktionApplikation></pre> |
| Source | <code><xs:element name="sperrtransaktionApplikation" type="tns:Transaktionsdatensatz_Type" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSNAWA_Req_Type / appNmTransaktionMAC

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram | |
| Type | tns:appNmTransaktionMAC_Type |
| Properties | content: complex |
| Model | appMAC_AH , appMAC_KVP , appMAC_AH_Schlüssel_ID , appMAC_KVP_Schlüssel_ID |
| Children | appMAC_AH, appMAC_AH_Schlüssel_ID, appMAC_KVP, appMAC_KVP_Schlüssel_ID |
| Instance | <pre><appNmTransaktionMAC> <appMAC_AH>{1,1}</appMAC_AH> <appMAC_KVP>{1,1}</appMAC_KVP> <appMAC_AH_Schlüssel_ID>{1,1}</appMAC_AH_Schlüssel_ID> <appMAC_KVP_Schlüssel_ID>{1,1}</appMAC_KVP_Schlüssel_ID> </appNmTransaktionMAC></pre> |
| Source | <code><xs:element name="appNmTransaktionMAC" type="tns:appNmTransaktionMAC_Type" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSNAWB_Req_Type / samSperrkandidat

| | | | | | |
|-----------------|---|--------------|----------|--------------|---|
| Namespace | No namespace | | | | |
| Diagram | | | | | |
| Type | tns:SAM_ID_Type | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT3 tns:ReferenceNumberThree tns:SAM_ID_Type | | | | |
| Properties | content: simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>16777215</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 16777215 | minInclusive | 0 |
| maxInclusive | 16777215 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="samSperrkandidat" type="tns:SAM_ID_Type" /></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Element tns:TXSNAWB_Req_Type / orgSperrkandidat

| | |
|-----------|--------------|
| Namespace | No namespace |
|-----------|--------------|

| | | | | | |
|-----------------|---|--------------|-------|--------------|---|
| Diagram | | | | | |
| Type | tns:Organisation_ID | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT2 tns:ReferenceNumberTwo tns:Organisation_ID | | | | |
| Properties | content: simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>65535</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 65535 | minInclusive | 0 |
| maxInclusive | 65535 | | | | |
| minInclusive | 0 | | | | |
| Source | <code><xs:element name="orgSperrkandidat" type="ka:Organisation_ID"/></code> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Element tns:TXSNAWB_Req_Type / zyklusNummer

| | | | | | |
|-----------------|---|--------------|------------|--------------|---|
| Namespace | No namespace | | | | |
| Annotations | Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste. | | | | |
| Diagram | | | | | |
| Type | tns:SperrlistenZyklusNummer_Type | | | | |
| Type hierarchy | <ul style="list-style-type: none"> xs:unsignedInt tns:INT4 tns:SperrlistenZyklusNummer_Type | | | | |
| Properties | content: simple | | | | |
| Facets | <table> <tr> <td>maxInclusive</td><td>4294967295</td></tr> <tr> <td>minInclusive</td><td>0</td></tr> </table> | maxInclusive | 4294967295 | minInclusive | 0 |
| maxInclusive | 4294967295 | | | | |
| minInclusive | 0 | | | | |
| Source | <pre> <xs:element name="zyklusNummer" type="tns:SperrlistenZyklusNummer_Type"> <xs:annotation> <xs:documentation>Die Sperrlisten-Zyklusnummer identifiziert eindeutig den Zeitpunkt der der Sperrliste zugrundeliegenden Sperrobjekte. Der Zyklus kann von einer NM-Liste oder einer ORG bzw. SAM Liste sein. Wenn samSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die SAM Liste, wenn orgSperrkandidat gesetzt ist, so bezieht sich der Zyklus auf die ORG Liste, ist nichts von beidem gesetzt, bezieht sich der Zyklus auf die NM Liste.</xs:documentation> </xs:annotation> </xs:element> </pre> | | | | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd | | | | |

Element tns:TXSNAWB_Req_Type / sperrtransaktionBerechtigung

| | |
|------------|--|
| Namespace | No namespace |
| Diagram | |
| Type | tns:Transaktionsdatensatz_Type |
| Properties | content: complex |
| Model | Transaktionsdaten |
| Children | Transaktionsdaten |
| Instance | <pre> <sperrtransaktionBerechtigung> <Transaktionsdaten>{1,1}</Transaktionsdaten> </pre> |

| | |
|-----------------|---|
| | <code></sperrrtransaktionBerechtigung></code> |
| Source | <code><xs:element name="sperrrtransaktionBerechtigung" type="tns:Transaktionsdatensatz_Type" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Element tns:TXSNAWB_Req_Type / berNmTransaktionMAC

| | |
|-----------------|---|
| Namespace | No namespace |
| Diagram | |
| Type | tns:berNmTransaktionMAC_Type |
| Properties | content: complex |
| Model | berMAC_PV , berMAC_KVP , berMAC_PV_Schluesssel_ID , berMAC_KVP_Schluesssel_ID |
| Children | berMAC_KVP, berMAC_KVP_Schluesssel_ID, berMAC_PV, berMAC_PV_Schluesssel_ID |
| Instance | <pre><berNmTransaktionMAC> <berMAC_PV>{1,1}</berMAC_PV> <berMAC_KVP>{1,1}</berMAC_KVP> <berMAC_PV_Schluesssel_ID>{1,1}</berMAC_PV_Schluesssel_ID> <berMAC_KVP_Schluesssel_ID>{1,1}</berMAC_KVP_Schluesssel_ID> </berNmTransaktionMAC></pre> |
| Source | <code><xs:element name="berNmTransaktionMAC" type="tns:berNmTransaktionMAC_Type" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/ion/2/XML-Schema_ION.xsd |

Attribute(s)

Attribute XML-Ausgangstext-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Ausgangstext-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Pool / @key

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Pool |
| Source | <code><xs:attribute name="key" type="XML-Ref" use="required" /></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-ArrayValue / @ref

| | |
|-----------|--------------|
| Namespace | No namespace |
|-----------|--------------|

| | |
|-----------------|---|
| Type | XML-Ref |
| Properties | use: prohibited |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-ArrayValue |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="prohibited"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-CompositeFunction / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-CompositeFunction |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-CommonFunction / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: optional |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-CommonFunction |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="optional"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Ausgangssequenz-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Ausgangssequenz-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Ausgangsdaten-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Ausgangsdaten-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungszu-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | content: simple |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungszu-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungsvon-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungsvon-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungsbezug-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungsbezug-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungstyp-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungstyp-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungsdatenzu-Entry / @ref

| | |
|------------|--|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: prohibited |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungsdatenzu-Entry |

| | |
|-----------------|---|
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="prohibited"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Zuordnungsausnahmezu-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Zuordnungsausnahmezu-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Bewertungsueber-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Bewertungsueber-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Bewertungsnach-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Bewertungsnach-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Bewertungsvon-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Bewertungsvon-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Bewertungsbezug-Entry / @ref

| | |
|-----------|--------------|
| Namespace | No namespace |
| Type | XML-Ref |

| | | |
|-----------------|---|---------------------------|
| Properties | use: | required |
| Facets | minInclusive | 1 |
| Used by | Complex Type | XML-Bewertungsbezug-Entry |
| Source | <xs:attribute name="ref" type="XML-Ref" use="required"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Attribute XML-Bewertungstyp-Entry / @ref

| | | |
|-----------------|---|-------------------------|
| Namespace | No namespace | |
| Type | XML-Ref | |
| Properties | use: | required |
| Facets | minInclusive | 1 |
| Used by | Complex Type | XML-Bewertungstyp-Entry |
| Source | <xs:attribute name="ref" type="XML-Ref" use="required"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Attribute XML-Mitnahmeanzahl-Entry / @ref

| | | |
|-----------------|---|--------------------------|
| Namespace | No namespace | |
| Type | XML-Ref | |
| Properties | use: | required |
| Facets | minInclusive | 1 |
| Used by | Complex Type | XML-Mitnahmeanzahl-Entry |
| Source | <xs:attribute name="ref" type="XML-Ref" use="required"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Attribute XML-Preisanpassung-Entry / @ref

| | | |
|-----------------|---|--------------------------|
| Namespace | No namespace | |
| Type | XML-Ref | |
| Properties | use: | required |
| Facets | minInclusive | 1 |
| Used by | Complex Type | XML-Preisanpassung-Entry |
| Source | <xs:attribute name="ref" type="XML-Ref" use="required"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Attribute XML-Eingangsadapter-Entry / @ref

| | | |
|-----------------|---|---------------------------|
| Namespace | No namespace | |
| Type | XML-Ref | |
| Properties | use: | required |
| Facets | minInclusive | 1 |
| Used by | Complex Type | XML-Eingangsadapter-Entry |
| Source | <xs:attribute name="ref" type="XML-Ref" use="required"/> | |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd | |

Attribute XML-Ausgangsadapter-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Ref |
| Properties | use: required |
| Facets | minInclusive 1 |
| Used by | Complex Type XML-Ausgangsadapter-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Testdatenablauf-Entry / @ref

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | XML-Testablauf-Ref |
| Properties | use: required |
| Used by | Complex Type XML-Testdatenablauf-Entry |
| Source | <code><xs:attribute name="ref" type="XML-Testablauf-Ref" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Testdatenparameter-Entry / @nr

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | xs:unsignedShort |
| Properties | use: required |
| Used by | Complex Type XML-Testdatenparameter-Entry |
| Source | <code><xs:attribute name="nr" type="xs:unsignedShort" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |

Attribute XML-Testdatenschnittstelle-Entry / @id

| | |
|-----------------|---|
| Namespace | No namespace |
| Type | xs:unsignedShort |
| Properties | use: required |
| Used by | Complex Type XML-Testdatenschnittstelle-Entry |
| Source | <code><xs:attribute name="id" type="xs:unsignedShort" use="required"/></code> |
| Schema location | file:/C:/Users/W.Hoffmann/Development/VDV-Interfaces/github-version/vdv-ka-interfaces/interfaces/world/build/api/relative/ka/pkm/2/XML-Schema_PKM.xsd |